NATIONWIDE ENVIRONMENTAL SERVICES, INC.

6th Avenue West Business Park
14818 W 6th Ave. Suite 5A
Golden, CO 80401

US EPA RECORDS CENTER REGION 5
452116

August 23, 2012

Mr. Tim Drexler
Remedial Project Manager
U.S. Environmental Protection Agency
77 West Jackson Boulevard, HSRM-6J
Chicago, IL 60604

Mr. Doyle W. Wilson
Illinois Environmental Protection Agency
1021 North Grand Avenue East
P.O. Box 19276
Springfield, IL 62794-9276

RE: Southeast Rockford Ground Water NPL Site
Ground Water Monitoring Report
Semi-Annual Monitoring Event – June 2012

Gentlemen:

Nationwide Environmental Services, Inc. (NES) is submitting the semi-annual monitoring report presenting the analytical data and data interpretation summary for ground water quality monitoring samples collected at the Southeast Rockford Ground Water NPL Site (the Site) during the June 2012 semi-annual monitoring event. This report includes additional data reporting information to address comments and suggestions received from USEPA on the semi-annual reports submitted for prior monitoring events.

NES continues to coordinate efforts with IEPA to share ground water data obtained from common monitoring well locations at the Site. NES is not aware of IEPA sample collection from Site monitoring locations since 2008, and therefore, no comparative Site data from IEPA is presented in this report.

The locations of the monitoring wells comprising the Site ground water monitoring network are shown in **Figure 1**. The analytical results are summarized in **Table 1** and present concentrations for the chemicals of concern (COC) identified in Section VI of the Site Record of Decision (ROD) and for vinyl chloride (VC). The historical analytical results for samples collected from the Site ground water monitoring network, by monitoring well location, are presented in **Table 2**. The ground water elevations for this sampling event are presented in **Table 3**. The validated laboratory data sheets and data quality summaries are provided in **Appendix A**. The field sampling sheets for the current monitoring event are contained in **Appendix B**.

The field sampling activity and analytical procedures utilized for the current monitoring event were performed in accordance with the 2008 amended Quality Assurance Project Plan and the 2010 amended Field Sampling Plan. No known issues or concerns were identified during the monitoring event that would result in a departure from the established procedures. The relevant analytical quality assurance/quality control (QA/QC) and field sampling information is presented in **Appendix A** and **Appendix B**, as noted above.

A series of graphs depicting historical total volatile organic compound (VOC) concentrations for select wells are enclosed to show the trends of total VOC concentrations occurring at each monitoring location. Note that the graphs provided in the last report were preliminary and those presented herein are updated versions. Although the graphs depict analytical results from 1999 and forward, the evaluation of the total VOCs presented in this report focuses mainly on changes, if any, from the previous semi-annual sampling event. While the graphs show fluctuation of total VOCs in ground water that are likely caused by the effects of various factors such as source area remedial activities performed by others, precipitation events, etc., NES is not aware of any specifics that would allow an interpretation of the data, other than the general observations presented in the following section.

Monitoring Data Review

Overall, total VOC concentrations have generally decreased across the Site since inception of the long-term monitoring program in March 1999. The ratios of parent VOC compound concentrations to associated breakdown product concentrations indicate biodegradation, comprising one component of natural attenuation, may be occurring at the Site. The presence of VC, chloroethane, and chloromethane in ground water samples are further indicators that natural attenuation may be occurring at the Site.

The status of total VOC concentrations at certain monitoring well locations, relative to the previous monitoring event (December 2011), are summarized below. The noted monitoring well locations are located proximate to, or down-gradient from, identified source areas. The Site source areas are segregated by general geographic location within the Site for the purpose of this report.

East-Source Area 7

Total VOC concentrations reported for ground water monitoring locations in the vicinity of the Area 7 source area have generally decreased or remained relatively stable from the previous sampling event.

North-Source Areas 4, 9, 10, & 11

Total VOC concentrations reported for ground water monitoring locations in the identified areas have generally decreased or remained relatively stable from the previous sampling event except as noted. Results for water quality samples collected at MW-201 and MW-202 revealed a slight increase in total VOC concentrations since the last sampling event. However, only tetrachloroethene (PCE) at MW-203 is above the maximum contaminant concentration (MCL).

West-Rock River

Total VOC concentrations reported for ground water monitoring locations in the area bordering the east side of the Rock River have generally decreased or remained stable from the previous sampling event except for the following:

- Results for MW-206A water quality samples revealed significant decreases in the concentrations of 1,1,-DCA, 1,1-DCE, cis-1,2-DCE, PCE, 1,1,1-TCA, and TCE since the last sampling event. This is in contrast to the last two events in which there were significant increases in the concentrations of these compounds from the June 2011 to the December 2011 results. Therefore, based on historical data (**Table 2**), it is believed that the December 2011 results are anomalous.
- Results for MW-206B water quality samples revealed a slight increase in the concentrations of most of the detected VOCs since the last sampling event.

Please contact me at telephone 303-232-2134 if you have any questions regarding the information provided or require any additional information.

Sincerely,

William B. Dotterrer

William B. Dotterrer,
Sr. Project Manager

cc: Nadine Miller, City of Rockford

Enclosures

Figures

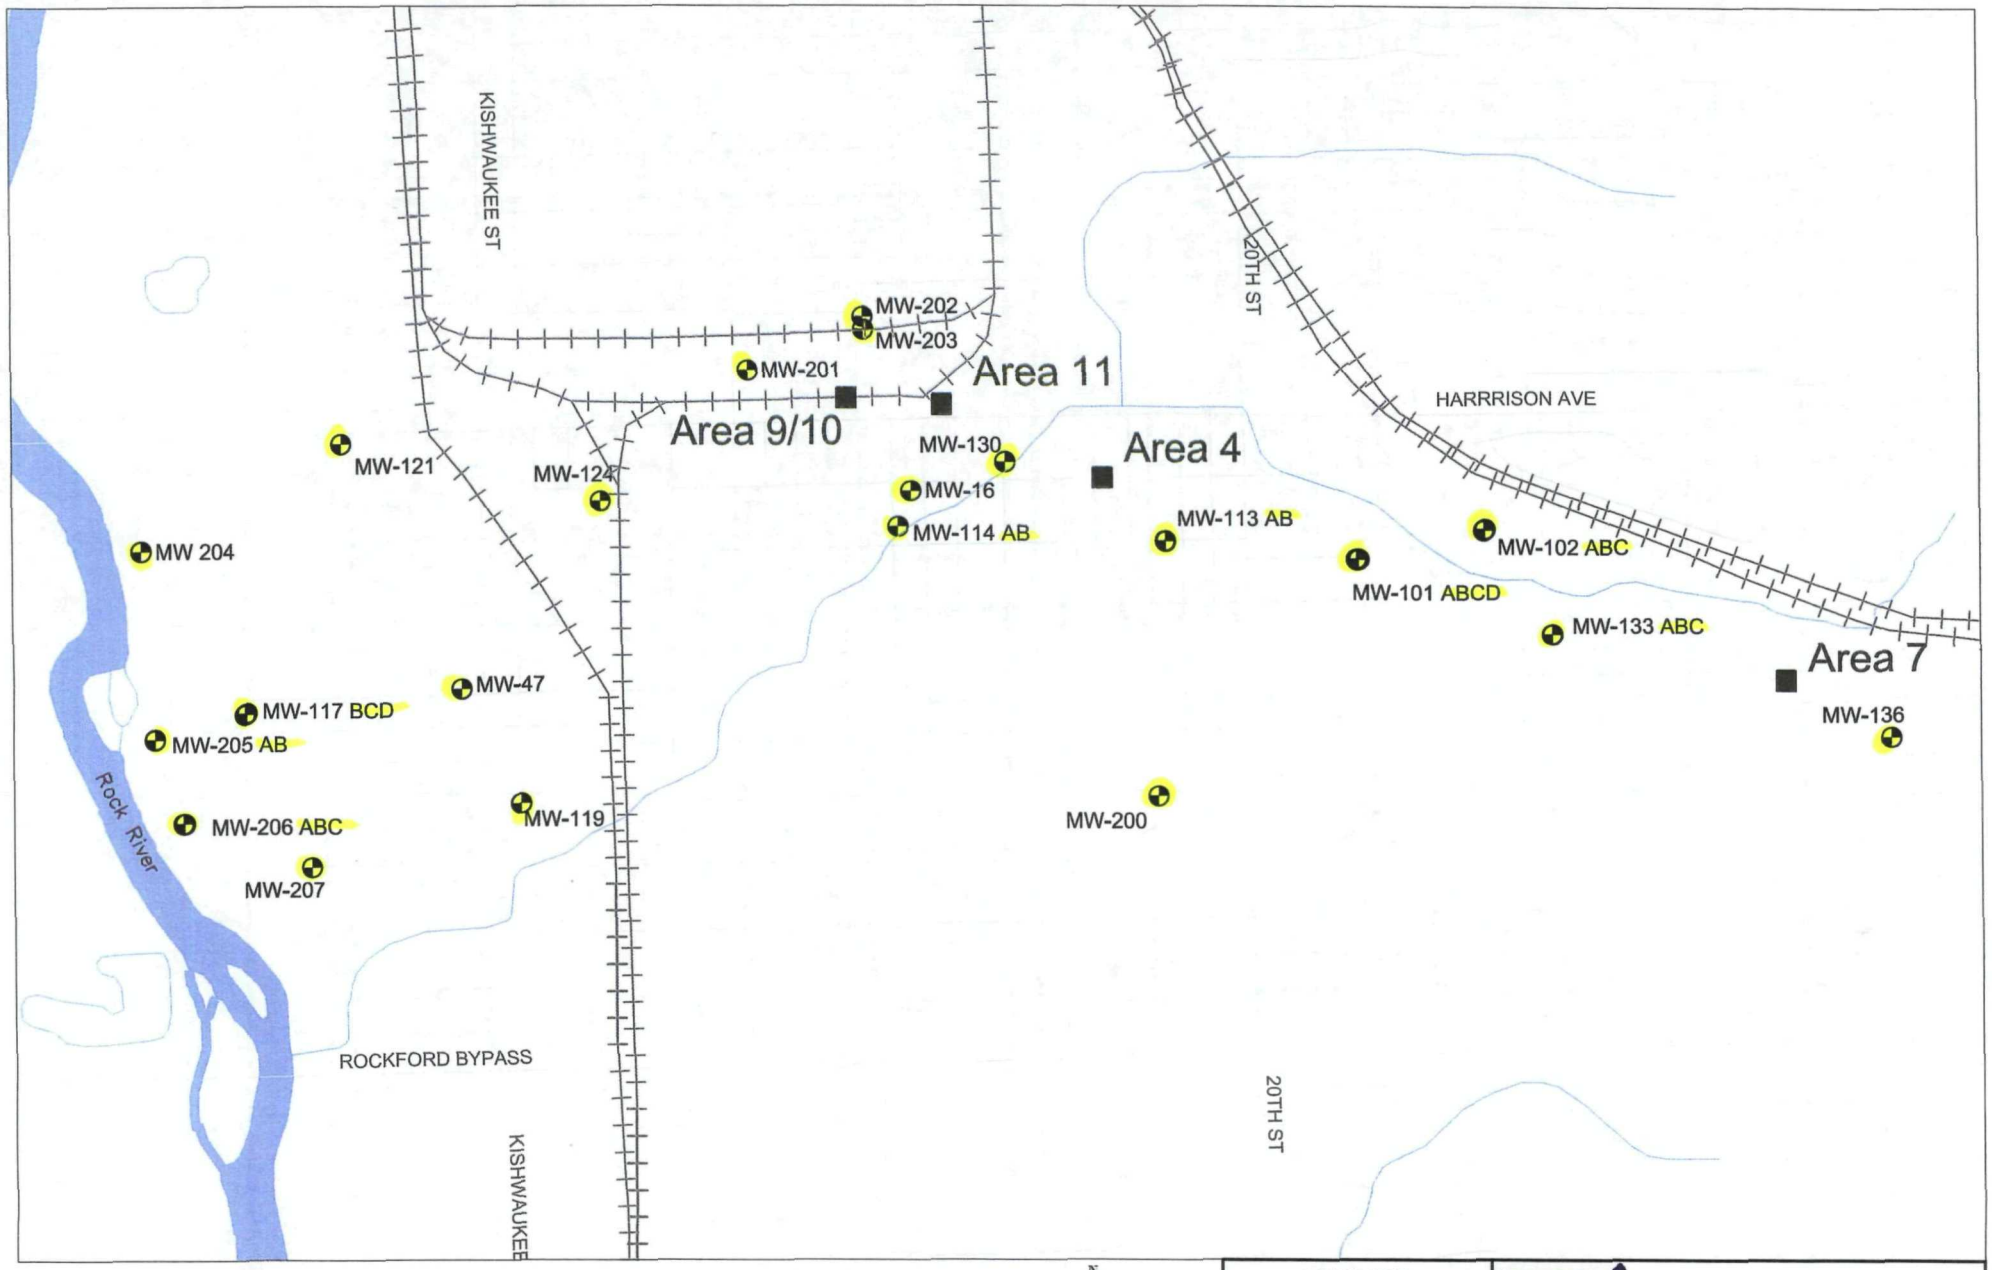

N
W E
S
0 1000' 2000'

LEGEND

Monitoring Well

Area

Figure 1
Southeast Rockford NPL Site
Ground Water Monitoring Network
and Source Locations
Winnebago County, Illinois

Southeast Rockford Superfund Site
Monitoring Wells Near Area 7

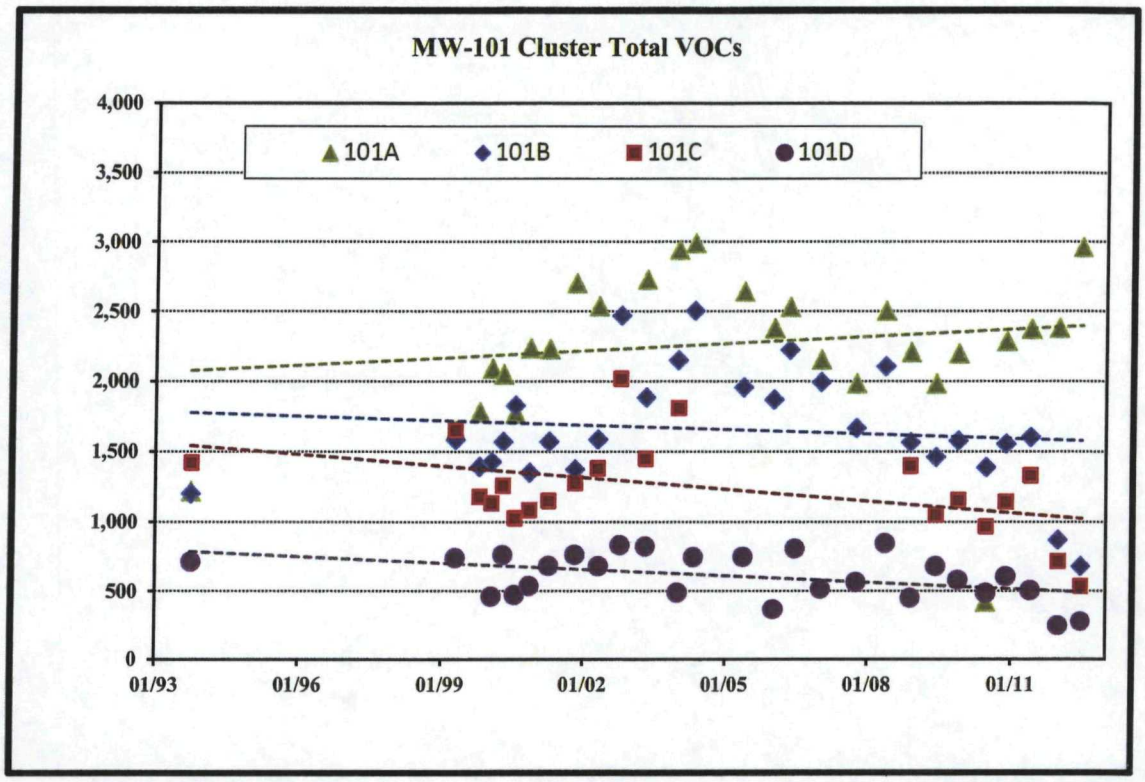

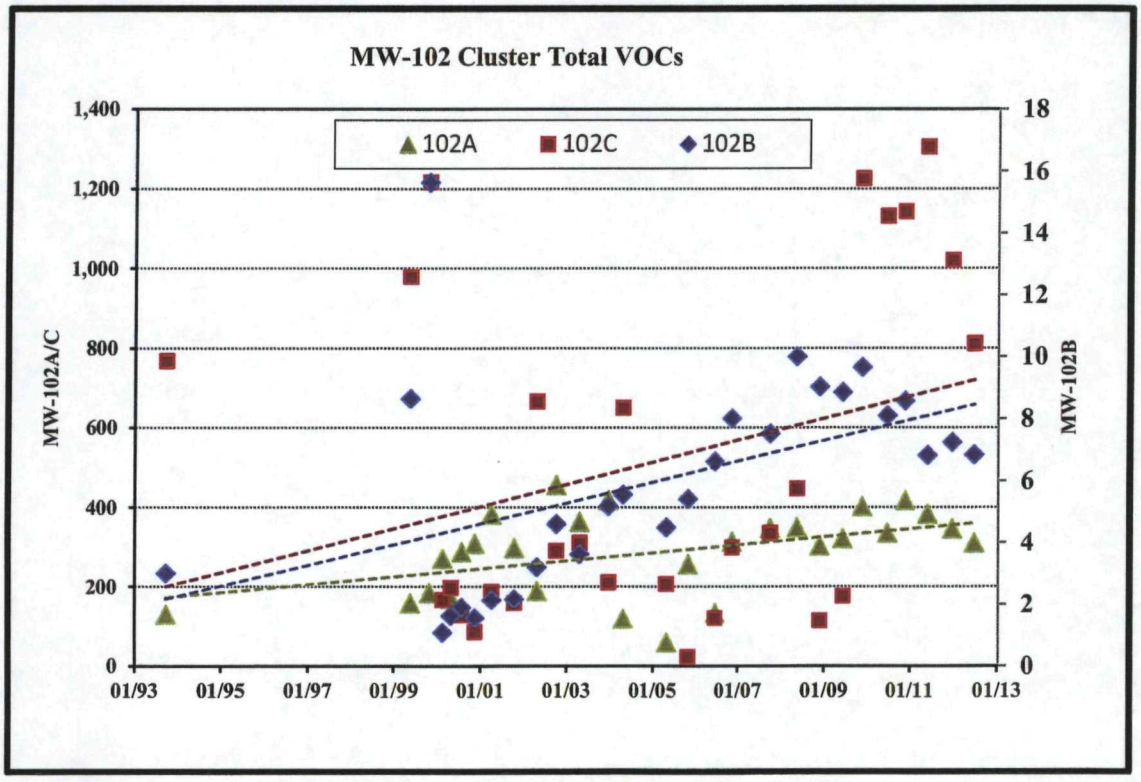

Y-axis = Total VOCs in parts per billion; X- axis = Sampling Date

Southeast Rockford Superfund Site
Monitoring Wells Near Area 7

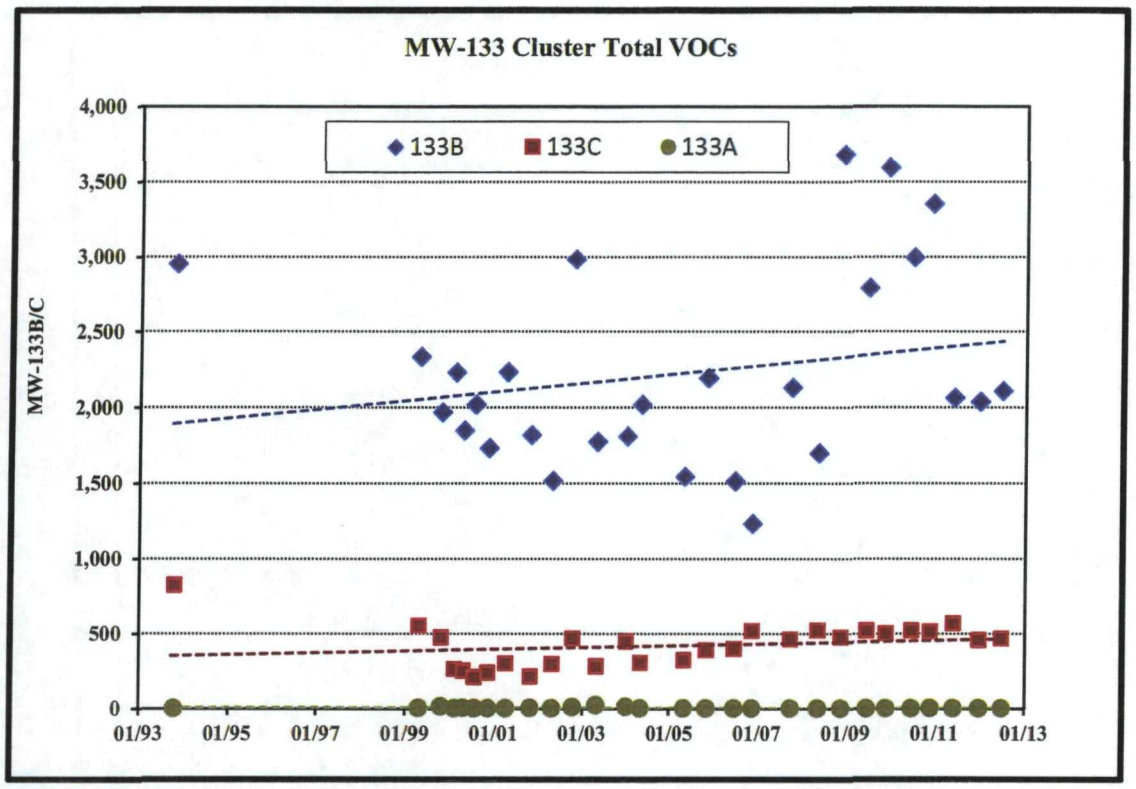

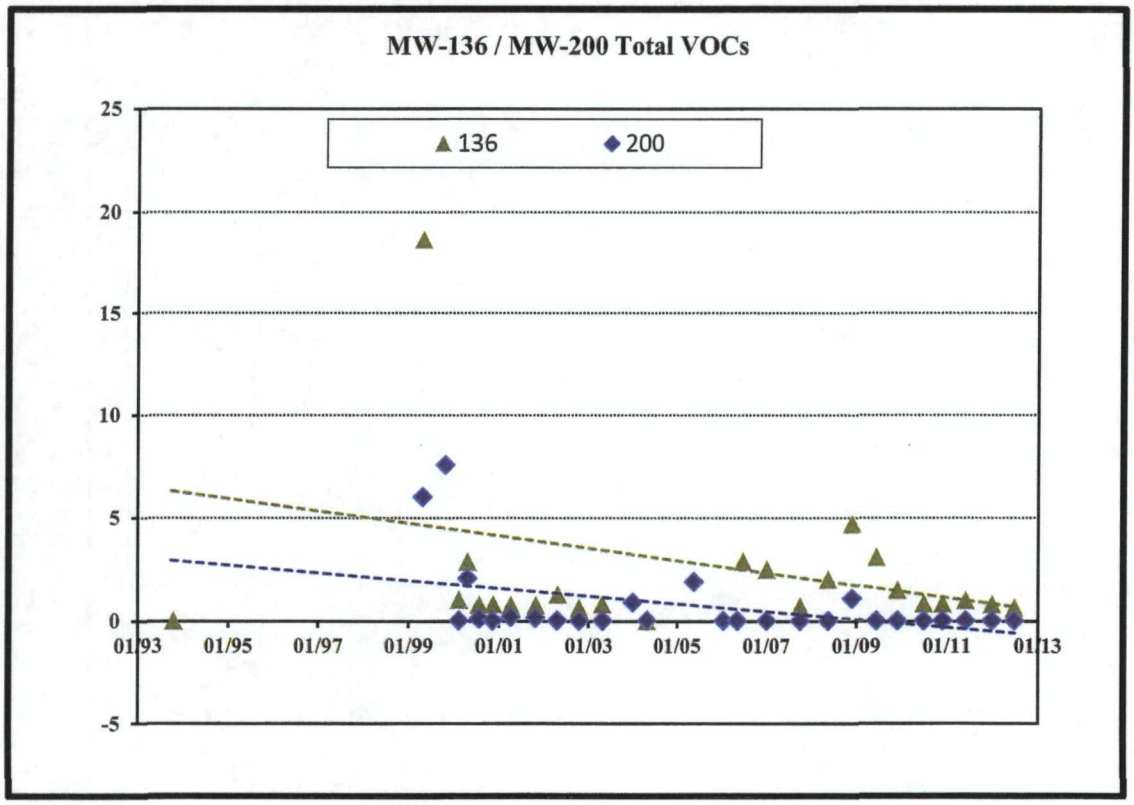

Y-axis = Total VOCs in parts per billion; X- axis = Sampling Date

Southeast Rockford Superfund Site
Monitoring Wells Near Areas 4, 9/10, 11

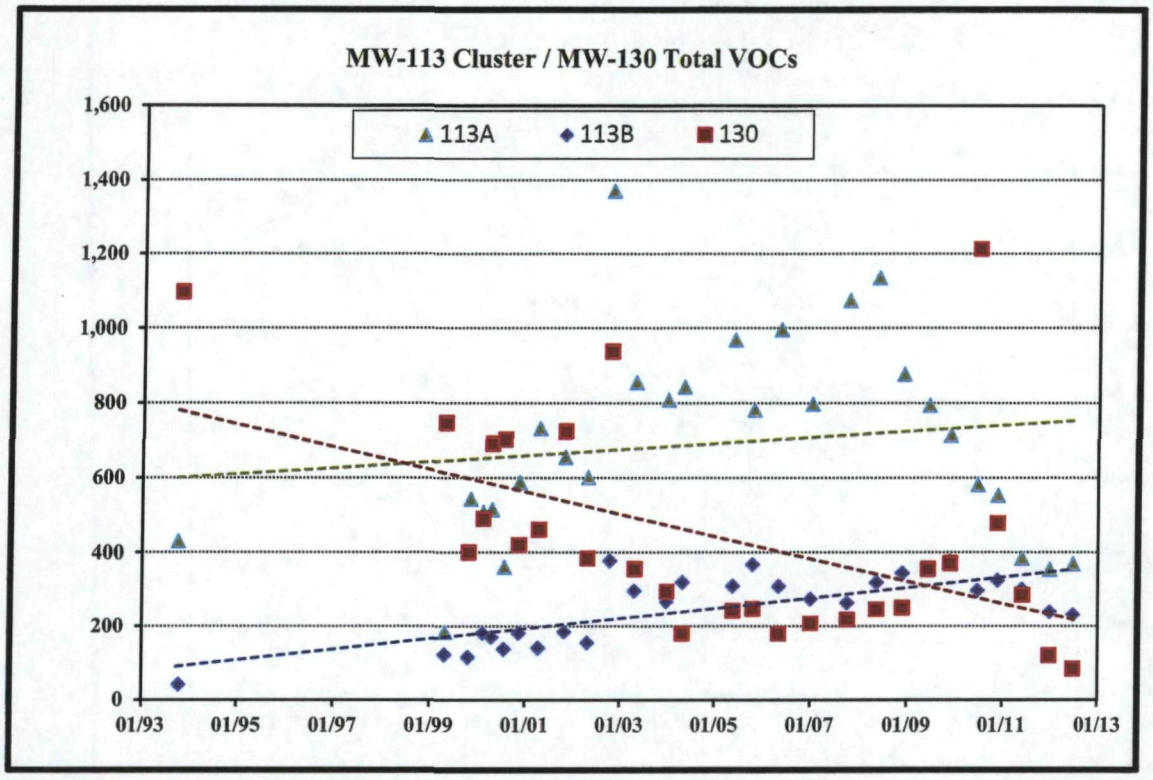

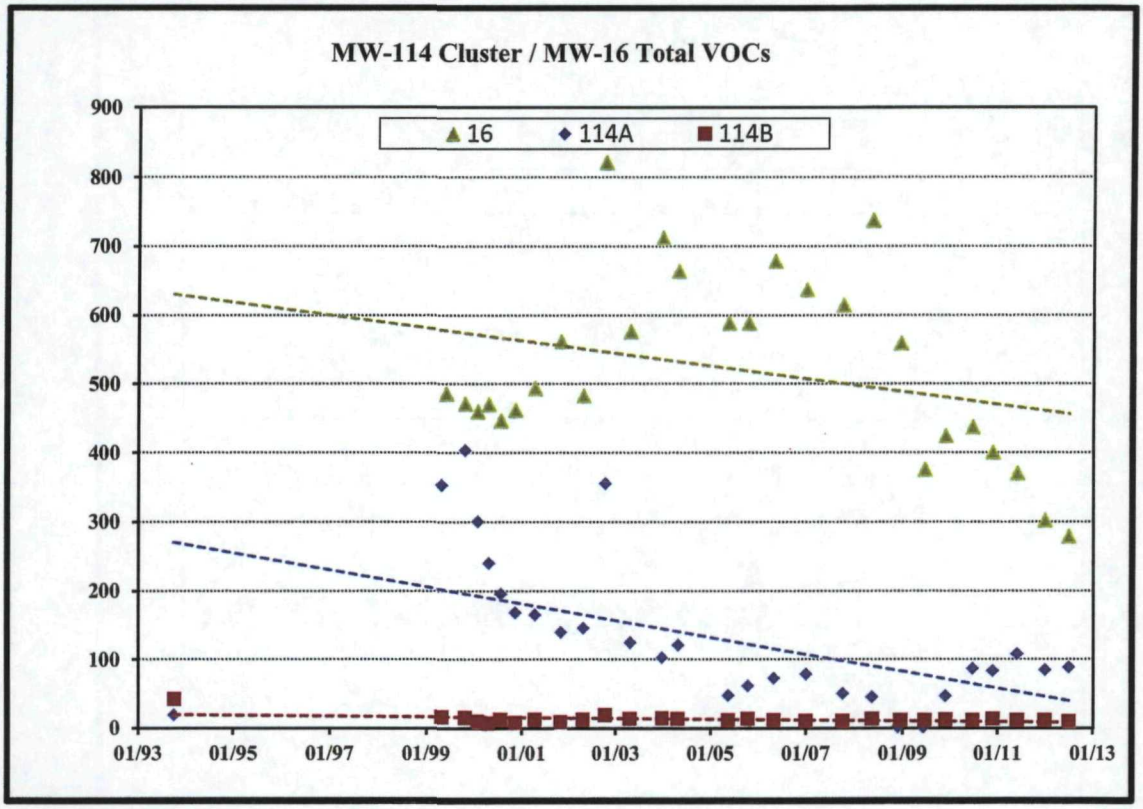

Y-axis = Total VOCs in parts per billion; X- axis = Sampling Date

Southeast Rockford Superfund Site
Monitoring Wells Near Areas 4, 9/10, 11

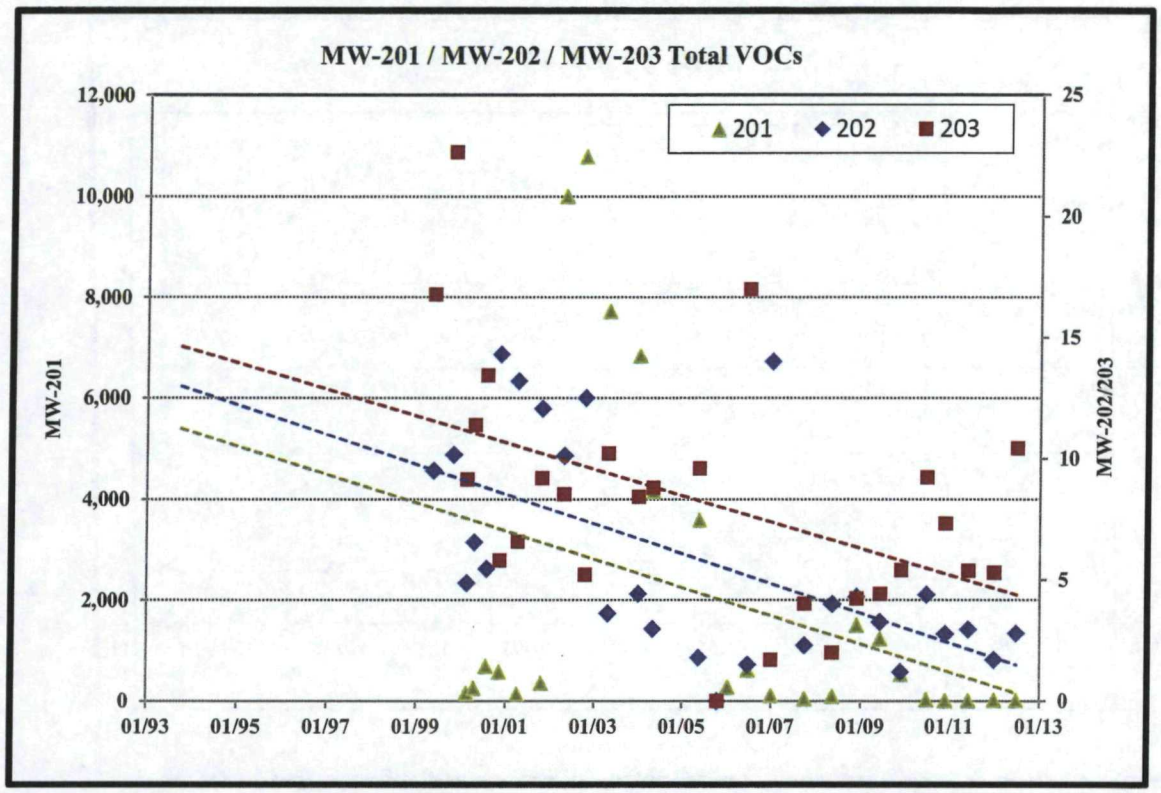

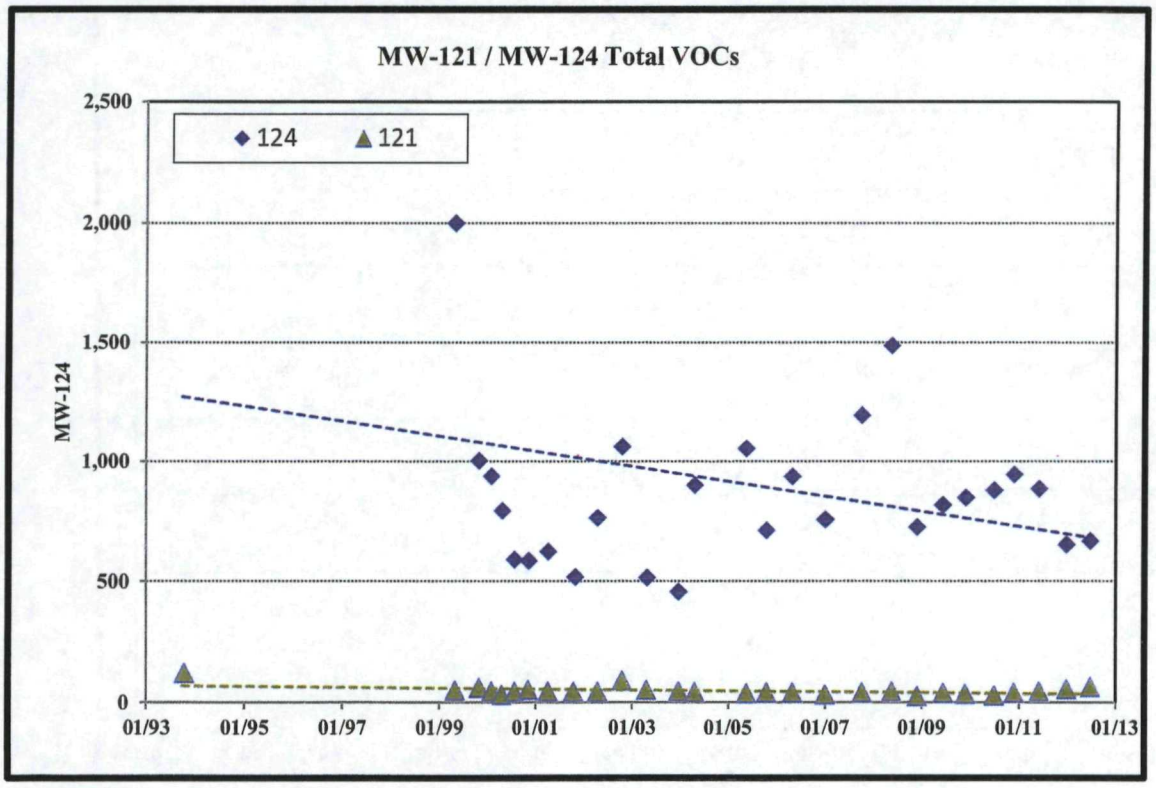

Y-axis = Total VOCs in parts per billion; X- axis = Sampling Date

Southeast Rockford Superfund Site
Monitoring Wells Near Rock River

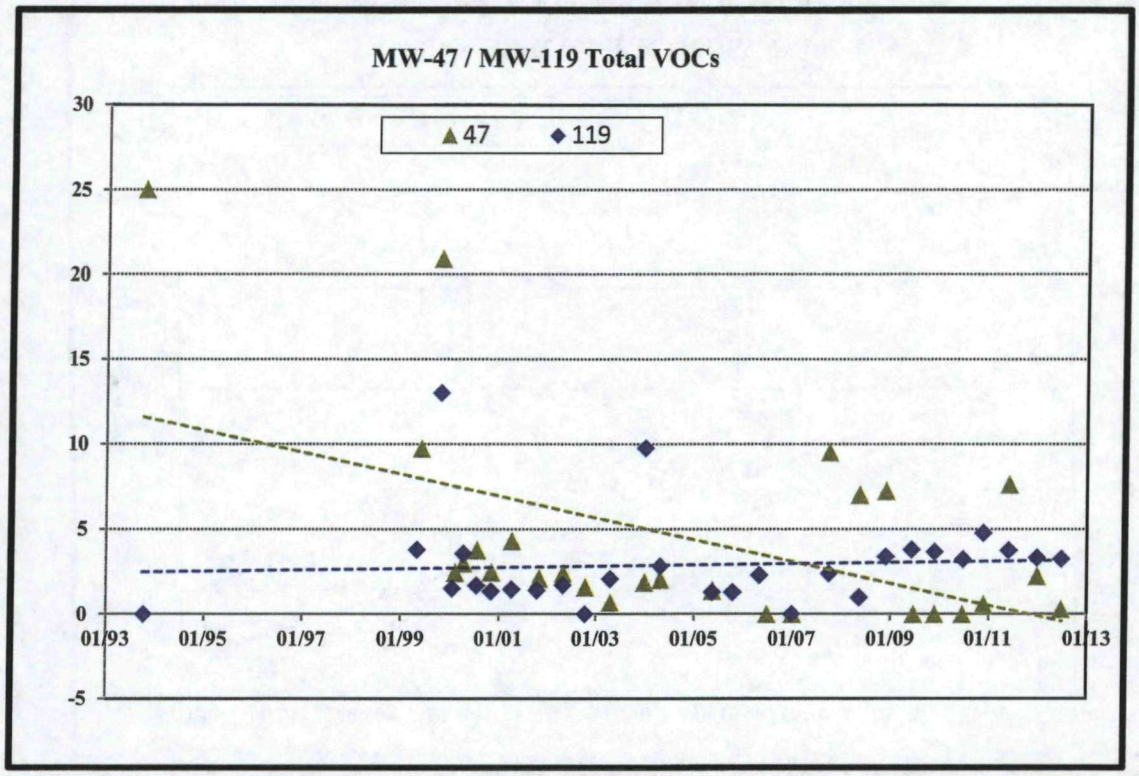

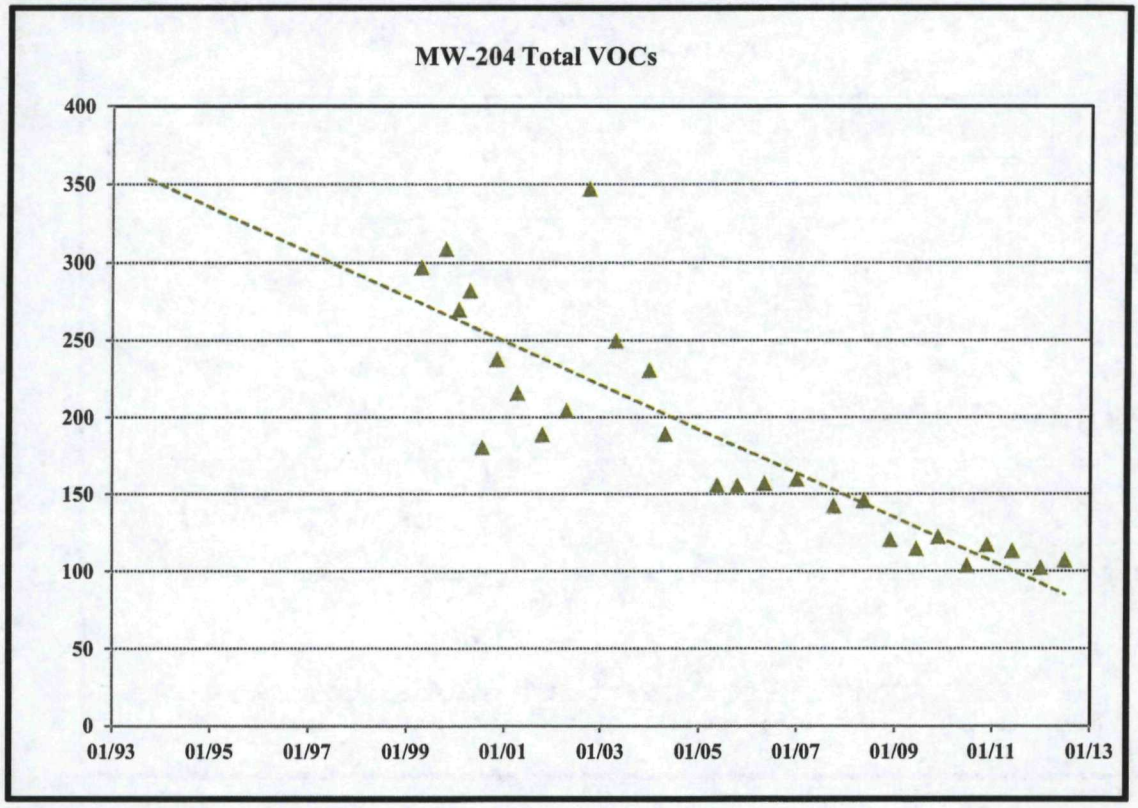

Y-axis = Total VOCs in parts per billion; X- axis = Sampling Date

Southeast Rockford Superfund Site
Monitoring Wells Near Rock River

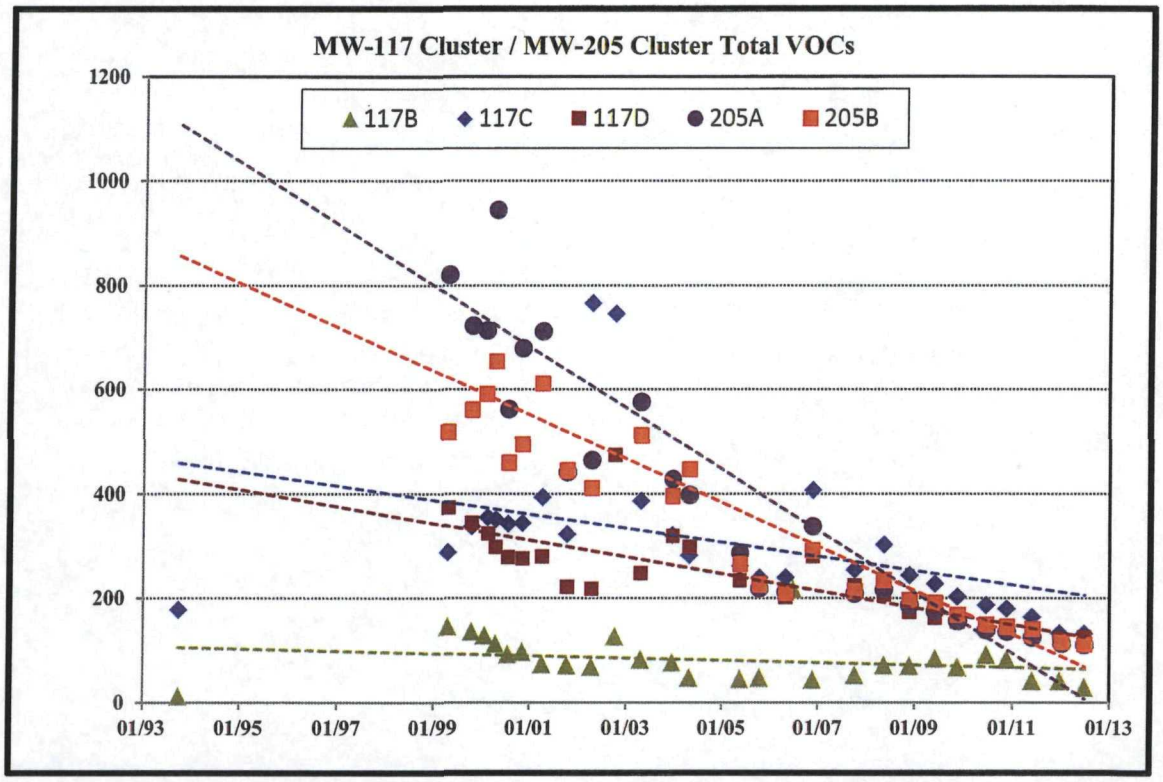

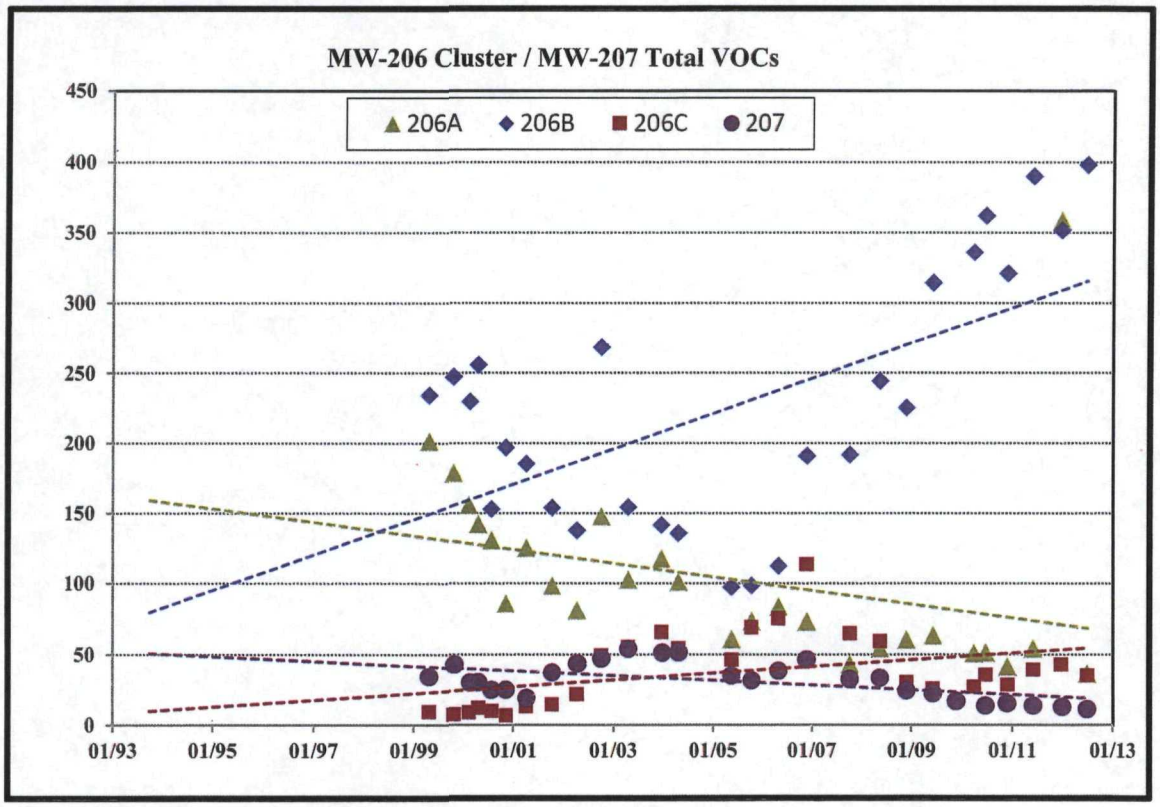

Y-axis = Total VOCs in parts per billion; X- axis = Sampling Date

Tables

Table 1: Southeast Rockford NPL Site
Summary of Groundwater Analytical Results
Sampling Event #27

Compound	MCL	MW-16 06/28/12	MW-47 06/26/12	MW-101A 06/25/12	MW-101B 06/25/12	MW-101C 06/25/12	MW-101D 06/25/12	MW-102A 06/27/12	MW-102B 06/27/12
Chloroform	N/A	1.1	1.0U	5.2J	1.9J	1.4J	1.1	1.0U	1.0U
1,1-Dichloroethane	N/A	72	1.0U	320	120	89	47	79	2.7
1,2-Dichloroethane	5	1.0U	1.0U	10U	5.0U	2.5U	1.0U	1.0U	1.0U
1,1-Dichloroethene	7	5.2	1.0U	**72**	**25**	**17**	**14**	1.4	1.0U
cis-1,2-Dichloroethene	70	25	1.0U	**1600**	47	**89**	33	**160**	3.8
trans-1,2-Dichloroethene	100	3.3	1.0U	66	4.3J	3.3	1.8	5.1	1.0U
Methylene Chloride	5	5.0U	5.0U	2.7J	25U	12U	5.0U	5.0U	5.0U
Tetrachloroethene	5	**11**	0.29J	**56**	**24**	**16**	**12**	1.0U	1.0U
1,1,1-Trichloroethane	200	120	1.0U	**650**	**430**	**300**	150	52	1.0U
Trichloroethene	5	**41**	1.0U	**190**	**27**	**20**	**19**	**13**	1.0U
Vinyl chloride	2	1.0U	1.0U	10U	5.0U	2.5U	1.0U	1.0U	0.32J

Compound	MCL	MW-102C 06/28/12	MW-113A 06/25/12	MW-113B 06/25/12	MW-114A 06/27/12	MW-114B 06/28/12	MW-117B 06/26/12	MW-117C 06/26/12	MW-117D 06/26/12
Chloroform	N/A	1.2J	1.1	0.48J	0.21J	1.0U	0.3J	0.4J	0.41J
1,1-Dichloroethane	N/A	130	100	60	4.3	1.1	5.9	25	43
1,2-Dichloroethane	5	5.0U	1.0U	1.0U	1.0U	1.0U	1.0U	1.0U	1.0U
1,1-Dichloroethene	7	**33**	**14**	**14**	5.6	1.0U	2.6	**17**	**11**
cis-1,2-Dichloroethene	70	**550**	48	**98**	3	1.8	0.77J	14	2.8
trans-1,2-Dichloroethene	100	4.4J	5.3	1.9	1.0U	1.0U	1.0U	1.0U	1.0U
Methylene Chloride	5	25U	5.0U	5.0U	5.0U	5.0U	5.0U	5.0U	5.0U
Tetrachloroethene	5	**7.3**	**13**	3.6	1.0U	1.0U	**5.9**	**23**	**22**
1,1,1-Trichloroethane	200	55	140	17	71	1.0U	7.8	37	33
Trichloroethene	5	**30**	**48**	**28**	4.2	**6.5**	**5.7**	**15**	**12**
Vinyl chloride	2	5.0U	1.0U	**9.4**	1.0U	1.0U	1.0U	1.0U	1.0U

Table 1: Southeast Rockford NPL Site
Summary of Groundwater Analytical Results
Sampling Event #27

Compound	MCL	MW-119 06/27/12	MW-121 06/27/12	MW-124 06/27/12	MW-130 06/25/12	MW-133A 06/28/12	MW-133B 06/28/12	MW-133C 06/28/12	MW-136 06/25/12
Chloroform	N/A	0.29J	0.86J	5.0U	0.26J	1.0U	5.2J	5.7	0.62J
1,1-Dichloroethane	N/A	0.97J	21	420	7.7	1.0U	180	51	1.0U
1,2-Dichloroethane	5	1.0U	1.0U	5.0U	1.0U	1.0U	10U	1.6	1.0U
1,1-Dichloroethene	7	1.0U	5.5	**17**	1.9	1.0U	**25**	**40**	1.0U
cis-1,2-Dichloroethene	70	0.88J	5.1	**100**	3	0.4J	**1200**	**130**	1.0U
trans-1,2-Dichloroethene	100	1.0U	0.62J	5.0U	1.0U	1.0U	60	1.7	1.0U
Methylene Chloride	5	5.0U	5.0U	25U	5.0U	5.0U	11J	5.0U	5.0U
Tetrachloroethene	5	1.0U	1.6	**9.5**	0.65J	1.0U	**65**	**6.6**	1.0U
1,1,1-Trichloroethane	200	1.1	10	90	68	0.3J	**470**	150	1.0U
Trichloroethene	5	1.0U	**19**	**5.2**	2.1	1.0U	**92**	**81**	1.0U
Vinyl chloride	2	1.0U	1.0U	**23**	1.0U	1.0U	10U	1.0U	1.0U

Compound	MCL	MW-200 06/25/12	MW-201 06/27/12	MW-202 06/27/12	MW-203 06/28/12	MW-204 06/27/12	MW-205A 06/28/12	MW-205B 06/28/12	MW-206A 06/26/12
Chloroform	N/A	1.0U	1.0U	1.0U	1.0U	0.63J	0.4J	0.43J	0.6J
1,1-Dichloroethane	N/A	1.0U	8	0.46J	1.0U	5.5	21	21	7.8
1,2-Dichloroethane	5	1.0U	1.0U	1.0U	1.0U	1.2	1.0U	1.0U	1.0U
1,1-Dichloroethene	7	1.0U	1.0U	1.0U	1.0U	**7.1**	**13**	**13**	3.7
cis-1,2-Dichloroethene	70	1.0U	0.75J	1.0U	1.0U	30	5.7	8.2	1.8
trans-1,2-Dichloroethene	100	1.0U	1.0U	1.0U	1.0U	1.3	1.0U	1.0U	1.0U
Methylene Chloride	5	5.0U	5.0U	5.0U	5.0U	5.0U	5.0U	5.0U	5.0U
Tetrachloroethene	5	1.0U	1.9	1.4	**10**	1.7	**24**	**23**	4.4
1,1,1-Trichloroethane	200	1.0U	5.8	0.94J	1.0U	5.8	30	30	11
Trichloroethene	5	1.0U	0.44J	1.0U	0.41J	**54**	**16**	**15**	**6.9**
Vinyl chloride	2	1.0U	1.0U	1.0U	1.0U	1.0U	1.0U	1.0U	1.0U

Table 1: Southeast Rockford NPL Site
Summary of Groundwater Analytical Results
Sampling Event #27

Compound	MCL	MW-206B 06/26/12	MW-206C 06/26/12	MW-207 06/26/12	MW-102B(d) 06/27/12	MW-114B(d) 06/28/12
Chloroform	N/A	1	1.0U	0.27J	1.0U	1.0U
1,1-Dichloroethane	N/A	69	5.8	1.4	2.7	1.1
1,2-Dichloroethane	5	2.4	1.0U	1.0U	1.0U	1.0U
1,1-Dichloroethene	7	**80**	3.8	0.4J	1.0U	0.41J
cis-1,2-Dichloroethene	70	**130**	6.1	1.2	3.9	1.8
trans-1,2-Dichloroethene	100	0.44J	1.0U	1.0U	1.0U	1.0U
Methylene Chloride	5	5.0U	5.0U	5.0U	5.0U	5.0U
Tetrachloroethene	5	**10**	1.0U	1.3	1.0U	1.0U
1,1,1-Trichloroethane	200	58	1.0U	2.2	1.0U	1.0U
Trichloroethene	5	**46**	**19**	3.9	1.0U	6.7
Vinyl chloride	2	0.86J	1.0U	1.0U	0.31J	1.0U

(d) Field duplicate
All units in micrograms per liter (µg/l) or parts per billion (ppb)
Bold value and outlined cell denotes analytical result > than MCL

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-16	06/01/99		3	76	1.2	24	140	1.8	2 U	5.4	170	64	1 U	**485**
MW-16	10/26/99		2.3 J	73	10 U	23	130	2.5 J	20 U	5.2 J	170	65	10 U	**471**
MW-16	01/31/00		2.3 J	75	10 U	2.2 J	120	16	20 U	5.9 J	170	68	10 U	**459**
MW-16	04/24/00		2.5 J	79	5 U	2 J	130 E	16	10 JB	5.7	170 E	65	5 U	**480**
MW-16	04/24/00	Dilution	50 DJB	75 D	50 U	50 U	130 D	17 DJ	100 DJB	5.3 DJ	160 D	62 D	2.8 DJ	**602**
MW-16	07/27/00		2.7	75	10 U	3.8	130	12	20 U	5.2	160	58	10 U	**447**
MW-16	11/13/00		2.2	87	10 U	20	150	2.8	20 U	5	140	55	10 U	**462**
MW-16	04/12/01		2.3	74	10 U	3.1	150	14	20 U	5.8	180	64	10 U	**493**
MW-16	10/31/01		2.5	88	10 U	10 U	160	22	20 U	7.1	210	72	10 U	**562**
MW-16	04/25/02		2.3	70	10 U	15	170	6.7	20 U	6.6	150	62	10 U	**483**
MW-16	10/15/02		20 U	130	20 U	98	240	22	40 U	20 U	240	91	1 U	**821**
MW-16	04/23/03		2.51	95.6 E	1.08	24.2	244 E	15.7	2 U	9.74	237 E	97.6 E	1 U	**727**
MW-16	04/23/03	Dilution	20 U	75.6	20 U	24.6	200	20 U	40 U	20 U	172	75.3	20 U	**548**
MW-16	12/26/03		2.48	93.9 E	1 U	32.2 E	209 E	13.9	1 U	9.45	208 E	77.8 E	1 U	**647**
MW-16	12/26/03	Dilution	10 U	93.9 D	10 U	31.7 D	247 D	10 U	10 U	9.14 JD	221 D	92.7 E	10 U	**695**
MW-16	12/26/03	Fld Dupe	10 U	82.7 D	10 U	34.5 E	230 E	10 U	10 U	7.88 JD	182 D	72.5 E	1 U	**610**
MW-16	04/28/04		20 U	100	20 U	30.1	254	20 U	40 U	20 U	202	77.3	20 U	**663**
MW-16	05/21/05		1.8	91	1 U	28	230	5.6	2 U	6.5	160	65	1 U	**588**
MW-16	10/20/05		1.8	91	1 U	28	230	5.6	2 U	6.5	160	65	1 U	**588**
MW-16	05/08/06		2	94	1 U	27	290	7.3	2 U	9.1	170	78	1 U	**677**
MW-16	01/04/07		5	94	5 U	24	280	5	10 U	5.3	160	63	5 U	**636**
MW-16	10/08/07		2	100	1	28	260	14	2 U	8	140	61	1 U	**614**
MW-16	05/17/08		20 U	130	20 U	39	320	20 U	40 U	20 U	170	78	20 U	**737**
MW-16	12/18/08	Dilution	1.3 J	100	1 J	2 U	240	35	0.7 J	4.6	120	56	2 U	**559**
MW-16	06/20/09	Dilution	1.6 J	110	2 U	2 U	39	6.8	2 U	5.5	170	42	2 U	**375**
MW-16	11/28/09	Dilution	1.6 J	110	2 U	7.9	56	6.9	0.88 J	6.1	180	55	2 U	**424**
MW-16	06/25/10		1.4	93	0.21 J	21	51	3.8	1 U	8.7	200	58	1 U	**437**
MW-16	11/27/10	Dilution	1.4 J	78	2 U	24	45	1.6 J	2 U	10	180	60	2 U	**400**
MW-16	06/01/11		1.2	81	1 U	19	40	3.2	1 U	11	160	54	1 U	**369**
MW-16	12/28/11		1.1	71	1 U	17	27	2.7	5 U	11	130	42	1 U	**302**
MW-16	06/28/12		1.1	72	1 U	5.2	25	3.3	5 U	11	120	41	1 U	**279**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-47	10/06/93		1 U	5	1 U	2	3	1 U	2 U	1	9	5		**25**
MW-47	06/01/99		1 U	1.1	1 U	0.49	1.3	1 U	2 U	0.53	3.5	2.8	1 U	**10**
MW-47	10/27/99		1 U	1.1	1 U	0.87 J	4.5	0.05 J	2 U	2.2	6.5	5.7	1 U	**21**
MW-47	02/17/00		1 U	0.32 J	1 U	0.1 J	0.18 J	1 U	2 U	0.27 J	1	0.58 J	1 U	**2**
MW-47	04/18/00		1 U	0.53 J	1 U	0.18 J	0.36 J	1 U	2 U	0.27 J	1	0.66 J	1 U	**3**
MW-47	07/27/00		1 U	0.61	1 U	0.13	0.38	1 U	2 U	0.64	1.2	0.82	1 U	**4**
MW-47	11/08/00		0.17	0.55	1 U	0.1	0.25	1 U	2 U	0.45	0.58	0.37	1 U	**2**
MW-47	04/10/01		0.28	0.57	1 U	1	0.31	1 U	2 U	0.48	1.1	0.56	1 U	**4**
MW-47	10/31/01		0.92	0.21	1 U	1 U	1 U	1 U	2 U	0.38	0.34	0.25	1 U	**2**
MW-47	04/30/02		1.3	0.13	1 U	1 U	0.13	1 U	2 U	0.33	0.23	0.27	1 U	**2**
MW-47	10/17/02		1	1 U	1 U	1 U	1 U	1 U	0.6	1 U	1 U	1 U	1 U	**2**
MW-47	04/22/03		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.67 J	1 U	1 U	**1**
MW-47	12/28/03		1 U	1 U	1 U	0.51 J	1 U	1 U	1 U	0.77 J	0.59 J	1 U	1 U	**2**
MW-47	04/28/04		1 U	0.54	1 U	1 U	1 U	1 U	2 U	1 U	0.91	0.58	1 U	**2**
MW-47	05/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1.4	1 U	1 U	**1**
MW-47	06/28/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-47	01/05/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-47	10/08/07		1 U	2	1 U	0.9	2	1 U	2 U	0.6	3	1	1 U	**10**
MW-47	05/17/08		1 U	1	1 U	1 U	1	1 U	2 U	1 U	4	1	1 U	**7**
MW-47	11/29/08		1 U	1.6	1 U	1 U	0.93 J	1 U	1 U	0.62 J	2.91	1.17	1 U	**7**
MW-47	11/29/08	Fld Dupe	0.15 J	1.58	1 U	0.34 J	0.96 J	1 U	1 U	0.61 J	2.89	1.15	1 U	**8**
MW-47	06/20/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-47	11/28/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-47	06/24/10		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-47	11/29/10		1 U	0.27 J	1 U	1 U	1 U	1 U	1 U	1 U	0.3 J	1 U	1 U	**1**
MW-47	06/03/11		1 U	2	1 U	0.68 J	0.7 J	1 U	1 U	0.33 J	2.7	1.2	1 U	**8**
MW-47	12/29/11		1 U	0.35 J	1 U	1 U	1 U	1 U	5 U	0.4 J	0.85 J	0.64 J	1 U	**2**
MW-47	06/26/12		1 U	1 U	1 U	1 U	1 U	1 U	5 U	0.29 J	1 U	1 U	1 U	**0**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-101A	10/04/93		4	150	17 U	43	190		17 U	17 U	650	180		**1217**
MW-101A	04/20/99		7.3	230	3.4	63	540	9.3	2 U	16	580	200	1 U	**1649**
MW-101A	10/25/99		5.6 J	240	50 U	64	620	7 J	100 U	14 J	610	220	50 U	**1781**
MW-101A	01/27/00		6.2 J	270	50 U	61	690	40 J	100 U	15 J	740	270	50 U	**2092**
MW-101A	04/25/00		7 JB	240	50 U	65	720	7.8 J	100 JB	50 U	690	220	50 U	**2050**
MW-101A	07/26/00		6.1	210	20 U	51	730	10	40 U	4.4	620	140	20 U	**1772**
MW-101A	11/16/00		6.3	310	50 U	77	830	8.3	100 U	15	740	250	50 U	**2237**
MW-101A	04/13/01		5.6	240	50 U	81	780	8.6	100 U	14	830	270	50 U	**2229**
MW-101A	10/30/01		6.3	300	50 U	79	990	12	100 U	15	1000	300	50 U	**2702**
MW-101A	04/22/02		6.8	250	50 U	82	1000	11	100 U	18	890	280	50 U	**2538**
MW-101A	10/10/02		100 U	370	100 U	440	1200	100 U	200 U	64	1200	340	1 U	**3614**
MW-101A	04/23/03		6.28	320 E	1 U	125 E	1080 E	19.4	2 U	26.8 E	919 E	427 E	1 U	**2923**
MW-101A	04/23/03	Dilution	100 U	266	100 U	81.8 J	1110	100 U	200 U	100 U	909	309	100 U	**2676**
MW-101A	12/26/03		8.18	313 E	3.83	128 E	1080 E	21.8	1 U	51.7 E	796 E	344 E	1 U	**2747**
MW-101A	12/26/03	Dilution	100 U	268 D	100 U	101 D	1260 D	100 U	100 U	100 U	950 D	278 D	100 U	**2857**
MW-101A	04/28/04		100 U	265	100 U	98.1	1230	100 U	200 U	56.4	1040	302	100 U	**2992**
MW-101A	05/21/05		10 U	260	10 U	89	1100	13	20 U	80	850	250	10 U	**2642**
MW-101A	01/12/06		4.5	220	5 U	37	990	44	10 U	61	800	220	5 U	**2377**
MW-101A	05/08/06		4.4	25 U	1 U	76	1100	17	2 U	93	970	270	1 U	**2530**
MW-101A	01/04/07		10 U	180	10 U	48	840	21	20 U	56	820	190	10 U	**2155**
MW-101A	10/07/07		4	220	2	38	790	72	2 U	67	590	200	1 U	**1983**
MW-101A	05/17/08		50 U	260	50 U	100	1000	50 U	100	64	740	240	50 U	**2504**
MW-101A	11/28/08	Dilution	4.1 J	233	2.15 J	57.5	908	38.4	1.8 J	56.2	691	214	5 U	**2206**
MW-101A	06/10/09	Dilution	4.3 J	230	2 J	50	870	30	5 U	56	550	190	5 U	**1982**
MW-101A	11/27/09	Dilution	5.2 J	280	10 U	70	990	36	10 U	47	550	220	10 U	**2198**
MW-101A	06/28/10	Dilution	2 U	54	2 U	15	210	6	2 U	6.8	90	38	2 U	**420**
MW-101A	06/28/10	Fld Dupe	2 U	51	2 U	14	200	5.3	2 U	6.3	86	37	2 U	**400**
MW-101A	11/26/10	Dilution	3.2 J	280	10 U	68	1100	18	10 U	36	550	230	10 U	**2285**
MW-101A	05/31/11	Dilution	4.5 J	310	10 U	46	1200	75	10 U	36	510	190	10 U	**2372**
MW-101A	12/28/11	Dilution	4.3 J	290	2.8 J	62	1200	49	50 U	52	540	180	10 U	**2380**
MW-101A	12/28/11	Fld Dupe	4.3 J	290	10 U	64	1200	52	50 U	52	540	180	10 U	**2382**
MW-101A	06/25/12	Dilution	5.2 J	320	10 U	72	1600	66	2.7 J	56	650	190	10 U	**2962**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-101B	10/04/93		5	140	25 U	42	190		25 U	84	560	180		**1201**
MW-101B	04/20/99		3.6	150	10 U	36	520	10 U	20 U	45	690	140	10 U	**1585**
MW-101B	10/25/99		3.6 J	140	25 U	38	430	3.2 J	50 U	47	580	150	25 U	**1392**
MW-101B	01/27/00		50 U	140	50 U	33 J	490	50 U	100 U	42 J	570	150	50 U	**1425**
MW-101B	04/25/00		4.5 J	150	50 U	37 J	510	5.2 J	100 JB	33 J	590	140	50 U	**1570**
MW-101B	07/26/00		4.4	150	20 U	41	700	4	40 U	39	750	140	20 U	**1828**
MW-101B	11/16/00		3.3	170	25 U	35	550	3.9	50 U	18	450	120	25 U	**1350**
MW-101B	04/13/01		50 U	140	50 U	42	570	50 U	100 U	39	620	160	50 U	**1571**
MW-101B	10/30/01		3.5	150	25 U	33	580	4	50 U	21	440	140	25 U	**1372**
MW-101B	04/22/02		4.4	140	50 U	37	630	4.4	3.3	48	580	140	50 U	**1587**
MW-101B	10/10/02		50 U	230	50 U	290	850	50 U	100 U	80	840	180	1 U	**2470**
MW-101B	04/23/03		3.62	202 E	1 U	66 E	891 E	11.7	2 U	67.1 E	753 E	206 E	1 U	**2200**
MW-101B	04/23/03	Dilution	50 U	162	50 U	45 J	795	50 U	100 U	50.7	656	160	50 U	**1869**
MW-101B	12/26/03		4.11	222 E	1 U	70.1 E	893 E	13	1 U	68 E	671 E	180 E	1 U	**2121**
MW-101B	12/26/03	Dilution	100 U	188 D	100 U	100 U	963 D	100 U	100 U	100 U	696 D	148 D	100 U	**1995**
MW-101B	04/28/04		50 U	226	50 U	59.4	1140	50 U	100 U	61.8	843	174	50 U	**2504**
MW-101B	05/21/05		10 U	200	10 U	50	920	10 U	20 U	47	610	130	10 U	**1957**
MW-101B	01/12/06		5 U	200	5 U	42	890	6.3	10 U	41	570	120	5 U	**1869**
MW-101B	05/08/06		10 U	230	10 U	52	1100	10 U	20 U	50	660	130	1 U	**2222**
MW-101B	01/04/07		10 U	210	10 U	46	950	10 U	20 U	46	620	120	10 U	**1992**
MW-101B	10/07/07		2	200	2	47	790	12	2 U	44	460	110	1 U	**1667**
MW-101B	05/17/08		50 U	240	50 U	64	960	50 U	100	52	560	130	50 U	**2106**
MW-101B	11/28/08	Dilution	2.4 J	181	1.75 J	36.2	760	7.45	1.35 J	41.1	438	96.3	5 U	**1566**
MW-101B	06/10/09	Dilution	3.1 J	160	1.8 J	31	750	7.1	5 U	36	390	81	5 U	**1460**
MW-101B	11/27/09	Dilution	2.6 J	170	5 U	37	840	8.4	5 U	37	400	81	5 U	**1576**
MW-101B	06/28/10	Dilution	10 U	130	10 U	35	790	9 J	10 U	32	320	70	10 U	**1386**
MW-101B	11/26/10	Dilution	10 U	130	10 U	36	850	10 U	10 U	32	430	77	10 U	**1555**
MW-101B	05/31/11	Dilution	5 U	140	5 U	32	910	6.2	5 U	30	420	63	5 U	**1601**
MW-101B	12/28/11	Dilution	1.7 J	120	0.86 J	26	270	5.5	10 U	25	380	40	2 U	**869**
MW-101B	06/25/12	Dilution	1.9 J	120	5 U	25	47	4.3 J	25 U	24	430	27	5 U	**679**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-101C	10/06/93		100 U	140	100 U	59	210	100	100 U	72	650	190		**1421**
MW-101C	04/20/99		3.5	140	10 U	34	550	10 U	20 U	45	740	140	10 U	**1653**
MW-101C	10/25/99		3 J	110	25 U	31	380	2.5 J	50 U	42	480	130	25 U	**1179**
MW-101C	01/27/00		20 U	110	20 U	28	370	2.8 J	40 U	42	460	120	20 U	**1133**
MW-101C	04/25/00		3.9 J	120	50 U	28 J	420	3.5 J	100 JB	31 J	450	100	50 U	**1256**
MW-101C	07/26/00		3.6	110	20 U	25	390	2.7	40 U	21	390	82	20 U	**1024**
MW-101C	11/13/00		2.6	130	25 U	24	420	2.7	50 U	34	370	100	25 U	**1083**
MW-101C	04/12/01		2.5	100	25 U	27	420	3	50 U	37	450	110	25 U	**1150**
MW-101C	10/30/01		2.9	120	25 U	21	510	11	50 U	32	470	110	25 U	**1277**
MW-101C	04/22/02		3.2	120	25 U	31	570	4.2	50 U	41	490	120	25 U	**1379**
MW-101C	10/10/02		50 U	200	50 U	200	660	50 U	28	150	650	130	1 U	**2018**
MW-101C	04/23/03		3	157 E	1 U	44.3 E	750 E	12.1	2 U	42 E	602 E	152 E	1 U	**1762**
MW-101C	04/23/03	Dilution	50 U	125	50 U	35.8 J	626	50 U	100 U	36.7 J	489	121	50 U	**1434**
MW-101C	12/30/03		3.64	193 E	1 U	57.2 E	782 E	32.5 E	1 U	63.2 E	644 E	175 E	1 U	**1951**
MW-101C	12/30/03	Dilution	50 U	141 D	50 U	42.4 JD	775 D	50 U	50 U	44.7 JD	628 D	142 D	50 U	**1773**
MW-101C	11/26/08	Dilution	2.45 J	157	2.05 J	33.8	682	6.8	1.5 J	27.9	398	86.4	5 U	**1398**
MW-101C	06/10/09	Dilution	2.6 J	120	5 U	22	550	5.8	5 U	24	270	56	5 U	**1050**
MW-101C	11/27/09	Dilution	2.4 J	120	5 U	28	620	5.5	5 U	25	290	63	5 U	**1154**
MW-101C	06/28/10	Dilution	5 U	85	5 U	23	570	5.4	5 U	19	220	44	5 U	**966**
MW-101C	11/26/10	Dilution	1.9 J	98	1.8 J	24	640	5 U	5 U	20	310	48	5 U	**1144**
MW-101C	05/31/11	Dilution	5 U	110	5 U	25	780	5.4	5 U	21	340	47	5 U	**1328**
MW-101C	12/28/11	Dilution	1.4 J	92	2 U	20	260	4	10 U	18	290	29	2 U	**714**
MW-101C	06/25/12	Dilution	1.4 J	89	2.5 U	17	89	3.3	12 U	16	300	20	2.5 U	**536**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-101D	10/06/93		50 U	72	50 U	34	130	50	50 U	31	300	96		**713**
MW-101D	04/21/99		2.6	80	5 U	24	230	5 U	10 U	23	300	80	5 U	**740**
MW-101D	01/27/00		1.6 J	42	10 U	14	130	1.5 J	20	18	180	54	10 U	**461**
MW-101D	04/25/00		2.4 JB	70	20 U	23	250	1.9 J	40 JB	23	270	81	20 U	**761**
MW-101D	07/26/00		2.5	60	1.2	14	180	1.1	20 U	2.9	180	33	10 U	**475**
MW-101D	11/16/00		2.2	76	1.3	17	210	1.3	20 U	3.8	180	46	10 U	**538**
MW-101D	04/13/01		2.2	66	10 U	21	250	1.9	20 U	18	250	73	10 U	**682**
MW-101D	10/30/01		2.3	70	20 U	22	260	2	40 U	26	300	80	20 U	**762**
MW-101D	04/30/02		2.5	66	20 U	22	260	2	40 U	20	240	67	20 U	**680**
MW-101D	10/10/02		20 U	100	20 U	94	280	20 U	40 U	20 U	300	58	1 U	**832**
MW-101D	04/23/03		2.17	72.1 E	1 U	28.2 E	323 E	5.34	2 U	24.8	297 E	82.6 E	1 U	**835**
MW-101D	04/23/03	Dilution	20 U	64.7	20 U	23.9	291	20 U	40 U	23	254	73.7	20 U	**730**
MW-101D	04/23/03	Fld Dupe	3	155 E	1 U	44.3 E	744 E	9.63	2 U	40.7 E	603 E	122	1 U	**1722**
MW-101D	12/28/03		1.87	47 E	0.88 J	19.8	184 E	8.27	1 U	19.2	202 E	58.3 E	1 U	**541**
MW-101D	12/28/03	Dilution	10 U	41.8 D	10 U	17.6 D	179 D	10 U	10 U	16 D	168 D	51.6 E	10 U	**474**
MW-101D	04/28/04		25 U	68	25 U	22.2	323	25 U	50 U	20.7	249	62.3	25 U	**745**
MW-101D	05/21/05		2	74	1 U	28	330	1 U	2 U	22	230	61	1 U	**747**
MW-101D	01/12/06		2 U	53	2 U	5	85	2 U	4 U	14	190	20	2 U	**367**
MW-101D	06/23/06		10 U	77	10 U	24	410	10 U	20 U	20	220	56	10 U	**807**
MW-101D	01/04/07		5	56	5 U	16	200	5 U	10 U	15	180	46	5 U	**518**
MW-101D	10/07/07		10 U	55	10 U	22	240	10 U	10 U	18	180	50	10 U	**565**
MW-101D	05/17/08		10 U	98	10 U	35	420 E	10 U	18 J	26	250 E	70	10 U	**917**
MW-101D	05/17/08	Dilution	25 U	81 D	25 U	28 D	380 D	25 U	50 U	25 U	220 D	60 D	25 U	**769**
MW-101D	11/28/08	Dilution	1.46 J	41.6	0.58 J	15	199	1.94 J	0.62 J	16.4	137	39.3	2 U	**453**
MW-101D	06/10/09	Dilution	1.8 J	68	0.86 J	19	340	3.6	2 U	20	180	47	2 U	**680**
MW-101D	11/27/09	Dilution	1.5 J	64	2.5 U	18	290	4.1	2.5 U	16	150	39	2.5 U	**583**
MW-101D	06/28/10	Dilution	2.5 U	44	2.5 U	16	270	3.1	2.5 U	13	110	32	2.5 U	**488**
MW-101D	11/26/10	Dilution	1.4 J	51	1 J	18	320	0.62 J	2.5 U	17	160	38	2.5 U	**607**
MW-101D	05/31/11	Dilution	1.4 J	60	2 U	17	210	2.4	2 U	15	170	31	2 U	**507**
MW-101D	12/28/11		1	42	1 U	13	39	2.1	5 U	12	120	19	1 U	**248**
MW-101D	06/25/12		1.1	47	1 U	14	33	1.8	5 U	12	150	19	1 U	**278**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-102A	09/28/93		2 U	26	2 U	4	32	2	23	2	34	6		**129**
MW-102A	05/20/99		1 U	43	0.25	1.2	54	1.8	2 U	0.6	51	6.3	1 U	**158**
MW-102A	10/25/99		0.15 J	43	5 U	2.5 J	61	1.7 J	10 U	3.1 J	57	15	5 U	**183**
MW-102A	02/16/00		5 U	64	5 U	2.8 J	90	3 J	10 U	5 U	97	14	5 U	**271**
MW-102A	04/25/00		5 U	43	5 U	1.5 J	49	1.4 J	10 JB	5 U	57	7.6	5 U	**170**
MW-102A	04/25/00	Fld Dupe	0.14 J	43	5 U	1.4 J	49	1.3 J	10 JB	5 U	57	7.7	5 U	**170**
MW-102A	07/26/00		10 U	71	10 U	2.7	95	2.5	20 U	10 U	100	16	10 U	**287**
MW-102A	11/16/00		5 U	91	5 U	2.8	110	2.7	10 U	5 U	88	14	5 U	**309**
MW-102A	04/10/01		10 U	91	10 U	4.2	140	4.4	20 U	10 U	120	22	10 U	**382**
MW-102A	10/17/01		10 U	77	10 U	2.3	110	4.1	20 U	10 U	88	16	10 U	**297**
MW-102A	04/30/02		5 U	47	5 U	1.6	65	1.9	10 U	5 U	62	11	5 U	**189**
MW-102A	10/10/02		20 U	130	20 U	20 U	160	20 U	40 U	20 U	140	26	1 U	**456**
MW-102A	04/25/03		1 U	101 E	1 U	4.17	153 E	5.08	2 U	1 U	123 E	25.7 E	1 U	**412**
MW-102A	04/25/03	Dilution	10 U	92.9	10 U	10 U	137	10 U	20 U	10 U	102	22.2	10 U	**354**
MW-102A	12/26/03		1 U	108 E	1 U	4.14	145 E	5.89	1 U	1 U	111 E	20.1	1 U	**394**
MW-102A	12/26/03	Dilution	10 U	118 D	10 U	10 U	156 D	5.56 JD	10 U	10 U	114 D	22.4 D	10 U	**416**
MW-102A	04/28/04		2 U	39	2 U	2 U	34.2	1.45	4 U	2 U	37.3	6.93	2 U	**119**
MW-102A	05/02/05		1 U	19	1 U	1 U	16	0.84	2 U	1 U	19	3.5	1 U	**58**
MW-102A	05/02/05	Fld Dupe	1 U	24	1 U	1 J	21	1.1	2 U	1 U	21	4.3	1 U	**72**
MW-102A	11/02/05		1 U	71	1 U	1.9	110	5.1	2 U	1 U	57	11	1 U	**256**
MW-102A	06/22/06		1 U	39	1 U	0.98	54	1.9	2 U	1 U	31	6.6	1 U	**133**
MW-102A	11/16/06		1 U	73	1 U	1.8	120	3.3	2 U	1 U	100	15	1 U	**313**
MW-102A	10/08/07		10 U	64	10 U	4	150	5	9	10 U	95	20	10 U	**347**
MW-102A	05/19/08		10 U	68	10 U	10 U	150	10 U	20	10 U	93	18	10 U	**349**
MW-102A	11/26/08		0.18 J	58.1	0.32 J	2.81	137	4.14	1 U	1 U	82.6	17.6	1 U	**303**
MW-102A	06/11/09		0.19 J	66	0.26 J	2.6	150	4.1	1 U	1 U	82	16	1 U	**321**
MW-102A	11/27/09		1 U	96	1 U	3.5	190	5.3	1 U	1 U	89	18	1 U	**402**
MW-102A	06/28/10	Dilution	2 U	80	2 U	2.7	170	5.3	2 U	2 U	62	15	2 U	**335**
MW-102A	11/26/10	Dilution	2 U	99	2 U	3	200	5.3	2 U	2 U	90	20	2 U	**417**
MW-102A	11/26/10	Fld Dupe	2 U	95	2 U	2.7	200	4.9	2 U	2 U	87	19	2 U	**409**
MW-102A	06/01/11		1 U	94	1 U	2.2	190	6	1 U	1 U	74	16	1 U	**382**
MW-102A	12/28/11		1 U	90	1 U	1.9	170	6	5 U	1 U	63	15	1 U	**346**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-102A	06/27/12		1 U	79	1 U	1.4	160	5.1	5 U	1 U	52	13	1 U	**311**
MW-102B	09/28/93		1 U	1 U	1 U	1 U	1 U	1 U	3	1 U	1 U	1 U		**3**
MW-102B	05/20/99		1 U	0.99	0.63	0.32	2.1	1 U	2 U	1.1	1.4	2.1	1 U	**9**
MW-102B	10/25/99		1 U	0.93 J	0.66 J	0.4 J	2.7	1 U	2 U	2	5.1	3.7	0.14 J	**16**
MW-102B	02/16/00		1 U	0.32 J	0.47 J	1 U	0.28 J	1 U	2 U	1 U	1 U	1 U	1 U	**1**
MW-102B	04/25/00		1 U	0.36 J	0.49 J	1 U	0.48 J	1 U	2 U	1 U	0.2 J	0.09 J	1 U	**2**
MW-102B	07/26/00		1 U	0.62	0.54	1 U	0.54	1 U	2 U	1 U	1 U	1 U	0.19 J	**2**
MW-102B	11/16/00		1 U	0.76	1 U	1 U	0.62	1 U	2 U	1 U	1 U	1 U	0.17 J	**2**
MW-102B	11/16/00	Fld Dupe	1 U	0.74 J	0.6 J	1 U	0.59 J	1 U	2 U	1 U	1 U	1 U	0.16 J	**2**
MW-102B	04/10/01		1 U	0.71	0.61	1 U	0.71	1 U	2 U	1 U	1 U	1 U	0.11 J	**2**
MW-102B	10/17/01		1 U	0.83	1 U	1 U	1.2	1 U	2 U	1 U	1 U	1 U	0.13 J	**2**
MW-102B	04/30/02		1 U	1	0.58	1 U	1.4	0.13	2 U	1 U	1 U	1 U	0.089	**3**
MW-102B	10/10/02		1 U	2	1 U	1 U	2	1 U	0.6	1 U	1 U	1 U	1 U	**5**
MW-102B	04/25/03		1 U	1.35	1 U	1 U	2.27	1 U	2 U	1 U	1 U	1 U	1 U	**4**
MW-102B	12/26/03		1 U	1.64	0.64 J	1 U	2.9	1 U	1 U	1 U	1 U	1 U	1 U	**5**
MW-102B	04/28/04		1 U	1.73	0.62	1 U	3.2	1 U	2 U	1 U	1 U	1 U	1 U	**6**
MW-102B	05/02/05		1 U	1.6	0.48	1 U	2.4	1 U	2 U	1 U	1 U	1 U	1 U	**4**
MW-102B	11/02/05		1 U	1.9	1 U	1 U	3.5	1 U	2 U	1 U	1 U	1 U	1 U	**5**
MW-102B	06/22/06		1 U	2.3	1 U	1 U	4.3	1 U	2 U	1 U	1 U	1 U	1 U	**7**
MW-102B	11/16/06		1 U	3	1 U	1 U	5	1 U	2 U	1 U	1 U	1 U	1 U	**8**
MW-102B	10/08/07		1 U	3	0.5	1 U	4	1 U	2 U	1 U	1 U	1 U	1 U	**8**
MW-102B	05/19/08		1 U	4	1 U	1 U	6	1 U	2 U	1 U	1 U	1 U	1 U	**10**
MW-102B	11/26/08		1 U	2.8	0.66 J	1 U	5.11	0.28 J	1 U	1 U	1 U	1 U	0.18 J	**9**
MW-102B	06/11/09		1 U	3.2	0.65 J	1 U	5	1 U	1 U	1 U	1 U	1 U	1 U	**9**
MW-102B	11/27/09		1 U	3.5	0.56 J	1 U	5.6	1 U	1 U	1 U	1 U	1 U	1 U	**10**
MW-102B	06/28/10		1 U	3	0.69 J	1 U	4.4	1 U	1 U	1 U	1 U	1 U	1 U	**8**
MW-102B	11/26/10		1 U	2.9	0.67 J	1 U	5	1 U	1 U	1 U	1 U	1 U	1 U	**9**
MW-102B	06/01/11		1 U	2.8	1 U	1 U	4	1 U	1 U	1 U	1 U	1 U	1 U	**7**
MW-102B	12/28/11		1 U	2.8	1 U	1 U	4.1	1 U	5 U	1 U	1 U	1 U	0.32 J	**7**
MW-102B	06/27/12		1 U	2.7	1 U	1 U	3.8	1 U	5 U	1 U	1 U	1 U	0.32 J	**7**
MW-102B	06/27/12	Fld Dupe	1 U	2.7	1 U	1 U	3.9	1 U	5 U	1 U	1 U	1 U	0.31 J	**7**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-102C	09/28/93		12 U	160	12 U	68	140	12 U	55	44	160	140		**767**
MW-102C	05/20/99		2.5	180	4	59	390	10 U	20 U	33	170	140	10 U	**979**
MW-102C	10/25/99		3 J	210	25 U	78	460	25 U	50 U	46	250	170	25 U	**1217**
MW-102C	02/16/00		0.66 J	32	0.91 J	12	61 E	0.57 J	0.38 J	5.9	60 E	26	2 U	**199**
MW-102C	02/16/00	Dilution	0.52 DJ	24 D	5 U	9 D	44 D	5 U	10 U	4.4 DJ	44 D	20 D	5 U	**146**
MW-102C	04/25/00		0.91 J	44	5 U	5.2	65	0.96 J	10 JB	0.67 J	60	10	5 U	**197**
MW-102C	07/26/00		0.64	29	0.8	4.5	39	0.41	4 U	0.99	44	8.2	2 U	**128**
MW-102C	11/16/00		0.32	19	2 U	4.5	28	0.26	4 U	1.1	23	8.3	2 U	**84**
MW-102C	04/10/01		0.94	48	5 U	2.6	39	5 U	10 U	0.8	90	5.4	5 U	**187**
MW-102C	10/17/01		0.6	29	4 U	8.9	53	0.39	8 U	3.5	46	17	4 U	**158**
MW-102C	04/30/02		2.1	110	2.4	40	240	3.3	20 U	19	170	78	10 U	**665**
MW-102C	10/10/02		5 U	56	5 U	54	87	5 U	10 U	4 J	69	20	1 U	**290**
MW-102C	04/25/03		1.16	83.3 E	1.57	33 E	200 E	4	2 U	16.3	143 E	64.8 E	1 U	**547**
MW-102C	04/25/03	Dilution	10 U	48.4	10 U	18.6	112	10 U	20 U	7.94 J	73.2	34.9	10 U	**295**
MW-102C	12/26/03		0.6 J	40.4 E	0.76 J	9.18	69 E	1.04	1 U	1.6	60.2 E	16.3	1 U	**199**
MW-102C	12/26/03	Dilution	4 U	42.6 D	4 U	9.85 D	79.1 D	4 U	4 U	4 U	59 D	16.2 D	4 U	**207**
MW-102C	04/28/04		25 U	105	25 U	38.2	278	25 U	50 U	20.9	136	70.4	25 U	**649**
MW-102C	05/02/05		0.74	69	1.2	0.62	22	1 U	2 U	1.1	110	1.5	1 U	**206**
MW-102C	11/02/05		1 U	3.4	1 U	1.3	7.4	1 U	2 U	1 U	6.4	2.9	1 U	**21**
MW-102C	11/02/05	Fld Dupe	1 U	18	1 U	5.8	46	1 U	2 U	2.5 H	15	9.9	1 U	**97**
MW-102C	06/22/06		1 U	23	1 U	8.4	49	1 U	2 U	4.9	19	15	1 U	**119**
MW-102C	11/16/06		1 U	69	1.3	10	120	0.97 J	2 U	4	70	23	1 U	**298**
MW-102C	10/08/07		0.4	60	1	22	170	2	2 U	10	35	34	1 U	**334**
MW-102C	10/08/07	Fld Dupe	0.5 J	90 D	1	33 D	270 D	4	2 U	16	52 D	51 D	0.6 J	**518**
MW-102C	05/19/08		10 U	66	10 U	26	210	10 U	21	12	74	37	10 U	**446**
MW-102C	11/26/08		0.21 J	18.9	0.33 J	5.75	56.6	0.79 J	1 U	2.66	18.4	9.54	1 U	**113**
MW-102C	06/11/09		0.31 J	36	0.57 J	6.1	99	0.74 J	1 U	0.94 J	23	8.9	1 U	**176**
MW-102C	11/27/09	Dilution	10 U	210	10 U	59	760	6.7 J	10 U	22	94	74	10 U	**1226**
MW-102C	06/28/10	Dilution	5 U	160	5 U	53	740	6.8	5 U	18	89	65	5 U	**1132**
MW-102C	11/26/10	Dilution	10 U	170	3.2 J	51	720	10 U	10 U	21	110	68	10 U	**1143**
MW-102C	06/01/11	Dilution	5 U	200	5 U	50	870	7	5 U	25	90	63	5 U	**1305**
MW-102C	12/28/11	Dilution	0.95 J	160	5 U	40	670	5.6	25 U	17	80	47	5 U	**1021**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-102C	06/27/12	Dilution	1.2 J	130	5 U	33	550	4.4 J	25 U	7.3	55	30	5 U	**811**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-113A	10/08/93		7 U	92	7 U	33	110	7 U	14 U	7 U	140	56		**431**
MW-113A	05/03/99		0.9	34	0.4	10	52	1.2	2 U	1.9	59	24	1 U	**183**
MW-113A	11/10/99		2.3 J	100	10 U	27	160	2.4 J	20	3.2 J	160	69	10 U	**544**
MW-113A	02/15/00		2.1 J	91	10 U	16	160	5.7 J	20 U	2.9 J	160	71	10 U	**509**
MW-113A	04/24/00		2.1 JB	92	10 U	5.1 J	160	13	20 JB	2.4 J	160	61	10 U	**516**
MW-113A	07/27/00		2.3	86	10 U	4	110	7.5	20 U	10 U	130	22	1 U	**362**
MW-113A	11/16/00		2.3	130	10 U	9.4	200	12	20 U	2.1	170	62	10 U	**588**
MW-113A	04/12/01		2.4	10	10 U	210	210	15	20 U	3.7	200	81	10 U	**732**
MW-113A	10/31/01		2.8	110	10 U	3	240	22	20 U	3.3	200	75	10 U	**656**
MW-113A	04/29/02		2.5	100	10 U	1.5	200	23	20 U	4.5	200	70	10 U	**602**
MW-113A	10/18/02		20 U	190	20 U	240	430	20 U	40 U	20 U	370	140	1 U	**1370**
MW-113A	04/23/03		2.84	139 E	1 U	27.6 E	371 E	18.2	2 U	8.11	306 E	126 E	1 U	**999**
MW-113A	04/23/03	Dilution	25 U	121	25 U	33.9	325	25 U	50 U	25 U	245	101	25 U	**826**
MW-113A	12/28/03		2.93	140 E	1.38	38.3 E	345 E	10.4	1 U	9.72	309 E	124 E	1 U	**981**
MW-113A	12/28/03	Dilution	20 U	109 D	20 U	31.4 D	318 D	20 U	20 U	20 U	232 D	92.9 D	20 U	**783**
MW-113A	04/28/04		25 U	123	25 U	32.4	360	25 U	50 U	25 U	239	89.1	25 U	**844**
MW-113A	04/28/04	Fld Dupe	3.09	123	1.6	35.9	371	37.9 E	2 U	10.3	240	96.8	1 U	**920**
MW-113A	05/21/05		5 U	140	5 U	45	410	5.7	10 U	8.1	260	100	5 U	**969**
MW-113A	10/20/05		2.6	110	1 U	22	330	17	2 U	8	210	82	1 U	**782**
MW-113A	05/08/06		2.3	110	1 U	32	470	9.1	20 U	10	270	93	1 U	**996**
MW-113A	01/04/07		10 U	110	10 U	27	430	10 U	20 U	10	210	10	10 U	**797**
MW-113A	10/08/07		2	150	1	46	480	15	2 U	10	260	110	1 U	**1074**
MW-113A	05/17/08		20 U	160	20 U	54	510 E	20 U	41	20 U	280	130	20 U	**1175**
MW-113A	05/17/08	Dilution	40 U	140 D	40 U	48 D	470 D	40 U	80 U	40 U	250 D	110 D	40 U	**1018**
MW-113A	11/29/08	Dilution	2.2 J	135	1.5 J	7.25	369	40.6	1.7 J	10.5	210	98.6	5 U	**876**
MW-113A	06/11/09	Dilution	2.6 J	110	5 U	21	370	15	5 U	10	180	85	5 U	**794**
MW-113A	11/28/09	Dilution	1.5 J	110	2.5 U	1.7 J	290	44	2.5 U	12	170	84	2.5 U	**713**
MW-113A	06/29/10	Dilution	1.1 J	88	1 J	3.3	240	30	0.85 J	12	130	76	2.5 U	**582**
MW-113A	11/28/10	Dilution	0.95 J	85	0.7 J	17	250	11	2.5 U	12	110	67	2.5 U	**554**
MW-113A	06/01/11		0.96 J	88	1 U	2.4	90	14	1 U	13	120	57	1 U	**385**
MW-113A	12/29/11		1.1	95	1 U	16	50	4.3	5 U	13	130	46	1 U	**355**
MW-113A	06/25/12		1.1	100	1 U	14	48	5.3	5 U	13	140	48	1 U	**369**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-113B	10/19/93		2 U	14	2 U	4	12	2 U	3 U	2 U	6	6		**42**
MW-113B	04/29/99		0.54	33	0.56	12	38	0.65	2 U	1.8	17	19	1 U	**123**
MW-113B	10/27/99		0.45 J	33	5 U	8.4	39	0.55 J	10 U	1.3 J	13	20	5 U	**116**
MW-113B	02/15/00		0.65 J	48	5 U	11	62	0.83 J	10 U	1.4 J	27	30	5 U	**181**
MW-113B	04/24/00		0.61 JB	43	5 U	11	56	0.98 J	10 JB	1.2 J	21	26	5 U	**170**
MW-113B	07/27/00		0.71	38	0.6	9.4	49	0.91	10 U	0.89	17	20	5 U	**137**
MW-113B	11/16/00		0.63	55	5 U	11	62	1.3	10 U	1.4	22	27	5 U	**180**
MW-113B	04/12/01		0.56	40	5 U	8.9	53	1	10 U	5 U	17	20	5 U	**140**
MW-113B	10/31/01		0.64	50	5 U	12	67	1.1	10 U	5 U	24	29	5 U	**184**
MW-113B	04/29/02		0.6	39	5 U	9.8	60	0.97	10 U	1.3	19	23	5 U	**154**
MW-113B	10/18/02		10 U	84	10 U	88	120	10 U	5	10 U	39	42	1 U	**378**
MW-113B	04/23/03		1.05	77.3 E	1 U	23.3	143 E	6.06	2 U	3.77	65.8 E	55.8 E	2.2	**378**
MW-113B	04/23/03	Dilution	10 U	58.6	10 U	17.4	115	10 U	20 U	10 U	45.6	41.9	10 U	**279**
MW-113B	12/28/03		0.97 J	71.3 E	1 U	21.4	134 E	4.01	1 U	3.72	53.4 E	52.1 E	1.24	**342**
MW-113B	12/28/03	Dilution	10 U	65.1 D	10 U	19.1 D	129 D	10 U	10 U	10 U	43.1 D	45.9 D	10 U	**302**
MW-113B	04/28/04		10 U	70	10 U	19.8	143	10 U	20 U	10 U	44.9	42.7	10 U	**320**
MW-113B	05/21/05		1 U	64	1 U	19	140	1.8	2 U	2.9	39	39	4.8	**311**
MW-113B	10/20/05		1 U	78	1 U	22	170	1.9	2 U	3.8	45	47	1 U	**368**
MW-113B	05/08/06		1 U	64	1 U	21	140	1.9	2 U	3.6	33	37	9.2	**310**
MW-113B	01/04/07		1 U	61	1 U	20	120	1.7	2 U	3	30	38	1.4	**275**
MW-113B	10/08/07		0.5	56	0.6	17	120	2	2 U	3	21	30	15	**265**
MW-113B	05/17/08		10 U	66	10 U	19	140	10 U	19 J	10 U	25	34	17	**320**
MW-113B	11/29/08		0.71 J	71.3	0.92 J	20.4	169	2.15	1 U	3.49	28.8	41.5	6.2	**344**
MW-113B	06/11/09		0.73 J	71	0.87 J	19	180	2.2	1 U	3.6	29	42	6.9	**355**
MW-113B	11/28/09		0.69 J	77	0.76 J	22	190	2.5	1 U	3.9	31	41	8	**377**
MW-113B	06/29/10	Dilution	2 U	63	2 U	19	150	2.7	2 U	3	19	33	9	**299**
MW-113B	11/28/10	Dilution	2 U	67	0.8 J	19	160	3	2 U	4.2	26	37	8.8	**326**
MW-113B	06/01/11		0.46 J	66	0.61 J	18	140	2.3	1 U	4.1	23	36	11	**301**
MW-113B	12/29/11		0.42 J	59	0.63 J	16	100	2	5 U	3.9	19	30	8.9	**240**
MW-113B	06/25/12		0.48 J	60	1 U	14	98	1.9	5 U	3.6	17	28	9.4	**232**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-114A	10/05/93		1 U	2	1 U	4	5	1 U	2 U	1 U	6	2		**19**
MW-114A	04/28/99		5 U	6.7	5 U	46	14	5 U	10 U	1.9 J	250	34	5 U	**353**
MW-114A	10/26/99		0.34 J	7.1 J	25 U	48	11 J	25 U	50 U	25 U	290	47	25 U	**403**
MW-114A	01/31/00		10 U	5 J	10 U	34	6.6 J	10 U	1.5 J	10 U	220	33	10 U	**300**
MW-114A	04/24/00		10 U	4.2 J	10 U	26	5.6 J	10 U	20 JB	10 U	160	24	10 U	**240**
MW-114A	07/27/00		10 U	3.9	10 U	24	5.4	10 U	20 U	10 U	140	22	10 U	**195**
MW-114A	11/13/00		10 U	4.2	10 U	20	4.7	10 U	20 U	10 U	120	19	10 U	**168**
MW-114A	04/12/01		5 U	2.7	5 U	18	3.9	5 U	10 U	5 U	120	20	5 U	**165**
MW-114A	10/31/01		5 U	2.5	5 U	15	3.6	5 U	10 U	5 U	100	18	5 U	**139**
MW-114A	04/25/02		5 U	3.1	5 U	16	4.1	5 U	10 U	5 U	100	22	5 U	**145**
MW-114A	04/25/02	Fld Dupe	5 U	3.1 J	5 U	16	4 J	5 U	10 U	5 U	100	22	5 U	**145**
MW-114A	10/15/02		10 U	10 U	10 U	140	7	10 U	20 U	10 U	170	38	1 U	**355**
MW-114A	04/23/03		1 U	3.28	1 U	13.4	4.09	1 U	2 U	1 U	94.6 E	23.5	1 U	**139**
MW-114A	04/23/03	Dilution	10 U	10 U	10 U	12.9	10 U	10 U	20 U	10 U	80.2	20.8	10 U	**114**
MW-114A	12/26/03		1 U	2.86	1 U	9.96	3.62	1 U	1 U	1 U	73.9 E	16.3	1 U	**107**
MW-114A	12/26/03	Dilution	4 U	2.86 JD	4 U	10.3 D	3.6 JD	4 U	4 U	4 U	70.1 D	15.9 D	4 U	**103**
MW-114A	04/28/04		5 U	3.69	5 U	12	4.25	5 U	10 U	5 U	79.9	20.8	5 U	**121**
MW-114A	05/21/05		1 U	2.5	1 U	5.7	3.3	1 U	2 U	1 U	28	7.9	1 U	**47**
MW-114A	10/20/05		1 U	2.6	1 U	7.2	2.9	1 U	2 U	1 U	39	9.8	1 U	**62**
MW-114A	05/06/06		1 U	3.4	1 U	9.4	3.7	1 U	2 U	1 U	44	12	1 U	**73**
MW-114A	01/04/07		1 U	3.5	1 U	11	3.3	1 U	2 U	1 U	51	9.6	1 U	**78**
MW-114A	10/08/07		1 U	2	1 U	7	2	1 U	2 U	2 U	34	5	1 U	**50**
MW-114A	05/17/08		2 U	2	2 U	5	3	2 U	3 J	2 U	28	4	2 U	**45**
MW-114A	11/29/08		1 U	0.28 J	1 U	1 U	1 U	1 U	1 U	1 U	1.09	1 U	1 U	**1**
MW-114A	06/11/09		0.16 J	1 U	1 U	1 U	1 U	1 U	1 U	1 U	0.9 J	1 U	1 U	**1**
MW-114A	11/28/09		0.46 J	1.9	1 U	3.9	1.3	1 U	1 U	1 U	36	2.7	1 U	**46**
MW-114A	06/25/10		1 U	3.2	1 U	6.6	2.2	1 U	1 U	1 U	70	4.4	1 U	**86**
MW-114A	11/27/10		1 U	2.8	1 U	8.5	2.1	1 U	1 U	1 U	65	4.7	1 U	**83**
MW-114A	06/01/11		1 U	4.2	1 U	10	2.9	1 U	1 U	1 U	85	5.5	1 U	**108**
MW-114A	12/28/11		1 U	3.6	1 U	9.1	2.6	1 U	5 U	0.18 J	65	4.1	1 U	**85**
MW-114A	06/27/12		0.21 J	4.3	1 U	5.6	3	1 U	5 U	1 U	71	4.2	1 U	**88**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-114B	10/04/93		2 U	14	2 U	4	12	2 U	3 U	2 U	6	6		42
MW-114B	04/28/99		1 U	0.89	1 U	0.6	3.3	1 U	2 U	1	4	6.2	1 U	16
MW-114B	10/26/99		1 U	1	1 U	0.46 J	3.3	1 U	2 U	0.66 J	1.2	8.2	1 U	15
MW-114B	01/31/00		1 U	0.81 J	1 U	0.18 J	2.3	1 U	2 U	1 U	1 U	5.7	1 U	9
MW-114B	04/24/00		1 U	0.68 J	1 U	0.11 J	1.7	1 U	2 JB	1 U	0.05 J	1.8	1 U	6
MW-114B	07/27/00		1 U	1	1 U	0.26	3	1 U	2 U	1 U	1 U	7.9	1 U	12
MW-114B	07/27/00	Fld Dupe	1 U	1	1 U	0.26 J	3	1 U	2 U	1 U	1 U	7.5	1 U	12
MW-114B	11/13/00		1 U	1.2	1 U	0.13	2.4	1 U	2 U	1 U	1 U	3.5	1 U	7
MW-114B	04/12/01		1 U	0.98	1 U	0.26	2.9	1 U	2 U	1 U	1 U	8.2	1 U	12
MW-114B	10/31/01		1 U	0.96	1 U	0.13	2.2	1 U	2 U	1 U	1 U	4.8	1 U	8
MW-114B	04/25/02		1 U	1.1	1 U	0.29	3	0.04	2 U	1 U	1 U	7.2	1 U	12
MW-114B	10/15/02		1 U	2	3	1	3	1 U	0.6	1 U	1 U	9	1 U	19
MW-114B	04/23/03		1 U	1.15	1 U	1 U	2.84	1 U	2 U	1 U	1 U	8.8	1 U	13
MW-114B	12/26/03		1 U	1.25	1 U	1.07	2.98	1 U	1 U	1 U	1 U	8.91	1 U	14
MW-114B	04/28/04		1 U	1.21	1 U	1 U	2.87	1 U	2 U	1 U	1 U	8.82	1 U	13
MW-114B	05/21/05		1 U	1.5	1 U	1 U	2.3	1 U	2 U	1 U	1 U	7.6	1 U	11
MW-114B	10/20/05		1 U	1.6	1 U	1 U	2.3	1 U	2 U	1 U	1 U	8.8	1 U	13
MW-114B	05/06/06		1 U	1 U	1 U	1 U	2.1	1 U	2 U	1 U	1 U	8.7	1 U	11
MW-114B	01/04/07		1 U	1.4	1 U	1 U	1.8	1 U	2 U	1 U	1 U	6.7	1 U	10
MW-114B	01/04/07	Fld Dupe	1 U	1.6	1 U	1 U	1.8	1 U	2 U	1 U	1 U	6.4	1 U	10
MW-114B	10/08/07		1 U	2	1 U	0.5	2	1 U	2 U	1 U	1 U	6	1 U	11
MW-114B	05/17/08		1 U	2	1 U	1 U	2	1 U	2 U	1 U	1 U	9	1 U	13
MW-114B	12/18/08		1 U	1.6	1 U	0.67 J	2	1 U	1 U	1 U	1 U	6.8	1 U	11
MW-114B	06/20/09		1 U	1.8	1 U	0.67 J	2.2	1 U	1 U	1 U	1 U	6.5	1 U	11
MW-114B	11/28/09		1 U	2.2	1 U	1	2	1 U	1 U	1 U	1 U	6.7	1 U	12
MW-114B	11/28/09	Fld Dupe	1 U	2.4	1 U	0.93 J	1.9	1 U	1 U	1 U	1 U	6.8	1 U	12
MW-114B	06/25/10		1 U	2.1	1 U	0.84 J	2	1 U	1 U	1 U	1 U	6.3	1 U	11
MW-114B	06/25/10	Fld Dupe	1 U	2	1 U	0.81 J	1.9	1 U	1 U	1 U	1 U	6.3	1 U	11
MW-114B	11/27/10		1 U	1.8	1 U	1	2.3	1 U	1 U	1 U	1 U	7.8	1 U	13
MW-114B	06/01/11		1 U	1.6	1 U	1 U	2.1	1 U	1 U	1 U	1 U	7.7	1 U	11
MW-114B	06/01/11	Fld Dupe	1 U	1.6	1 U	1 U	2.1	1 U	1 U	1 U	1 U	7.4	1 U	11
MW-114B	12/28/11		1 U	1.3	1 U	0.54 J	2.2	1 U	5 U	1 U	1 U	6.7	1 U	11

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-114B	06/28/12		1 U	1.1	1 U	1 U	1.8	1 U	5 U	1 U	1 U	6.5	1 U	**9**
MW-114B	06/28/12	Fld Dupe	1 U	1.1	1 U	0.41 J	1.8	1 U	5 U	1 U	1 U	6.7	1 U	**10**
MW-117B	10/04/93		0.6	1 U	1 U	1 U	1	1 U	2 U	4	2	5		**13**
MW-117B	04/22/99		0.72	7.3	0.54	14	16	1 U	2 U	3.1	83	21	1 U	**146**
MW-117B	10/18/99		0.58 J	7.7	5 U	14	17	5 U	10	1.3 J	68	17	5 U	**136**
MW-117B	01/26/00		0.36 J	8	5 U	9.5	18	5 U	10	1.9 J	59	22	5 U	**129**
MW-117B	04/17/00		0.39 J	8.1	0.42 J	11	19	2 U	4 JB	1.6 J	49	19	0.07 J	**113**
MW-117B	07/24/00		0.49	6.6	2 U	9.6	15	2 U	4 U	1.7	42	17	2 U	**92**
MW-117B	11/07/00		0.42	10	2 U	11	18	2 U	4 U	1.7	37	19	2 U	**97**
MW-117B	04/09/01		0.37	5.8	2 U	7.3	13	0.25	4 U	1.8	28	17	2 U	**74**
MW-117B	10/15/01		0.35	7.1	2 U	7.5	16	2 U	4 U	1.3	23	16	2 U	**71**
MW-117B	04/16/02		0.3	5.9	0.22	7.3	15	0.2	2 U	1.7	22	16	1 U	**69**
MW-117B	10/07/02		5 U	8	5 U	54	20	5 U	10 U	3	25	16	1 U	**126**
MW-117B	04/22/03		1 U	7.55	1 U	10.4	20.1	0.61 J	2 U	2.31	23.1	18.4	1 U	**82**
MW-117B	12/22/03		0.99 J	5.96	1 U	9.38	18.7	0.53 J	1 U	2.25	21.8	16.9	1 U	**77**
MW-117B	04/28/04		0.73	3.77	1 U	4.76	11.5	1 U	2 U	2	13.5	11.5	1 U	**48**
MW-117B	05/21/05		1 U	4.5	1 U	5.7	13	1 U	2 U	1.6	11	9.4	1 U	**45**
MW-117B	10/19/05		1 U	4.7	1 U	5.6	14	1 U	2 U	1.8	12	9.3	1 U	**47**
MW-117B	06/28/06		1 U	21	1 U	23	70	1 U	2 U	24	56	23	1 U	**217**
MW-117B	11/21/06		1 U	3.6	1 U	4	11	1 U	2 U	2.1	12	11	1 U	**44**
MW-117B	10/06/07		0.4	6	1 U	8	8	1 U	2 U	2	16	12	1 U	**52**
MW-117B	05/17/08		1 U	8	1 U	11	11	1 U	2 U	3	25 E	16	1 U	**74**
MW-117B	05/17/08	Dilution	2 U	7 D	2 U	10 D	9 D	2 U	4 U	3 D	22 D	14 D	2 U	**65**
MW-117B	11/28/08		0.38 J	7.91	1 U	8.73	8.11	1 U	1 U	4.99	24	15.8	1 U	**70**
MW-117B	06/09/09		0.49 J	11	1 U	12	7.9	1 U	1 U	4.5	31	17	1 U	**84**
MW-117B	11/24/09		0.42 J	8.5	1 U	9	5.1	1 U	1 U	5.3	24	15	1 U	**67**
MW-117B	06/24/10		0.32 J	12	1 U	12	6	1 U	1 U	6.5	37	17	1 U	**91**
MW-117B	11/24/10		0.31 J	11	1 U	8.1	4.6	1 U	1 U	8.4	31	19	1 U	**82**
MW-117B	05/31/11		1 U	4.7	1 U	3.9	2.2	1 U	1 U	7.8	13	10	1 U	**42**
MW-117B	12/22/11		0.29 J	8.7	1 U	4.5	1.8	1 U	5 U	6.7	11	8.7	1 U	**42**
MW-117B	06/26/12		0.3 J	5.9	1 U	2.6	0.77 J	1 U	5 U	5.9	7.8	5.7	1 U	**29**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-117C	10/04/93		2 U	17	2 U	13	23	2 U	5 U	2 U	50	75		**178**
MW-117C	04/22/99		0.77	54	2.3	44	69	2 U	4 U	6	75	36	0.79 J	**288**
MW-117C	10/18/99		5 U	60	5 U	53	82	5 U	10 U	7.5	94	40	0.96 J	**337**
MW-117C	02/16/00		0.82 J	61	5 U	53	94	0.5 J	0.8 J	9.7	93	41	0.9 J	**355**
MW-117C	04/18/00		0.79 J	54	2.2 J	49	94	0.6 J	10 JB	10	91	39	0.82 J	**351**
MW-117C	07/24/00		1	55	2.4	48	99	1.1	10 U	8.7	89	38	0.63 J	**343**
MW-117C	11/07/00		0.79	69	2.4	50	100	5 U	10 U	8.8	78	34	0.74 J	**344**
MW-117C	04/09/01		0.84	57	2.3	59	120	0.82	10 U	12	99	42	0.72 J	**394**
MW-117C	10/15/01		0.81	48	5 U	45	110	0.44	10 U	11	74	32	0.67 J	**322**
MW-117C	04/16/02		0.75	41	1.6	469	120	0.74	0.3	16	82	34	0.42 J	**766**
MW-117C	10/07/02		20 U	59	20 U	330	150	20 U	32	22	110	42	0.6 J	**746**
MW-117C	04/22/03		0.85 J	43.6 E	1.35	63.6 E	134 E	1.71	2 U	27.1 E	113 E	48 E	0.67 J	**434**
MW-117C	04/22/03	Dilution	10 U	40	10 U	58.2	123	10 U	20 U	23.1	93	44.3	10 U	**382**
MW-117C	12/22/03		0.82 J	39.6 E	1.01	55.8 E	126 E	2.07	1 U	27.5 E	104 E	46.4 E	1 U	**403**
MW-117C	12/22/03	Dilution	10 U	33.1 D	10 U	43.3 D	107 D	10 U	10 U	19.9 D	78.2 D	34.8 D	10 U	**316**
MW-117C	04/28/04		10 U	30.5	10 U	37	97.3	10 U	20 U	20.3	66.4	30.1	10 U	**282**
MW-117C	05/21/05		1 U	28	1 U	34	91	1 U	2 U	22	59	27	1 U	**261**
MW-117C	10/19/05		1 U	25	1 U	29	84	1 U	2 U	20	54	26	1 U	**238**
MW-117C	05/06/06		1 U	25	1 U	26	91	1 U	2 U	21	50	26	1 U	**239**
MW-117C	11/21/06		1 U	41	1 U	46	140	1 U	2 U	36	100	44	1 U	**407**
MW-117C	10/06/07		0.5	24	0.3	30	88	0.9	2 U	24	60	26	1 U	**254**
MW-117C	05/17/08		5 U	28	5 U	33	99	5 U	10	30	72	30	5 U	**302**
MW-117C	11/28/08		0.55 J	24.1	0.26 J	25.6	85.9	0.31 J	1 U	26.5	57.1	23.1	1 U	**243**
MW-117C	06/09/09		0.51 J	24	0.23 J	25	70	0.33 J	1 U	26	58	23	1 U	**227**
MW-117C	11/24/09		0.48 J	23	1 U	24	57	1 U	1 U	26	51	21	1 U	**202**
MW-117C	06/24/10		0.42 J	24	1 U	23	40	0.24 J	1 U	28	51	20	1 U	**187**
MW-117C	11/24/10		0.38 J	22	1 U	22	34	1 U	1 U	27	53	21	1 U	**179**
MW-117C	05/31/11		0.45 J	25	1 U	21	24	1 U	1 U	27	47	19	1 U	**163**
MW-117C	12/22/11		0.38 J	23	1 U	17	13	1 U	5 U	25	37	17	1 U	**132**
MW-117C	06/26/12		0.4 J	25	1 U	17	14	1 U	5 U	23	37	15	1 U	**131**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-117D	04/22/99		0.74	46	2	50	110	2 U	4 U	17	110	38	2 U	**374**
MW-117D	10/18/99		10 U	39	10 U	44	110	10 U	1.5 J	17	97	35	10 U	**344**
MW-117D	02/17/00		0.8 J	34	1.4 J	41	100	5 U	10 U	19	91	35	0.45 J	**323**
MW-117D	04/18/00		0.63 J	29	1.1 J	35	90	5 U	10 JB	17	82	32	0.38 J	**297**
MW-117D	07/24/00		0.85	27	1.2	36	81	5 U	10 U	16	80	35	5 U	**277**
MW-117D	11/07/00		0.6	37	1	33	87	5 U	10 U	16	71	30	5 U	**276**
MW-117D	04/09/01		0.65	29	5 U	37	88	0.39	10 U	13	80	31	5 U	**279**
MW-117D	10/16/01		0.53	23	5 U	25	75	5 U	10 U	17	57	23	5 U	**221**
MW-117D	04/16/02		0.61	21	5 U	24	72	5 U	10 U	18	58	23	5 U	**217**
MW-117D	10/07/02		10 U	36	10 U	180	100	10 U	18	24	87	29	1 U	**474**
MW-117D	04/22/03		0.64 J	29.8 E	0.7 J	43.1 E	95.8 E	1 U	2 U	6.41	78.7 E	32.4 E	1 U	**288**
MW-117D	04/22/03	Dilution	5 U	28.3	5 U	36.7	83.1	5 U	10 U	4.62 J	64.5	26	5 U	**243**
MW-117D	12/22/03		0.61 J	28.1 E	1 U	30.4 E	102 E	1 U	1 U	30.1 E	84.2 E	31.2 E	1 U	**307**
MW-117D	12/22/03	Dilution	5 U	29 D	5 U	32.8 D	110 D	5 U	5 U	29.6 D	85.1 D	31.2 E	5 U	**318**
MW-117D	04/28/04		5 U	28.6	5 U	37.7	105	5 U	10 U	17.4	75.5	33.2	5 U	**297**
MW-117D	05/21/05		1 U	20	1 U	24	84	1 U	2 U	21	60	24	1 U	**233**
MW-117D	10/19/05		1 U	24	1 U	21	73	1 U	2 U	24	58	22	1 U	**222**
MW-117D	05/06/06		1 U	23	1 U	17	67	1 U	2 U	22	52	20	1 U	**201**
MW-117D	05/06/06	Fld Dupe	1 U	18	1 U	30	52	1 U	2 U	23	70	33	1 U	**226**
MW-117D	11/21/06		1 U	27	1 U	22	76	2.1	2 U	31	89	32	1 U	**279**
MW-117D	10/06/07		0.4	22	0.3	22	71	1	2 U	15	62	29	1 U	**223**
MW-117D	05/17/08		5 U	24	5 U	24	31	5 U	12	30	62	23	5 U	**206**
MW-117D	11/28/08		0.46 J	23.3	1 U	19.5	23.5	0.27 J	1 U	28.6	58	19.4	1 U	**173**
MW-117D	06/09/09		0.49 J	25	1 U	18	13	1 U	1 U	30	55	20	1 U	**161**
MW-117D	11/24/09		0.49 J	29	1 U	19	11	1 U	1 U	28	49	18	1 U	**154**
MW-117D	06/24/10		0.33 J	28	1 U	16	5.3	0.18 J	1 U	29	46	15	1 U	**140**
MW-117D	11/24/10		0.34 J	30	1 U	16	5.6	1 U	1 U	29	45	17	1 U	**143**
MW-117D	05/31/11		1 U	37	1 U	13	5.4	1 U	1 U	26	39	15	1 U	**135**
MW-117D	12/22/11		0.34 J	38	1 U	10	3.8	1 U	5 U	23	31	13	1 U	**119**
MW-117D	06/26/12		0.41 J	43	1 U	11	2.8	1 U	5 U	22	33	12	1 U	**124**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-119	10/11/93		12 U	12 U	12 U	12 U	12 U	12 U	25 U	12 U	12 U	12 U		0
MW-119	05/03/99		1 U	1 U	1 U	1 U	0.36	1 U	2 U	0.63	1.8	1	5 U	4
MW-119	10/27/99		0.26 J	0.35 J	1 U	0.28 J	1.3	1 U	2 U	1.4	2.5	2	1 U	8
MW-119	01/26/00		0.19 J	0.21 J	1 U	1 U	1 U	1 U	2 U	0.18 J	0.75 J	0.2 J	1 U	2
MW-119	04/17/00		0.16 J	0.23 J	1 U	1 U	1 U	1 U	2 JB	0.19 J	0.79 J	0.2 J	1 U	4
MW-119	07/25/00		0.12	0.26	1 U	1 U	1 U	1 U	2 U	0.22	0.88	0.21	1 U	2
MW-119	11/08/00		1 U	0.27	1 U	1 U	1 U	1 U	2 U	0.18	0.72	0.18	1 U	1
MW-119	04/10/01		1 U	0.26	1 U	1 U	1 U	1 U	2 U	0.17	0.85	0.19	1 U	1
MW-119	10/16/01		0.1	0.29	1 U	1 U	1 U	1 U	2 U	0.15	0.71	0.16	1 U	1
MW-119	04/30/02		0.1	0.31	1 U	1 U	1 U	1 U	2 U	0.18	0.95	0.17	1 U	2
MW-119	10/17/02		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	0
MW-119	04/22/03		1.07	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1	1 U	1 U	2
MW-119	12/30/03		7.22	0.67 J	1 U	0.54 J	0.59 J	1 U	1 U	1 U	0.72 J	1 U	1 U	10
MW-119	04/28/04		1.67	0.51	1 U	1 U	1 U	1 U	2 U	1 U	0.62	1 U	1 U	3
MW-119	05/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1.3	1 U	1 U	1
MW-119	10/20/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1.3	1 U	1 U	1
MW-119	05/06/06		1 U	1.2	1 U	1 U	1 U	1 U	2 U	1 U	1.1	1 U	1 U	2
MW-119	01/04/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	0
MW-119	10/08/07		1 U	1	1 U	1 U	0.4	1 U	2 U	1 U	1	1 U	1 U	2
MW-119	05/18/08		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1	1 U	1 U	1
MW-119	11/29/08		0.3 J	0.98 J	1 U	1 U	0.54 J	1 U	1 U	1 U	1.29	0.27 J	1 U	3
MW-119	06/10/09		0.64 J	1	1 U	1 U	0.66 J	1 U	1 U	1 U	1.2	0.29 J	1 U	4
MW-119	11/29/09		0.45 J	1.4	1 U	1 U	0.61 J	1 U	1 U	1 U	1.2	1 U	1 U	4
MW-119	06/29/10		1 U	0.92 J	1 U	1 U	1.2	1 U	1 U	1 U	1.1	1 U	1 U	3
MW-119	11/27/10		0.46 J	1.1	1 U	1 U	1.1	1 U	1 U	1 U	1.7	0.42 J	1 U	5
MW-119	06/03/11		0.32 J	0.97 J	1 U	1 U	0.69 J	1 U	1 U	1 U	1.4	0.37 J	1 U	4
MW-119	12/29/11		0.29 J	1	1 U	1 U	0.69 J	1 U	5 U	1 U	1	0.34 J	1 U	3
MW-119	06/27/12		0.29 J	0.97 J	1 U	1 U	0.88 J	1 U	5 U	1 U	1.1	1 U	1 U	3

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-121	10/15/93		2 U	2 U	2 U	2 U	27	2 U	5 U	4	7	82		120
MW-121	04/28/99		5 U	3.4	5 U	6	7.2	5 U	10 U	2.7	3.8	26	5 U	49
MW-121	10/26/99		0.67 J	3.8	0.78 J	8	8.4	0.15 J	2 U	3.4	5.5	33 E	1 U	64
MW-121	10/26/99	Dilution	2 U	3.2 D	0.67 DJ	6.6 D	6.8 D	0.1 DJ	4 U	2.9 D	4.4 D	29 D	2 U	54
MW-121	01/31/00		0.65 J	2.9	2 U	5.5	6.3	0.2 J	0.41 J	2.5	3.4	23	2 U	45
MW-121	04/18/00		0.55 J	2.8	0.72 J	3	5.6	0.22 J	2 JB	0.64 J	2.8	11	1 U	29
MW-121	07/25/00		0.68	3.5	0.82	4.4	6.8	0.39	2 U	1.8	4.3	20	1 U	43
MW-121	11/08/00		0.77	4.6	0.89	8	7	0.22	2 U	2.6	5.1	22	1 U	51
MW-121	04/10/01		0.78	3.7	0.82	2	6.7	0.68	2 U	2.3	5.5	22	1 U	44
MW-121	10/16/01		0.82	3.8	0.81	3.6	6.5	0.42	2 U	2.4	5.9	19	1 U	43
MW-121	04/17/02		0.75	3.8	0.07	3	6.1	0.58	2 U	2.6	6.9	20	0.064 J	44
MW-121	10/17/02		5 U	5	5 U	42	7	5 U	2 U	3	9	24	1 U	90
MW-121	04/22/03		0.65 J	4.3	0.55 J	7.28	5.74	1 U	2 U	2.85	7.18	22.6	1 U	51
MW-121	12/28/03		1 U	4.76	1 U	5.11	4.61	1 U	1 U	2.74	5.79	20.3	0.68 J	44
MW-121	04/28/04		0.52	4.37	1 U	4.58	4.79	1 U	2 U	2.43	5.84	18.8	1 U	41
MW-121	05/21/05		1 U	2.2	1 U	3.9	5.2	1 U	2 U	1.9	5.1	18	1 U	36
MW-121	05/21/05	Fld Dupe	1 U	2.4	1 U	4.8	5.3	1 U	2 U	2.1	6	20	1 U	41
MW-121	10/20/05		1 U	2.9	1 U	3.9	5.9	1 U	2 U	2.1	5.7	20	1 U	41
MW-121	05/06/06		1 U	2.5	1 U	3.3	5.3	1 U	2 U	2.3	4.8	22	1 U	40
MW-121	01/03/07		1 U	1.4	1 U	1.7	3	1 U	2 U	1.9	3.9	20	1 U	32
MW-121	10/07/07		0.7	2	1 U	2	6	0.4	2 U	2	5	22	1 U	40
MW-121	05/18/08		1 U	2	1 U	2	7	1 U	2 U	2	6	26 E	1 U	45
MW-121	05/18/08	Dilution	2 U	2 D	2 U	3 D	6 D	2 U	3 DJ	2 D	5 D	25 D	2 U	46
MW-121	11/29/08		0.56 J	1.36	1 U	1 U	3.42	0.55 J	1 U	1.84	2.67	14.4	1 U	25
MW-121	06/11/09		0.65 J	1.9	1 U	1 U	4.8	0.76 J	1 U	2.3	4	23	1 U	37
MW-121	11/25/09		0.63 J	2.1	1 U	1.8	4.3	1 U	1 U	2	3.1	20	1 U	34
MW-121	06/29/10		1 U	2.9	1 U	1.7	3.7	1 U	1 U	1.5	2	16	1 U	28
MW-121	11/25/10		0.6 J	4.6	1 U	2.5	4.3	1 U	1 U	2.1	3.4	22	1 U	40
MW-121	06/03/11		0.63 J	9.6	1 U	4.1	4.7	0.42 J	1 U	1.8	4.2	19	1 U	44
MW-121	12/29/11		0.75 J	15	1 U	6.9	4.9	0.51 J	5 U	1.8	6.6	18	1 U	54
MW-121	06/27/12		0.86 J	21	1 U	5.5	5.1	0.62 J	5 U	1.6	10	19	1 U	64

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-124	10/18/93		120 U	150	120 U	410	210		120 U	50	1400	140		**2360**
MW-124	04/28/99		10 U	75	10 U	97	1200	10 U	20 U	47	540	36	3.4 J	**1998**
MW-124	04/28/99	Fld Dupe	10 U	75	10 U	97	1100 D	10 U	20 JBU	47	540 D	36	3.4 J	**1898**
MW-124	10/27/99		50 U	50	50 U	41 J	560	50 U	8.2 J	28 J	280	28 J	6.9 J	**1002**
MW-124	01/31/00		25 U	95	25 U	36	540	25 U	50 U	12 J	190	20 J	44	**937**
MW-124	04/24/00		0.72 J	92	25 U	24 J	440	3.9 J	50 JB	3.8 J	100	14 J	63	**791**
MW-124	07/25/00		20 U	89	20 U	20	330	20 U	40 U	20 U	79	10	60	**588**
MW-124	11/13/00		20 U	110	20 U	20	300	20 U	40 U	2.7	75	12	63	**583**
MW-124	04/12/01		20 U	47	20 U	35	240	2.1	40 U	30	230	24	13 J	**621**
MW-124	10/29/01		10 U	98	10 U	19	190	1.4	20 U	6.2	110	16	76	**517**
MW-124	04/17/02		20 U	64	20 U	35	370	12	40 U	30	210	26	16 J	**763**
MW-124	04/17/02	Fld Dupe	20 U	65	20 U	41	370	5.7 J	40 U	30	200	20 U	18 J	**730**
MW-124	10/17/02		20 U	92	20 U	230	360	20 U	40 U	35	290	33	21	**1061**
MW-124	04/25/03		1 U	83.4 E	1.32	30 E	226 E	8.35	2 U	13.8	136 E	20.9	62.7 E	**582**
MW-124	04/25/03	Dilution	10 U	71.4	10 U	26.4	213	10 U	20 U	13.5	119	18.9	39.2	**501**
MW-124	12/28/03		1 U	109 E	1.34	22.8	174 E	6.96	1 U	11.2	116 E	19.2	67.2 E	**528**
MW-124	12/28/03	Dilution	10 U	83.2 D	10 U	20.1 D	176 D	10 U	10 U	10.6 D	94.7 D	15.6 D	40 D	**440**
MW-124	04/28/04		40 U	197	40 U	43.6	389	40 U	80 U	34.6	185	26.7	24 J	**900**
MW-124	05/21/05		5 U	340	5 U	37	420	5 U	10 U	8.4	120	18	110	**1053**
MW-124	10/20/05		1 U	250	1 U	25	260	1.5	2 U	6.6	76	15	75 H	**709**
MW-124	05/06/06		1 U	320	1.2	29	370	1.5	2 U	15	120	18	61	**936**
MW-124	01/04/07		10 U	370	10 U	15	250	10 U	20 U	10 U	110	10	10 U	**755**
MW-124	10/07/07		1 U	620	0.7	28	300	4	2 U	8	100	12	120	**1193**
MW-124	05/18/08		40 U	870	40 U	42	320	40 U	80 U	40 U	190	40 U	64	**1486**
MW-124	11/29/08	Dilution	5 U	415	5 U	16.1	144	1.4 J	1.45 J	11.8	90	10.4	32.1	**722**
MW-124	06/10/09	Dilution	1 J	500	5 U	18	150	5 U	5 U	14	100	10	23	**816**
MW-124	11/29/09	Dilution	5 U	510	5 U	22	170	5 U	5 U	16	98	9.4	21	**846**
MW-124	06/29/10	Dilution	5 U	500	5 U	20	220	5 U	1.9 J	14	82	8.6	30	**877**
MW-124	11/27/10	Dilution	5 U	490	5 U	25	280	5 U	5 U	14	95	9.2	30	**943**
MW-124	06/03/11	Dilution	5 U	450	5 U	28	240	5 U	2.4 J	13	120	7.4	23	**884**
MW-124	12/29/11	Dilution	5 U	370	5 U	20	130	5 U	25 U	12	96	5.9	17	**651**
MW-124	06/27/12	Dilution	5 U	420	5 U	17	100	5 U	25 U	9.5	90	5.2	23	**665**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-130	10/19/93		67 U	26	67 U	10	25		8	67 U	1000	28		**1097**
MW-130	04/28/99		0.19	19	1 U	11	24	1 U	2 U	5.3	670	17	1 U	**746**
MW-130	04/28/99	Fld Dupe	0.17 J	18	1 U	10	23 DJ	1 U	2 U	5.3	670 D	17	1 U	**743**
MW-130	10/28/99		25 U	10 J	25 U	4.9 J	7.8 J	25 U	50 U	25 U	370	8.2 J	25 U	**401**
MW-130	02/16/00		25 U	11 J	25 U	3.6 J	7.5 J	25 U	50 U	25 U	460	8.5 J	25 U	**491**
MW-130	04/24/00		50 JB	12 J	50 U	3.1 J	7.7 J	50 U	100 JB	50 U	510	8.3 J	50 U	**691**
MW-130	07/27/00		20 U	13	20 U	3.3	7.7	20 U	40 U	20 U	670	8.5	20 U	**703**
MW-130	11/14/00		25 U	12	25 U	4.3	7.2	25 U	50 U	25 U	390	7	25 U	**421**
MW-130	04/12/01		20 U	10	20 U	20 U	5.7	20 U	40 U	20 U	440	6.2	20 U	**462**
MW-130	10/30/01		50 U	14	50	50 U	50 U	50 U	100 U	50 U	660	50 U	50 U	**724**
MW-130	10/30/01	Fld Dupe	50 U	15 J	50 U	50 U	6.5 J	50 U	100 U	50 U	610	8.1 J	50 U	**640**
MW-130	04/30/02		25 U	11	25 U	1.6	5.7	25 U	50 U	0.97	360	5.4	25 U	**385**
MW-130	10/17/02		50 U	50 U	50 U	54	50 U	50 U	43	50 U	840	50 U	1 U	**937**
MW-130	04/25/03		0.1 J	13	1 U	5.33	7.5	0.48 J	2 U	1.37	424 E	5.94	1 U	**458**
MW-130	04/25/03	Dilution	20 U	11.6 J	20 U	20 U	20 U	20 U	40 U	20 U	322	20 U	20 U	**334**
MW-130	04/25/03	Fld Dupe	20 U	13.2	1 U	20 U	20 U	0.43 J	2 U	1.37	437 E	20 U	1 U	**452**
MW-130	12/28/03		1 U	12.1	1 U	5.65	8.09	1 U	1 U	1.11	320 E	5.46	1 U	**352**
MW-130	12/28/03	Dilution	20 U	10.3 JD	20 U	20 U	20 U	20 U	20 U	20 U	263 D	20 U	20 U	**273**
MW-130	04/28/04		10 U	11	10 U	10 U	10.6	10 U	20 U	10 U	157	10 U	10 U	**179**
MW-130	05/21/05		1 U	14	1 U	4	11	1 U	2 U	1 U	210	3.5	1 U	**243**
MW-130	10/20/05		1 U	16	1 U	4.2	14	1 U	2 U	1 U	210	3.6	1 U	**248**
MW-130	05/08/06		1 U	16	1 U	4.1	14	1 U	2 U	1 U	140	3.6	1 U	**178**
MW-130	01/04/07		1 U	20	1 U	4.6	18	1 U	2 U	1 U	160	4.3	1 U	**207**
MW-130	10/07/07		1 U	17	1 U	5	21	0.6	2 U	0.6	170	4	1 U	**218**
MW-130	05/17/08		10 U	22	10 U	10 U	25	10 U	20 U	10 U	200	10 U	10 U	**247**
MW-130	11/29/08	Dilution	2 U	21.9	2 U	4.18	21	0.4 J	0.56 J	0.56 J	198	4.26	2 U	**251**
MW-130	06/11/09	Dilution	0.48 J	26	2 U	4.3	20	2 U	2 U	0.9 J	300	4.3	2 U	**356**
MW-130	11/29/09	Dilution	2 U	31	2 U	5.5	12	2 U	2 U	2 U	320	3.3	2 U	**372**
MW-130	06/29/10	Dilution	10 U	70	10 U	15	17	10 U	2.9 J	10 U	1100	7.6 J	10 U	**1213**
MW-130	11/27/10	Dilution	5 U	29	5 U	8.4	8.3	5 U	5 U	5 U	430	3.6 J	5 U	**479**
MW-130	06/03/11	Dilution	2.5 U	20	2.5 U	5.4	6.5	2.5 U	1 J	2.5 U	250	3.8	2.5 U	**287**
MW-130	12/28/11		1 U	9.7	1 U	2.7	4.1	1 U	5 U	0.68 J	100	2.7	1 U	**120**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-130	06/25/12		0.26 J	7.7	1 U	1.9	3	1 U	5 U	0.65 J	68	2.1	1 U	**84**
MW-133A	10/20/93		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.8	1 U		**1**
MW-133A	04/26/99		1 U	1 U	1 U	1 U	0.27	1 U	2 U	0.37	0.95	1.1	1 U	**3**
MW-133A	10/26/99		0.03 J	0.52 J	1 U	0.66 J	1.8	1 U	2 U	1	4.6	4.8	1 U	**13**
MW-133A	02/15/00		1 U	0.08 J	1 U	1 U	0.16 J	1 U	2 U	1 U	0.38 J	1 U	1 U	**1**
MW-133A	04/25/00		1 U	1 U	1 U	1 U	1 U	1 U	2 JB	1 U	0.35 J	1 U	1 U	**2**
MW-133A	07/27/00		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	10 U	**0**
MW-133A	11/16/00		1 U	1 U	1 U	1 U	0.49	1 U	2 U	1 U	0.81	0.11	1 U	**1**
MW-133A	04/10/01		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	10/31/01		1 U	0.41	1 U	0.1	1.2	1 U	2 U	1 U	1	0.19	1 U	**3**
MW-133A	04/29/02		1 U	1 U	1 U	1 U	0.04	1 U	2 U	1 U	0.06	1 U	1 U	**0**
MW-133A	10/16/02		1 U	1	1 U	1 U	4	1 U	0.6	1 U	3	1 U	1 U	**9**
MW-133A	04/25/03		1 U	2.96	1 U	1.05	11.7	1 U	2 U	1 U	5.2	0.98 J	1 U	**22**
MW-133A	12/30/03		1 U	1.92	1 U	0.53 J	6.34	1 U	1 U	1 U	2.51	1 U	1 U	**11**
MW-133A	04/28/04		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	05/02/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	11/02/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	06/22/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	11/16/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	10/07/07		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-133A	05/17/08		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	11/26/08		1 U	1 U	1 U	1 U	0.26 J	1 U	1 U	1 U	0.32 J	1 U	1 U	**1**
MW-133A	06/20/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-133A	06/20/09	Fld Dupe	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-133A	11/28/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-133A	06/25/10		1 U	1 U	1 U	1 U	0.23 J	1 U	1 U	1 U	0.26 J	1 U	1 U	**0**
MW-133A	11/27/10		1 U	0.21 J	1 U	1 U	0.91 J	1 U	1 U	1 U	0.86 J	1 U	1 U	**2**
MW-133A	11/27/10	Fld Dupe	1 U	1 U	1 U	1 U	0.79 J	1 U	1 U	1 U	0.82 J	1 U	1 U	**2**
MW-133A	06/02/11		1 U	1 U	1 U	1 U	1 U	1 U	0.28 J	1 U	1 U	1 U	1 U	**0**
MW-133A	12/28/11		1 U	1 U	1 U	1 U	0.67 J	1 U	5 U	1 U	0.67 J	1 U	1 U	**1**
MW-133A	06/28/12		1 U	1 U	1 U	1 U	0.4 J	1 U	5 U	1 U	0.3 J	1 U	1 U	**1**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-133B	10/20/93		100 U	270	100 U	130	810		100 U	160	1200	380		**2950**
MW-133B	04/26/99		10	200	4.6	110	780	7	4 U	110	840	270	2 U	**2332**
MW-133B	10/26/99		7.9 J	170	50 U	67	810	7.1 J	6.8 J	77	630	190	50 U	**1966**
MW-133B	02/15/00		9.3 J	180	50 U	100	840	50 U	100 U	120	730	250	50 U	**2229**
MW-133B	04/25/00		12 J	170	50 U	78	600	50 U	100 JB	76	620	190	50 U	**1846**
MW-133B	07/27/00		12	160	4.1	88	670	10	40 U	94	760	220	20 U	**2018**
MW-133B	11/16/00		11	200	25 U	88	530	9.5	50 U	94	570	230	25 U	**1733**
MW-133B	04/10/01		13	200	50 U	46	660	43	100 U	140	830	300	50 U	**2232**
MW-133B	10/31/01		12	180	50 U	7	510	49	100 U	110	700	250	50 U	**1818**
MW-133B	04/29/02		9.1	150	3.7	25 U	460	54	50 U	99	570	170	25 U	**1516**
MW-133B	10/16/02		50 U	250	50 U	650	820	50 U	31	140	800	290	1 U	**2981**
MW-133B	04/25/03		10.7	183 E	3.97	110 E	728 E	24.5	2 U	151 E	699 E	325 E	1 U	**2235**
MW-133B	04/25/03	Dilution	40 U	158	40 U	40.4	571	41.4	80 U	112	617	237	40 U	**1777**
MW-133B	12/30/03		9.91	162 E	1 U	93 E	562 E	16.3	1 U	122 E	510 E	250 E	1 U	**1725**
MW-133B	12/30/03	Dilution	50 U	151 D	50 U	81.6 D	623 D	50 U	50 U	109 D	577 D	240 D	50 U	**1782**
MW-133B	04/28/04		10 U	161	10 U	106	803	10 U	20 U	111	622	216	100 U	**2019**
MW-133B	05/02/05		5.6	120	5 U	70	630	17	10 U	81	460	160	5 U	**1544**
MW-133B	05/02/05	Fld Dupe	5.7	120	5 U	74	580	13	10 U	87	420	150	5 U	**1450**
MW-133B	11/02/05		8.2	180	5 U	98	930	28	10 U	110	620	220	5 U	**2194**
MW-133B	06/22/06		10 U	110	10 U	54	720	11	20 U	68	430	120	10 U	**1513**
MW-133B	06/22/06	Fld Dupe	10 U	120	10 U	53	710	17	20 U	80	450	140	10 U	**1570**
MW-133B	11/16/06		10 U	160	10 U	10 U	740	78	50 U	85	10 U	170	10 U	**1233**
MW-133B	10/07/07		6	160	3	84	930	38	2 U	110	600	200	1 U	**2131**
MW-133B	05/17/08		40 U	130	40 U	60	900	40 U	80 U	59	440	110	40 U	**1699**
MW-133B	11/26/08		8 J	308	5.4 J	12	1860	193	3.2 J	126	955	208	10 U	**3679**
MW-133B	06/20/09	Dilution	7.3 J	230	4.3 J	19	1400	140	10 U	110	710	170	10 U	**2791**
MW-133B	11/28/09	Dilution	7.8 J	280	20 U	100	2000	84	20 U	110	820	190	20 U	**3592**
MW-133B	06/25/10	Dilution	5.4 J	230	4 J	81	1700	47	20 U	96	680	150	20 U	**2993**
MW-133B	11/27/10	Dilution	20 U	240	20 U	120	1900	11 J	20 U	110	790	180	20 U	**3351**
MW-133B	06/02/11	Dilution	3.8 J	150	2.9 J	56	1200	29	11	70	420	120	10 U	**2063**
MW-133B	12/28/11	Dilution	4.9 J	180	3.9 J	5.3 J	1100	100	50 U	73	470	100	10 U	**2037**
MW-133B	06/28/12	Dilution	5.2 J	180	10 U	25	1200	60	11 J	65	470	92	10 U	**2108**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-133C	10/20/93		20 U	76	20 U	75	120		20 U	44	340	170		**825**
MW-133C	04/26/99		8.5	57	2.8	47	100	5 U	10 U	28	200	110	5 U	**553**
MW-133C	10/26/99		7.2 J	49	10 U	40	91	1.1 J	20 U	22	170	93	10 U	**473**
MW-133C	02/15/00		5.4	31	2.3 J	23	32	0.42 J	10 U	2.5 J	110	55	5 U	**262**
MW-133C	04/25/00		4.7 JB	28	10 U	21	28	0.34 J	20 JB	1.2 J	100	48	10 U	**251**
MW-133C	07/27/00		4.9	28	2.2	18	30	5 U	10 U	0.82	91	34	5 U	**209**
MW-133C	07/27/00	Fld Dupe	5.4	31	2.4 J	21	32	0.55 J	10 U	1 J	100	44	5 U	**237**
MW-133C	11/16/00		5.2	35	2.2	22	31	5 U	10 U	1.2	95	47	5 U	**239**
MW-133C	04/10/01		6.2	36	10 U	28	36	10 U	20 U	1.6	130	62	10 U	**300**
MW-133C	10/31/01		5.1	31	5 U	14	31	5 U	10 U	5 U	100	31	5 U	**212**
MW-133C	10/31/01	Fld Dupe	5.3	32	2 J	18	33	5 U	10 U	5 U	100	40	5 U	**230**
MW-133C	04/29/02		5.4	33	1.8	26	45	0.73	0.49	4.5	120	58	5 U	**295**
MW-133C	10/16/02		6	49	10 U	150	51	10 U	6	10 U	140	66	1 U	**468**
MW-133C	10/16/02	Fld Dupe	7	49 D	2 U	180 D	53 D	5	0.9 J	2	150 D	74 D	1 U	**521**
MW-133C	04/25/03		5.34	33.5 E	1.86	29.9 E	42.1 E	1.04	2 U	2.41	137 E	72.2 E	1 U	**325**
MW-133C	04/25/03	Dilution	5.04 J	31.6	10 U	26.5	39.2	10 U	20 U	10 U	113	60.7	10 U	**276**
MW-133C	12/30/03		6.43	40.7 E	2.01	36.8 E	55.5 E	0.8 J	1 U	3.02	166 E	83 E	1 U	**394**
MW-133C	12/30/03	Dilution	5.64 JD	143 D	10 U	32.5 D	49.5 D	10 U	10 U	10 U	136 D	74.4 E	10 U	**441**
MW-133C	04/28/04		5.42	34.7	10 U	29.2	47.2	10 U	20 U	10 U	124	63.7	10 U	**304**
MW-133C	05/02/05		5.7	37	1.8	31	53	0.59	2 U	2.6	130	63	1 U	**325**
MW-133C	11/02/05		6.5	46	5 U	43	70	5 U	10 U	5 U	150	75	5 U	**391**
MW-133C	06/22/06		7.3	44	1 U	42	71	1.3	2 U	4.3	150	78	1 U	**398**
MW-133C	11/16/06		7.7	61	1.9	23	86	3.5	2 U	5.1	220	110	1 U	**518**
MW-133C	10/07/07		7	50	2	51	88	2	2 U	5	170	88	1 U	**463**
MW-133C	05/17/08		8 U	60	8 U	62	120	8 U	16 U	8 U	200 E	100	8 U	**542**
MW-133C	05/17/08	Dilution	10 U	57 D	10 U	58 D	110 D	10 U	20 U	10 U	180 D	94 D	10 U	**499**
MW-133C	05/17/08	Fld Dupe	7	60 D	20 U	65 D	110 D	20 U	20 DJ	20 U	200 D	110 D	20 U	**572**
MW-133C	11/26/08		7.82	53.6	1.92	24.6	96.9	6.93	0.23 J	6.06	182	94.8	1 U	**475**
MW-133C	06/20/09		7.4	59	2	36	110	9.7	1 U	6	190	100	1 U	**520**
MW-133C	11/28/09		7.1	58	1.8	53	110	1.2	1 U	6.2	170	94	1 U	**501**
MW-133C	06/25/10		6.9	54	1.8	50	130	1.3	1 U	8.6	180	89	1 U	**522**
MW-133C	11/27/10		6.1	47	1.8	46	130	0.3 J	1 U	10	180	94	1 U	**515**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-133C	06/02/11		6.3	56	1.8	51	180	1.5	0.47 J	16	160	95	1 U	**568**
MW-133C	12/28/11		5.8	50	1.8	41	130	2	5 U	9.7	140	76	1 U	**456**
MW-133C	06/28/12		5.7	51	1.6	40	130	1.7	5 U	6.6	150	81	1 U	**468**
MW-136	10/19/93		5 U	5 U	5 U	5 U	5 U	5 U	10 U	5 U	5 U	5 U		**0**
MW-136	04/29/99		0.37	0.35	1 U	0.88	3.5	1 U	2 U	1.7	8	3.8	1 U	**19**
MW-136	10/28/99		1.5	0.34 J	1 U	0.37 J	1.1	0.03 J	2 U	1.4	16	2.4	1 U	**23**
MW-136	02/15/00		0.74 J	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.28 J	1 U	1 U	**1**
MW-136	04/25/00		0.57 JB	1 U	1 U	1 U	1 U	1 U	2 JB	1 U	0.31 J	1 U	1 U	**3**
MW-136	07/27/00		0.48	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.3	1 U	1 U	**1**
MW-136	11/17/00		0.5	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.29	1 U	1 U	**1**
MW-136	04/10/01		0.45	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.3	1 U	1 U	**1**
MW-136	10/31/01		0.45	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.3	1 U	1 U	**1**
MW-136	04/29/02		0.45	1 U	1 U	1 U	1 U	1 U	2 U	0.53	0.3	1 U	1 U	**1**
MW-136	10/18/02		0.6	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**1**
MW-136	04/23/03		0.8 J	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**1**
MW-136	04/28/04		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-136	06/23/06		1.1	1 U	1 U	1 U	1 U	1 U	1.8	1 U	1 U	1 U	1 U	**3**
MW-136	01/05/07		2.5	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**3**
MW-136	10/07/07		1 U	1 U	1 U	1 U	1 U	1 U	0.7	1 U	1 U	1 U	1 U	**1**
MW-136	05/18/08		2	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**2**
MW-136	11/29/08		4.5	1 U	1 U	1 U	0.2 J	1 U	1 U	1 U	1 U	1 U	1 U	**5**
MW-136	06/11/09		3.1	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**3**
MW-136	11/28/09		1.5	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**2**
MW-136	06/29/10		0.84 J	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**1**
MW-136	11/28/10		0.82 J	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**1**
MW-136	06/01/11		1	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**1**
MW-136	12/29/11		0.79 J	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**1**
MW-136	06/25/12		0.62 J	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**1**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-200	04/26/99		1 U	1 U	1 U	0.34	0.66	1 U	2 U	0.61	2.2	2.2	1 U	**6**
MW-200	10/27/99		1 U	1 U	1 U	0.26 J	1.3	1 U	2 U	1.1	1.9	1.8	1 U	**6**
MW-200	02/15/00		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	04/25/00		1 U	1 U	1 U	1 U	1 U	1 U	2 JB	1 U	0.07 J	1 U	1 U	**2**
MW-200	07/27/00		1 U	1 U	1 U	1 U	0.1	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	11/14/00		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	04/10/01		1 U	1 U	1 U	1 U	0.17	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	10/29/01		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	0.12	1 U	**0**
MW-200	04/22/02		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	10/18/02		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	04/25/03		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	12/30/03		1 U	1 U	1 U	0.89 J	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**1**
MW-200	04/28/04		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	04/28/04	Fld Dupe	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-200	05/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1.9	1 U	1 U	**2**
MW-200	01/12/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	05/08/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	01/04/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	10/08/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	05/18/08		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	11/29/08		1 U	1 U	1 U	1 U	0.69 J	1 U	1 U	1 U	0.21 J	0.17 J	1 U	**1**
MW-200	06/11/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-200	11/28/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-200	06/29/10		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-200	11/28/10		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-200	05/31/11		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-200	12/29/11		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**0**
MW-200	06/25/12		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**0**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-201	02/16/00		5 U	48	5 U	1.1 J	85	5 U	10 U	5 U	4.5 J	8.3	5.6	**153**
MW-201	04/18/00		10 U	120	10 U	1.9 J	87	0.78 J	20 JB	10 U	4.9 J	15	7.2 J	**257**
MW-201	04/18/00	Fld Dupe	0.29 J	130	10 U	2.3 J	93	0.74 J	20 JB	10 U	5.8 J	12	5.8 J	**270**
MW-201	07/25/00		20 U	330	20 U	6.8	220	20 U	40 U	20 U	110	4.5	22	**693**
MW-201	11/13/00		20 U	340	20 U	5.2	180	20 U	40 U	20 U	39	4.9	7.1 J	**576**
MW-201	04/12/01		5 U	43	5 U	1.6	60	0.64	10 U	5 U	12	19	5.8	**142**
MW-201	04/12/01	Fld Dupe	5 U	43	5 U	1.6 J	60	0.64 J	10 U	5 U	12	18	5.5	**141**
MW-201	10/29/01		10 U	150	10 U	3.6	120	10 U	20 U	10 U	55	25	4.8 J	**358**
MW-201	04/30/02		5	5500	250 U	130	2600	250 U	500 U	250 U	1700	13	50 J	**9998**
MW-201	10/03/02		500 U	7100	500 U	480	2200	500 U	1000 U	500 U	970	500 U	28 E	**0778**
MW-201	10/03/02	Fld Dupe	1 U	7700	1 U	420 J	2200	7	2 U	1 U	1000	26 E	50 E	**1403**
MW-201	04/25/03		0.05 J	1410 E	1 U	52.8 E	989 E	20.3	2 U	0.29 J	452 E	28.9 E	108 E	**3061**
MW-201	04/25/03	Dilution	500 U	6350	500 U	500 U	863	500 U	1000 U	500 U	294 J	500 U	500 U	**7507**
MW-201	12/30/03		1 U	1580 E	1 U	15	123 E	1 U	1 U	1 U	175 E	2.99	39.4 E	**1935**
MW-201	12/30/03	Dilution	400 U	6480 D	400 U	400 U	400 U	400 U	400 U	400 U	400 U	400 U	400 U	**6480**
MW-201	12/30/03	Fld Dupe	400 U	1430 E	1 U	13.4	90.9 E	1 U	1 U	1 U	145 E	2.12	38.7 E	**1720**
MW-201	04/28/04		500 U	4150	500 U	500 U	500 U	500 U	1000 U	500 U	500 U	500 U	500 U	**4150**
MW-201	05/21/05		25 U	3500	25 U	25 U	58	25 U	50 U	25 U	26	25 U	25 U	**3584**
MW-201	01/12/06		1 U	230	1 U	1.2	23	1 U	2 U	1 U	8.8	14	1 U	**277**
MW-201	06/28/06		10 U	550	10 U	10 U	16	10 U	20 U	10 U	32	14	10 U	**612**
MW-201	01/05/07		1 U	80	1 U	1 U	5.1	1 U	2 U	1 U	20	2.8	1 U	**108**
MW-201	10/08/07		1 U	20	1 U	2	2	1 U	2 U	6	7	9	1	**47**
MW-201	05/18/08		1 U	64 E	1 U	2	11	1 U	2 U	1 U	7	10	8	**102**
MW-201	05/18/08	Dilution	4 U	55 D	4 U	4 U	9 D	4 U	8 U	4 U	6 D	9 D	6 D	**85**
MW-201	11/29/08	Dilution	2 J	1460	10 U	10 U	7.1 J	10 U	4.4 J	10 U	14.2	7.7 J	6.2 J	**1502**
MW-201	11/29/08	Fld Dupe	10 U	1580	10 U	10 U	5.5 J	10 U	3.1 J	10 U	12.5	7.1 J	5.6 J	**1614**
MW-201	06/10/09	Dilution	2 J	1200	10 U	10 U	16	10 U	10 U	10 U	10	7.7 J	10 U	**1236**
MW-201	06/10/09	Fld Dupe	10 U	1200	10 U	10 U	9.8 J	10 U	10 U	10 U	7.4 J	5.7 J	10 U	**1223**
MW-201	11/29/09	Dilution	10 U	480	10 U	10 U	6.4 J	10 U	10 U	10 U	37	10 U	10	**533**
MW-201	11/29/09	Fld Dupe	10 U	500	10 U	10 U	5.7 J	10 U	10 U	10 U	36	10 U	9.3 J	**551**
MW-201	06/29/10		1 U	12	1 U	1 U	5	1 U	1 U	0.53 J	4.4	1.1	0.91 J	**24**
MW-201	11/28/10		1 U	2.7	1 U	0.43 J	0.75 J	1 U	1 U	0.93 J	3.4	1.2	1 U	**9**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-201	06/03/11		1 U	2.2	1 U	1 U	0.69 J	1 U	1 U	1.3	3.4	0.85 J	1 U	**8**
MW-201	06/03/11	Fld Dupe	1 U	2.2	1 U	1 U	0.63 J	1 U	0.26 J	1.2	3.4	0.87 J	1 U	**9**
MW-201	12/29/11		1 U	3.7	1 U	1 U	3.3	1 U	5 U	1.7	2.4	0.73 J	1 U	**12**
MW-201	12/29/11	Fld Dupe	1 U	3.6	1 U	1 U	3.3	1 U	5 U	1.8	2.4	0.77 J	1 U	**12**
MW-201	06/27/12		1 U	8	1 U	1 U	0.75 J	1 U	5 U	1.9	5.8	0.44 J	1 U	**17**
MW-202	05/20/99		1 U	1 U	1 U	1 U	0.81	1 U	2 U	4.6	2	2.1	1 U	**10**
MW-202	10/28/99		1 U	1 U	1 U	0.18 J	0.68 J	1 U	2 U	5	2.2	2.1	1 U	**10**
MW-202	02/16/00		1 U	1 U	1 U	1 U	1 U	1 U	2 U	3.6	0.77 J	0.5 J	1 U	**5**
MW-202	04/18/00		0.25 J	1 U	1 U	1 U	1 U	1 U	2 JB	3.1	0.65 J	0.55 J	1 U	**7**
MW-202	07/27/00		0.48	1 U	1 U	1 U	1 U	1 U	2 U	3.5	0.72	0.75	1 U	**5**
MW-202	11/13/00		1 U	1 U	1 U	1 U	1 U	1 U	2 U	14	0.11	0.19	1 U	**14**
MW-202	04/12/01		1 U	1 U	1 U	1 U	1 U	1 U	2 U	13	0.08	0.11	1 U	**13**
MW-202	10/29/01		1 U	1 U	1 U	1 U	1 U	1 U	2 U	12	0.06	1 U	1 U	**12**
MW-202	04/30/02		1 U	1 U	1 U	1 U	1 U	1 U	2 U	10	1 U	0.12	1 U	**10**
MW-202	10/17/02		1 U	1 U	1 U	1 U	1 U	1 U	0.5	12	1 U	1 U	1 U	**13**
MW-202	04/24/03		1 U	1 U	1 U	1 U	1 U	1 U	2 U	2.82	1 U	0.8 J	1 U	**4**
MW-202	12/30/03		1 U	1 U	1 U	0.54 J	1 U	1 U	1 U	2.78	1 U	1.11	1 U	**4**
MW-202	04/28/04		1 U	1 U	1 U	1 U	1 U	1 U	2 U	2.3	1 U	0.68	1 U	**3**
MW-202	05/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1.8	1 U	1 U	1 U	**2**
MW-202	10/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-202	06/28/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1.5	1 U	1 U	1 U	**2**
MW-202	01/05/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	14	1 U	1 U	1 U	**14**
MW-202	10/08/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1	1	0.3	1 U	**2**
MW-202	05/19/08		1 U	1 U	1 U	1 U	1 U	1 U	2 U	4	1 U	1 U	1 U	**4**
MW-202	11/29/08		0.3 J	0.95 J	1 U	1 U	1 U	1 U	1 U	1.26	1.15	0.65 J	1 U	**4**
MW-202	06/11/09		1 U	0.46 J	1 U	1 U	1 U	1 U	1 U	1.2	1	0.6 J	1 U	**3**
MW-202	11/29/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1.2	1 U	1 U	1 U	**1**
MW-202	06/29/10		1 U	0.7 J	1 U	1 U	1 U	1 U	1 U	1.6	1.3	0.79 J	1 U	**4**
MW-202	11/28/10		1 U	1 U	1 U	1 U	1 U	1 U	1 U	2.1	0.67 J	1 U	1 U	**3**
MW-202	06/03/11		1 U	0.35 J	1 U	1 U	1 U	1 U	0.26 J	1.5	0.45 J	0.39 J	1 U	**3**
MW-202	12/29/11		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1.2	0.22 J	0.28 J	1 U	**2**
MW-202	06/27/12		1 U	0.46 J	1 U	1 U	1 U	1 U	5 U	1.4	0.94 J	1 U	1 U	**3**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-203	05/20/99		1 U	1 U	1 U	1 U	0.67	1 U	2 U	14	0.92	1.2	1 U	17
MW-203	10/28/99		0.08 J	0.28 J	1 U	0.42 J	1.5	0.06 J	2 U	15	2.7	2.6	1 U	23
MW-203	02/15/00		1 U	1 U	1 U	1 U	0.13 J	1 U	2 U	8.6	0.26 J	0.16 J	1 U	9
MW-203	04/18/00		1 U	1 U	1 U	1 U	0.07 J	1 U	2 U	11	0.14 J	0.17 J	1 U	11
MW-203	07/27/00		1 U	1 U	1 U	1 U	1 U	1 U	2 U	13	0.2	0.24	1 U	13
MW-203	11/13/00		0.82	1 U	1 U	1 U	1 U	1 U	2 U	3.5	0.66	0.81	1 U	6
MW-203	04/12/01		1.8	1 U	1 U	1 U	1 U	1 U	2 U	3.2	0.81	0.76	1 U	7
MW-203	10/29/01		4.3	0.19	1 U	1 U	1 U	1 U	2 U	3.1	0.76	0.84	1 U	9
MW-203	04/30/02		4.1	0.12	1 U	1 U	1 U	1 U	2 U	3	0.69	0.63	1 U	9
MW-203	10/17/02		1	1 U	1 U	1 U	1 U	1 U	0.5	3	1 U	0.7	1 U	5
MW-203	04/24/03		1 U	1 U	1 U	1 U	1 U	1 U	2 U	10.2	1 U	1 U	1 U	10
MW-203	12/30/03		1 U	1 U	1 U	1 U	1 U	1 U	1 U	8.43	1 U	1 U	1 U	8
MW-203	04/28/04		1 U	1 U	1 U	1 U	1 U	1 U	2 U	8.79	1 U	1 U	1 U	9
MW-203	05/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	9.6	1 U	1 U	1 U	10
MW-203	10/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	0
MW-203	06/28/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	17	1 U	1 U	1 U	17
MW-203	01/05/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1.7	1 U	1 U	1 U	2
MW-203	10/08/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	4	1 U	1 U	1 U	4
MW-203	05/18/08		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1	1	1 U	1 U	2
MW-203	05/18/08	Fld Dupe	1 U	1 U	1 U	1 U	1 U	1 U	2 U	1	1	1 U	1 U	2
MW-203	11/29/08		0.15 J	0.45 J	1 U	1 U	1 U	1 U	1 U	3.11	0.19 J	0.33 J	1 U	4
MW-203	06/11/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	4.4	1 U	1 U	1 U	4
MW-203	11/29/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	5.4	1 U	1 U	1 U	5
MW-203	06/29/10		1 U	1 U	1 U	1 U	1 U	1 U	0.32 J	8.9	1 U	1 U	1 U	9
MW-203	11/28/10		1 U	1 U	1 U	1 U	1 U	1 U	1 U	7.3	1 U	1 U	1 U	7
MW-203	06/03/11		1 U	1 U	1 U	1 U	1 U	1 U	0.27 J	5.1	1 U	1 U	1 U	5
MW-203	12/29/11		1 U	1 U	1 U	1 U	1 U	1 U	5 U	5.1	1 U	0.19 J	1 U	5
MW-203	06/28/12		1 U	1 U	1 U	1 U	1 U	1 U	5 U	10	1 U	0.41 J	1 U	10

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-204	04/23/99		20 U	20 U	20 U	6.2	56	20 U	40 U	20 U	4.7	230	20 U	**297**
MW-204	10/26/99		10 U	5.2 J	4.5 J	8.6 J	51	0.55 J	20 U	2.4 J	5.4 J	230	1.1 J	**309**
MW-204	01/31/00		0.67 J	5 J	5.3 J	8.2 J	41	10 U	2 J	2.4 J	4.2 J	200	0.85 J	**270**
MW-204	04/24/00		0.92 J	4.9 J	5.7 J	9.2 J	44	10 U	20 JB	2 J	4 J	190	1.2 J	**282**
MW-204	07/25/00		1.1	4.4	5.7	6.9	38	10 U	20 U	1.3	3.4	120	10 U	**181**
MW-204	11/08/00		10 U	6.5	6.8	11	37	10 U	20 U	2.4	4	170	10 U	**238**
MW-204	04/12/01		10 U	5	6	11	27	10 U	20 U	2.4	4.5	160	10 U	**216**
MW-204	10/16/01		10 U	5.4	10 U	13	23	10 U	20 U	2.8	4.9	140	10 U	**189**
MW-204	04/17/02		0.77	6.9	10	18	20	10 U	20 U	2.9	6	140	0.041 J	**205**
MW-204	10/03/02		20 U	14	20 U	140	23	20 U	40 U	20 U	20 U	170	1 U	**347**
MW-204	04/22/03		0.59 J	8.21	9.93	28.4 E	28.6 E	0.61 J	2 U	3.9	9.93	192 E	0.76 J	**283**
MW-204	04/22/03	Dilution	10 U	7.58 J	9.49 J	23.9	26.8	10 U	20 U	10 U	9.28 J	165	10 U	**242**
MW-204	12/28/03		0.58 J	8.14	9.41	26.3 E	28.8 E	1 U	1 U	3.83	11.3	163 E	0.8 J	**252**
MW-204	12/28/03	Dilution	10 U	7.65 JD	8.32 JD	21.8 D	23.7 D	10 U	10 U	10 U	9.1 JD	151 D	10 U	**222**
MW-204	04/28/04		10 U	6.41	8.07	21	20.7	10 U	20 U	10 U	8.96	124	10 U	**189**
MW-204	05/21/05		1 U	6	5.9	22	13	1 U	2 U	2.8	10	96	1 U	**156**
MW-204	10/19/05		1 U	6.2	5.7	20	15	1 U	2 U	2.3	9.1	97	1 U	**155**
MW-204	05/06/06		1 U	5.7	4.4	21	13	1 U	2 U	2.9	10	100	1 U	**157**
MW-204	01/03/07		1 U	6	3.5	22	15	1 U	2 U	3.2	10	100	1 U	**160**
MW-204	10/07/07		0.5	6	3	19	15	0.5	2 U	3	10	85	0.4 J	**142**
MW-204	10/07/07	Fld Dupe	0.5 J	5	3	18	15	0.4 J	2 U	3	9	82 D	1 U	**136**
MW-204	05/18/08		4 U	6	4 U	20	20	4 U	8 U	4 U	9	91	4 U	**146**
MW-204	11/29/08		0.65 J	4.9	2.07	13.6	14.4	0.29 J	1 U	2.64	7.61	74	0.32 J	**120**
MW-204	06/11/09		0.67 J	4.3	1.4	11	14	0.4 J	1 U	2.6	7.2	73	0.31 J	**115**
MW-204	11/25/09		0.65 J	5.8	1.8	14	20	1 U	1 U	2.6	6.2	71	0.56 J	**123**
MW-204	06/29/10		1 U	5.2	1.3	12	18	1 U	1 U	2	4.3	61	1 U	**104**
MW-204	11/25/10		0.54 J	5.3	1.5	11	24	1 U	1 U	2.5	6.4	66	1 U	**117**
MW-204	06/02/11		0.5 J	5.9	1.3	11	26	0.4 J	1 U	2.1	5.9	60	0.25 J	**113**
MW-204	12/29/11		0.55 J	5.3	1.3	10	26	0.52 J	5 U	2	5.6	51	1 U	**102**
MW-204	06/27/12		0.63 J	5.5	1.2	7.1	30	1.3	5 U	1.7	5.8	54	1 U	**107**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-205A	04/22/99		0.88	23	4.4	100	49	5 U	10 U	3.9	570	69	5 U	**820**
MW-205A	10/21/99		1.1 J	23 J	25 U	110	57	25 U	50 U	3.4 J	460	68	25 U	**723**
MW-205A	02/07/00		25 U	22 J	3.5 J	110	56	25 U	50 U	3.6 J	450	68	25 U	**713**
MW-205A	04/18/00		50 U	23 J	50 U	140	61	50 U	100 JB	50 U	540	80	50 U	**944**
MW-205A	07/25/00		20 U	19	3.5	92	50	20 U	40 U	20 U	350	47	20 U	**562**
MW-205A	11/07/00		25 U	27	25 U	120	56	25 U	50 U	25 U	410	66	25 U	**679**
MW-205A	04/09/01		20 U	23	20 U	130	56	20 U	40 U	4.3	430	68	20 U	**711**
MW-205A	10/16/01		1.1	18	20 U	87	44	20 U	40 U	2.1	240	49	20 U	**441**
MW-205A	04/16/02		1.1	17	20 U	79	43	20 U	40 U	6.7	270	47	20 U	**464**
MW-205A	10/07/02		50 U	50 U	50 U	690	53	50 U	84	110	310	49	1 U	**1296**
MW-205A	04/22/03		0.78 J	21	2.39	122 E	51.2 E	1 U	2 U	7.15	397 E	72.8 E	1 U	**674**
MW-205A	04/22/03	Dilution	25 U	19.8 J	25 U	111	46.6	25 U	50 U	25 U	322	64.3	25 U	**564**
MW-205A	12/22/03		0.69 J	19.7	1.48	95.6 E	52.7 E	1 U	1 U	11.3	308 E	64.3 E	1 U	**554**
MW-205A	12/22/03	Dilution	20 U	15.4 JD	20 U	71.9 D	38.5 D	20 U	20 U	20 U	237 D	47.1 E	20 U	**410**
MW-205A	04/28/04		20 U	15.8	20 U	68.7	39.9	20 U	40 U	20 U	229	43.9	20 U	**397**
MW-205A	05/21/05		1 U	15	1 U	51	43	1 U	2 U	11	130	36	1 U	**286**
MW-205A	10/19/05		1 U	13	1 U	35	38	1 U	2 U	11	89	32	1 U	**218**
MW-205A	05/06/06		1 U	14	1 U	29	37	1 U	2 U	18	81	32	1 U	**211**
MW-205A	11/21/06		1 U	13	1 U	49	47	1 U	2 U	17	160	51	1 U	**337**
MW-205A	10/06/07		0.5	12	0.4	31	39	1 U	2 U	16	75	34	1 U	**208**
MW-205A	05/18/08		4 U	13	4 U	27	48	4 U	8 U	20	73	35	4 U	**216**
MW-205A	11/28/08		0.49 J	11.9	0.29 J	21.3	41.5	1 U	1 U	20.2	59.5	30.8	1 U	**186**
MW-205A	06/09/09		0.45 J	10	0.27 J	19	36	1 U	1 U	19	60	30	1 U	**175**
MW-205A	11/25/09		0.48 J	11	1 U	19	32	1 U	1 U	20	46	27	1 U	**155**
MW-205A	06/24/10		0.35 J	11	1 U	16	25	1 U	1 U	22	41	23	1 U	**138**
MW-205A	11/25/10		0.38 J	13	1 U	16	18	1 U	1 U	23	41	24	1 U	**135**
MW-205A	06/02/11		0.34 J	15	1 U	15	13	1 U	1 U	23	36	22	1 U	**124**
MW-205A	01/08/12		0.31 J	20	1 U	14	7.4	1 U	5 U	24	31	16	1 U	**113**
MW-205A	06/28/12		0.4 J	21	1 U	13	5.7	1 U	5 U	24	30	16	1 U	**110**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-205B	04/22/99		0.73	23	3.4	74	47	5 U	10 U	3.5	310	57	5 U	**519**
MW-205B	10/21/99		25 U	23 J	25 U	82	54	25 U	50 U	3.4 J	340	58	25 U	**560**
MW-205B	02/07/00		25 U	24 J	25 U	86	57	25 U	50 U	3.8 J	360	60	25 U	**591**
MW-205B	04/18/00		20 U	26	20 U	90	59	20 U	40 JB	3.8 J	370	65	20 U	**654**
MW-205B	07/25/00		20 U	23	20 U	70	52	20 U	40 U	20 U	270	44	20 U	**459**
MW-205B	11/07/00		20 U	31	2.9	79	55	20 U	40 U	3.6	270	53	20 U	**495**
MW-205B	04/09/01		20 U	31	20 U	110	68	20 U	40 U	4.5	330	67	20 U	**611**
MW-205B	10/16/01		20 U	21	20 U	73	50	20 U	40 U	5.1	250	45	20 U	**444**
MW-205B	04/16/02		0.82	22	10 U	59	53	1.4	0.7	5.8	220	48	10 U	**411**
MW-205B	10/07/02		50 U	50 U	50 U	470	65	50 U	90	110	310	49	1 U	**1094**
MW-205B	04/22/03		0.75 J	24.2	1.79	92.4 E	59.6 E	1 U	2 U	11.4	303 E	63.8 E	1 U	**557**
MW-205B	04/22/03	Dilution	20 U	23.7	20 U	93.1	57.3	20 U	40 U	10 J	262	60.4	20 U	**507**
MW-205B	12/22/03		0.7 J	21.6	1.36	70.5 E	53.8 E	0.55 J	1 U	13	239 E	52.1 E	1 U	**453**
MW-205B	12/22/03	Dilution	20 U	18.7 JD	20 U	64.9 D	47.1 D	20 U	20 U	10.5 JD	201 D	44.6 D	20 U	**387**
MW-205B	04/28/04		20 U	22.4	20 U	75.5	54.4	20 U	40 U	11.4	233	49.3	20 U	**446**
MW-205B	05/21/05		1 U	17	1 U	43	47	1 U	2 U	13	110	34	1 U	**264**
MW-205B	10/19/05		1 U	17	1 U	32	43	1 U	2 U	14	89	31	1 U	**226**
MW-205B	05/06/06		1 U	18	1 U	26	52	1 U	2 U	23	59	31	1 U	**209**
MW-205B	11/21/06		1 U	18	1 U	39	71	1 U	2 U	23	95	44	1 U	**290**
MW-205B	10/06/07		0.4	15	0.4	30	52	1 U	2 U	18	66	31	1 U	**213**
MW-205B	05/18/08		4 U	16	4 U	30	63	4 U	8 U	22	69	34	4 U	**234**
MW-205B	11/28/08		0.49 J	15	0.38 J	19.9	43.1	1 U	1 U	12.8	79.4	24.6	1 U	**196**
MW-205B	06/09/09		0.49 J	15	0.25 J	21	44	1 U	1 U	18	63	29	1 U	**191**
MW-205B	11/25/09		0.55 J	14	1 U	21	37	1 U	1 U	21	47	27	1 U	**168**
MW-205B	06/24/10		0.38 J	14	0.16 J	17	29	1 U	1 U	22	43	23	1 U	**149**
MW-205B	11/25/10		0.41 J	15	1 U	17	23	1 U	1 U	23	42	24	1 U	**144**
MW-205B	06/02/11		0.38 J	17	1 U	18	21	1 U	1 U	23	39	22	1 U	**140**
MW-205B	01/08/12		0.32 J	20	1 U	14	11	1 U	5 U	23	31	16	1 U	**115**
MW-205B	06/28/12		0.43 J	21	1 U	13	8.2	1 U	5 U	23	30	15	1 U	**111**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-206A	04/23/99		0.64	8.5	0.75	22	23	2 U	4 U	9.3	100	37	2 U	**201**
MW-206A	10/20/99		10 U	9.8 J	10 U	21	21	10 U	20 U	6.6 J	87	33	10 U	**178**
MW-206A	02/07/00		0.55 J	10	5 U	14	20	5 U	10 U	7	79	25	5 U	**156**
MW-206A	04/18/00		0.55 J	9.6	5 U	12	20	0.36 J	10 JB	5.2	62	22	5 U	**142**
MW-206A	07/25/00		0.72	9.4	5 U	14	21	5 U	10 U	3.1	66	16	5 U	**130**
MW-206A	11/07/00		5 U	12	5 U	5.9	13	5 U	10 U	0.84	46	7.6	5 U	**85**
MW-206A	04/09/01		0.66	9.7	5 U	13	20	5 U	10 U	4.5	55	22	5 U	**125**
MW-206A	10/16/01		0.49	8.8	2 U	9.9	18	2 U	0.34	3.5	39	18	2 U	**98**
MW-206A	04/16/02		0.39	7.1	2 U	7.1	15	0.39	4 U	3.4	31	16	2 U	**80**
MW-206A	10/08/02		5 U	11	5 U	57	23	5 U	10 U	3	35	18	1 U	**147**
MW-206A	04/21/03		0.87 J	11.8	1 U	11.7	30.3 E	1.05	2 U	3.48	31.1 E	18.1	1 U	**108**
MW-206A	04/21/03	Dilution	2 U	11	2 U	11.1	28.4	2 U	4 U	3.17	26.9	17	2 U	**98**
MW-206A	12/22/03		1.04	14.5	1 U	13.9	38.4 E	1.4	1 U	3.99	35.8 E	19	1 U	**128**
MW-206A	12/22/03	Dilution	2 U	12.4 D	2 U	11.4 D	33.6 D	1.11 JD	2 U	3.36 D	29.8 D	16.5 D	2 U	**108**
MW-206A	04/28/04		1.28	10.7	2 U	11.1	31.6	2 U	4 U	3.65	27.4	15.1	2 U	**101**
MW-206A	05/21/05		1.1	5.6	1 U	6.7	16	1 U	2 U	2.9	17	11	1 U	**60**
MW-206A	10/19/05		1 U	8.1	1 U	8.8	23	1 U	2 U	3.1	19	11	1 U	**73**
MW-206A	05/06/06		1 U	9.2	1 U	9.1	25	1 U	2 U	3.8	23	13	1 U	**83**
MW-206A	11/27/06		1.1	9	1 U	8.2	14	1 U	2 U	4.2	22	14	1 U	**73**
MW-206A	10/06/07		0.6	5	1 U	5	6	1 U	2 U	3	14	9	1 U	**43**
MW-206A	05/18/08		1 U	6	1 U	8	7	1 U	2 U	4	18	11	1 U	**54**
MW-206A	11/28/08		0.28 J	13	0.19 J	7.54	9.43	0.21 J	1 U	1.95	17.9	7.85	1.59	**60**
MW-206A	06/10/09		0.41 J	11	1 U	7.5	7.3	1 U	1 U	2.8	23	9.9	0.97 J	**63**
MW-206A	04/01/10		0.27 J	7.6	1 U	6.8	4.2	1 U	1 U	3.7	18	10	1 U	**51**
MW-206A	06/25/10		0.28 J	8.3	1 U	7.1	4.2	1 U	1 U	3.8	18	9.3	1 U	**51**
MW-206A	11/29/10		0.16 J	13	1 U	4.4	4.5	1 U	1 U	1.5	9.7	4.3	3.6	**41**
MW-206A	06/02/11		0.27 J	12	1 U	6.8	3.8	1 U	0.27 J	3.4	17	9.6	0.55 J	**54**
MW-206A	12/22/11		0.93 J	75	2.2	76	100	1 U	5 U	7.3	52	44	0.92 J	**358**
MW-206A	06/26/12		0.6 J	7.8	1 U	3.7	1.8	1 U	5 U	4.4	11	6.9	1 U	**36**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-206B	04/23/99		10 U	5.1	10 U	2.5	59	10 U	20 U	13	4.6	150	10 U	**234**
MW-206B	10/20/99		10 U	9.1 J	10 U	4.9 J	54	10 U	1.3 J	9.6 J	8.4 J	160	10 U	**247**
MW-206B	02/17/00		10 U	13	10 U	8.8 J	36	10 U	20 U	5.8 J	16	150	10 U	**230**
MW-206B	04/18/00		0.62 J	14	10 U	9 J	40	0.28 J	20 JB	5.6 J	16	150	10 U	**256**
MW-206B	07/25/00		0.6	12	5 U	6	36	5 U	10 U	0.98	11	86	5 U	**153**
MW-206B	11/07/00		5 U	17	5 U	8.4	34	5 U	10 U	3.3	14	120	5 U	**197**
MW-206B	04/09/01		0.51	14	5 U	9.1	33	5 U	10 U	2.5	16	110	5 U	**185**
MW-206B	10/16/01		0.62	14	5 U	11	26	5 U	10 U	1.7	20	80	5 U	**153**
MW-206B	04/16/02		0.69	12	5 U	10	23	5 U	10 U	1.5	20	70	5 U	**137**
MW-206B	10/08/02		5 U	22	5 U	76	31	5 U	4	5 U	35	100	1 U	**268**
MW-206B	04/22/03		0.83 J	16.2	0.7 J	16.8	22.1	1 U	2 U	1.35	32.5 E	75.7 E	1 U	**166**
MW-206B	04/22/03	Dilution	5 U	15.1	5 U	15.7	20.5	5 U	10 U	5 U	27.2	68.7	5 U	**147**
MW-206B	12/22/03		0.88 J	17.3	0.71 J	18.2	21.5	1 U	1 U	1.34	34 E	68.8 E	1 U	**163**
MW-206B	12/22/03	Dilution	4 U	14.8 D	4 U	14 D	17.4 D	4 U	4 U	4 U	26.5 D	54.5 D	4 U	**127**
MW-206B	04/28/04		4 U	16	4 U	14.2	19.5	4 U	8 U	4 U	26.3	59.2	4 U	**135**
MW-206B	05/21/05		1 U	16	1 U	13	13	1 U	2 U	1 U	22	33	1 U	**97**
MW-206B	10/19/05		1 U	16	1 U	12	13	1 U	2 U	1 U	22	35	1 U	**98**
MW-206B	05/06/06		1 U	24	1 U	17	15	1 U	2 U	1 U	24	32	1 U	**112**
MW-206B	11/27/06		1 U	47	1.4	31	21	1 U	2 U	1.2	44	45	1 U	**191**
MW-206B	11/27/06	Fld Dupe	1 U	7.1	1 U	5	18	1 U	2 U	1 U	1 U	71	1 U	**101**
MW-206B	10/06/07		0.8	50	1	39	32	1 U	2 U	1	39	28	0.5 J	**191**
MW-206B	05/18/08		4 U	56	4 U	46	50	4 U	8 U	4 U	44	48	4 U	**244**
MW-206B	11/28/08		0.92 J	57.7	1.74	40.9	45.8	0.2 J	1 U	1.71	39.9	35.6	0.72 J	**225**
MW-206B	06/10/09		1	79	2.3	63	70	0.33 J	1 U	3.3	57	37	0.86 J	**314**
MW-206B	04/01/10		0.97 J	77	2.3	77	76	0.57 J	1 U	4.4	58	38	1.2	**335**
MW-206B	06/25/10		1	84	2.4	77	90	0.39 J	1 U	4.9	64	37	1.1	**362**
MW-206B	11/29/10		0.92 J	78	2.3	71	72	0.53 J	1 U	5.5	55	34	1.1	**320**
MW-206B	06/02/11		1.1	91	2.7	83	98	0.39 J	0.27 J	7.2	61	44	1.1	**390**
MW-206B	12/22/11		0.93 J	72	2.2	75	100	1 U	5 U	7.3	50	43	0.96 J	**351**
MW-206B	06/26/12		1	69	2.4	80	130	0.44 J	5 U	10	58	46	0.86 J	**398**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-206C	04/23/99		1 U	1 U	1 U	0.31	2.7	1 U	2 U	0.41	1.5	4.1	1 U	9
MW-206C	10/20/99		1 U	0.18 J	1 U	0.15 J	2.3	1 U	2 U	1 U	0.26 J	4.3	1 U	7
MW-206C	02/07/00		1 U	1 U	1 U	1 U	3.5	1 U	2 U	1 U	1 U	5.3	1 U	9
MW-206C	04/18/00		1 U	1 U	1 U	1 U	4	1 U	2 JB	1 U	1 U	6	1 U	12
MW-206C	07/25/00		1 U	1 U	1 U	1.3	4.8	1 U	2 U	1 U	1 U	3.5	1 U	10
MW-206C	11/07/00		1 U	0.14	1 U	0.12	2.3	1 U	2 U	1 U	0.29	3.4	1 U	6
MW-206C	11/07/00	Fld Dupe	1 U	0.14 J	1 U	0.12 J	2.3	1 U	2 U	1 U	0.28 J	3.3	1 U	6
MW-206C	04/09/01		1 U	0.36	1 U	0.28	4.3	1 U	2 U	0.25	0.7	6.6	1 U	12
MW-206C	04/09/01	Fld Dupe	1 U	0.33 J	1 U	0.26 J	4.2	1 U	2 U	0.26 J	0.48 J	6.3	1 U	12
MW-206C	10/16/01		1 U	0.24	1 U	0.11	5.9	1 U	2 U	0.2	0.18	7.6	1 U	14
MW-206C	04/16/02		1 U	1 U	1 U	0.17	6.9	1 U	2 U	0.06	1 U	14	1 U	21
MW-206C	10/08/02		5 U	5 U	5 U	5 U	15	5 U	4	5 U	5 U	30	1 U	49
MW-206C	04/22/03		1 U	0.86 J	1 U	0.55 J	14.4	1 U	2 U	1 U	1 U	43 E	1 U	59
MW-206C	04/22/03	Dilution	2.5 U	2.5 U	2.5 U	2.5 U	13.2	2.5 U	5 U	2.5 U	2.5 U	39.1	2.5 U	52
MW-206C	12/22/03		1 U	1.37	1 U	1.68	16.6	0.61 J	1 U	1 U	1 U	53 E	1 U	73
MW-206C	12/22/03	Dilution	4 U	4 U	4 U	4 U	14 D	4 U	4 U	4 U	4 U	44.7 D	4 U	59
MW-206C	04/28/04		2 U	1.21	2 U	2 U	14.9	2 U	4 U	2 U	2 U	37.7	2 U	54
MW-206C	05/21/05		1 U	1.5	1 U	1.1	9.2	1 U	2 U	1 U	1 U	34	1 U	46
MW-206C	10/19/05		1 U	3.8	1 U	2.6	15	1 U	0.1	1 U	1 U	47	1 U	69
MW-206C	05/06/06		1 U	5	1 U	3.5	14	1 U	2 U	1 U	1 U	52	1 U	75
MW-206C	11/27/06		1 U	6.5	1 U	4.4	17	1 U	2 U	1 U	1 U	85	1 U	113
MW-206C	10/06/07		1 U	5	1 U	4	11	1 U	2 U	0.4	1 U	44	1 U	64
MW-206C	05/18/08		2 U	5	2 U	4	12	2 U	4 U	2 U	2 U	38	2 U	59
MW-206C	11/28/08		1 U	3.11	1 U	2.01	5.23	1 U	1 U	1 U	1 U	19.4	1 U	30
MW-206C	06/10/09		1 U	2.7	1 U	1.8	4.8	1 U	1 U	1 U	1 U	16	1 U	25
MW-206C	04/01/10		1 U	3.4	1 U	2.7	4.8	1 U	1 U	1 U	1 U	16	1 U	27
MW-206C	06/25/10		1 U	5.2	1 U	3.6	6.5	1 U	1 U	1 U	1 U	20	1 U	35
MW-206C	11/29/10		1 U	3.9	1 U	3.1	5.1	1 U	1 U	1 U	1 U	16	1 U	28
MW-206C	06/02/11		1 U	6	1 U	3.9	6.9	1 U	0.26 J	1 U	1 U	22	1 U	39
MW-206C	12/22/11		1 U	6.3	1 U	4.4	7.5	1 U	5 U	0.3 J	1 U	24	1 U	43
MW-206C	06/26/12		1 U	5.8	1 U	3.8	6.1	1 U	5 U	1 U	1 U	19	1 U	35

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-207	04/23/99		0.39	0.76	2 U	2 U	1.6	2 U	4 U	2.6	2.7	26	2 U	**34**
MW-207	10/27/99		0.59 J	1.3	1 U	0.74 J	5.1	0.06 J	2 U	3.9	5.9	25	1 U	**43**
MW-207	02/17/00		0.54 J	1.1	1 U	0.22 J	1.2	1 U	2 U	2.8	2	22	1 U	**30**
MW-207	04/18/00		0.62 J	1.2	1 U	0.1 J	1.2	0.1 J	2 JB	2.7	2	20	1 U	**30**
MW-207	07/25/00		0.63	1.3	1 U	1 U	1.4	0.16	2 U	2.1	2	17	1 U	**25**
MW-207	11/08/00		0.71	2.1	1 U	0.24	1.4	1 U	2 U	2.3	1.9	16	1 U	**25**
MW-207	04/10/01		0.6	1.5	1 U	1 U	3.2	0.44	2 U	0.51	1.5	11	1 U	**19**
MW-207	10/16/01		0.44	5.3	1 U	0.13	3.4	0.33	2 U	1	4.2	22	1 U	**37**
MW-207	04/17/02		0.36	6.2	2 U	0.26	3.7	0.39	4 U	1.4	5.7	25	1 U	**43**
MW-207	10/08/02		1 U	8	1 U	6	5	1 U	0.8	0.9	5	21	1 U	**47**
MW-207	04/22/03		0.54 J	7.42	1 U	1.8	5.09	1 U	2 U	2.5	8.37	29.3 E	1 U	**55**
MW-207	04/22/03	Dilution	2 U	7.05	2 U	2.13	4.88	2 U	4 U	2.3	7.6	27.8	2 U	**52**
MW-207	12/28/03		0.53 J	6.12	1 U	2.64	4.5	1 U	1 U	2.58	8.64	29.4 E	1 U	**54**
MW-207	12/28/03	Dilution	2 U	5.68 D	2 U	2.18 D	3.78 D	2 U	2 U	2.21 D	7.19 D	25.8 E	2 U	**47**
MW-207	04/28/04		2 U	5.87	2 U	1.85	4.26	2 U	4 U	2.67	8.24	28.1	2 U	**51**
MW-207	05/21/05		1 U	4.3	1 U	1.7	3	1 U	2 U	2.1	5.4	18	1 U	**35**
MW-207	05/21/05	Fld Dupe	1 U	4.4	1 U	1.6	3	1 U	2 U	2	5.3	18	1 U	**34**
MW-207	10/19/05		1 U	4.5	1 U	1 U	2.7	1 U	2 U	1.3	5.7	17	1 U	**31**
MW-207	05/06/06		1 U	5.2	1 U	1.8	3.3	1 U	2 U	2	6.7	19	1 U	**38**
MW-207	11/27/06		1 U	5.7	1 U	1.1	3.1	1 U	2 U	2.6	9.3	24	1 U	**46**
MW-207	10/07/07		0.4	4	1 U	0.7	3	1 U	1 U	2	7	15	1 U	**32**
MW-207	05/18/08		1 U	4	1 U	2	3	1 U	2 U	2	7	15	1 U	**33**
MW-207	11/29/08		0.36 J	2.97	1 U	1 U	1.89	0.27 J	1 U	1.98	5.58	10.8	1 U	**24**
MW-207	06/10/09		0.31 J	2.4	1 U	0.65 J	1.8	1 U	1 U	2.1	4.6	9.9	1 U	**22**
MW-207	11/25/09		1 U	1.6	1 U	0.6 J	1.2	1 U	1 U	2.2	3.5	7.4	1 U	**17**
MW-207	06/24/10		0.18 J	1.3	1 U	0.52 J	1	1 U	1 U	1.9	2.8	5.6	1 U	**13**
MW-207	11/25/10		0.22 J	1.3	1 U	0.72 J	1.3	1 U	1 U	2.2	3	6	1 U	**15**
MW-207	06/02/11		1 U	1.5	1 U	0.6 J	1.2	1 U	0.3 J	1.6	2.8	5.2	1 U	**13**
MW-207	12/29/11		0.19 J	1.5	1 U	0.57 J	1.4	1 U	5 U	1.7	2.6	4.4	1 U	**12**
MW-207	06/26/12		0.27 J	1.4	1 U	0.4 J	1.2	1 U	5 U	1.3	2.2	3.9	1 U	**11**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Results reported in micrograms per liter (µg/l)

Highlighted results equal or exceed the Maximum Contaminant Level (MCL), where applicable

CFM	Chloroform
1,1-DCA	1,1-Dichloroethane
1,2-DCA	1,2-Dichloroethane
1,1-DCE	1,1-Dichloroethene
c1,2-DCE	cis- 1,2-Dichloroethene
t1,2-DCE	trans-1,2-Dichloroethene
MC	Methylene Chloride
PCE	Tetrachloroethene
1,1,1-TCA	1,1,1-Trichloroethane
TCE	Trichloroethene
VC	Vinyl Chloride
Total VOCs	Sum of Total Volatile Organic Compound Concentrations

B	Concentration is less than the reporting limit but greater than the instrument detection limit.
D	Reported concentration is based on an analysis requiring a secondary detection limit.
E	The associated value exceeds the calibration range.
J	The reported concentration is estimated.
U	*Analyte was not detected at or above the reporting limit.*

Sample Type reported as undiluted, investigative sample unless stated otherwise

Fld Dupe	Field Duplicate

Table 3: Southeast Rockford NPL Site
Ground Water Elevations

Station Identification	Measurement Date	Water Level (ft TOC)	Groundwater Elevation (ft amsl)	Total Depth (ft TOC)	Comments
MW-16	06/27/08	25.81	702.23	62.36	Limited access - IEPA Lock
MW-47	06/25/08	42.52	693.14	54.49	
MW-101A	06/24/08	43.87	721.75	90.35	
MW-101B	06/24/08	44.75	721.87	153.74	
MW-101C	06/24/08	44.48	722.00	174.89	
MW-101D	06/24/08	46.75	718.21	212.72	
MW-102A	06/26/08	18.71	769.72	37.69	
MW-102B	06/26/08	34.62	753.99	100.50	Field Duplicate (FD-1) collected
MW-102C	06/26/08	37.04	752.83	187.42	black silty water. Hard to pump - a lot of silt, had to pump at higher than normal pressure at the beginning of the purge to clear the pump.
MW-113A	06/24/08	56.28	710.26	104.50	
MW-113B	06/24/08	56.98	709.67	155.26	
MW-114A	06/26/08	29.48	697.41	97.48	outer
MW-114B	06/27/08	32.32	695.10	222.58	Field duplicate (FD-2) collected
MW-117B	06/25/08	7.48	688.78	89.50	
MW-117C	06/25/08	6.11	690.00	158.31	1 bolt hole stripped
MW-117D	06/25/08	5.76	690.34	200.20	
MW-119	06/26/08	26.92	692.05	62.41	
MW-121	06/26/08	23.57	693.41	67.55	
MW-124	06/26/08	33.46	697.84	102.76	
MW-130	06/24/08	24.74	703.21	38.17	
MW-133A	06/27/08	28.86	751.32	37.85	
MW-133B	06/27/08	27.76	752.57	61.49	
MW-133C	06/27/08	23.39	756.90	98.49	
MW-136	06/24/08	34.43	800.34	44.33	
MW-200	06/24/08	50.69	709.47	89.93	
MW-201	06/26/08	31.02	698.01	50.15	
MW-202	06/26/08	30.06	699.56	50.01	
MW-203	06/27/08	29.54	699.55	49.35	well pump was removed by unknown. Pumped utilizing a QED sample pro portable pump with teflon liner & tubing.
MW-204	06/26/08	28.84	688.37	88.96	
MW-205A	06/27/08	4.31	689.02	110.27	
MW-205B	06/27/08	4.20	689.02	150.05	
MW-206A	06/25/08	6.81	686.89	90.24	
MW-206B	06/25/08	4.38	688.88	129.94	
MW-206C	06/25/08	4.66	688.40	251.31	
MW-207	06/25/08	36.09	688.08	90.81	

ft amsl Feet above mean sea level
ft TOC Feet from Top of Casing

APPENDIX A

Ground Water Monitoring
Laboratory Data Sheets and
Data Validation Summary

Data Quality Control Criteria Review Summary

SDG Number: 1206447 **Project Number:** 1016-2

Site: SE Rockford, 27th Event

Contractor Lab: TriMatrix (Grand Rapids, MI)

Validator: Brian LaFlamme **Validation Date:** 08/01/12

Sample Matrix: Water **Sample Date:** 06/25/12 – 06/28/12

Analytical Methods: EPA SW-846 Method 8260B

Sample Designations:

MW-16	**MW-113A**	**MW-124**	**MW-203**	**Trip Blank TML1159**
MW-47	**MW-113B**	**MW-130**	**MW-204**	
MW-101A	**MW-114A**	**MW-133A**	**MW-205A**	**FD-1 (field duplicate of MW-102B)**
MW-101B	**MW-114B**	**MW-133B**	**MW-205B**	**FD-2 (field duplicate of MW-114B)**
MW-101C	**MW-117B**	**MW-133C**	**MW-206A**	
MW-101D	**MW-117C**	**MW-136**	**MW-206B**	
MW-102A	**MW-117D**	**MW-200**	**MW-206C**	
MW-102B	**MW-119**	**MW-201**	**MW-207**	
MW-102C	**MW-121**	**MW-202**		

The analytical data were reviewed in accordance with the analytical methods, SW-846 validation guidelines, and the Environmental Protections Agency (EPA) Contract Laboratory Program (CLP) National Functional Guidelines. The review included comparing quality control (QC) values provided on the laboratory QC forms to method QC criteria. Review of the raw data was not performed.

Quality Control Summary

QC Review Item	VOA
Completeness	X
Case Narrative	X
Chain of Custody (COC) Forms	X
Sample Preservation	X
Holding Times	X
Laboratory Blank Results	X
System Monitoring Compounds (Surrogate) Results	X
Matrix Spike/Matrix Duplicate (MS/MSD) Results	X
Laboratory Control Sample (LCS) Results	X
Method Specific QC Results *	1
System Performance	X
Field QC Results #	2
Other	X

X Acceptable, no qualification necessary NR Not required
See validation summary comment NA Not applicable
*) The reviewer has indicated in the comments, if necessary, the method specific QC results included in the data package that were reviewed.
#) Field QC may include field duplicates, trip blanks, rinse blanks, field blanks, and equipment blank samples as required by project specific criteria.

Data for the above samples are:

- [x] Acceptable for use
- [ ] Acceptable for use as qualified
- [ ] Unacceptable for use

Is action required by the Project Manager?

Yes ☐ No ☒

Data Validation Summary Comments:

1. **Method Specific QC Criteria** – The corresponding CCV in the analytical batch had a recovery below the lower control limit of the method. Positive results for acetone and 1,2-Dibromo-3-chloropropane in any associated samples are considered estimated; non-detectable results are considered approximate. Because neither of these compounds are chemicals of concern, qualification is not necessary.

2. **Field Quality Control Samples** – The relative percent difference (RPD) is not necessarily calculated if both the primary and duplicate results are not five times greater than the reporting limit. However, the RPD between the investigative and duplicate samples was generally less than 4%. An RPD of 84% resulted from comparing a reporting limited to an estimated result reported below the reporting limit. Qualification is not necessary.

OVERALL ASSESSMENT OF DATA

Based on the review of the quality control criteria, the method appeared to be in control. Therefore, the data are acceptable for use.

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**FD-1**	Sampled:	06/27/12 15:00
Lab Sample ID:	**1206447-27**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**2.7**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**3.9**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By _____

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**FD-1**	Sampled:	06/27/12 15:00
Lab Sample ID:	**1206447-27**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	1.0U	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	1.0U	1.0	0.21
75-01-4	Vinyl Chloride	**0.31J**	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*103*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ Phone: 616.975.4500 ♦ Fax: 616.942.7463 ♦ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**FD-2**	Sampled:	06/28/12 12:18
Lab Sample ID:	**1206447-34**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**1.1**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**0.41J**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**1.8**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**FD-2**	Sampled:	06/28/12 12:18
Lab Sample ID:	**1206447-34**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	1.0U	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**6.7**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*103*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-16**	Sampled:	06/28/12 11:40
Lab Sample ID:	**1206447-32**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**1.1**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**72**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**5.2**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**25**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	**3.3**	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-16**	Sampled:	06/28/12 11:40
Lab Sample ID:	**1206447-32**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**11**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**120**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**41**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*106*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-47**	Sampled:	06/26/12 13:40
Lab Sample ID:	**1206447-13**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-47**	Sampled:	06/26/12 13:40
Lab Sample ID:	**1206447-13**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**0.29J**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	1.0U	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*101*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ Phone: 616.975.4500 ♦ Fax: 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-101A**	Sampled:	06/27/12 15:31
Lab Sample ID:	**1206447-28**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/06/12 By: DLV
Dilution Factor:	1	Analyzed:	07/06/12 By: DLV
QC Batch:	1208318	Analytical Batch:	2G09007

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**79**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**1.4**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**160**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	**5.1**	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-101A**	Sampled:	06/27/12 15:31
Lab Sample ID:	**1206447-28**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/06/12 By: DLV
Dilution Factor:	1	Analyzed:	07/06/12 By: DLV
QC Batch:	1208318	Analytical Batch:	2G09007

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	1.0U	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**52**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**13**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*104*	*85-118*
1,2-Dichloroethane-d4	*104*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*97*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-101A**	Sampled:	06/25/12 10:23
Lab Sample ID:	**1206447-02**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	10	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	200U	200	11
71-43-2	Benzene	10U	10	1.1
74-97-5	Bromochloromethane	10U	10	3.0
75-27-4	Bromodichloromethane	10U	10	1.3
75-25-2	Bromoform	10U	10	2.6
74-83-9	Bromomethane	10U	10	2.1
75-15-0	Carbon Disulfide	50U	50	2.3
56-23-5	Carbon Tetrachloride	10U	10	2.6
108-90-7	Chlorobenzene	10U	10	1.7
75-00-3	Chloroethane	10U	10	1.4
67-66-3	Chloroform	**5.2J**	10	0.98
74-87-3	Chloromethane	10U	10	2.9
*96-12-8	1,2-Dibromo-3-chloropropane	10U	10	1.3
124-48-1	Dibromochloromethane	10U	10	1.5
106-93-4	1,2-Dibromoethane	10U	10	1.5
95-50-1	1,2-Dichlorobenzene	10U	10	2.4
541-73-1	1,3-Dichlorobenzene	10U	10	2.4
106-46-7	1,4-Dichlorobenzene	10U	10	2.5
75-34-3	1,1-Dichloroethane	**320**	10	1.8
107-06-2	1,2-Dichloroethane	10U	10	2.1
75-35-4	1,1-Dichloroethene	**72**	10	2.1
156-59-2	cis-1,2-Dichloroethene	**1600**	10	1.2
156-60-5	trans-1,2-Dichloroethene	**66**	10	2.0
78-87-5	1,2-Dichloropropane	10U	10	2.8
10061-01-5	cis-1,3-Dichloropropene	10U	10	1.9
10061-02-6	trans-1,3-Dichloropropene	10U	10	1.9
100-41-4	Ethylbenzene	10U	10	2.1
591-78-6	2-Hexanone	50U	50	4.9
75-09-2	Methylene Chloride	**2.7J**	50	2.4
78-93-3	2-Butanone (MEK)	**25J**	50	6.3
108-10-1	4-Methyl-2-pentanone (MIBK)	50U	50	4.0

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlab.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-101A**	Sampled:	06/25/12 10:23
Lab Sample ID:	**1206447-02**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	10	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	10U	10	2.0
79-34-5	1,1,2,2-Tetrachloroethane	10U	10	2.6
127-18-4	Tetrachloroethene	**56**	10	2.3
108-88-3	Toluene	10U	10	1.8
71-55-6	1,1,1-Trichloroethane	**650**	10	1.4
79-00-5	1,1,2-Trichloroethane	10U	10	2.0
79-01-6	Trichloroethene	**190**	10	2.1
75-01-4	Vinyl Chloride	10U	10	2.1
1330-20-7	Xylene (Total)	30U	30	3.9

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*105*	*85-118*
1,2-Dichloroethane-d4	*103*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-101B**	Sampled:	06/25/12 09:50
Lab Sample ID:	**1206447-01**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	5	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	100U	100	5.4
71-43-2	Benzene	5.0U	5.0	0.57
74-97-5	Bromochloromethane	5.0U	5.0	1.5
75-27-4	Bromodichloromethane	5.0U	5.0	0.64
75-25-2	Bromoform	5.0U	5.0	1.3
74-83-9	Bromomethane	5.0U	5.0	1.1
75-15-0	Carbon Disulfide	25U	25	1.2
56-23-5	Carbon Tetrachloride	5.0U	5.0	1.3
108-90-7	Chlorobenzene	5.0U	5.0	0.84
75-00-3	Chloroethane	5.0U	5.0	0.72
67-66-3	Chloroform	**1.9J**	5.0	0.49
74-87-3	Chloromethane	5.0U	5.0	1.4
96-12-8	1,2-Dibromo-3-chloropropane	5.0U	5.0	0.64
124-48-1	Dibromochloromethane	5.0U	5.0	0.76
106-93-4	1,2-Dibromoethane	5.0U	5.0	0.76
95-50-1	1,2-Dichlorobenzene	5.0U	5.0	1.2
541-73-1	1,3-Dichlorobenzene	5.0U	5.0	1.2
106-46-7	1,4-Dichlorobenzene	5.0U	5.0	1.2
75-34-3	1,1-Dichloroethane	**120**	5.0	0.92
107-06-2	1,2-Dichloroethane	5.0U	5.0	1.1
75-35-4	1,1-Dichloroethene	**25**	5.0	1.0
156-59-2	cis-1,2-Dichloroethene	**47**	5.0	0.60
156-60-5	trans-1,2-Dichloroethene	**4.3J**	5.0	1.0
78-87-5	1,2-Dichloropropane	5.0U	5.0	1.4
10061-01-5	cis-1,3-Dichloropropene	5.0U	5.0	0.95
10061-02-6	trans-1,3-Dichloropropene	5.0U	5.0	0.94
100-41-4	Ethylbenzene	5.0U	5.0	1.0
591-78-6	2-Hexanone	25U	25	2.5
75-09-2	Methylene Chloride	25U	25	1.2
78-93-3	2-Butanone (MEK)	25U	25	3.2
108-10-1	4-Methyl-2-pentanone (MIBK)	25U	25	2.0

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-101B**	Sampled:	06/25/12 09:50
Lab Sample ID:	**1206447-01**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	5	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	5.0U	5.0	1.0
79-34-5	1,1,2,2-Tetrachloroethane	5.0U	5.0	1.3
127-18-4	Tetrachloroethene	**24**	5.0	1.1
108-88-3	Toluene	5.0U	5.0	0.92
71-55-6	1,1,1-Trichloroethane	**430**	5.0	0.69
79-00-5	1,1,2-Trichloroethane	5.0U	5.0	1.0
79-01-6	Trichloroethene	**27**	5.0	1.1
75-01-4	Vinyl Chloride	5.0U	5.0	1.0
1330-20-7	Xylene (Total)	15U	15	2.0

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*104*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-101C**	Sampled:	06/25/12 11:45
Lab Sample ID:	**1206447-04**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/06/12 By: DLV
Dilution Factor:	2.5	Analyzed:	07/06/12 By: DLV
QC Batch:	1208318	Analytical Batch:	2G09007

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	50U	50	2.7
71-43-2	Benzene	2.5U	2.5	0.28
74-97-5	Bromochloromethane	2.5U	2.5	0.74
75-27-4	Bromodichloromethane	2.5U	2.5	0.32
75-25-2	Bromoform	2.5U	2.5	0.64
74-83-9	Bromomethane	2.5U	2.5	0.54
75-15-0	Carbon Disulfide	12U	12	0.58
56-23-5	Carbon Tetrachloride	2.5U	2.5	0.66
108-90-7	Chlorobenzene	2.5U	2.5	0.42
75-00-3	Chloroethane	2.5U	2.5	0.36
67-66-3	Chloroform	**1.4J**	2.5	0.24
74-87-3	Chloromethane	2.5U	2.5	0.72
96-12-8	1,2-Dibromo-3-chloropropane	2.5U	2.5	0.32
124-48-1	Dibromochloromethane	2.5U	2.5	0.38
106-93-4	1,2-Dibromoethane	2.5U	2.5	0.38
95-50-1	1,2-Dichlorobenzene	2.5U	2.5	0.59
541-73-1	1,3-Dichlorobenzene	2.5U	2.5	0.60
106-46-7	1,4-Dichlorobenzene	2.5U	2.5	0.62
75-34-3	1,1-Dichloroethane	**89**	2.5	0.46
107-06-2	1,2-Dichloroethane	2.5U	2.5	0.53
75-35-4	1,1-Dichloroethene	**17**	2.5	0.52
156-59-2	cis-1,2-Dichloroethene	**89**	2.5	0.30
156-60-5	trans-1,2-Dichloroethene	**3.3**	2.5	0.50
78-87-5	1,2-Dichloropropane	2.5U	2.5	0.69
10061-01-5	cis-1,3-Dichloropropene	2.5U	2.5	0.48
10061-02-6	trans-1,3-Dichloropropene	2.5U	2.5	0.47
100-41-4	Ethylbenzene	2.5U	2.5	0.52
591-78-6	2-Hexanone	12U	12	1.2
75-09-2	Methylene Chloride	12U	12	0.61
78-93-3	2-Butanone (MEK)	12U	12	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	12U	12	0.99

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ Phone: 616.975.4500 ♦ Fax: 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-101C**	Sampled:	06/25/12 11:45
Lab Sample ID:	**1206447-04**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/06/12 By: DLV
Dilution Factor:	2.5	Analyzed:	07/06/12 By: DLV
QC Batch:	1208318	Analytical Batch:	2G09007

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	2.5U	2.5	0.51
79-34-5	1,1,2,2-Tetrachloroethane	2.5U	2.5	0.64
127-18-4	Tetrachloroethene	**16**	2.5	0.56
108-88-3	Toluene	2.5U	2.5	0.46
71-55-6	1,1,1-Trichloroethane	**300**	2.5	0.34
79-00-5	1,1,2-Trichloroethane	2.5U	2.5	0.51
79-01-6	Trichloroethene	**20**	2.5	0.53
75-01-4	Vinyl Chloride	2.5U	2.5	0.52
1330-20-7	Xylene (Total)	7.5U	7.5	0.98

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*104*	*85-118*
1,2-Dichloroethane-d4	*100*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By _____

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-101D**	Sampled:	06/25/12 11:00
Lab Sample ID:	**1206447-03**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**1.1**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**47**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**14**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**33**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	**1.8**	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-101D**	Sampled:	06/25/12 11:00
Lab Sample ID:	**1206447-03**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**12**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**150**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**19**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*106*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ Phone: 616.975.4500 ♦ Fax: 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-102B**	Sampled:	06/27/12 14:57
Lab Sample ID:	**1206447-26**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**2.7**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**3.8**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-102B**	Sampled:	06/27/12 14:57
Lab Sample ID:	**1206447-26**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	1.0U	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	1.0U	1.0	0.21
75-01-4	Vinyl Chloride	**0.32J**	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*101*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ Phone: 616.975.4500 ♦ Fax: 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-102C**	Sampled:	06/27/12 14:28
Lab Sample ID:	**1206447-25**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	5	Analyzed:	07/03/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	100U	100	5.4
71-43-2	Benzene	5.0U	5.0	0.57
74-97-5	Bromochloromethane	5.0U	5.0	1.5
75-27-4	Bromodichloromethane	5.0U	5.0	0.64
75-25-2	Bromoform	5.0U	5.0	1.3
74-83-9	Bromomethane	5.0U	5.0	1.1
75-15-0	Carbon Disulfide	25U	25	1.2
56-23-5	Carbon Tetrachloride	5.0U	5.0	1.3
108-90-7	Chlorobenzene	5.0U	5.0	0.84
75-00-3	Chloroethane	5.0U	5.0	0.72
67-66-3	Chloroform	**1.2J**	5.0	0.49
74-87-3	Chloromethane	5.0U	5.0	1.4
*96-12-8	1,2-Dibromo-3-chloropropane	5.0U	5.0	0.64
124-48-1	Dibromochloromethane	5.0U	5.0	0.76
106-93-4	1,2-Dibromoethane	5.0U	5.0	0.76
95-50-1	1,2-Dichlorobenzene	5.0U	5.0	1.2
541-73-1	1,3-Dichlorobenzene	5.0U	5.0	1.2
106-46-7	1,4-Dichlorobenzene	5.0U	5.0	1.2
75-34-3	1,1-Dichloroethane	**130**	5.0	0.92
107-06-2	1,2-Dichloroethane	5.0U	5.0	1.1
75-35-4	1,1-Dichloroethene	**33**	5.0	1.0
156-59-2	cis-1,2-Dichloroethene	**550**	5.0	0.60
156-60-5	trans-1,2-Dichloroethene	**4.4J**	5.0	1.0
78-87-5	1,2-Dichloropropane	5.0U	5.0	1.4
10061-01-5	cis-1,3-Dichloropropene	5.0U	5.0	0.95
10061-02-6	trans-1,3-Dichloropropene	5.0U	5.0	0.94
100-41-4	Ethylbenzene	5.0U	5.0	1.0
591-78-6	2-Hexanone	25U	25	2.5
75-09-2	Methylene Chloride	25U	25	1.2
78-93-3	2-Butanone (MEK)	**11J**	25	3.2
108-10-1	4-Methyl-2-pentanone (MIBK)	25U	25	2.0

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-102C**	Sampled:	06/27/12 14:28
Lab Sample ID:	**1206447-25**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	5	Analyzed:	07/03/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	5.0U	5.0	1.0
79-34-5	1,1,2,2-Tetrachloroethane	5.0U	5.0	1.3
127-18-4	Tetrachloroethene	**7.3**	5.0	1.1
108-88-3	Toluene	5.0U	5.0	0.92
71-55-6	1,1,1-Trichloroethane	**55**	5.0	0.69
79-00-5	1,1,2-Trichloroethane	5.0U	5.0	1.0
79-01-6	Trichloroethene	**30**	5.0	1.1
75-01-4	Vinyl Chloride	5.0U	5.0	1.0
1330-20-7	Xylene (Total)	15U	15	2.0

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*103*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-113A**	Sampled:	06/25/12 13:52
Lab Sample ID:	**1206447-06**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**1.1**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**100**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**14**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**48**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	**5.3**	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

VALIDATED

Continued on next page

Reviewed By [signature]

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-113A**	Sampled:	06/25/12 13:52
Lab Sample ID:	**1206447-06**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**13**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**140**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	**0.67J**	1.0	0.20
79-01-6	Trichloroethene	**48**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*105*	*85-118*
1,2-Dichloroethane-d4	*99*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By [signature]

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-113B**	Sampled:	06/25/12 14:32
Lab Sample ID:	**1206447-07**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.48J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**60**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**14**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**98**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	**1.9**	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-113B**	Sampled:	06/25/12 14:32
Lab Sample ID:	**1206447-07**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**3.6**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**17**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**28**	1.0	0.21
75-01-4	Vinyl Chloride	**9.4**	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*104*	*85-118*
1,2-Dichloroethane-d4	*103*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*97*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-114A**	Sampled:	06/27/12 11:33
Lab Sample ID:	**1206447-24**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.21J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**4.3**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**5.6**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**3.0**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-114A**	Sampled:	06/27/12 11:33
Lab Sample ID:	**1206447-24**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	1.0U	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**71**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**4.2**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*106*	*85-118*
1,2-Dichloroethane-d4	*105*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-114B**	Sampled:	06/28/12 12:15
Lab Sample ID:	**1206447-33**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**1.1**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**1.8**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-114B**	Sampled:	06/28/12 12:15
Lab Sample ID:	**1206447-33**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	1.0U	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**6.5**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*101*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By: [signature]

Date: 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ Phone: 616.975.4500 ♦ Fax: 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-117B**	Sampled:	06/26/12 11:28
Lab Sample ID:	**1206447-10**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.30J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**5.9**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**2.6**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**0.77J**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-117B**	Sampled:	06/26/12 11:28
Lab Sample ID:	**1206447-10**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**5.9**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**7.8**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**5.7**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*97*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-117C**	Sampled:	06/26/12 12:11
Lab Sample ID:	**1206447-11**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.40J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**25**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**17**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**14**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By [signature]

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-117C**	Sampled:	06/26/12 12:11
Lab Sample ID:	**1206447-11**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**23**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**37**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**15**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*104*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-117D**	Sampled:	06/26/12 12:57
Lab Sample ID:	**1206447-12**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.41J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**43**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**11**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**2.8**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-117D**	Sampled:	06/26/12 12:57
Lab Sample ID:	**1206447-12**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**22**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**33**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**12**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*104*	*85-118*
1,2-Dichloroethane-d4	*103*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-119**	Sampled:	06/27/12 10:56
Lab Sample ID:	**1206447-21**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.29J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**0.97J**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**0.88J**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By [signature]

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-119**	Sampled:	06/27/12 10:56
Lab Sample ID:	**1206447-21**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	1.0U	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**1.1**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	1.0U	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*103*	*85-118*
1,2-Dichloroethane-d4	*104*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*100*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-121**	Sampled:	06/27/12 07:55
Lab Sample ID:	**1206447-19**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.86J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**21**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**5.5**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**5.1**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	**0.62J**	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By: [signature]

Date: 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-121**	Sampled:	06/27/12 07:55
Lab Sample ID:	**1206447-19**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**1.6**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**10**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**19**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*103*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-124**	Sampled:	06/27/12 08:38
Lab Sample ID:	**1206447-20**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	5	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	100U	100	5.4
71-43-2	Benzene	5.0U	5.0	0.57
74-97-5	Bromochloromethane	5.0U	5.0	1.5
75-27-4	Bromodichloromethane	5.0U	5.0	0.64
75-25-2	Bromoform	5.0U	5.0	1.3
74-83-9	Bromomethane	5.0U	5.0	1.1
75-15-0	Carbon Disulfide	25U	25	1.2
56-23-5	Carbon Tetrachloride	5.0U	5.0	1.3
108-90-7	Chlorobenzene	5.0U	5.0	0.84
75-00-3	Chloroethane	5.0U	5.0	0.72
67-66-3	Chloroform	5.0U	5.0	0.49
74-87-3	Chloromethane	5.0U	5.0	1.4
*96-12-8	1,2-Dibromo-3-chloropropane	5.0U	5.0	0.64
124-48-1	Dibromochloromethane	5.0U	5.0	0.76
106-93-4	1,2-Dibromoethane	5.0U	5.0	0.76
95-50-1	1,2-Dichlorobenzene	5.0U	5.0	1.2
541-73-1	1,3-Dichlorobenzene	5.0U	5.0	1.2
106-46-7	1,4-Dichlorobenzene	5.0U	5.0	1.2
75-34-3	1,1-Dichloroethane	**420**	5.0	0.92
107-06-2	1,2-Dichloroethane	5.0U	5.0	1.1
75-35-4	1,1-Dichloroethene	**17**	5.0	1.0
156-59-2	cis-1,2-Dichloroethene	**100**	5.0	0.60
156-60-5	trans-1,2-Dichloroethene	5.0U	5.0	1.0
78-87-5	1,2-Dichloropropane	5.0U	5.0	1.4
10061-01-5	cis-1,3-Dichloropropene	5.0U	5.0	0.95
10061-02-6	trans-1,3-Dichloropropene	5.0U	5.0	0.94
100-41-4	Ethylbenzene	5.0U	5.0	1.0
591-78-6	2-Hexanone	25U	25	2.5
75-09-2	Methylene Chloride	25U	25	1.2
78-93-3	2-Butanone (MEK)	25U	25	3.2
108-10-1	4-Methyl-2-pentanone (MIBK)	25U	25	2.0

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-124**	Sampled:	06/27/12 08:38
Lab Sample ID:	**1206447-20**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	5	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	5.0U	5.0	1.0
79-34-5	1,1,2,2-Tetrachloroethane	5.0U	5.0	1.3
127-18-4	Tetrachloroethene	**9.5**	5.0	1.1
108-88-3	Toluene	5.0U	5.0	0.92
71-55-6	1,1,1-Trichloroethane	**90**	5.0	0.69
79-00-5	1,1,2-Trichloroethane	5.0U	5.0	1.0
79-01-6	Trichloroethene	**5.2**	5.0	1.1
75-01-4	Vinyl Chloride	**23**	5.0	1.0
1330-20-7	Xylene (Total)	15U	15	2.0

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*104*	*85-118*
1,2-Dichloroethane-d4	*103*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-130**	Sampled:	06/25/12 15:19
Lab Sample ID:	**1206447-08**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.26J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**7.7**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**1.9**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**3.0**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-130**	Sampled:	06/25/12 15:19
Lab Sample ID:	**1206447-08**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**0.65J**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**68**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**2.1**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*105*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By [signature]

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-133A**	Sampled:	06/28/12 13:17
Lab Sample ID:	**1206447-35**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**0.40J**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By: [signature]

Date: 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ Phone: 616.975.4500 ♦ Fax: 616.942.7463 ♦ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-133A**	Sampled:	06/28/12 13:17
Lab Sample ID:	**1206447-35**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	1.0U	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**0.30J**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	1.0U	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-133B**	Sampled:	06/28/12 13:49
Lab Sample ID:	**1206447-36**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	10	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	200U	200	11
71-43-2	Benzene	10U	10	1.1
74-97-5	Bromochloromethane	10U	10	3.0
75-27-4	Bromodichloromethane	10U	10	1.3
75-25-2	Bromoform	10U	10	2.6
74-83-9	Bromomethane	10U	10	2.1
75-15-0	Carbon Disulfide	50U	50	2.3
56-23-5	Carbon Tetrachloride	10U	10	2.6
108-90-7	Chlorobenzene	10U	10	1.7
75-00-3	Chloroethane	10U	10	1.4
67-66-3	Chloroform	**5.2J**	10	0.98
74-87-3	Chloromethane	10U	10	2.9
*96-12-8	1,2-Dibromo-3-chloropropane	10U	10	1.3
124-48-1	Dibromochloromethane	10U	10	1.5
106-93-4	1,2-Dibromoethane	10U	10	1.5
95-50-1	1,2-Dichlorobenzene	10U	10	2.4
541-73-1	1,3-Dichlorobenzene	10U	10	2.4
106-46-7	1,4-Dichlorobenzene	10U	10	2.5
75-34-3	1,1-Dichloroethane	**180**	10	1.8
107-06-2	1,2-Dichloroethane	10U	10	2.1
75-35-4	1,1-Dichloroethene	**25**	10	2.1
156-59-2	cis-1,2-Dichloroethene	**1200**	10	1.2
156-60-5	trans-1,2-Dichloroethene	**60**	10	2.0
78-87-5	1,2-Dichloropropane	10U	10	2.8
10061-01-5	cis-1,3-Dichloropropene	10U	10	1.9
10061-02-6	trans-1,3-Dichloropropene	10U	10	1.9
100-41-4	Ethylbenzene	10U	10	2.1
591-78-6	2-Hexanone	50U	50	4.9
75-09-2	Methylene Chloride	**11J**	50	2.4
78-93-3	2-Butanone (MEK)	**42J**	50	6.3
108-10-1	4-Methyl-2-pentanone (MIBK)	50U	50	4.0

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-133B**	Sampled:	06/28/12 13:49
Lab Sample ID:	**1206447-36**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	10	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	10U	10	2.0
79-34-5	1,1,2,2-Tetrachloroethane	10U	10	2.6
127-18-4	Tetrachloroethene	**65**	10	2.3
108-88-3	Toluene	10U	10	1.8
71-55-6	1,1,1-Trichloroethane	**470**	10	1.4
79-00-5	1,1,2-Trichloroethane	10U	10	2.0
79-01-6	Trichloroethene	**92**	10	2.1
75-01-4	Vinyl Chloride	10U	10	2.1
1330-20-7	Xylene (Total)	30U	30	3.9

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*105*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By [signature]

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-133C**	Sampled:	06/28/12 14:20
Lab Sample ID:	**1206447-37**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	**0.38J**	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**5.7**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**51**	1.0	0.18
107-06-2	1,2-Dichloroethane	**1.6**	1.0	0.21
75-35-4	1,1-Dichloroethene	**40**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**130**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	**1.7**	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ Phone: 616.975.4500 ♦ Fax: 616.942.7463 ♦ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-133C**	Sampled:	06/28/12 14:20
Lab Sample ID:	**1206447-37**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**6.6**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**150**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	**0.94J**	1.0	0.20
79-01-6	Trichloroethene	**81**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*106*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By [signature]

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◊ Grand Rapids, MI 49512 ◊ Phone: 616.975.4500 ◊ Fax: 616.942.7463 ◊ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-136**	Sampled:	06/25/12 12:58
Lab Sample ID:	**1206447-05**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/02/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.62J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-136**	Sampled:	06/25/12 12:58
Lab Sample ID:	**1206447-05**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/02/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	1.0U	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	1.0U	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*101*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ Phone: 616.975.4500 ♦ Fax: 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-200**	Sampled:	06/25/12 16:05
Lab Sample ID:	**1206447-09**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-200**	Sampled:	06/25/12 16:05
Lab Sample ID:	**1206447-09**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	1.0U	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	1.0U	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*100*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*96*	*82-110*

VALIDATED

Reviewed By [signature]

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-201**	Sampled:	06/27/12 10:13
Lab Sample ID:	**1206447-23**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**8.0**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**0.75J**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-201**	Sampled:	06/27/12 10:13
Lab Sample ID:	**1206447-23**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**1.9**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**5.8**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**0.44J**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*103*	*85-118*
1,2-Dichloroethane-d4	*103*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By _____

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-202**	Sampled:	06/27/12 09:25
Lab Sample ID:	**1206447-22**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**0.46J**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-202**	Sampled:	06/27/12 09:25
Lab Sample ID:	**1206447-22**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**1.4**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**0.94J**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	1.0U	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*103*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By _____

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-203**	Sampled:	06/28/12 10:56
Lab Sample ID:	**1206447-31**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-203**	Sampled:	06/28/12 10:56
Lab Sample ID:	**1206447-31**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**10**	1.0	0.23
108-88-3	Toluene	**0.19J**	1.0	0.18
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**0.41J**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*101*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*98*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By [signature]

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-204**	Sampled:	06/27/12 07:20
Lab Sample ID:	**1206447-18**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.63J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**5.5**	1.0	0.18
107-06-2	1,2-Dichloroethane	**1.2**	1.0	0.21
75-35-4	1,1-Dichloroethene	**7.1**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**30**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	**1.3**	1.0	0.20
78-87-5	1,2-Dichloropropane	**0.41J**	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ Phone: 616.975.4500 ♦ Fax: 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-204**	Sampled:	06/27/12 07:20
Lab Sample ID:	**1206447-18**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**1.7**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**5.8**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**54**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*103*	*85-118*
1,2-Dichloroethane-d4	*104*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*100*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-205A**	Sampled:	06/28/12 08:54
Lab Sample ID:	**1206447-30**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.40J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**21**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**13**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**5.7**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-205A**	Sampled:	06/28/12 08:54
Lab Sample ID:	**1206447-30**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**24**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**30**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**16**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*104*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*97*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-205B**	Sampled:	06/28/12 08:25
Lab Sample ID:	**1206447-29**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.43J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**21**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**13**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**8.2**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-205B**	Sampled:	06/28/12 08:25
Lab Sample ID:	**1206447-29**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/04/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**23**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**30**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**15**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By [signature]

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-206A**	Sampled:	06/26/12 16:22
Lab Sample ID:	**1206447-17**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.60J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**7.8**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**3.7**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**1.8**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-206A**	Sampled:	06/26/12 16:22
Lab Sample ID:	**1206447-17**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208263	Analytical Batch:	2G06011

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**4.4**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**11**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**6.9**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*104*	*85-118*
1,2-Dichloroethane-d4	*103*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By [signature]

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-206B**	Sampled:	06/26/12 15:47
Lab Sample ID:	**1206447-16**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	**0.22J**	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**1.0**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**69**	1.0	0.18
107-06-2	1,2-Dichloroethane	**2.4**	1.0	0.21
75-35-4	1,1-Dichloroethene	**80**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**130**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	**0.44J**	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-206B**	Sampled:	06/26/12 15:47
Lab Sample ID:	**1206447-16**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**10**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**58**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	**5.6**	1.0	0.20
79-01-6	Trichloroethene	**46**	1.0	0.21
75-01-4	Vinyl Chloride	**0.86J**	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*105*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*96*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-206C**	Sampled:	06/26/12 15:22
Lab Sample ID:	**1206447-15**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**5.8**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**3.8**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**6.1**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-206C**	Sampled:	06/26/12 15:22
Lab Sample ID:	**1206447-15**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	1.0U	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**19**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*98*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-207**	Sampled:	06/26/12 14:19
Lab Sample ID:	**1206447-14**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	**0.27J**	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	**1.4**	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	**0.40J**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**1.2**	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**MW-207**	Sampled:	06/26/12 14:19
Lab Sample ID:	**1206447-14**	Sampled By:	Patrick Egan
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/02/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208186	Analytical Batch:	2G03006

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	**1.3**	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	**2.2**	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	**3.9**	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By [signature]

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**Trip Blank TML1159**	Sampled:	06/28/12 00:00
Lab Sample ID:	**1206447-38**	Sampled By:	TML
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.1
71-43-2	Benzene	1.0U	1.0	0.11
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.13
75-25-2	Bromoform	1.0U	1.0	0.26
74-83-9	Bromomethane	1.0U	1.0	0.21
75-15-0	Carbon Disulfide	5.0U	5.0	0.23
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.26
108-90-7	Chlorobenzene	1.0U	1.0	0.17
75-00-3	Chloroethane	1.0U	1.0	0.14
67-66-3	Chloroform	1.0U	1.0	0.098
74-87-3	Chloromethane	1.0U	1.0	0.29
*96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.13
124-48-1	Dibromochloromethane	1.0U	1.0	0.15
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.15
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.24
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.24
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.25
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.18
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.21
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.12
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.20
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.28
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.19
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.19
100-41-4	Ethylbenzene	1.0U	1.0	0.21
591-78-6	2-Hexanone	5.0U	5.0	0.49
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	0.63
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	0.40

Continued on next page

*See Statement of Data Qualifications

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1206447**
Project:	SE Rockford, Il Site	Description:	Laboratory Services
Client Sample ID:	**Trip Blank TML1159**	Sampled:	06/28/12 00:00
Lab Sample ID:	**1206447-38**	Sampled By:	TML
Matrix:	Water	Received:	06/29/12 08:30
Unit:	ug/L	Prepared:	07/03/12 By: DLV
Dilution Factor:	1	Analyzed:	07/03/12 By: DLV
QC Batch:	1208269	Analytical Batch:	2G06014

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.20
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.26
127-18-4	Tetrachloroethene	1.0U	1.0	0.23
108-88-3	Toluene	1.0U	1.0	0.18
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.14
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.20
79-01-6	Trichloroethene	1.0U	1.0	0.21
75-01-4	Vinyl Chloride	1.0U	1.0	0.21
1330-20-7	Xylene (Total)	3.0U	3.0	0.39

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*98*	*82-110*

VALIDATED

Reviewed By

Date 8-1-12

This report shall not be reproduced except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ Phone: 616.975.4500 ◆ Fax: 616.942.7463 ◆ www.trimatrixlabs.com

APPENDIX B
Ground Water Monitoring
Field Data Sheets

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	60	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW16**
Casing Stickup (Ft.)	2.36	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	28-Jun-12
Total Well Depth (Ft.) TOC	62.36	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	25.81	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	36.55	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
11:10							0	25.81	Static
11:14	7.32	4.72	12.91	0.00	1.08		400	25.87	Start Time
11:17	7.32	4.62	12.81	-1.00	1.09		400		redish brown
11:20	7.34	4.56	12.89	-3.00	1.09		400		clear
11:26	7.34	4.65	12.78	-4.00	1.09		400	25.87	clear
11:29	7.35	4.64	12.82	-6.00	1.09		400		clear
11:33	7.36	4.65	12.76	-6.00	1.09	21	400		clear
MINUTES							**TOTAL LITERS**		
19.0	0.02	0.00%	-0.16%	-2.00	-0.09%		**7.60**		

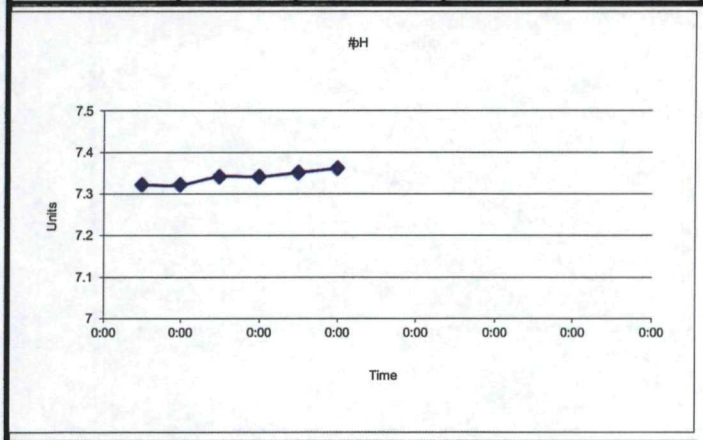

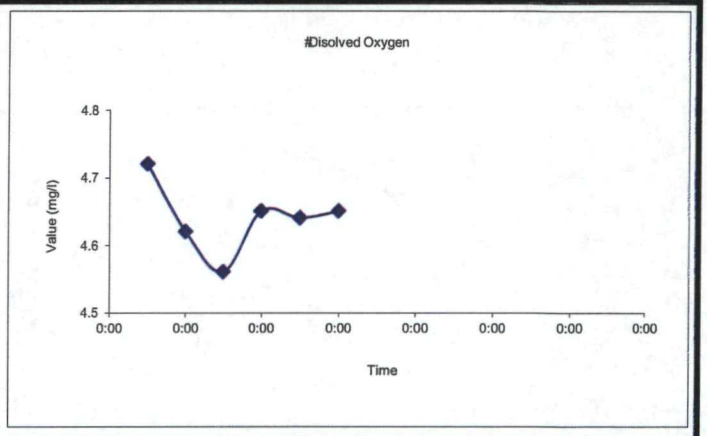

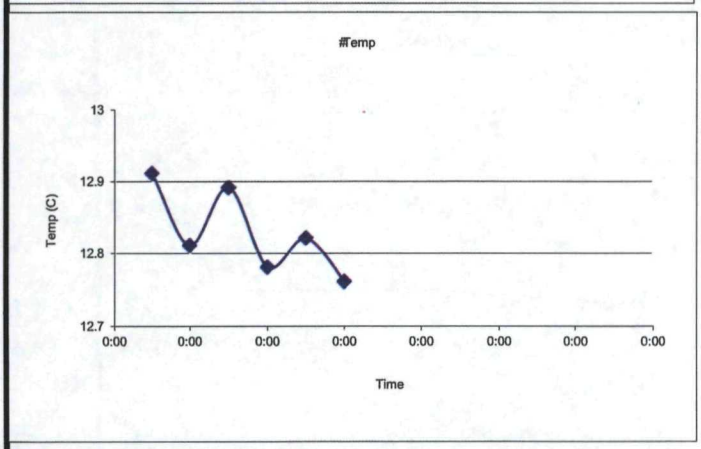

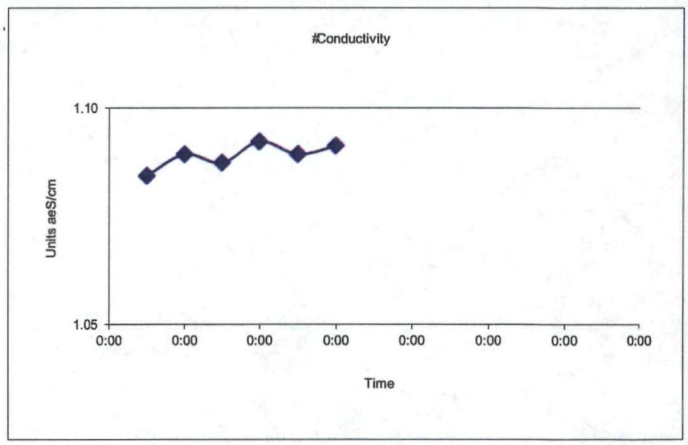

Remarks: (well condition, maintenance, etc...)

Limited access - IEPA Lock

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	52	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 47**
Casing Stickup (Ft.)	-0.63	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	26-Jun-12
Total Well Depth (Ft.) TOC	54.49	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	42.52	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	11.97	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
10:30							0	42.52	Start Time
13:14	7.50	8.34	13.52	23.00	1.11		300	42.69	brown
13:17	7.51	8.27	13.61	23.00	1.11		300		brown
13:20	7.53	8.40	13.58	20.00	1.11		300		clear
13:26	7.58	8.47	13.43	18.00	1.12		300	42.69	clear
13:31	7.63	8.51	13.49	17.00	1.12		300		clear
13:36	7.56	8.53	13.46	13.00	1.12	43	300		clear
MINUTES							**TOTAL LITERS**		
22.0	-0.02	0.70%	0.22%	-5.00	0.00%		**6.60**		

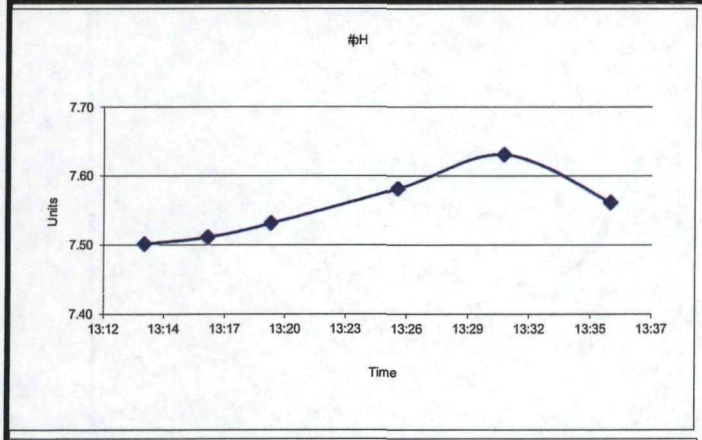

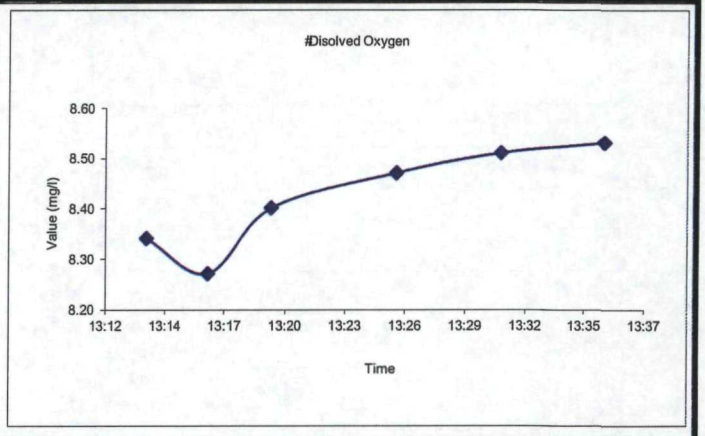

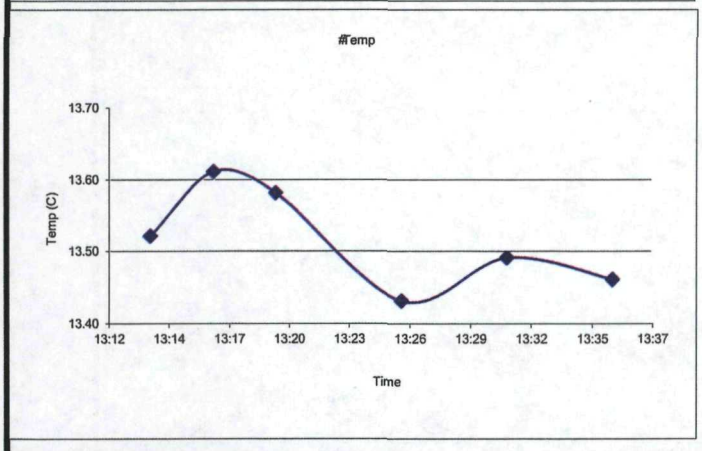

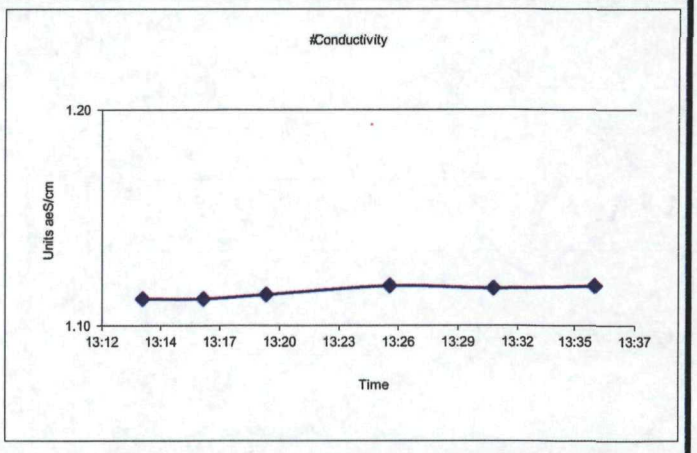

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	88	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 101A**
Casing Stickup (Ft.)	1.45	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	25-Jun-12
Total Well Depth (Ft.) TOC	90.35	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	43.87	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	46.48	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
9:53							0	43.87	Static
10:05	7.46	3.27	11.24	3.00	0.89		500		Start Time
10:09	7.47	3.24	11.13	0.00	0.89		500	43.86	clear
10:13	7.49	3.27	11.23	-3.00	0.89		500		clear
10:17	7.50	3.24	11.17	-6.00	0.89		500		clear
10:20	7.50	3.22	11.17	-7.00	0.89		500	43.86	clear
10:23	7.51	3.22	11.18	-9.00	0.89	33	500		clear
MINUTES							**TOTAL LITERS**		
18.0	0.01	-0.62%	0.09%	-3.00	-0.11%		**9.00**		

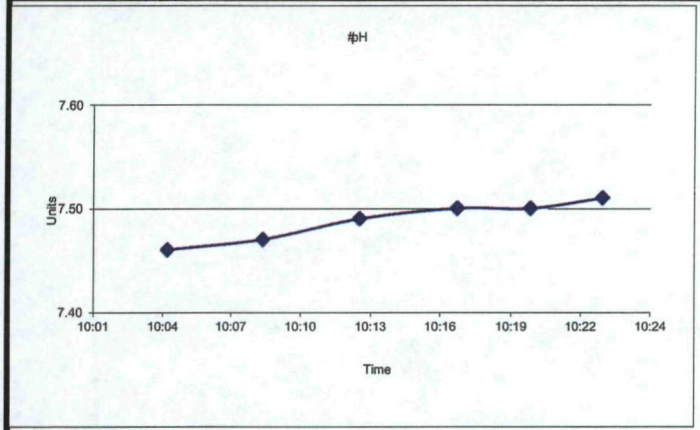

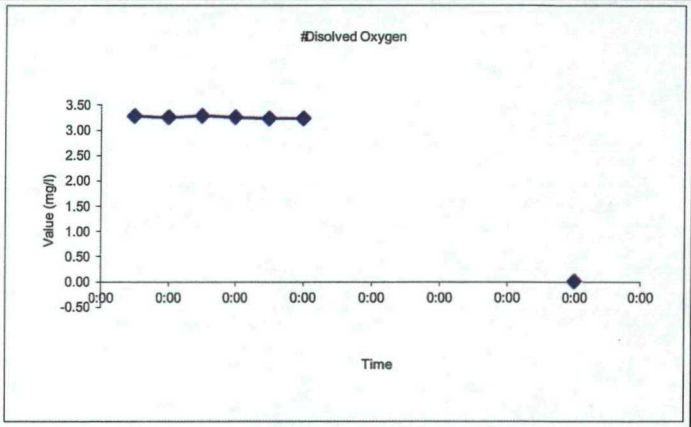

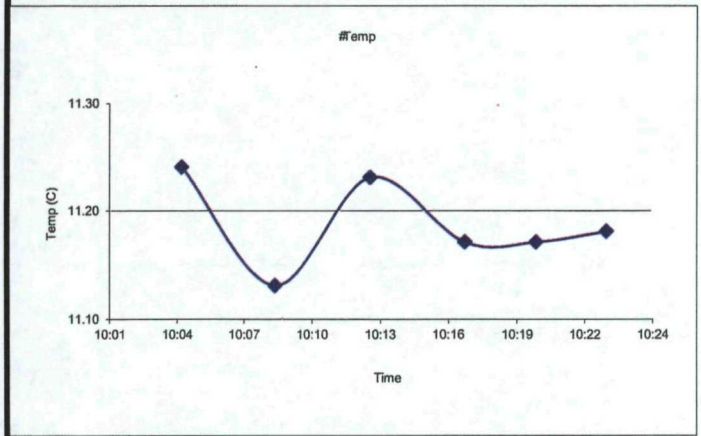

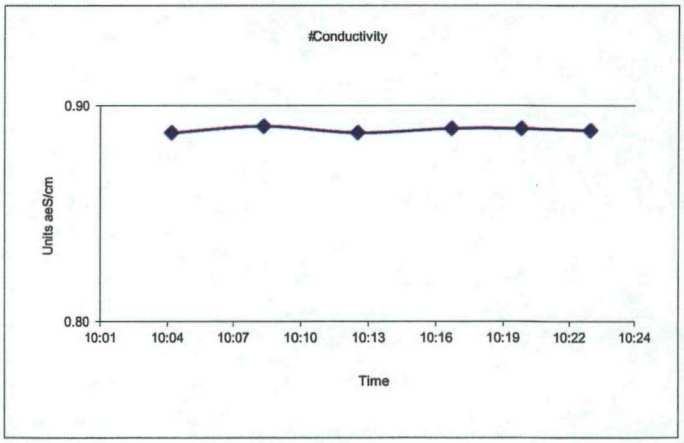

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	151	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 101B**
Casing Stickup (Ft.)	2.16	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	25-Jun-12
Total Well Depth (Ft.) TOC	153.74	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	44.75	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	108.99	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
							0	44.75	Static
9:28	7.23	4.49	11.52	40.00	0.81		450		Start Time
9:32	7.26	4.45	11.44	40.00	0.81		450	44.98	clear
9:36	7.26	4.32	11.43	40.00	0.81		450		clear
9:40	7.26	4.26	11.46	40.00	0.81		450		clear
9:45	7.27	4.24	11.43	38.00	0.81		450	45.03	clear
9:48	7.29	4.21	11.45	35.00	0.81	23	450		clear
MINUTES							**TOTAL LITERS**		
20.0	0.03	-1.19%	-0.09%	-5.00	0.12%		**9.00**		

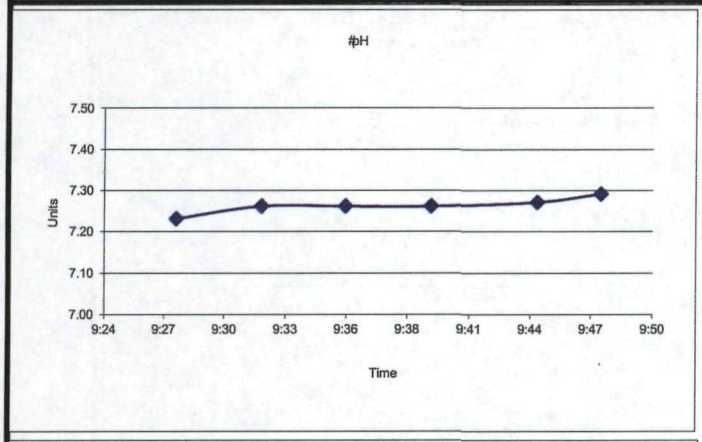

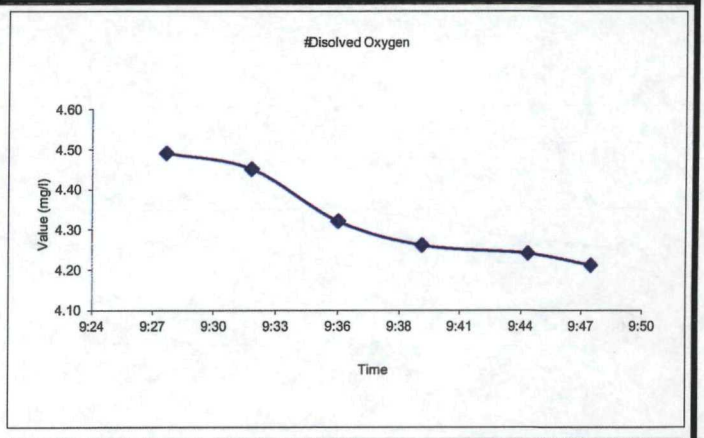

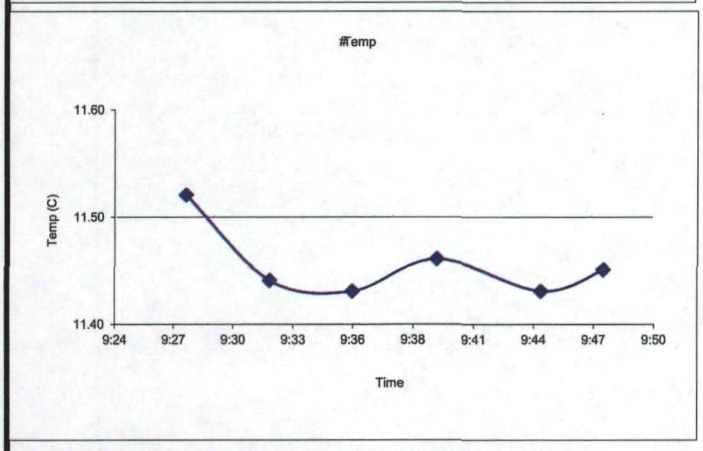

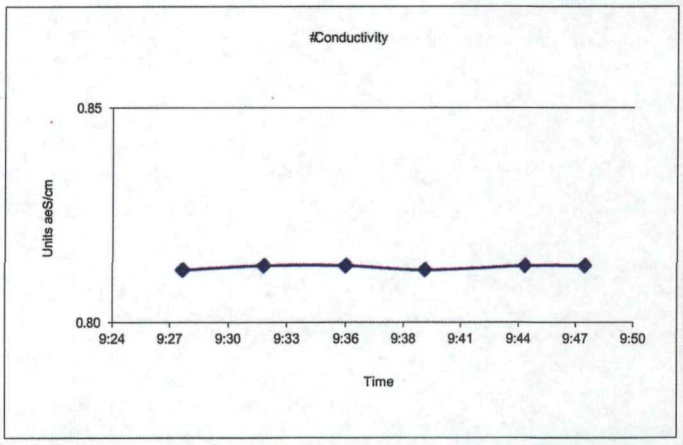

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	172	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 101C**
Casing Stickup (Ft.)	1.12	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	25-Jun-12
Total Well Depth (Ft.) TOC	174.89	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	44.48	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	130.41	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
11:08							0	44.48	Static
11:15	7.30	3.20	11.71	49.00	0.82		500		Start Time
11:18	7.32	3.17	11.75	48.00	0.82		500	44.68	clear
11:21	7.32	3.17	11.76	46.00	0.82		500		clear
11:25	7.34	3.13	11.80	44.00	0.82		500		clear
11:30	7.36	3.07	11.80	41.00	0.82		500		clear
11:35	7.38	3.08	11.81	38.00	0.82		500	44.68	clear
11:39	7.38	3.08	11.71	38.00	0.82		500		clear
11:43	7.39	3.08	11.71	35.00	0.82	10	500		clear
MINUTES						**TOTAL LITERS**			
28.0	0.01	0.00%	-0.85%	-3.00	0.00%		**14.00**		

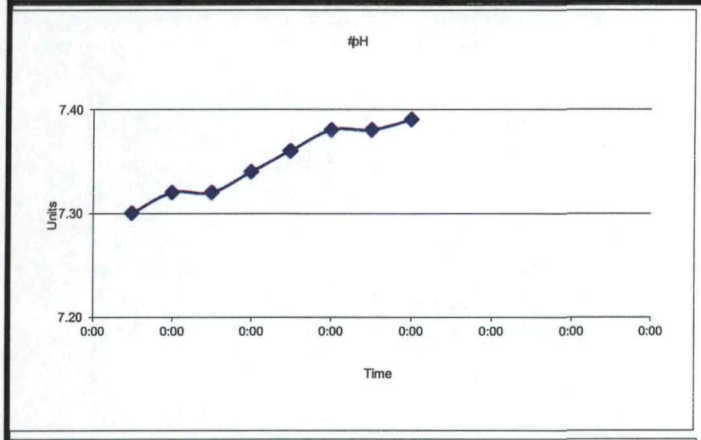

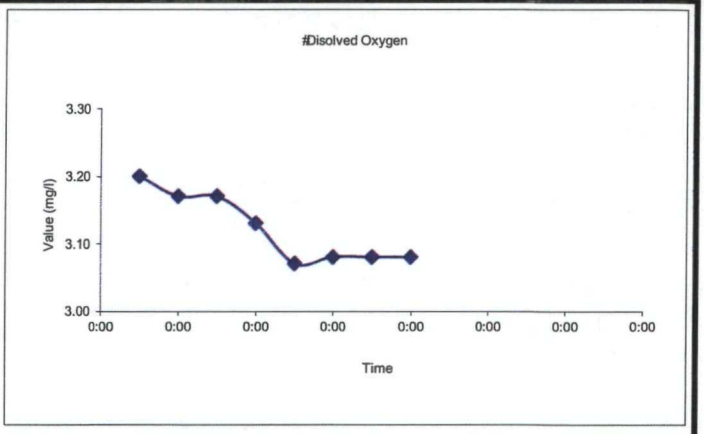

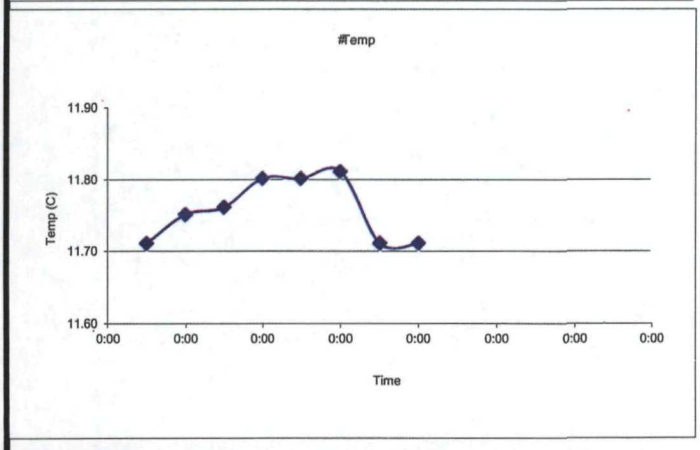

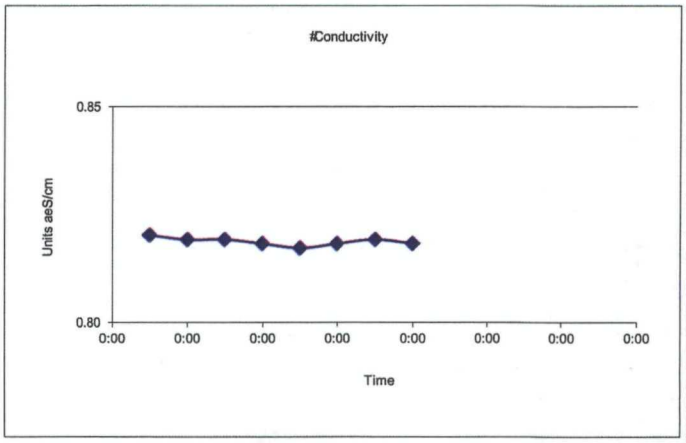

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	172	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 101D**
Casing Stickup (Ft.)	0.89	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	25-Jun-12
Total Well Depth (Ft.) TOC	212.72	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	46.75	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	165.97	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
10:35							0	46.75	Static
10:41	7.35	4.06	11.07	23.00	0.95		500		Start Time
10:45	7.37	4.10	11.15	24.00	0.95		500		cloudy
10:50	7.38	4.07	11.15	25.00	0.95		500	46.75	clear
10:55	7.38	4.00	11.17	27.00	0.95		500		clear
10:58	7.36	4.10	11.21	27.00	0.95	13	500	46.75	clear
MINUTES							**TOTAL LITERS**		
17.0	-0.02	0.73%	0.54%	2.00	-0.11%		**8.50**		

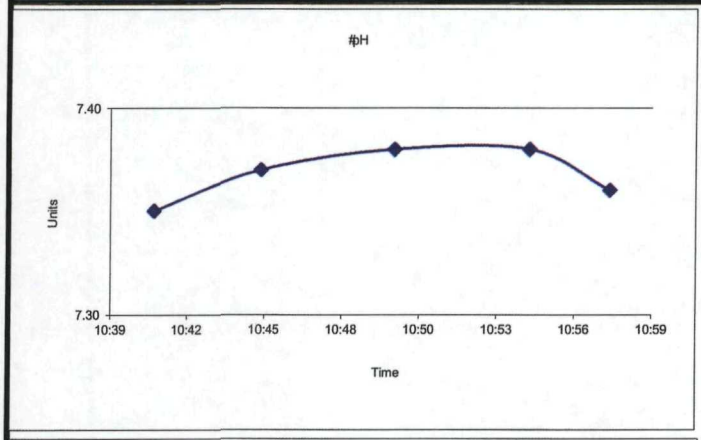

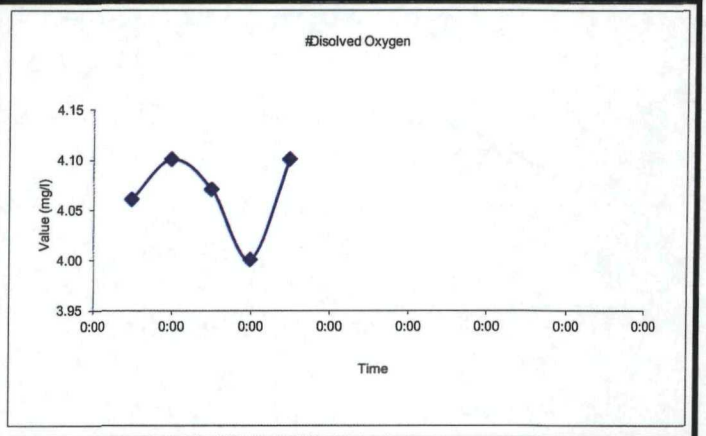

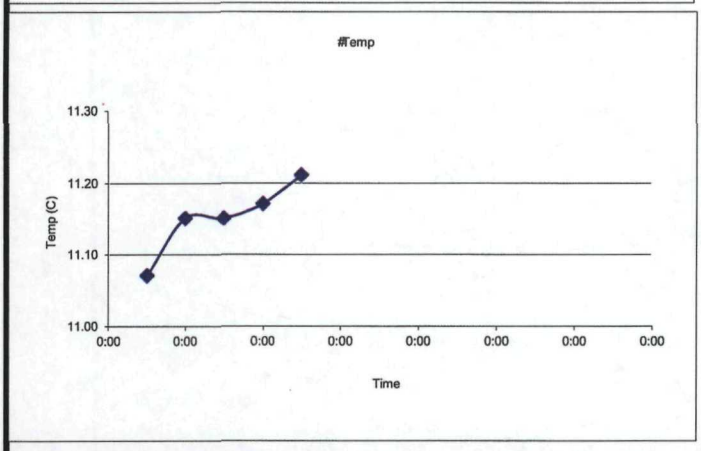

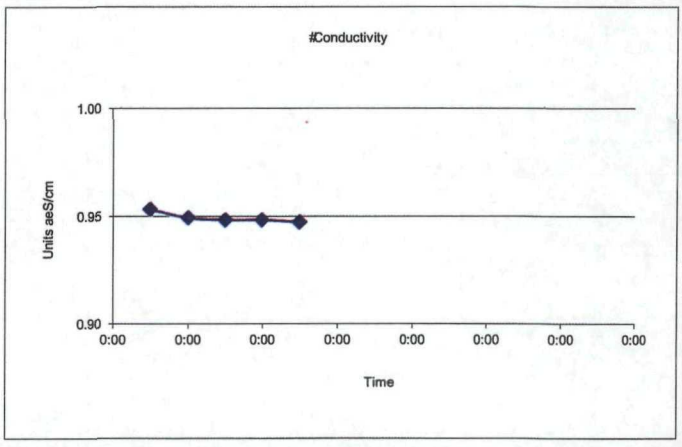

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	35	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 102A**
Casing Stickup (Ft.)	-0.47	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	27-Jun-12
Total Well Depth (Ft.) TOC	37.69	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	18.71	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	18.98	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
14:57							0	18.71	Static
15:03	7.39	2.52	12.61	-30	2.87		450		Start Time
15:07	7.39	2.47	12.64	-32	2.84		450	18.71	brown cloudy
15:11	7.38	2.45	12.65	-32	2.81		450		brown cloudy
15:15	7.40	2.32	12.64	-33	2.79		450	18.71	cloudy
15:22	7.38	2.43	12.78	-31	2.75		450		cloudy
15:28	7.40	2.31	12.60	-32	2.73	34	450		clear
MINUTES							**TOTAL LITERS**		
25.0	0.00	-0.43%	-0.32%	1.00	-2.16%		**11.25**		

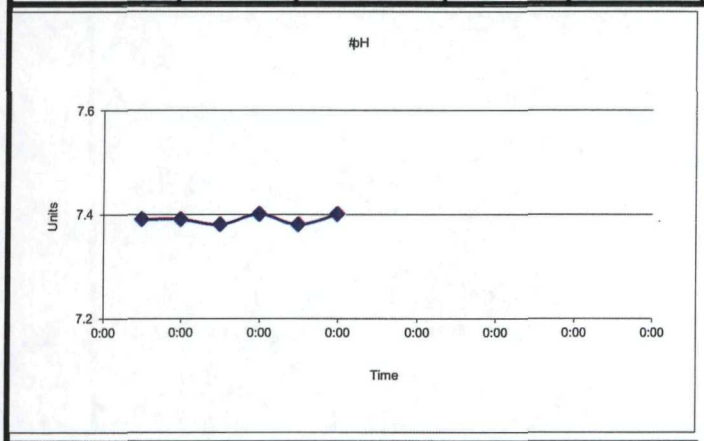

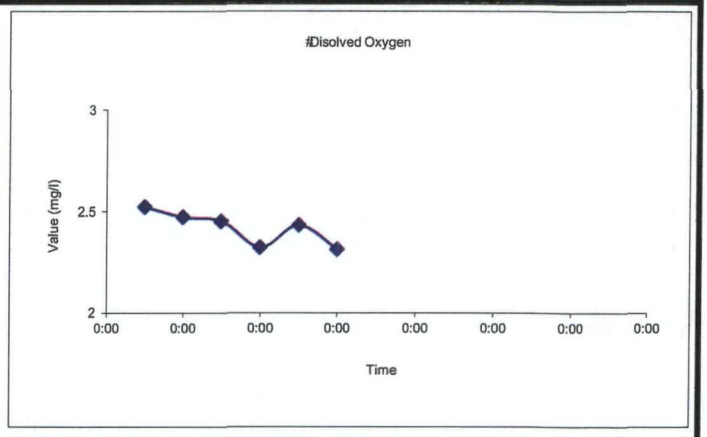

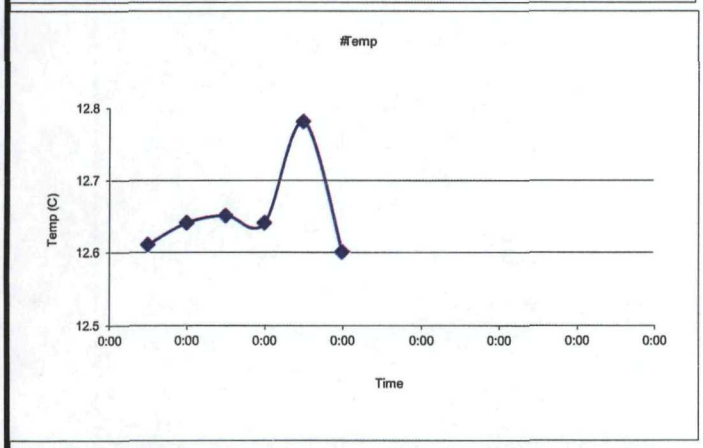

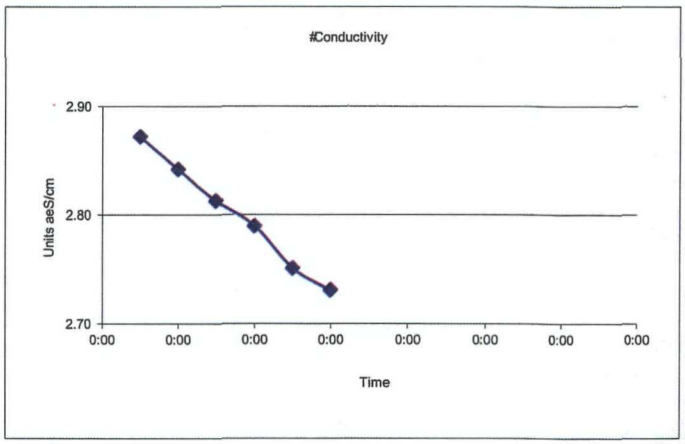

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	98	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 102B**
Casing Stickup (Ft.)	-0.68	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	27-Jun-12
Total Well Depth (Ft.) TOC	100.5	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	34.62	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	65.88	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
14:30							0	34.62	Static
14:35	7.50	1.14	12.33	-85	0.71		450	34.62	redish brown color
14:40	7.54	1.12	12.28	-91	0.71		450		redish brown color
14:44	7.53	1.08	12.27	-91	0.71		450		redish brown color
14:48	7.54	1.08	12.27	-93	0.71		450		clear
14:51	7.56	1.07	12.27	-96	0.71	22	450	34.62	clear
MINUTES							**TOTAL LITERS**		
16.0	0.03	-0.93%	0.00%	-5.00	-0.14%		**7.20**		

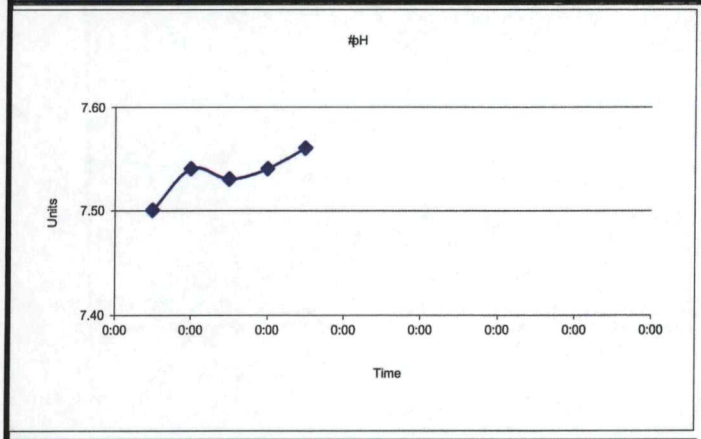

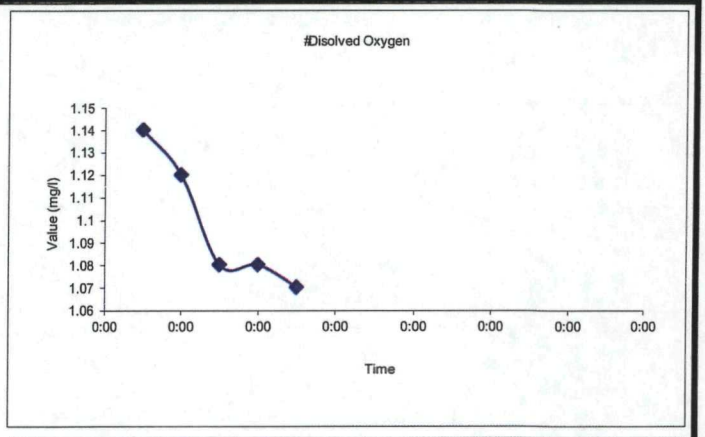

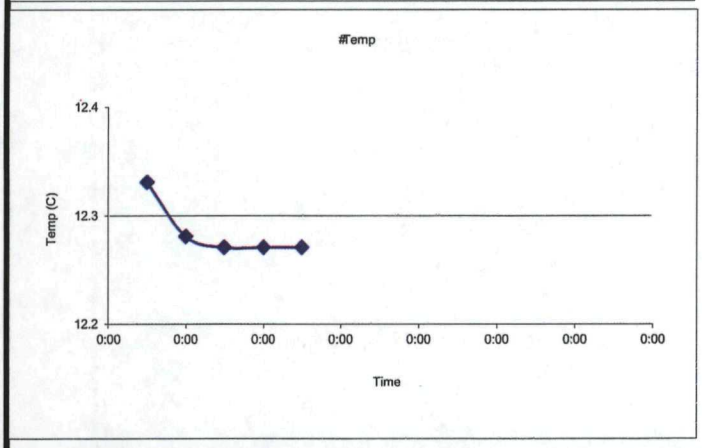

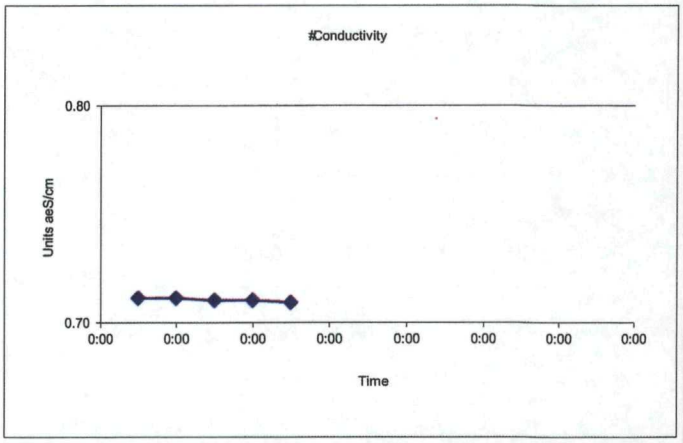

Remarks: (well condition, maintenance, etc...)

Field Duplicate (FD-1) collected

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	185	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 102C**
Casing Stickup (Ft.)	-0.43	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	27-Jun-12
Total Well Depth (Ft.) TOC	187.42	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	37.04	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	150.38	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
13:45							0	37.04	Static
13:55	7.47	1.45	12.04	-118	0.56		380	35.72	Start Time
14:02	7.47	1.44	12.04	-118	0.57		380		black silty
14:07	7.46	1.41	12.03	-116	0.57		380		black silty
14:15	7.44	1.39	12.14	-115	0.57		380	35.62	black silty
14:20	7.46	1.39	11.91	-118	0.58		380		black silty
14:25	7.48	1.39	11.93	-119	0.58	98	380		black silty
MINUTES							**TOTAL LITERS**		
30.0	0.04	0.00%	-1.76%	-4.00	1.38%		**11.40**		

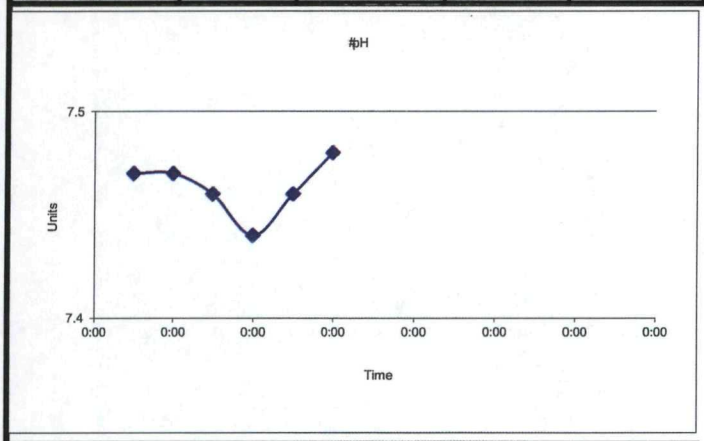

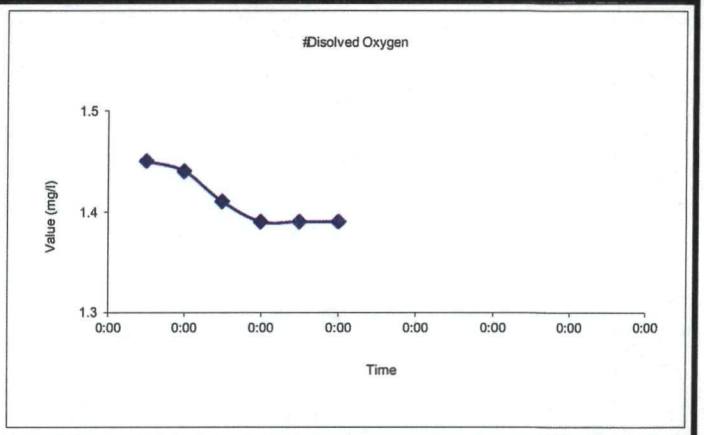

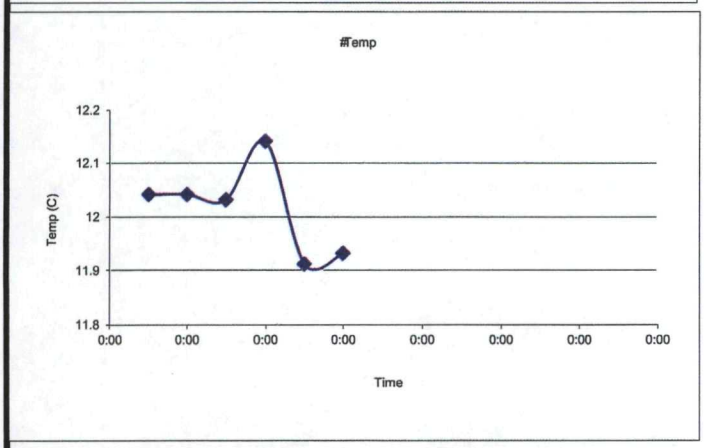

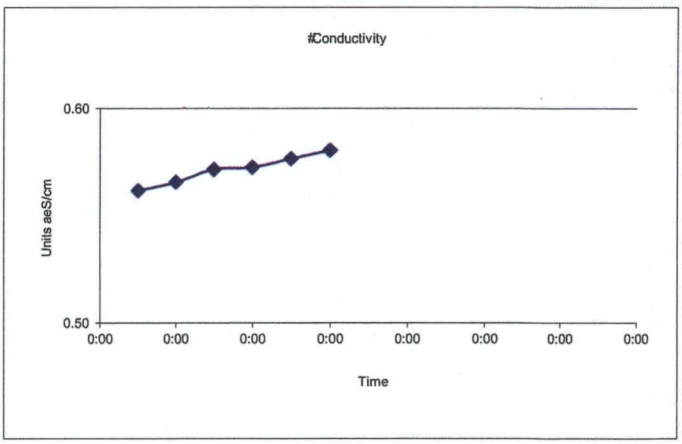

Remarks: (well condition, maintenance, etc...)

black silty water. Hard to pump - a lot of silt, had to pump at higher than normal pressure at the beginning of the purge to clear the pump.

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	102	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 113A**
Casing Stickup (Ft.)	-1.06	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	25-Jun-12
Total Well Depth (Ft.) TOC	104.5	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	56.28	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	48.22	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
13:15							0	56.28	Static
13:28	7.3	2.19	11.51	40	0.97		500	56.28	Start Time
13:37	7.32	2.19	11.49	40	0.97		500		brown & cloudy
13:41	7.34	2.21	11.50	37	0.96		500		cloudy
13:45	7.35	2.20	11.49	36	0.97		500		cloudy
13:49	7.36	2.17	11.49	34	0.96		500	56.48	cloudy
13:52	7.37	2.17	11.52	33	0.96	145	500		clear
MINUTES							**TOTAL LITERS**		
24.0	0.02	-1.38%	0.26%	-3.00	-0.10%		**12.00**		

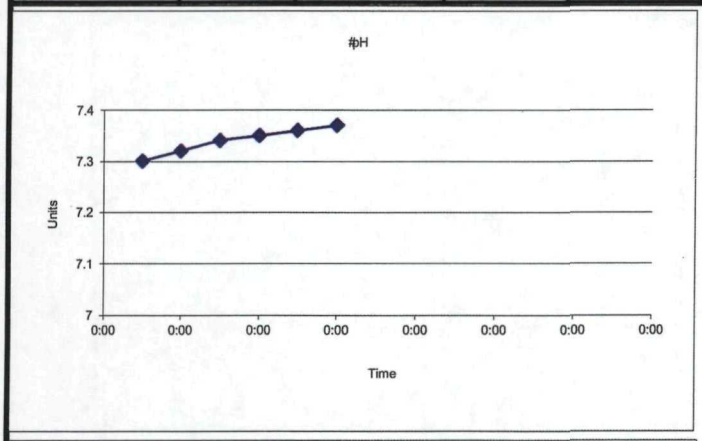

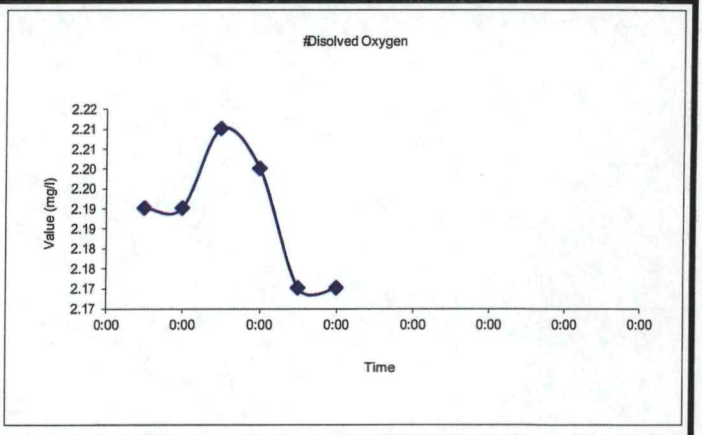

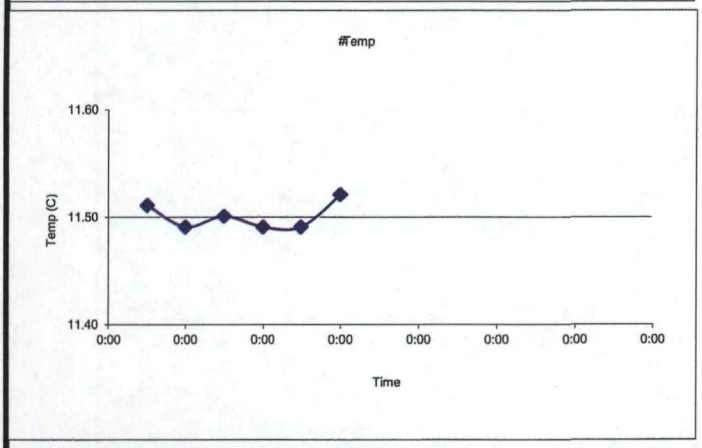

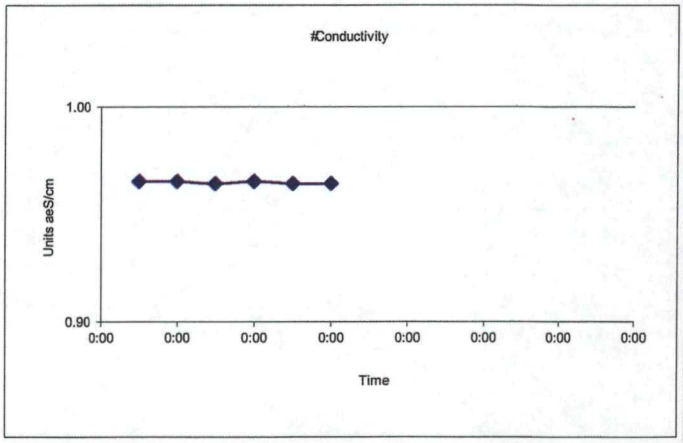

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	153	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 113B**
Casing Stickup (Ft.)	-0.43	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	25-Jun-12
Total Well Depth (Ft.) TOC	155.26	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	56.98	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	98.28	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
14:00							0	56.98	Static
14:10	7.53	1.6	11.59	-109	0.778		500	57.00	Start Time
14:12	7.54	1.53	11.58	-109	0.777		500		cloudy white
14:15	7.55	1.53	11.59	-107	0.777		500		cloudy
14:18	7.55	1.53	11.6	-102	0.777		500		clear
14:21	7.56	1.5	11.61	-104	0.777		500	57.00	clear
14:24	7.57	1.48	11.61	-102	0.776		500		clear
14:27	7.57	1.48	11.66	-102	0.775	123	500		clear
MINUTES							**TOTAL LITERS**		
17.0	0.01	-1.35%	0.43%	2.00	-0.26%		**8.50**		

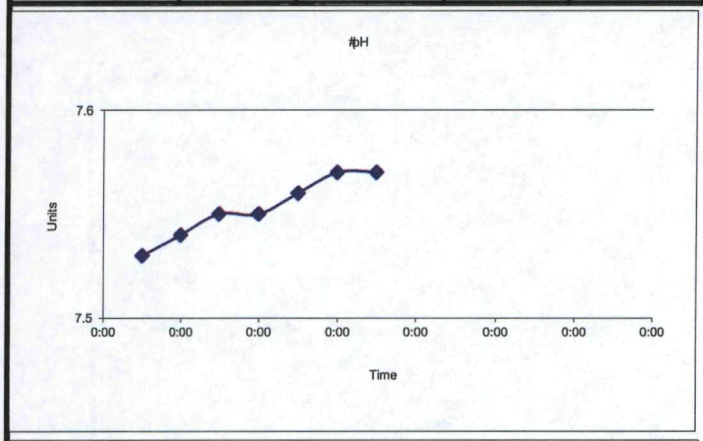

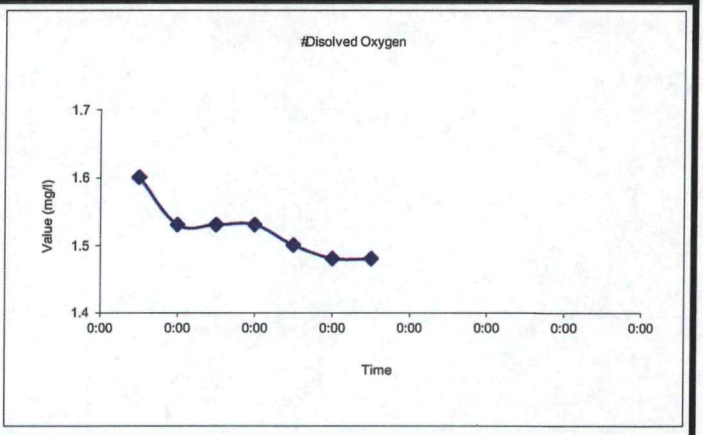

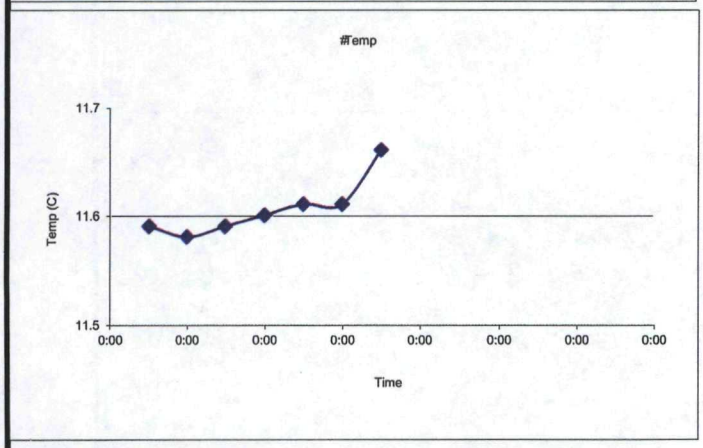

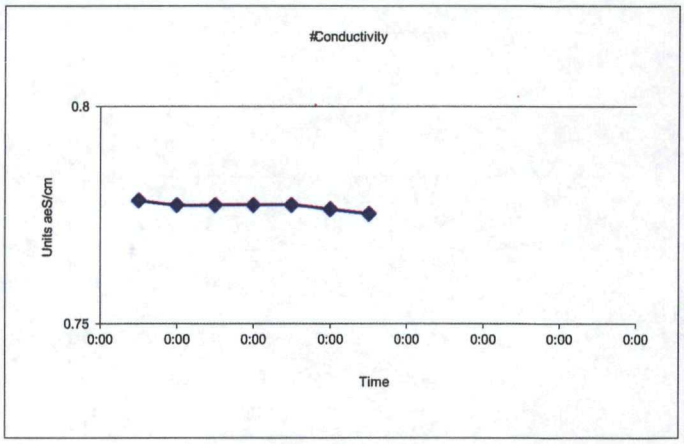

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	95	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 114A**
Casing Stickup (Ft.)	2.45	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	27-Jun-12
Total Well Depth (Ft.) TOC	97.48	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	29.48	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	68	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB NTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
11:02							0	29.48	Static
11:10	7.46	2.37	12.71	-2	0.92		500		Start Time
11:13	7.47	2.40	12.72	-4	0.92		500		clear
11:17	7.48	2.45	12.67	-8	0.92		500	29.50	clear
11:21	7.49	2.50	12.60	-12	0.93		500		clear
11:25	7.49	2.52	12.63	-12	0.93		500	29.50	clear
11:30	7.49	2.57	12.64	-15	0.93	11	500		clear
MINUTES							**TOTAL LITERS**		
20.0	0.00	2.72%	0.32%	-3.00	0.32%		**10.00**		

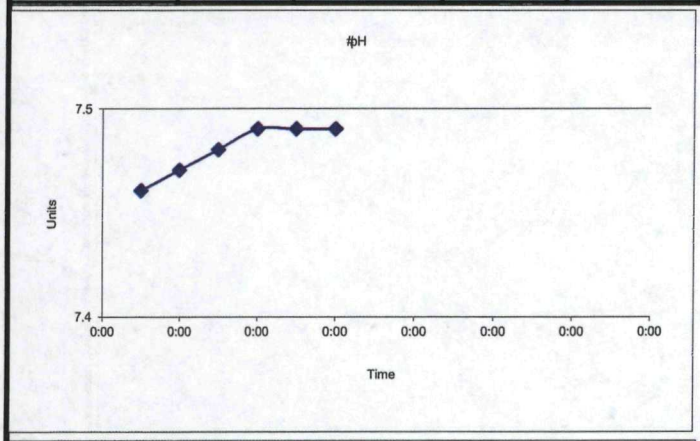

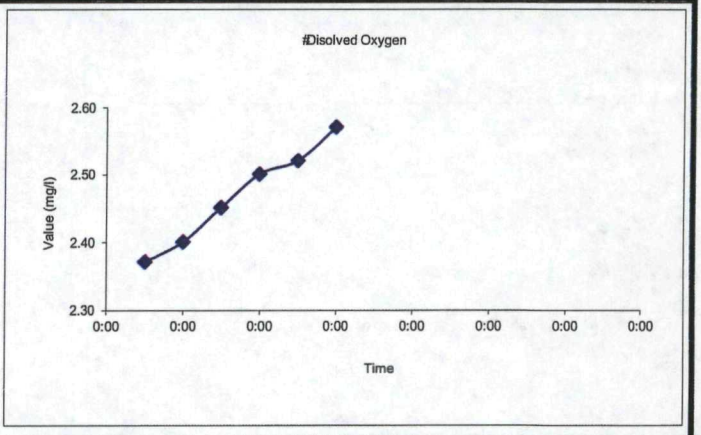

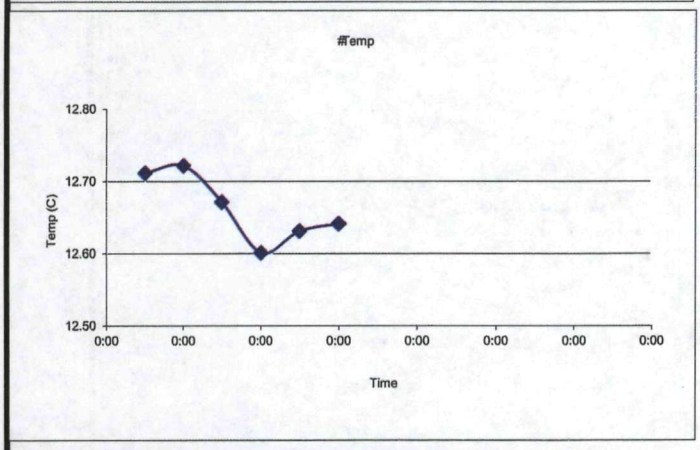

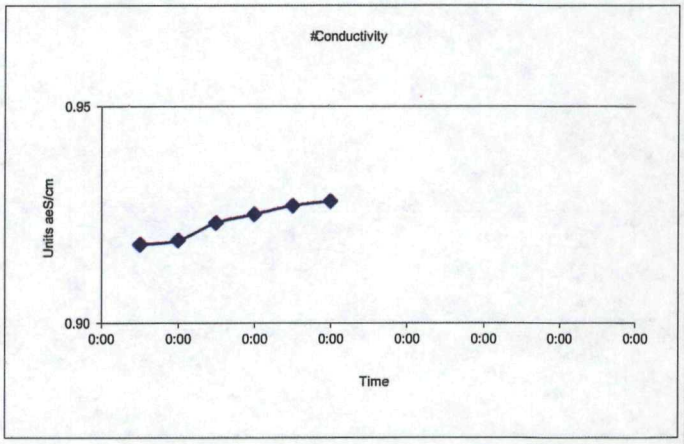

Remarks: (well condition, maintenance, etc...)

outer

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	220	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 114B**
Casing Stickup (Ft.)	2.35	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	28-Jun-12
Total Well Depth (Ft.) TOC	222.58	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	32.32	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	190.26	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
11:45							0	32.32	Static
11:55	7.53	0.42	12.84	-206	0.86		500	32.34	clear
12:00	7.53	0.42	12.85	-209	0.86		500		clear
12:05	7.52	0.42	12.92	-209	0.86		500		clear
12:09	7.54	0.41	12.86	-207	0.86		500	32.34	clear
12:12	7.55	0.42	12.65	-207	0.86	12	500		clear
MINUTES							**TOTAL LITERS**		
17.0	0.03	0.00%	-2.13%	2.00	0.46%		**8.50**		

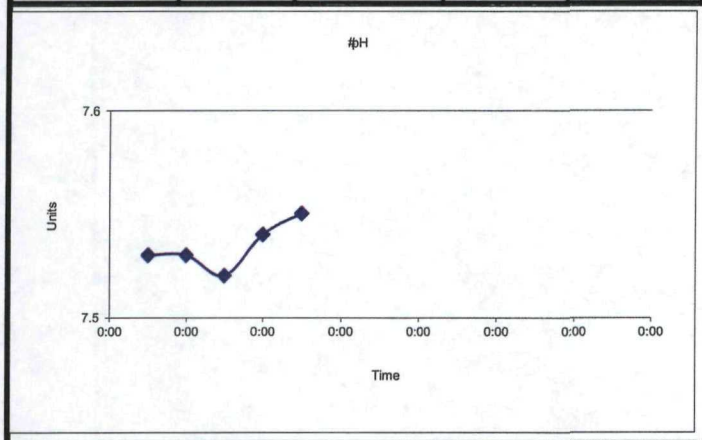

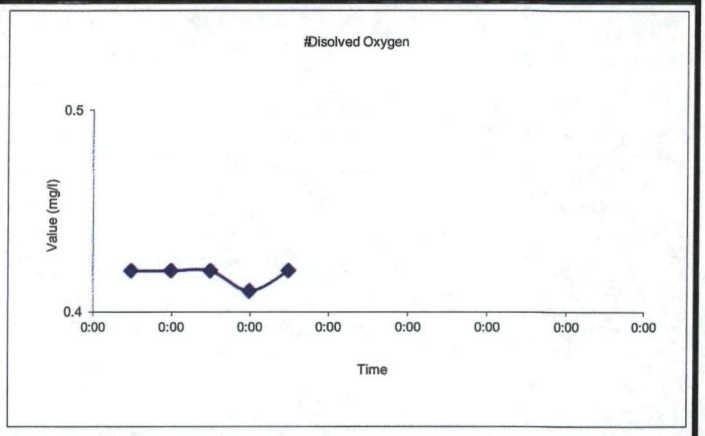

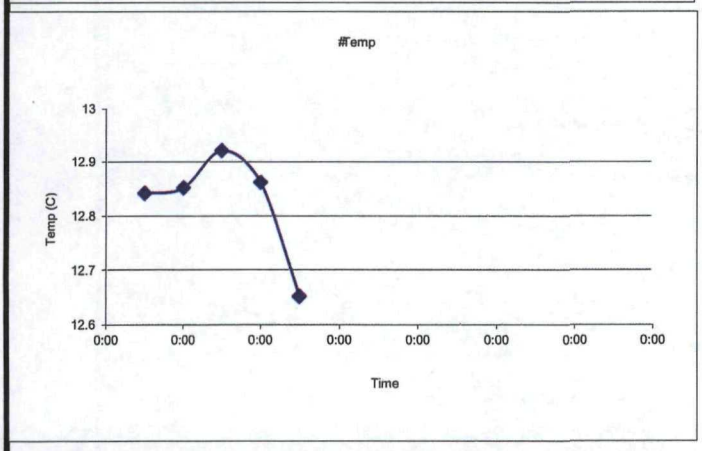

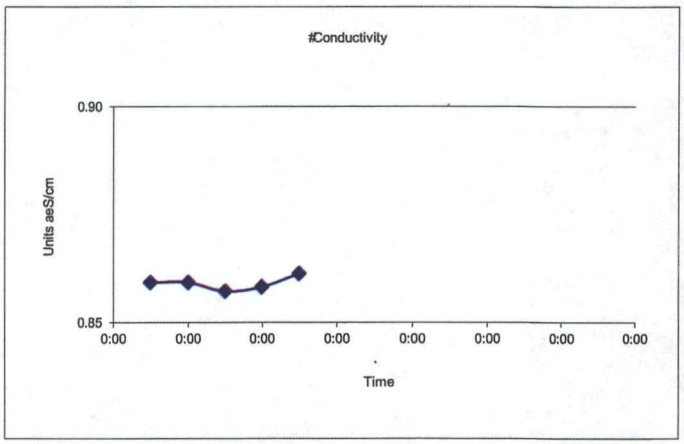

Remarks: (well condition, maintenance, etc...)

Field duplicate (FD-2) collected

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	87	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 117B**
Casing Stickup (Ft.)	-0.45	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	26-Jun-12
Total Well Depth (Ft.) TOC	89.5	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	7.48	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	82.02	**Field Analysis Equip**	YSI 556 MPS	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
10:50							0	7.48	Static
11:00	7.31	1.83	12.12	48	0.73		430		Start Time
11:10	7.35	1.78	12.11	38	0.73		430		clear
11:20	7.35	1.79	12.07	32	0.73		430		clear
11:25	7.37	1.74	12.17	26	0.73		430		clear
11:28	7.39	1.71	12.16	26	0.73	64	430	7.48	clear
MINUTES							**TOTAL LITERS**		
28.0	0.04	-4.68%	0.74%	-6.00	-0.14%		**12.04**		

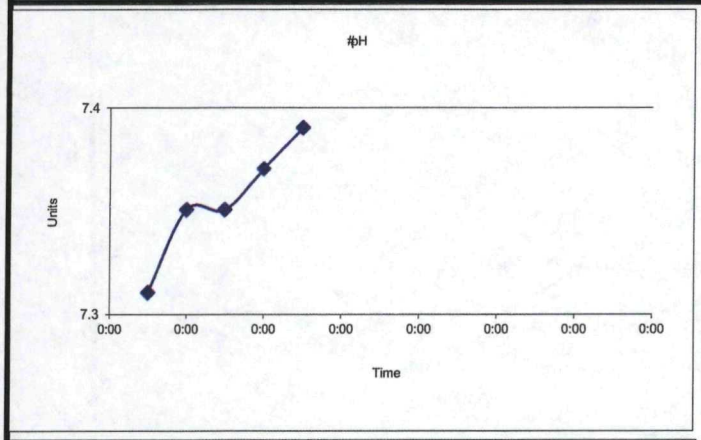

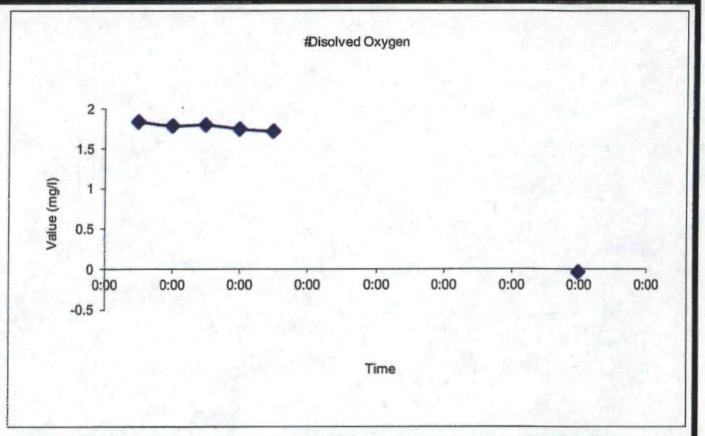

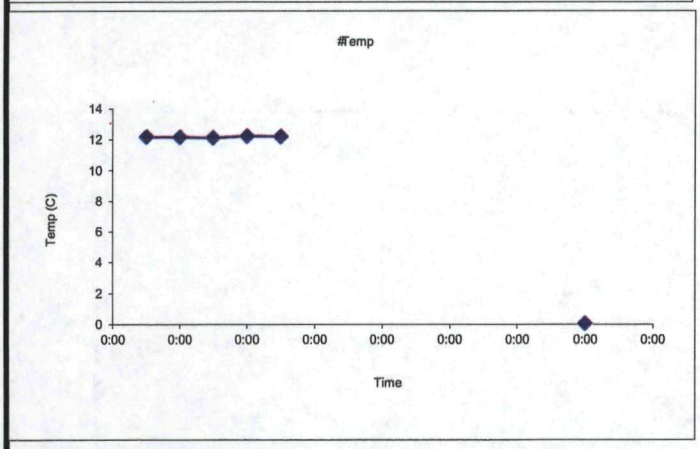

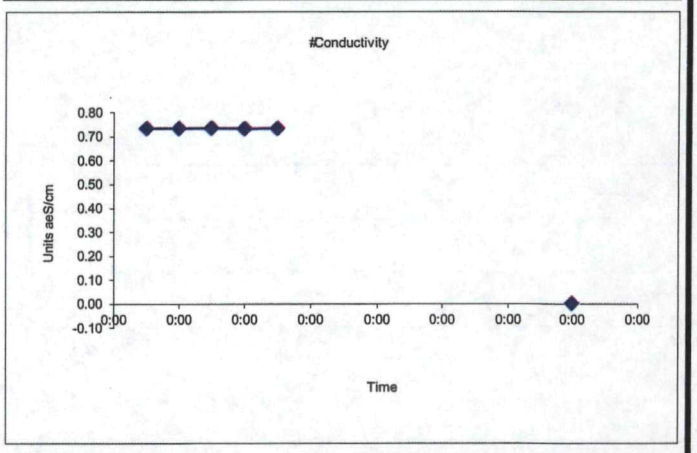

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	156	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 117C**
Casing Stickup (Ft.)	-0.63	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	26-Jun-12
Total Well Depth (Ft.) TOC	158.31	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	6.11	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	152.2	**Field Analysis Equip**	YSI556 MPS	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
11:33							0	6.11	Static
11:45	7.43	1.26	12.57	-47	0.90		410		Start Time
11:50	7.43	1.22	12.53	-48	0.90		410		clear
11:57	7.42	1.21	12.63	-48	0.90		410	6.11	clear
12:03	7.43	1.21	12.61	-50	0.90		410		clear
12:06	7.43	1.19	12.60	-51	0.90		410	6.11	clear
12:10	7.43	1.17	12.69	-53	0.90	0	410		clear
MINUTES							**TOTAL LITERS**		
25.0	0.00	-3.42%	0.63%	-3.00	0.00%		**10.25**		

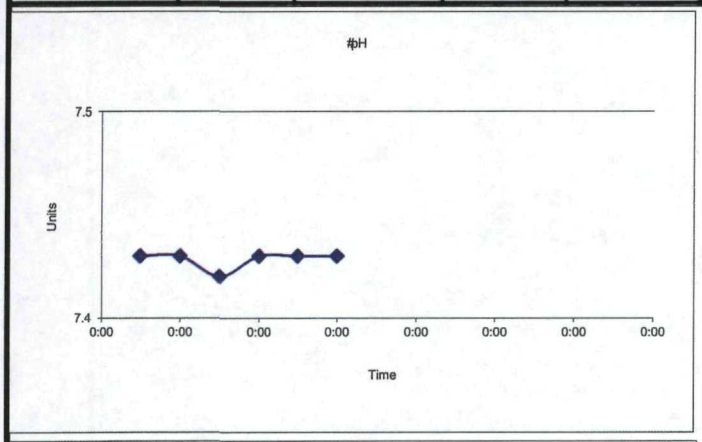

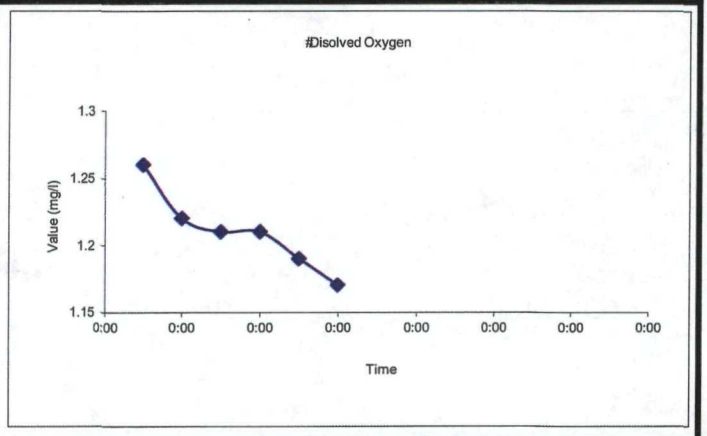

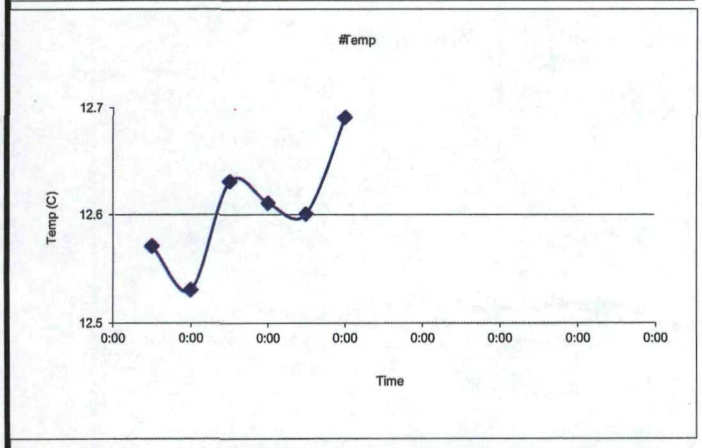

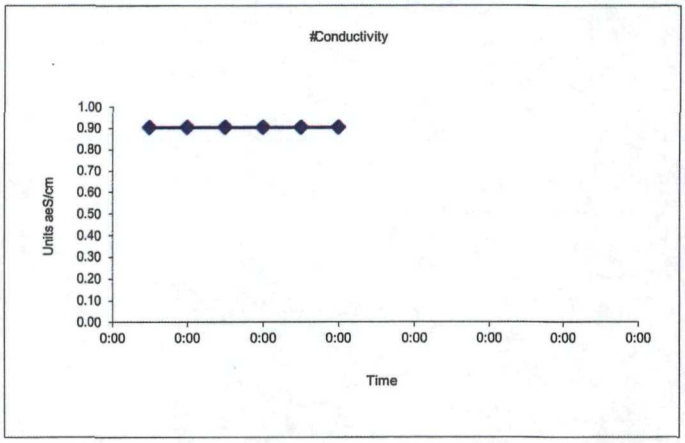

Remarks: (well condition, maintenance, etc...)

1 bolt hole stripped

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	198	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 117D**
Casing Stickup (Ft.)	-0.3	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	26-Jun-12
Total Well Depth (Ft.) TOC	200.2	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	5.76	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	194.44	**Field Analysis Equip**	*YSI556 MPS*	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
12:18							0	5.76	Static
12:32	7.54	0.87	12.44	-87	1.00		500		Start Time
12:35	7.56	0.88	12.44	-84	1.01		500		clear
12:38	7.58	0.87	12.45	-79	1.01		500		clear
12:41	7.60	0.89	12.44	-84	1.00		500	5.77	clear
12:44	7.61	0.88	12.46	-83	1.00		500		clear
12:48	7.60	0.88	12.51	-79	1.01		500		clear
12:51	7.59	0.87	12.49	-79	1.01		500		clear
12:55	7.58	0.90	12.46	-82	1.01	8	500	5.76	clear
MINUTES							**TOTAL LITERS**		
23.0	-0.02	2.22%	-0.40%	-3.00	0.20%		**11.50**		

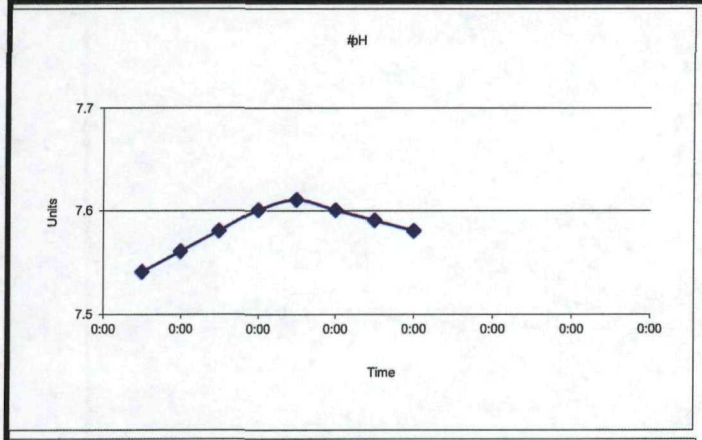

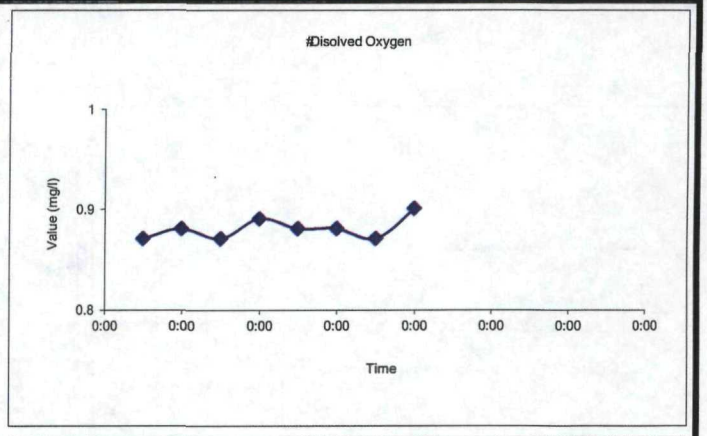

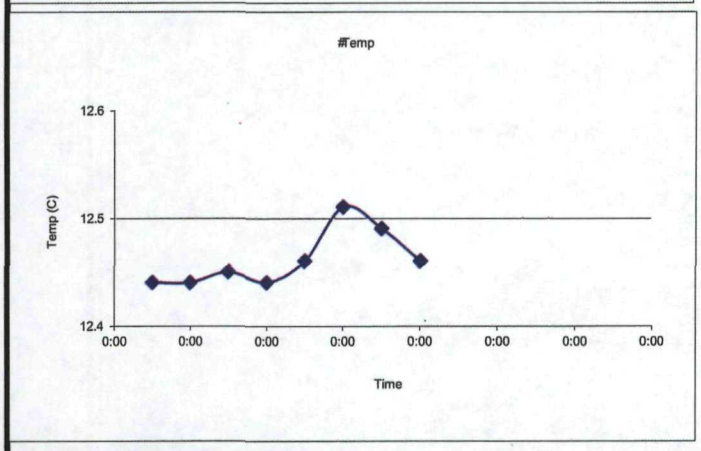

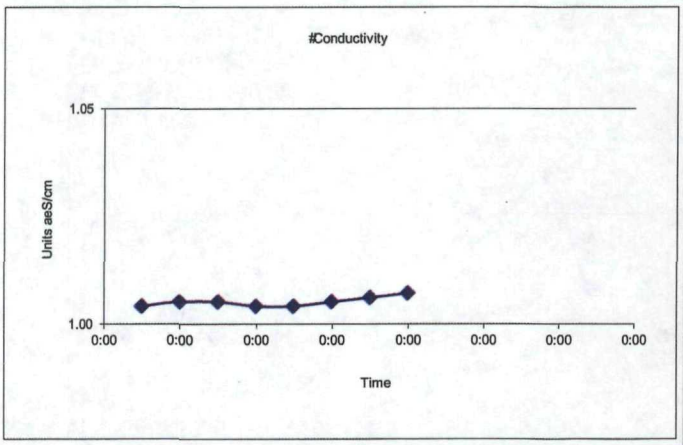

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	60	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 119**
Casing Stickup (Ft.)	3.25	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	27-Jun-12
Total Well Depth (Ft.) TOC	62.41	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	26.92	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	35.49	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
10:22							0	26.92	Static
10:30	7.44	4.83	13.09	49	1.12		300	26.97	Start Time
10:35	7.44	4.77	13.07	48	1.12		300		clear
10:38	7.44	4.80	13.06	47	1.12		300		clear
10:43	7.44	4.73	13.09	47	1.12		300	26.98	clear
10:47	7.44	4.68	13.06	47	1.12		300		clear
10:50	7.44	4.67	13.09	47	1.12	12	300		clear
MINUTES							**TOTAL LITERS**		
20.0	0.00	-1.28%	0.00%	0.00	0.09%		**6.00**		

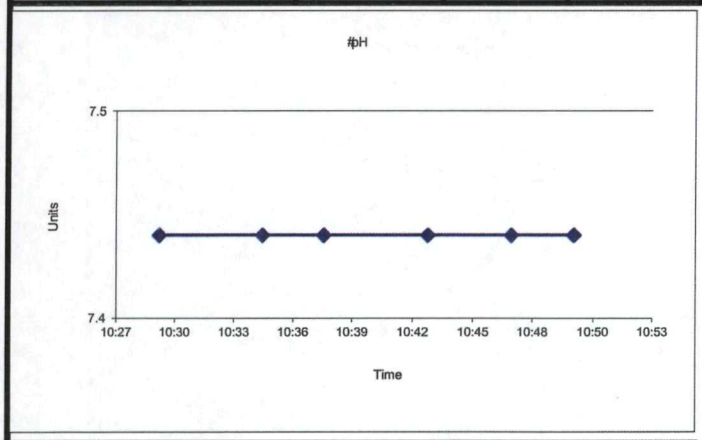

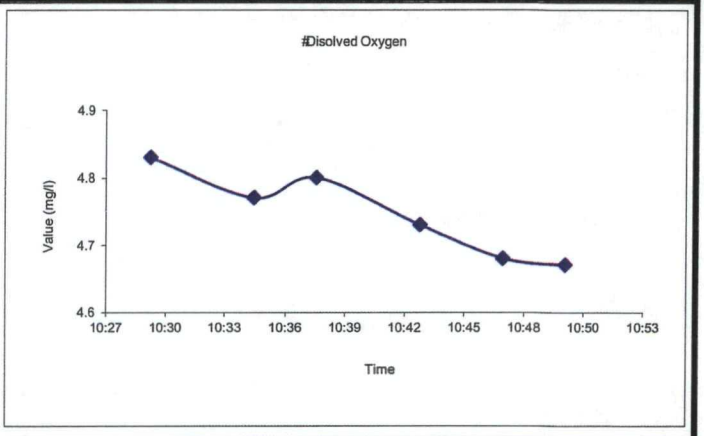

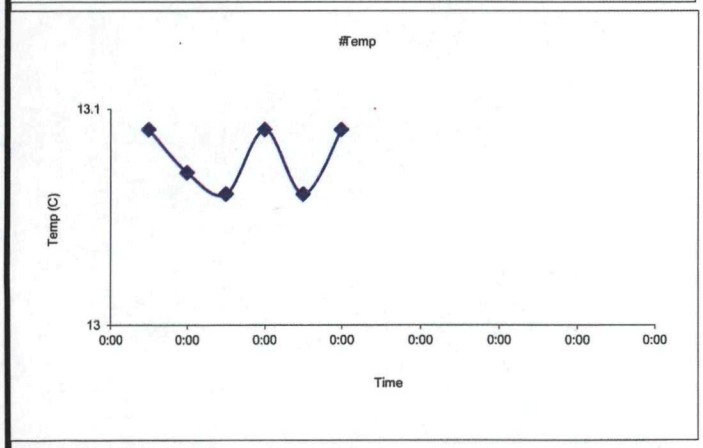

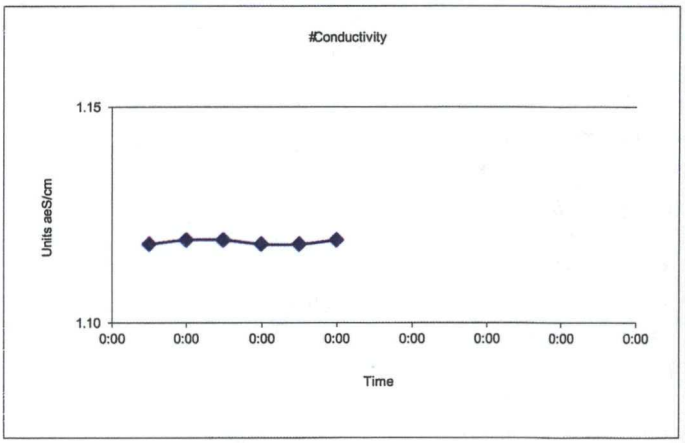

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	65	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 121**
Casing Stickup (Ft.)	2.53	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	27-Jun-12
Total Well Depth (Ft.) TOC	67.55	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	23.57	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	43.98	**Field Analysis Equip**	YSI556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
7:25							0	23.57	Start Time
7:35	7.40	4.30	13.43	29	1.07		270		cloudy
7:40	7.39	4.18	13.47	27	1.07		270	23.71	clear
7:43	7.39	4.21	13.48	28	1.07		270		clear
7:47	7.39	4.18	13.36	28	1.08		270		clear
7:50	7.40	3.97	13.47	27	1.07		270	23.71	clear
7:53	7.39	3.90	13.43	27	1.07	73	270		clear
MINUTES							**TOTAL LITERS**		
18.0	0.00	-7.18%	0.52%	-1.00	-0.19%		**4.86**		

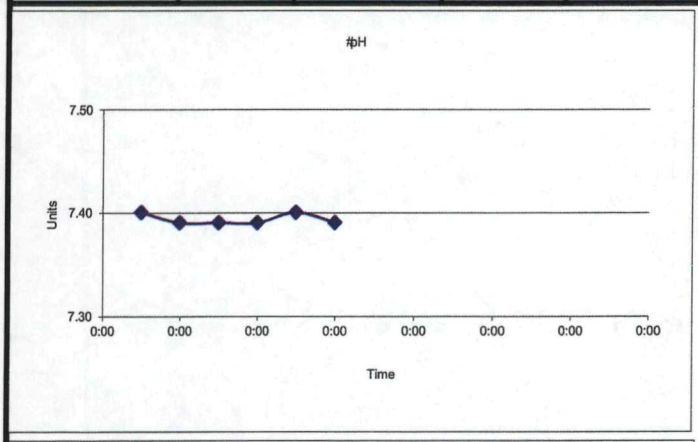

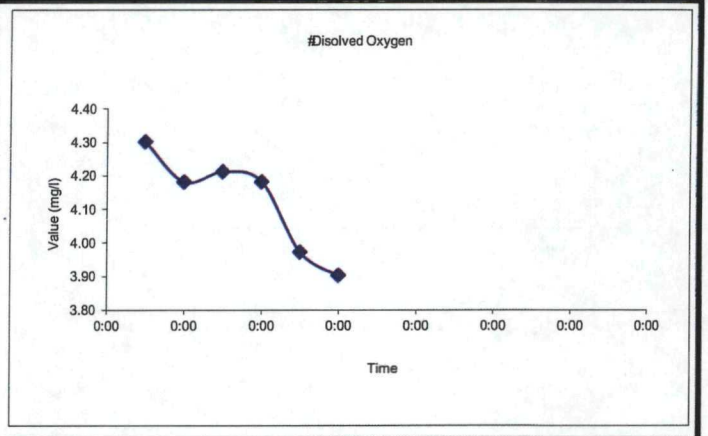

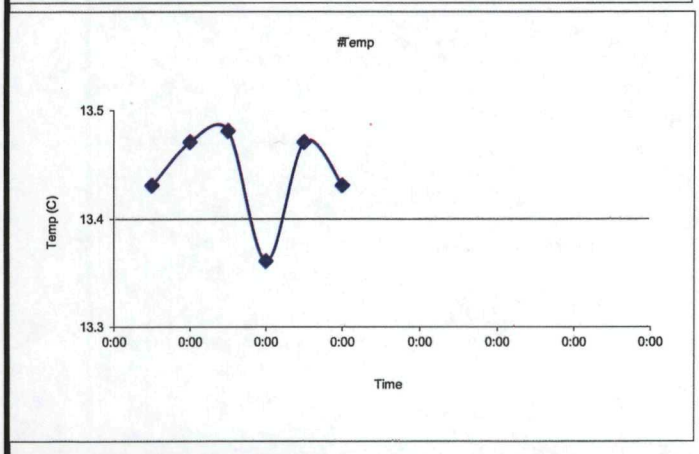

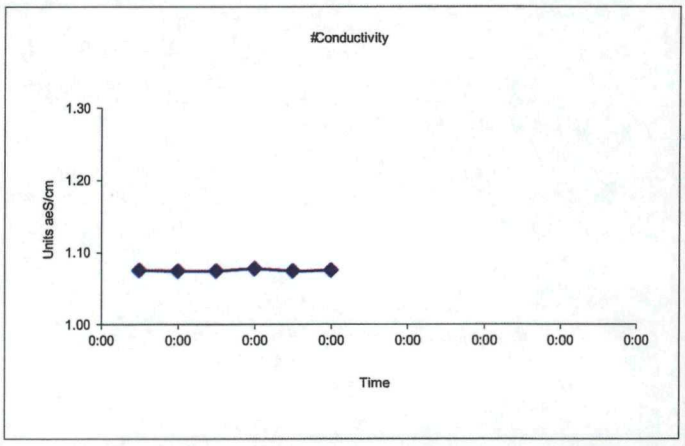

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	100	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 124**
Casing Stickup (Ft.)	2.17	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	27-Jun-12
Total Well Depth (Ft.) TOC	102.76	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	33.46	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	69.3	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
8:03							0	33.46	Start Time
8:10	7.43	1.41	13.77	-86	1.01		340	33.63	cloudy
8:15	7.43	1.41	13.74	-83	1.02		340		cloudy
8:21	7.43	1.39	13.78	-82	1.02		340		clear
8:25	7.43	1.39	13.76	-81	1.02		340		clear
8:29	7.43	1.36	13.75	-81	1.03		340	33.64	clear
8:32	7.43	1.38	13.70	-81	1.03		340		clear
8:35	7.43	1.34	13.72	-79	1.03	5	340		sample
MINUTES							**TOTAL LITERS**		
25.0	0.00	-1.49%	-0.22%	2.00	0.48%		**8.50**		

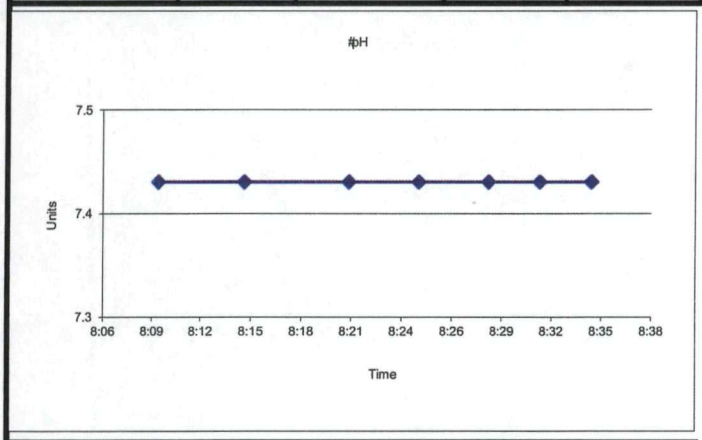

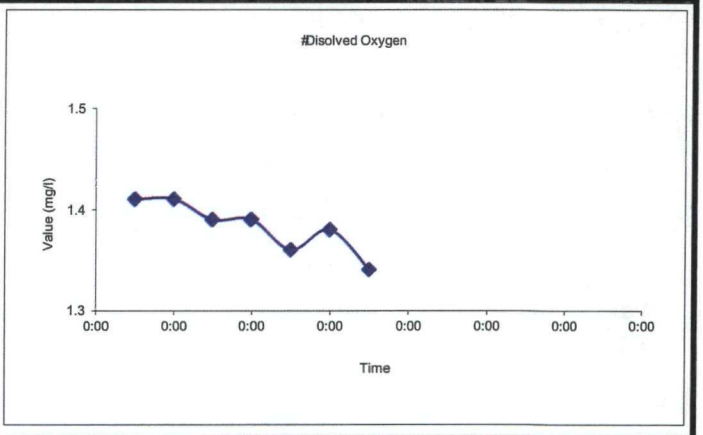

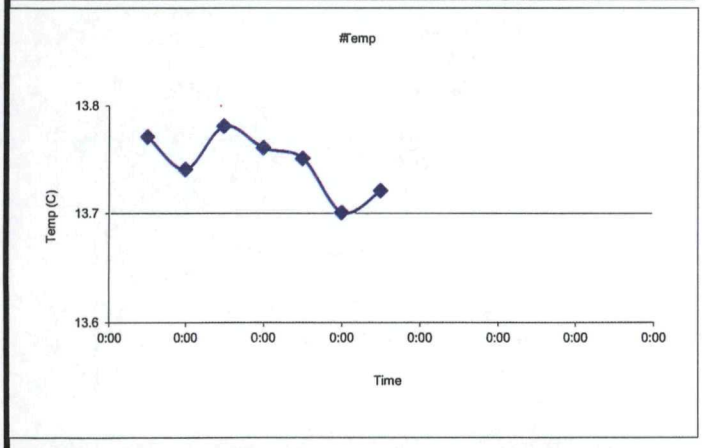

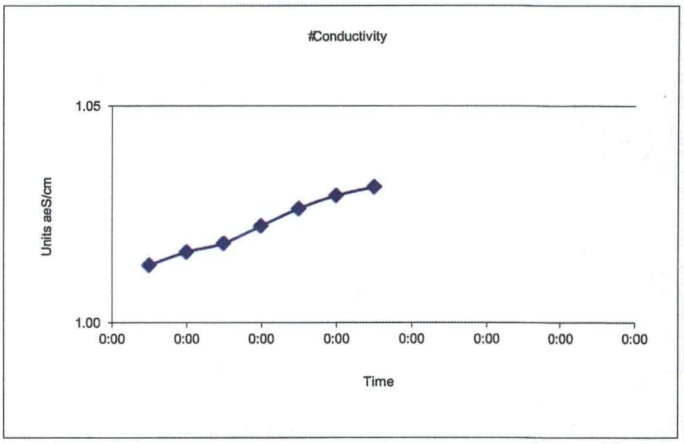

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	36	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 130**
Casing Stickup (Ft.)	-0.3	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	25-Jun-12
Total Well Depth (Ft.) TOC	38.17	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	24.74	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	13.43	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
14:40							0	24.74	Start Time
14:55	7.36	3.26	12.21	1	1.13		490		cloudy
15:00	7.37	3.30	12.22	0	1.13		490	24.83	clear
15:05	7.37	3.37	12.15	2	1.13		490		clear
15:10	7.38	3.42	12.10	2	1.13		490	24.85	clear
15:15	7.37	3.47	12.11	3	1.13	33	490		clear
MINUTES							**TOTAL LITERS**		
20.0	0.00	2.88%	-0.33%	1.00	0.00%		**9.80**		

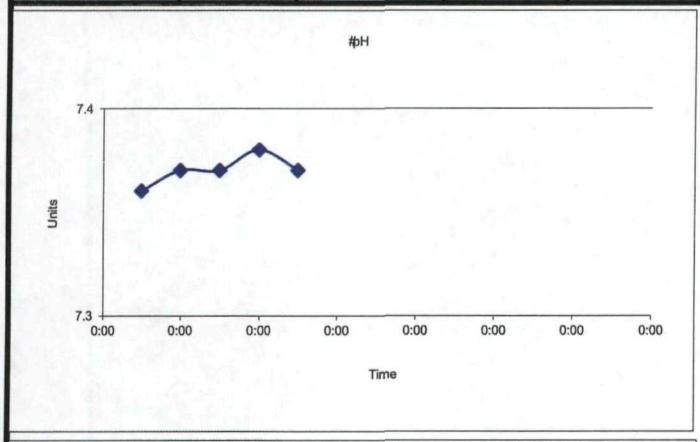

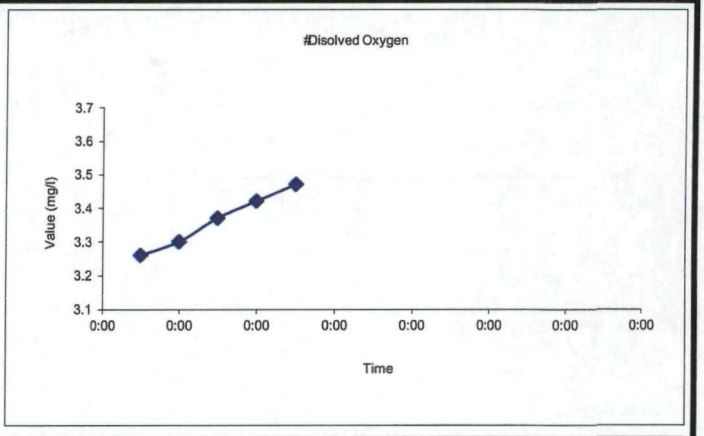

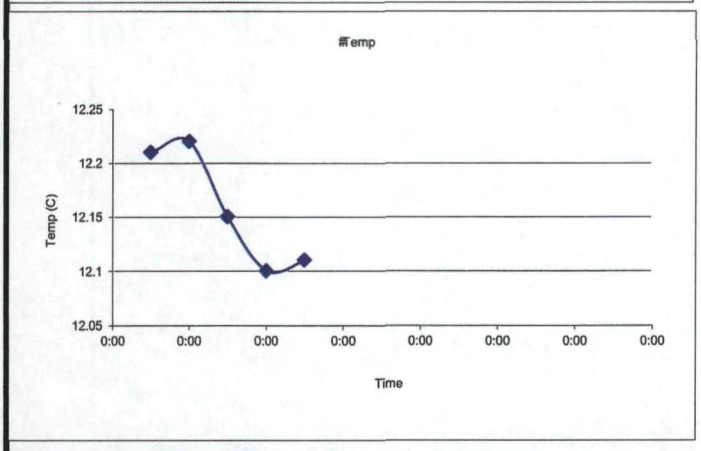

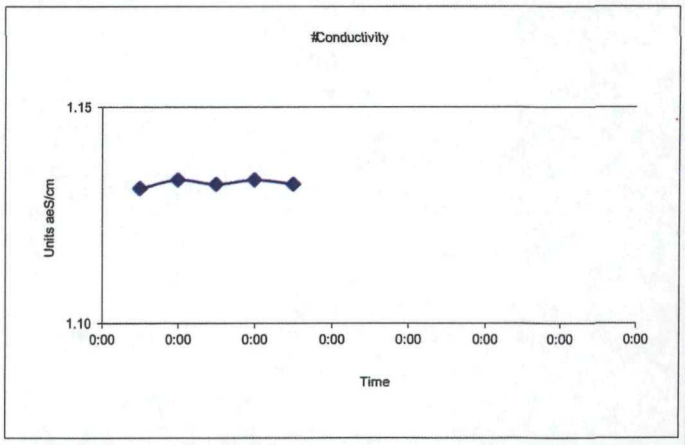

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	35	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 133A**
Casing Stickup (Ft.)	2.3	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	28-Jun-12
Total Well Depth (Ft.) TOC	37.85	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	28.86	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	8.99	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
12:45							0	28.86	Static
13:00	7.25	3.70	11.23	-9	0.53		450		Start Time
13:03	7.26	3.65	11.25	-11	0.53		450		brown cloudy
13:08	7.26	3.66	11.26	-11	0.53		450	28.91	cloudy
13:12	7.26	3.61	11.35	-11	0.52		450		clear
13:15	7.25	3.62	11.35	-11	0.53	13	450	28.91	clear
MINUTES							**TOTAL LITERS**		
15.0	-0.01	-1.10%	0.79%	0.00	0.00%		**6.75**		

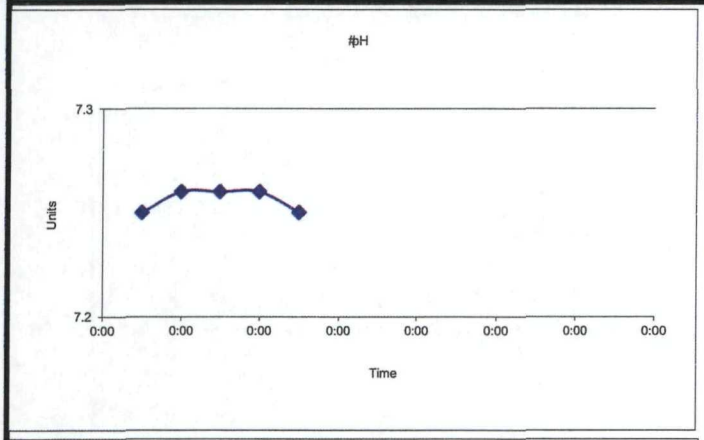

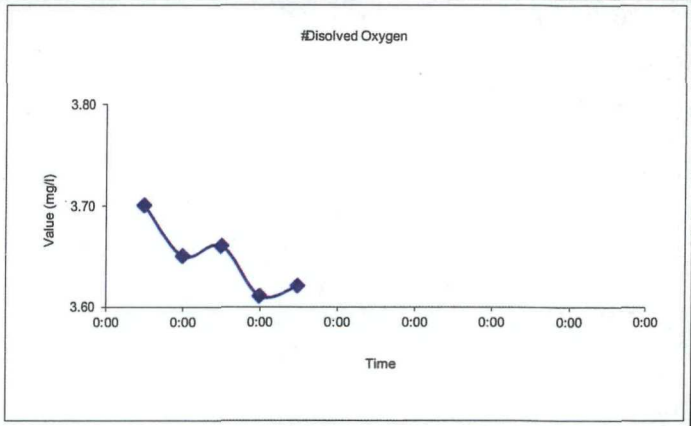

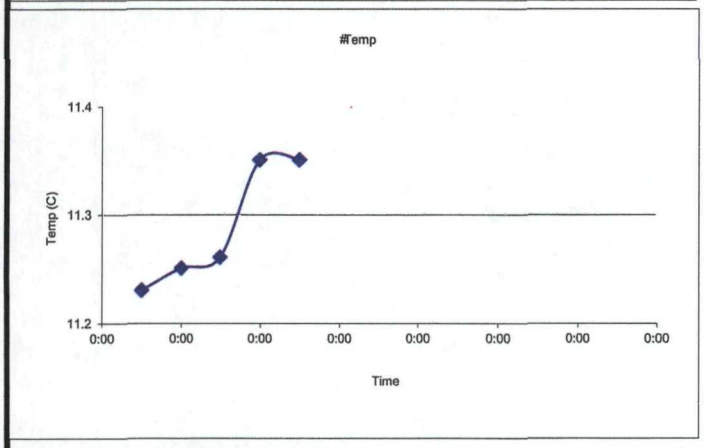

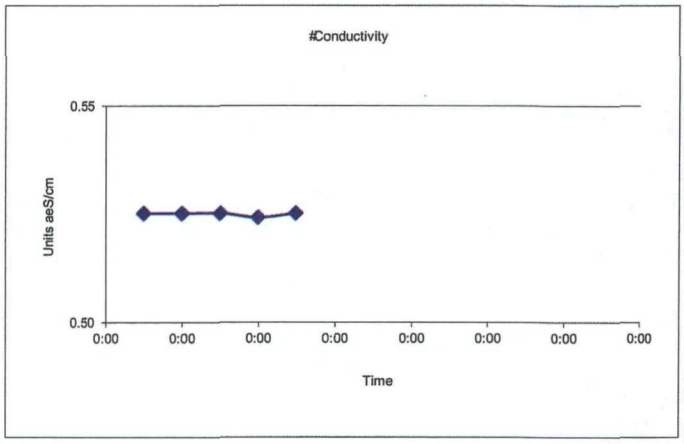

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	59	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 133B**
Casing Stickup (Ft.)	2.51	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	28-Jun-12
Total Well Depth (Ft.) TOC	61.49	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	27.76	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	33.73	**Field Analysis Equip**	YAI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB NTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
13:20							0	27.76	Static
13:32	7.20	3.65	11.29	0	0.53		500		slightly cloudy
13:35	7.23	3.66	11.21	-3	0.53		500	27.81	slightly cloudy
13:39	7.24	3.69	11.18	-4	0.53		500		slightly cloudy
13:43	7.24	3.70	11.19	-5	0.53		500		clear
13:46	7.25	3.70	11.19	-6	0.53	55	500	27.82	clear
MINUTES							**TOTAL LITERS**		
14.0	0.01	0.27%	0.09%	-2.00	0.00%		**7.00**		

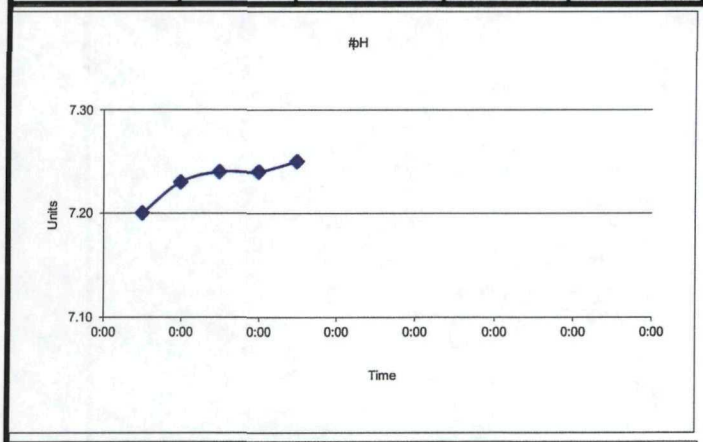

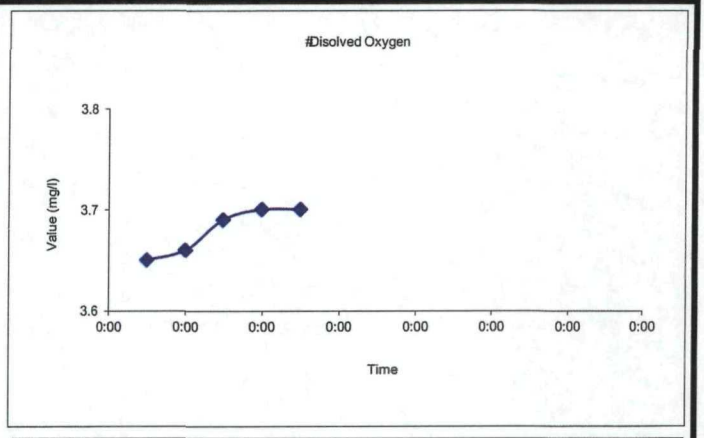

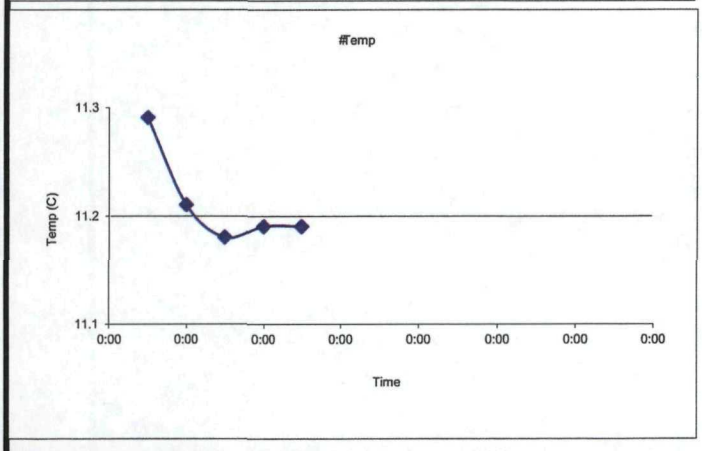

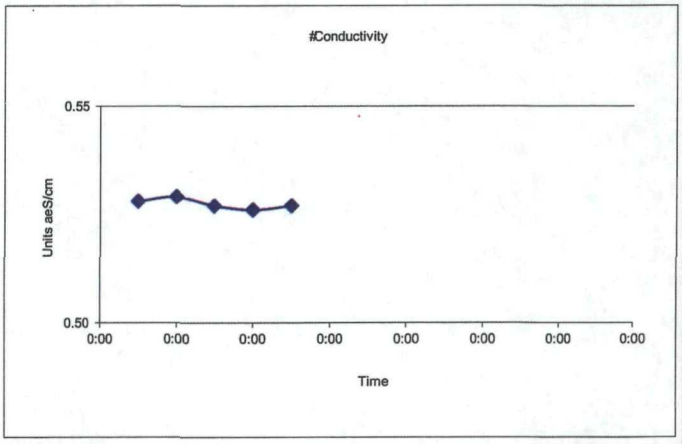

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	96	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 133C**
Casing Stickup (Ft.)	2.37	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	28-Jun-12
Total Well Depth (Ft.) TOC	98.49	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	23.39	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	75.1	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
13:55							0	23.39	Static
13:57	7.46	3.49	11.78	-34	0.90		500		Start Time
14:00	7.49	3.62	11.56	-36	0.90		500	23.39	clear
14:05	7.48	3.53	11.74	-36	0.90		500		clear
14:08	7.48	3.57	11.55	-36	0.90		500		clear
14:11	7.47	3.59	11.53	-35	0.90		500		clear
14:15	7.45	3.55	11.63	-34	0.90		500	23.39	clear
14:18	7.43	3.55	11.65	-33	0.90	24	500		clear
MINUTES							**TOTAL LITERS**		
21.0	-0.04	-1.13%	1.03%	2.00	-0.11%		**10.50**		

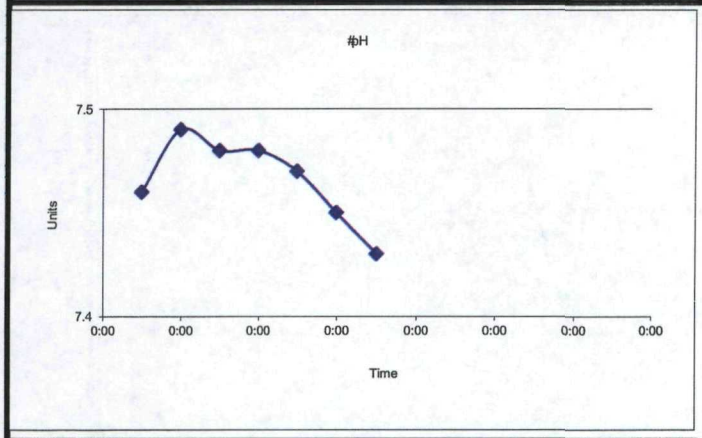

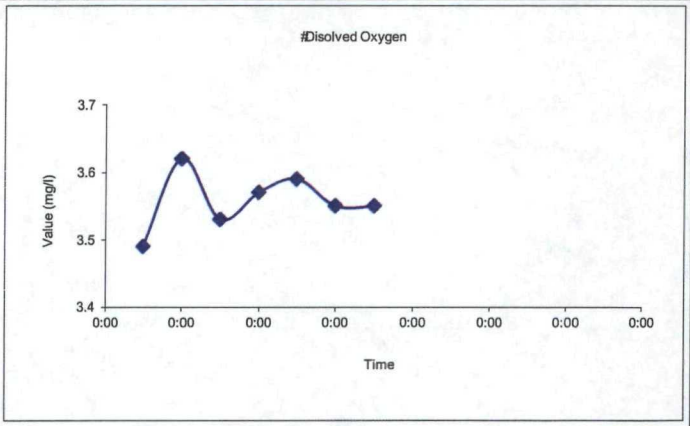

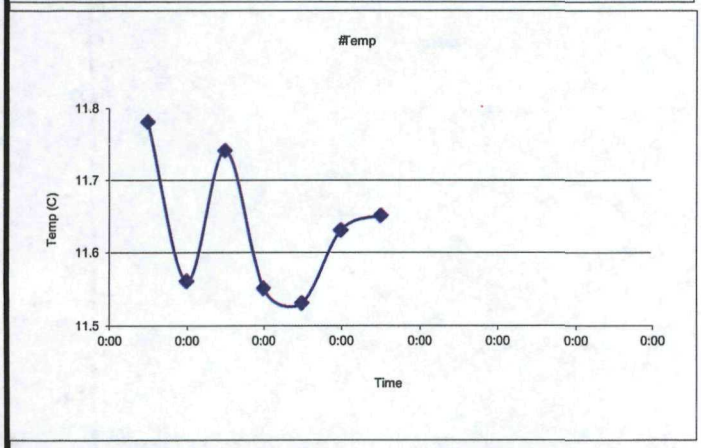

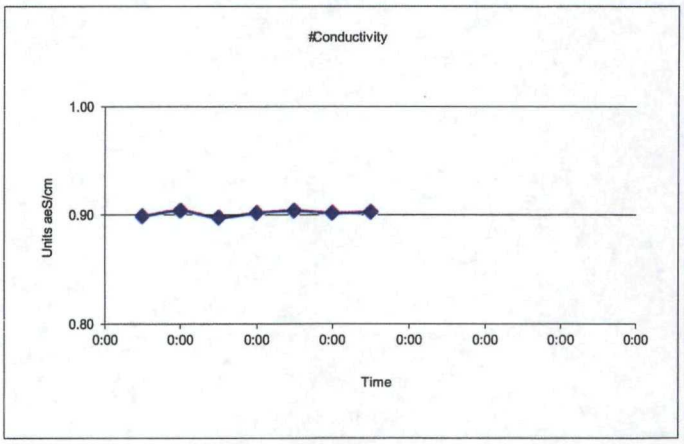

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	42	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 136**
Casing Stickup (Ft.)	-0.42	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	25-Jun-12
Total Well Depth (Ft.) TOC	44.33	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	34.43	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	9.9	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
12:22							0	34.43	Static
12:30	7.21	4.42	13.08	65	1.18		300		Start Time
12:38	7.22	4.54	13.01	66	1.18		300	34.75	clear
12:41	7.23	4.42	13.08	63	1.18		300		clear
12:45	7.24	4.55	13.08	62	1.18		300		clear
12:48	7.25	4.53	13.03	63	1.18		300	34.78	clear
12:52	7.24	4.49	13.03	64	1.18	93	300		clear
MINUTES							**TOTAL LITERS**		
22.0	0.00	-1.34%	-0.38%	2.00	0.25%		**6.60**		

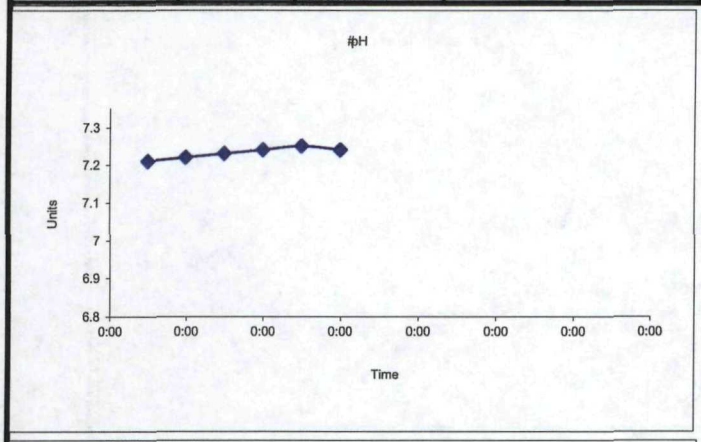

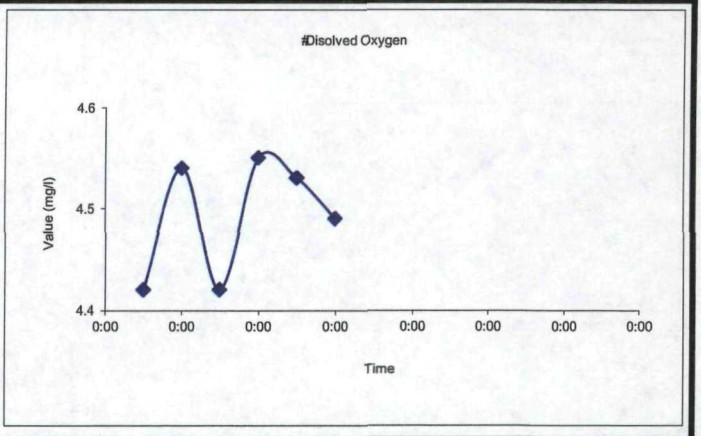

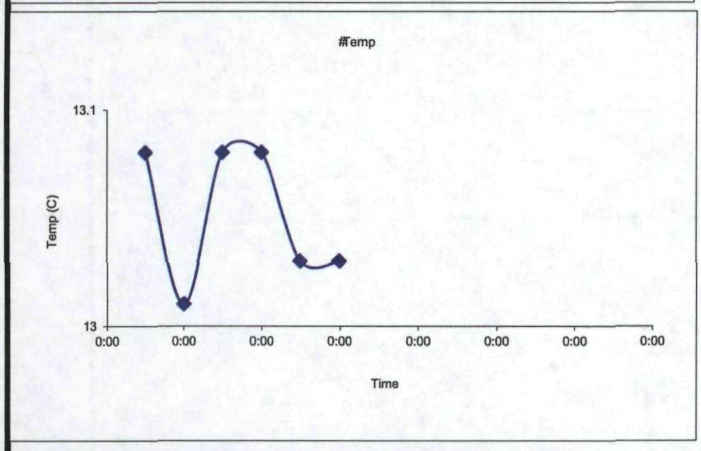

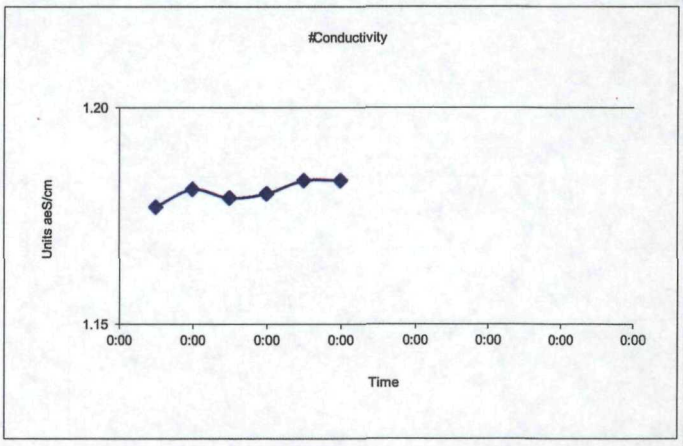

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	87	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 200**
Casing Stickup (Ft.)	1.15	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	25-Jun-12
Total Well Depth (Ft.) TOC	89.93	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	50.69	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	39.24	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
15:25							0	50.69	Static
15:33	7.38	8.59	12.04	-1	1.06		500		Start Time
15:38	7.39	8.37	12.02	-1	1.06		500		cloudy
15:43	7.39	7.99	12.22	0	1.06		500		cloudy
15:47	7.43	8.03	12.08	-1	1.06		500	50.73	cloudy
15:51	7.41	8.22	12.17	0	1.06		500		slightly cloudy
15:55	7.43	8.09	12.00	-1	1.06		500		slightly cloudy
15:58	7.44	7.84	11.99	-2	1.06		500		slightly cloudy
16:01	7.48	7.88	11.95	-5	1.06	76	500	50.76	slightly cloudy
MINUTES							**TOTAL LITERS**		
28.0	0.05	-2.66%	-0.42%	-4.00	-0.09%		**14.00**		

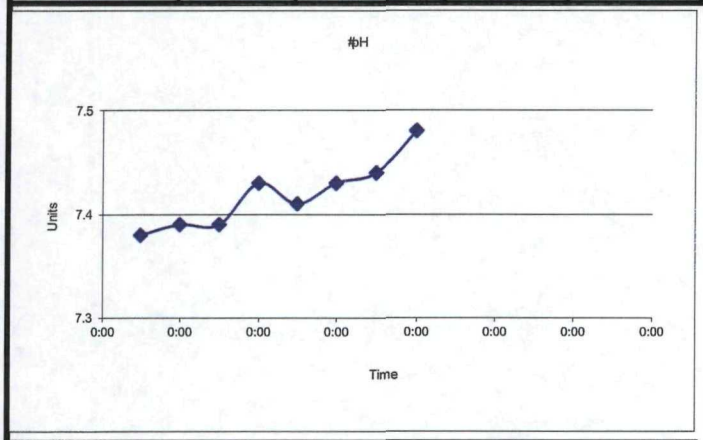

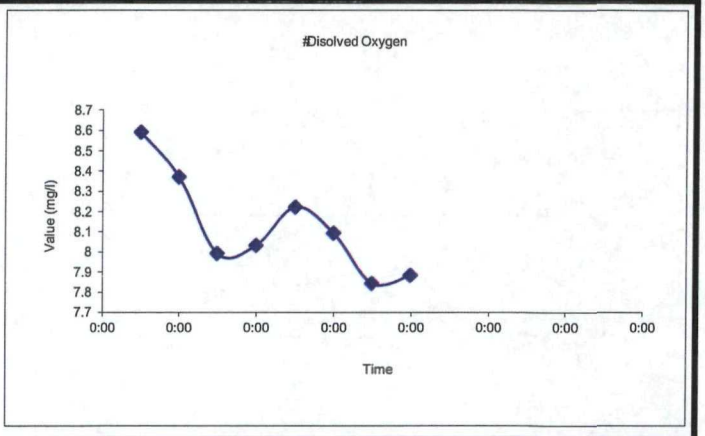

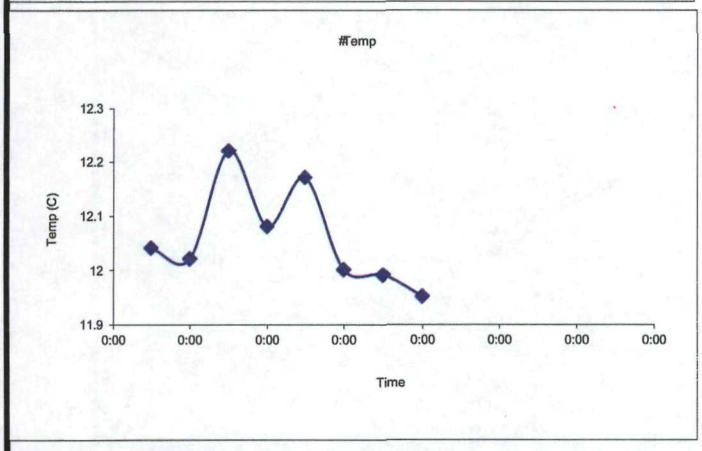

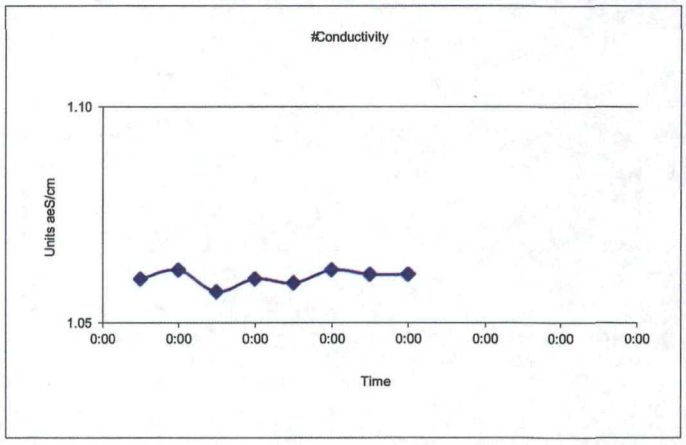

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	48	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 201**
Casing Stickup (Ft.)	-0.32	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	27-Jun-12
Total Well Depth (Ft.) TOC	50.15	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	31.02	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	19.13	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
9:38							0	31.02	Start Time
9:51	7.49	8.37	14.61	140	0.99		330	31.02	cloudy
9:59	7.49	8.50	14.54	143	0.98		330		clear
10:03	7.53	8.59	14.51	146	0.98		330		clear
10:06	7.51	8.45	14.54	150	0.97		330	31.02	clear
10:10	7.5	8.62	14.48	151	0.97		330		clear
10:13	7.53	8.59	14.46	150	0.96	23	330		clear
MINUTES							**TOTAL LITERS**		
22.0	0.02	1.63%	-0.55%	0.00	-0.93%		**7.26**		

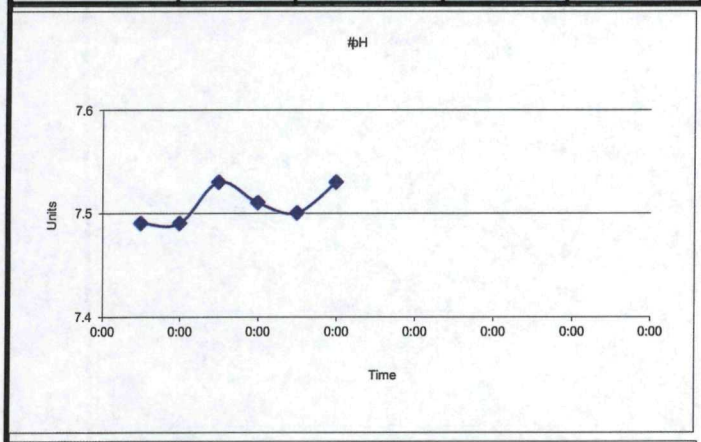

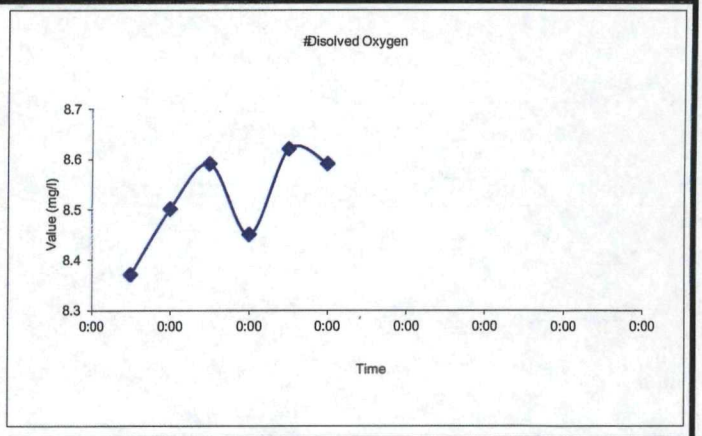

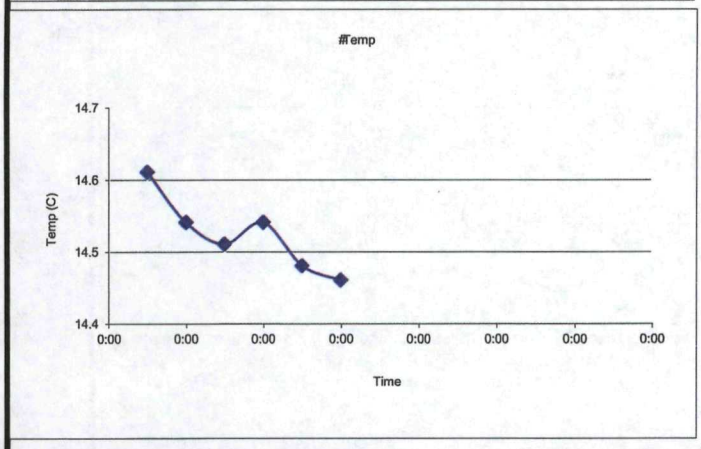

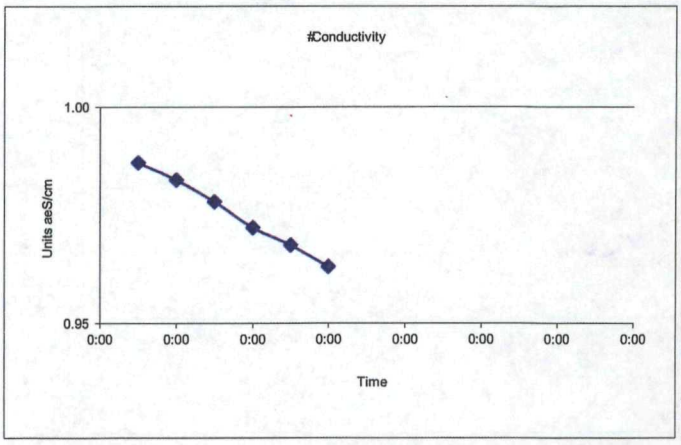

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	48	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 202**
Casing Stickup (Ft.)	-0.32	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	27-Jun-12
Total Well Depth (Ft.) TOC	50.01	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	30.06	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	19.95	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
8:56							0	30.06	Start Time
9:09	7.42	4.65	14.74	42	1.17		300	30.06	cloudy
9:12	7.42	4.61	14.80	42	1.17		300		clear
9:17	7.42	4.59	14.80	43	1.17		300	30.06	clear
9:20	7.42	4.60	14.77	43	1.17		300		clear
9:23	7.42	4.55	14.77	44	1.17	122	300	30.06	clear
MINUTES							**TOTAL LITERS**		
14.0	0.00	-0.88%	-0.20%	1.00	0.09%		**4.20**		

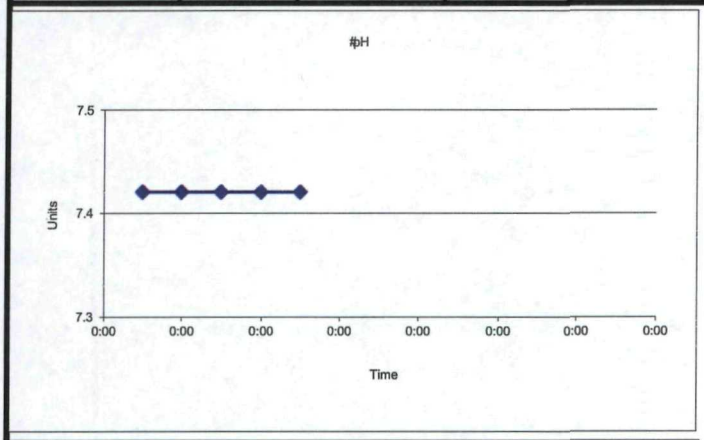

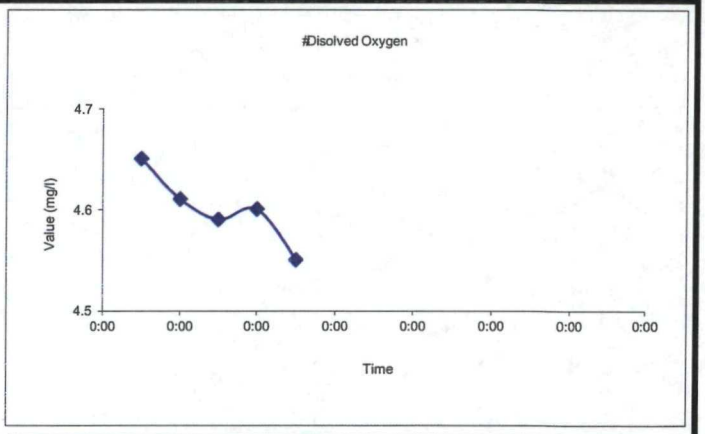

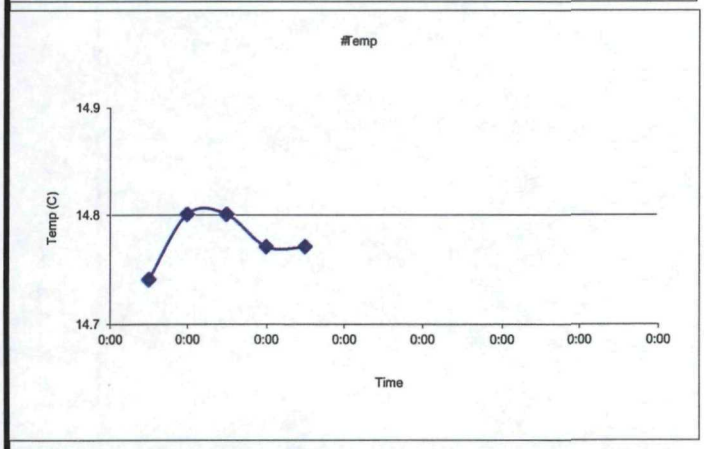

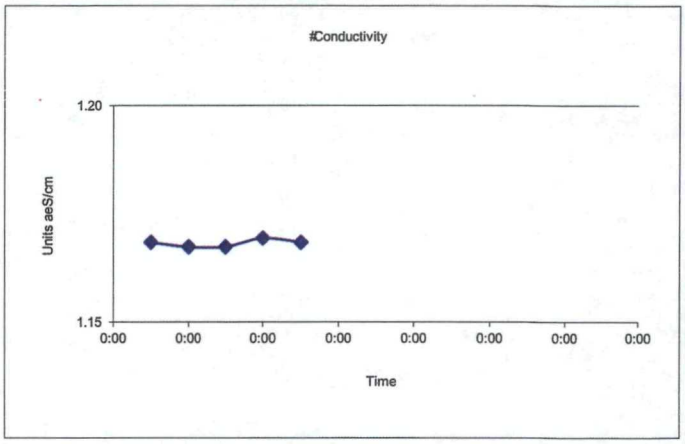

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	47	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 203**
Casing Stickup (Ft.)	-0.58	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	28-Jun-12
Total Well Depth (Ft.) TOC	49.35	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	29.54	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	19.81	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
10:15							0	29.54	Start Time
10:30	7.35	1.5	22.78	53	0.91		250		cloudy
10:38	7.36	1.51	22.67	50	0.91		250	29.61	cloudy
10:42	7.35	1.52	22.63	42	0.91		250		clear
10:48	7.35	1.52	22.67	40	0.91		250	29.61	clear
10:51	7.36	1.53	22.82	37	0.92		250		clear
10:55	7.36	1.57	22.78	32	0.92	10	250		clear
MINUTES							**TOTAL LITERS**		
25.0	0.01	3.18%	0.48%	-8.00	1.08%		**6.25**		

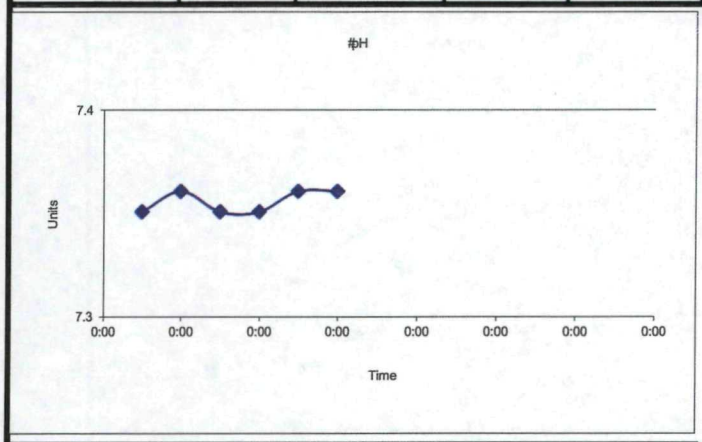

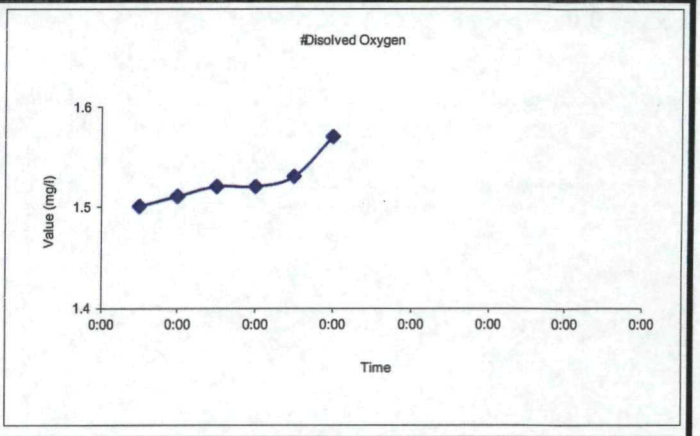

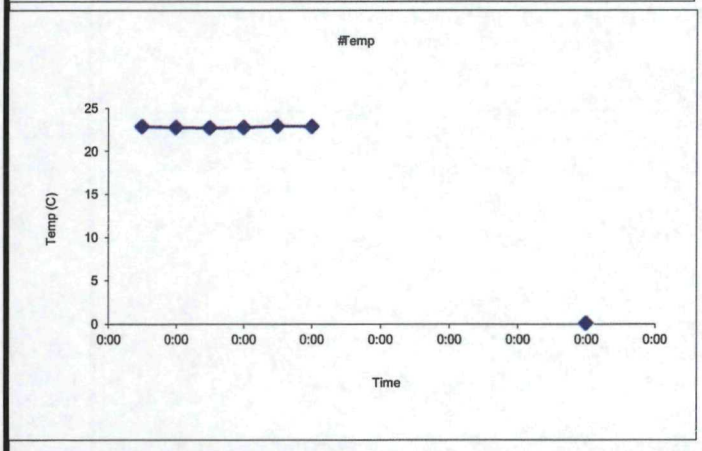

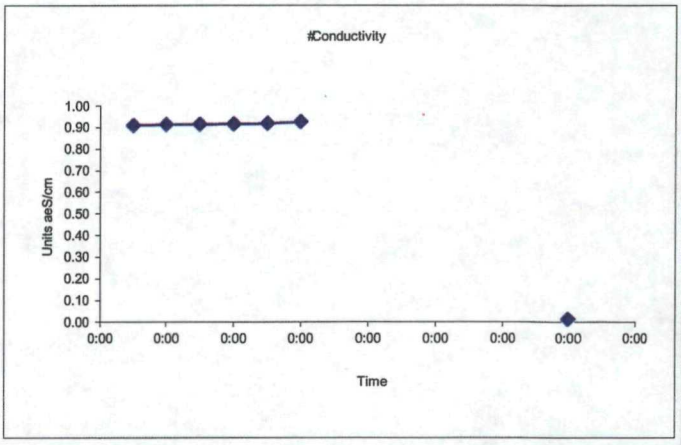

Remarks: (well condition, maintenance, etc...)

well pump was removed by unknown. Pumped utilizing a QED sample pro portable pump with teflon liner & tubing.

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2"	**Pump Inlet** (Ft.) TOC	86	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 204**
Casing Stickup (Ft.)	-0.39	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	27-Jun-12
Total Well Depth (Ft.) TOC	88.96	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	28.84	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	60.12	**Field Analysis Equip**	YSI 556 MPS	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
6:40							0	28.84	Static
6:50	7.30	1.50	13.06	124	0.84		400		slightly cloudy
6:53	7.30	1.46	13.06	121	0.84		400	28.92	slightly cloudy
6:56	7.31	1.41	13.08	119	0.84		400		slightly cloudy
7:00	7.31	1.38	13.09	118	0.84		400		slightly cloudy
7:05	7.31	1.35	13.08	116	0.84		400	28.88	slightly cloudy
7:10	7.31	1.32	13.04	115	0.84		400		slightly cloudy
7:13	7.31	1.28	13.07	114	0.84	118	400		slightly cloudy
MINUTES							**TOTAL LITERS**		
23.0	0.00	-5.47%	-0.08%	-2.00	0.00%		**9.20**		

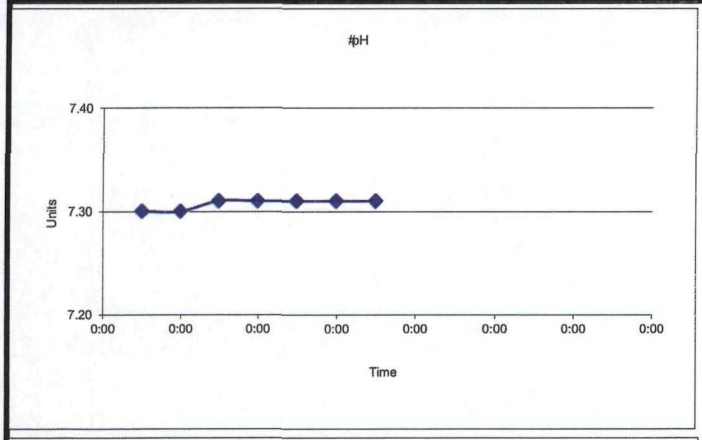

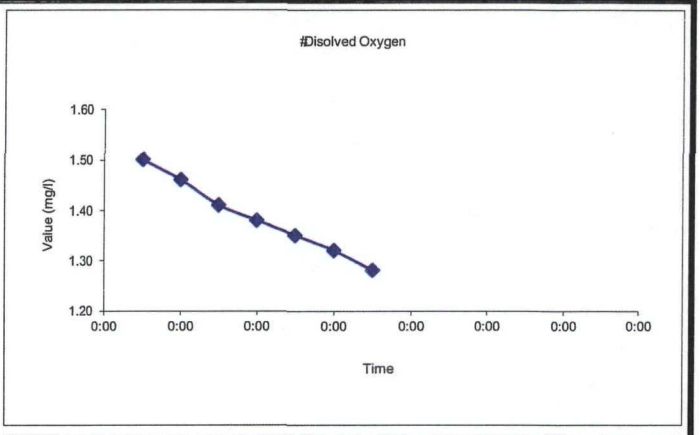

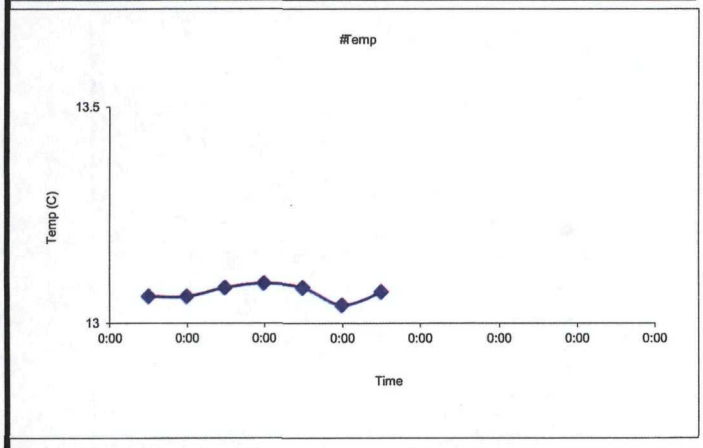

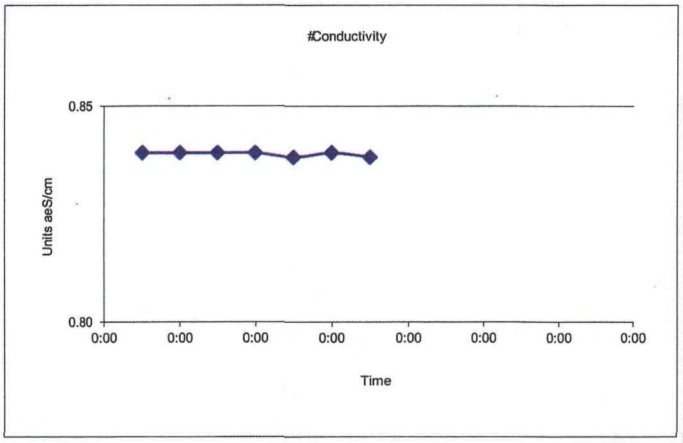

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	108	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 205A**
Casing Stickup (Ft.)	-0.34	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	28-Jun-12
Total Well Depth (Ft.) TOC	110.27	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	4.31	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	105.96	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
8:25							0	4.31	Static
8:31	7.47	7.39	13.36	-8	0.94		420		clear
8:36	7.49	7.11	13.34	-10	0.94		420	4.31	clear
8:42	7.49	6.97	13.34	-11	0.94		420		clear
8:47	7.49	7.07	13.40	-12	0.94		420	4.31	clear
8:51	7.50	7.20	13.41	-13	0.94	5	420		clear
MINUTES							**TOTAL LITERS**		
20.0	0.01	3.19%	0.52%	-2.00	0.11%		**8.40**		

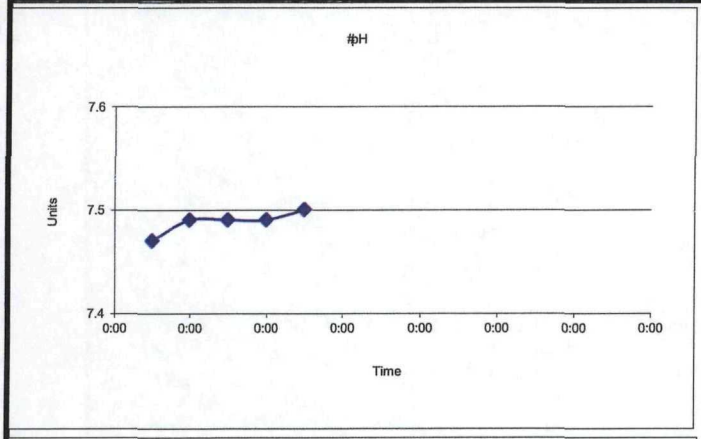

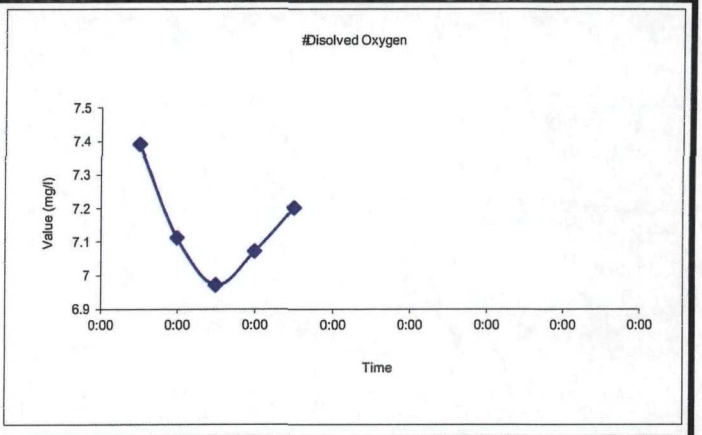

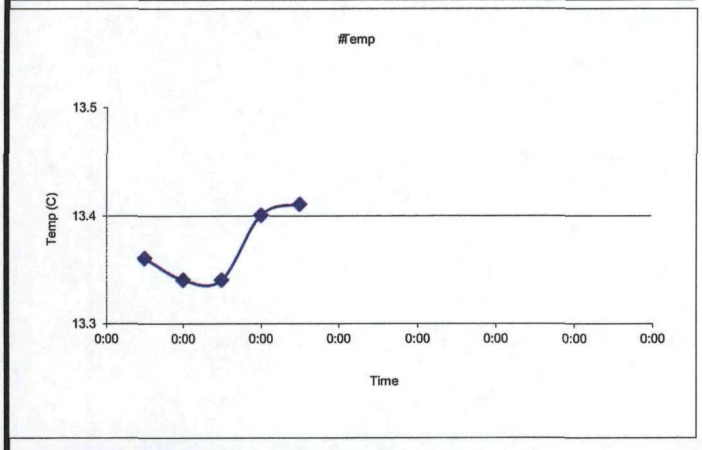

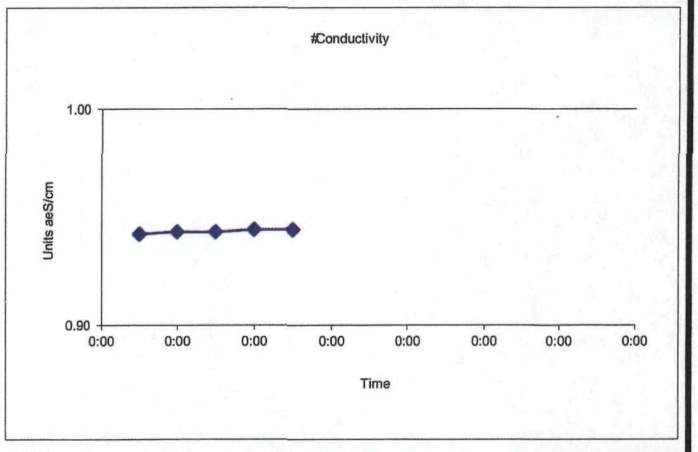

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	148	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 205B**
Casing Stickup (Ft.)	-0.48	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	28-Jun-12
Total Well Depth (Ft.) TOC	150.05	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	4.2	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	145.85	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
7:50							0	4.20	Static
8:01	7.46	1.44	13.63	34	0.94		400	4.20	clear
8:06	7.45	1.40	13.63	30	0.94		400		clear
8:11	7.46	1.36	13.67	25	0.94		400	4.20	clear
8:17	7.46	1.32	13.66	24	0.94		400		clear
8:22	7.46	1.28	13.63	22	0.94	0	400		clear
MINUTES							**TOTAL LITERS**		
21.0	0.00	-6.25%	-0.29%	-3.00	0.11%		**8.40**		

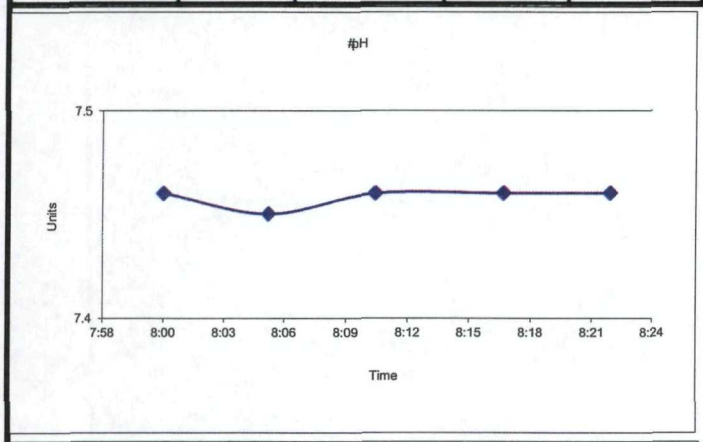

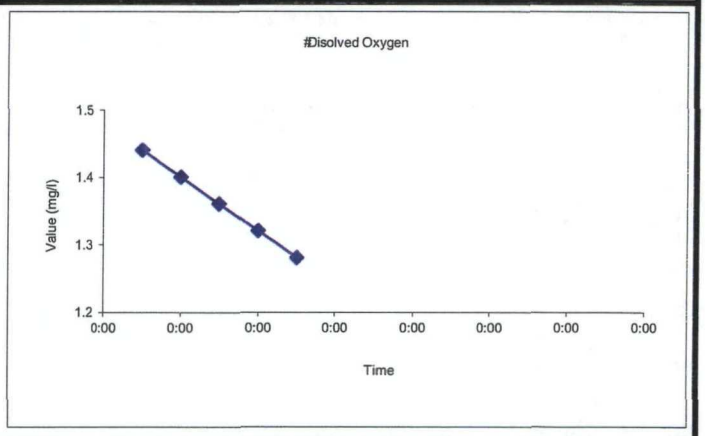

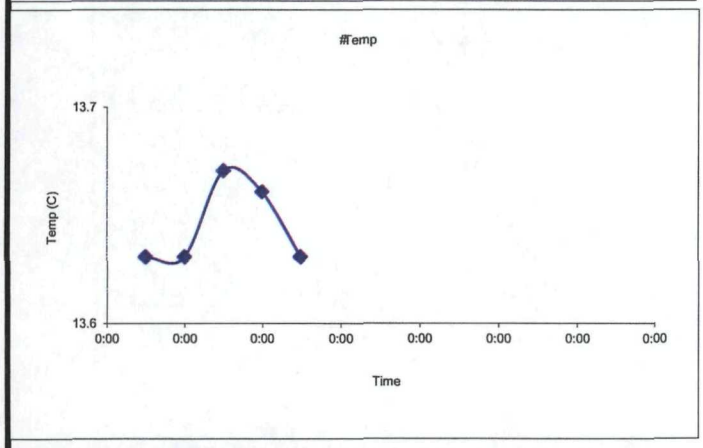

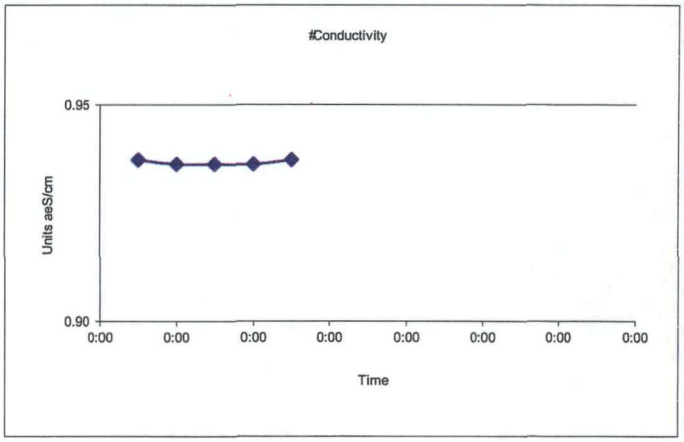

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	88	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 206A**
Casing Stickup (Ft.)	-0.36	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	26-Jun-12
Total Well Depth (Ft.) TOC	90.24	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	6.81	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	83.43	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
15:50							0	6.81	Static
16:02	7.54	1.52	12.69	-10	0.72		300		Start Time
16:07	7.56	1.56	12.62	-13	0.72		300	6.81	clear
16:13	7.59	1.57	12.64	-14	0.72		300		clear
16:16	7.59	1.57	12.69	-14	0.72		300	6.81	clear
16:20	7.60	1.59	12.84	-13	0.72	77	300		clear
MINUTES							**TOTAL LITERS**		
18.0	0.01	1.26%	1.56%	1.00	-0.42%		**5.40**		

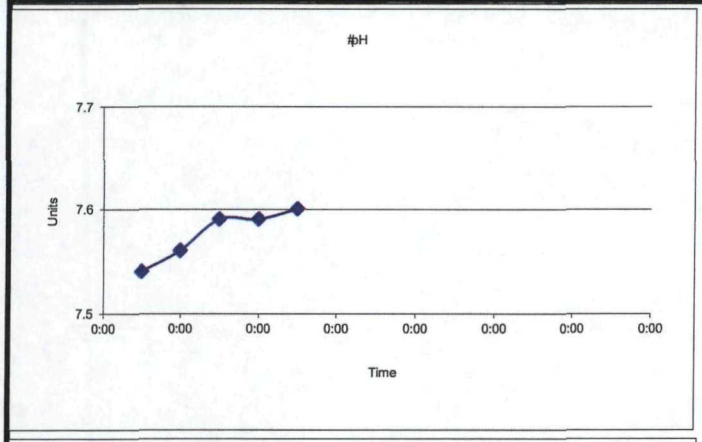

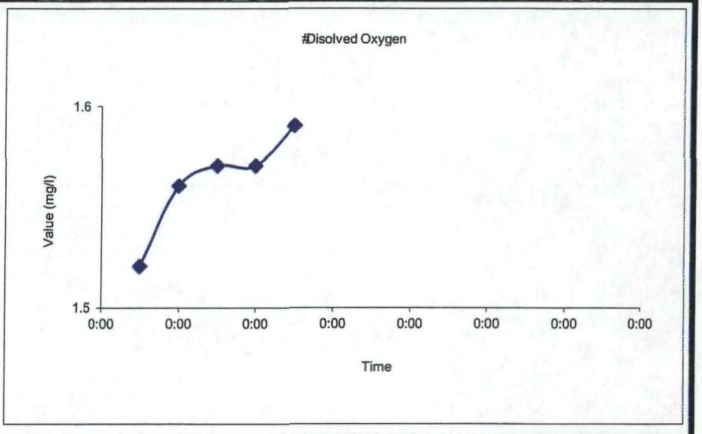

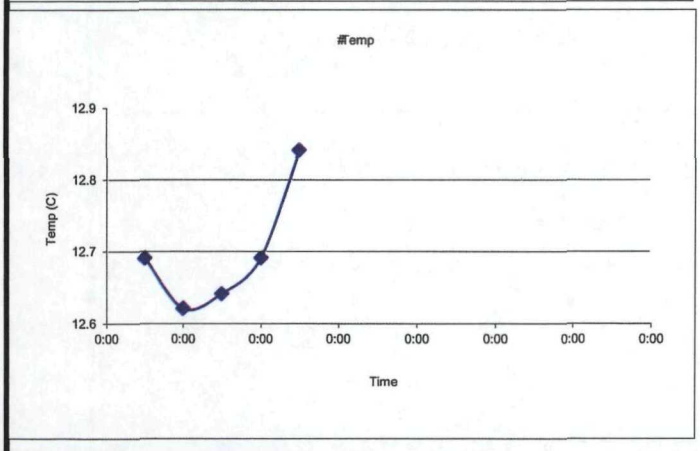

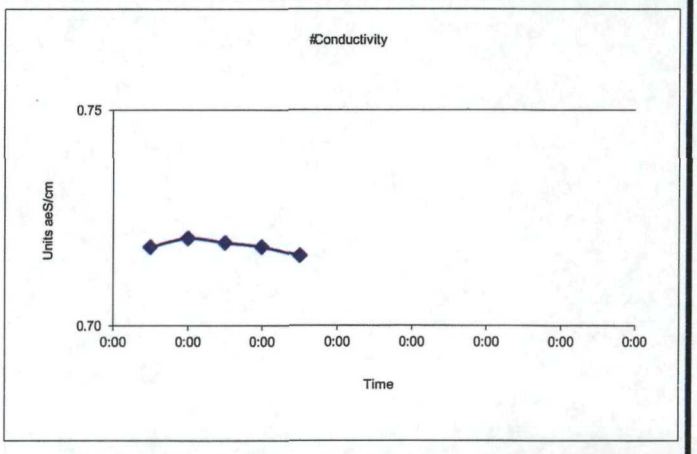

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	127	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 206B**
Casing Stickup (Ft.)	-0.45	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	26-Jun-12
Total Well Depth (Ft.) TOC	129.94	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	4.38	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	125.56	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
15:18							0	4.38	Static
15:21	7.59	0.98	13.66	-22	0.85		380		Start Time
15:24	7.61	0.94	13.44	-23	0.85		380	4.38	clear
15:27	7.77	0.91	13.51	-50	0.85		380		clear
15:31	7.65	0.90	13.53	-42	0.85		380		clear
15:34	7.63	0.88	13.65	-37	0.85		380		clear
15:38	7.62	0.86	13.68	-35	0.84		380	4.38	clear
15:42	7.62	0.84	13.65	-34	0.85	0	380		clear
MINUTES						**TOTAL LITERS**			
21.0	-0.01	-4.76%	0.00%	3.00	0.00%		**7.98**		

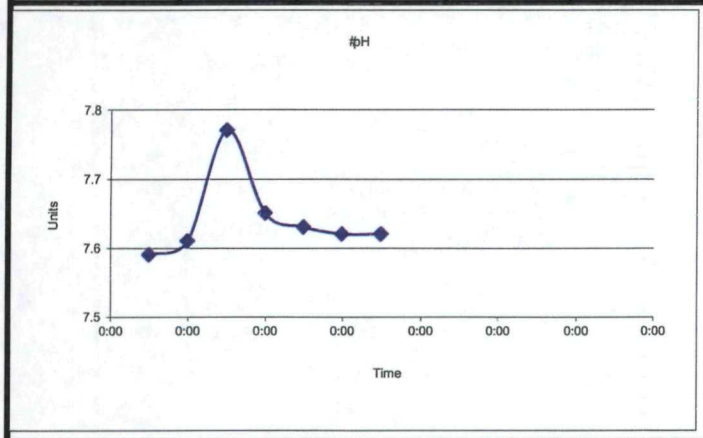

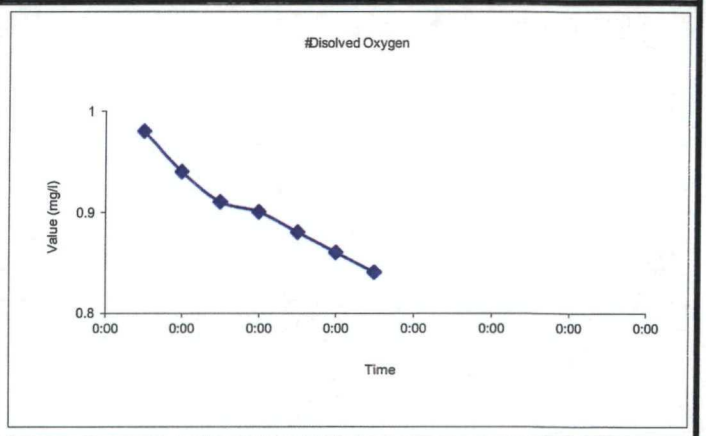

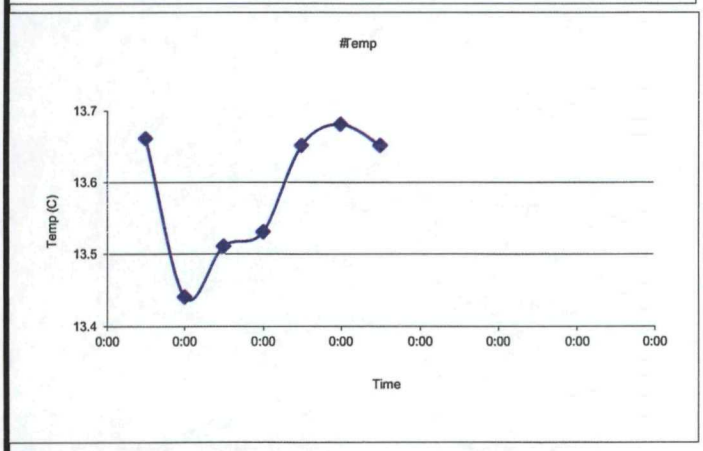

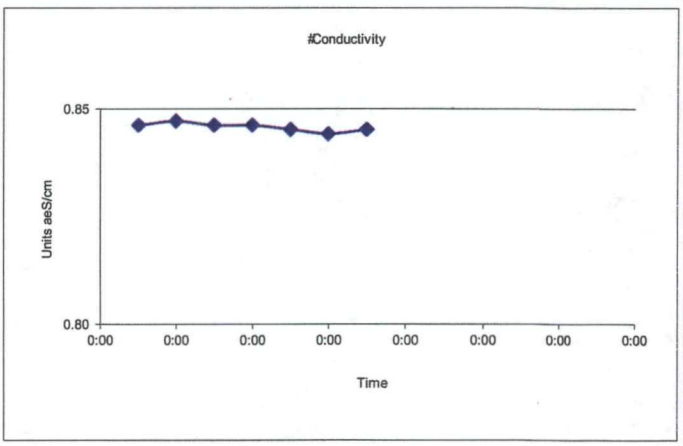

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	249	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 206C**
Casing Stickup (Ft.)	-0.55	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	26-Jun-12
Total Well Depth (Ft.) TOC	251.31	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	4.66	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	246.65	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
14:40							0	4.66	Static
14:56	7.48	0.97	12.83	-61	0.61		400		clear
15:01	7.47	0.95	12.74	-65	0.61		400	4.66	clear
15:07	7.48	0.92	12.79	-69	0.60		400		clear
15:12	7.47	0.91	12.70	-70	0.61		400		clear
15:16	7.48	0.90	12.76	-73	0.61		400	4.66	clear
15:20	7.49	0.89	12.76	-75	0.61	10	400		clear
MINUTES							**TOTAL LITERS**		
24.0	0.02	-2.25%	0.47%	-5.00	-0.17%		**9.60**		

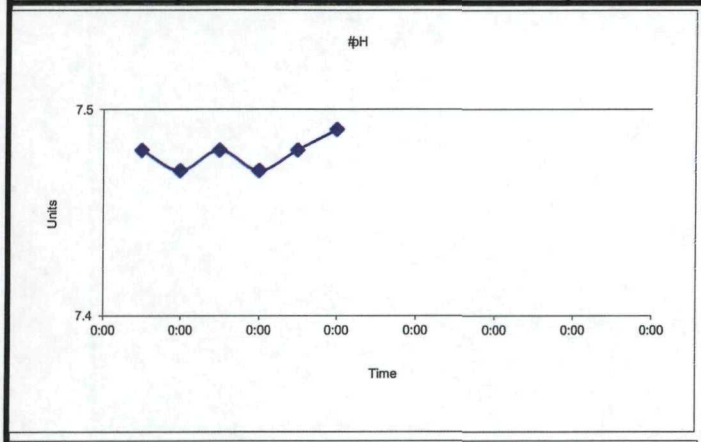

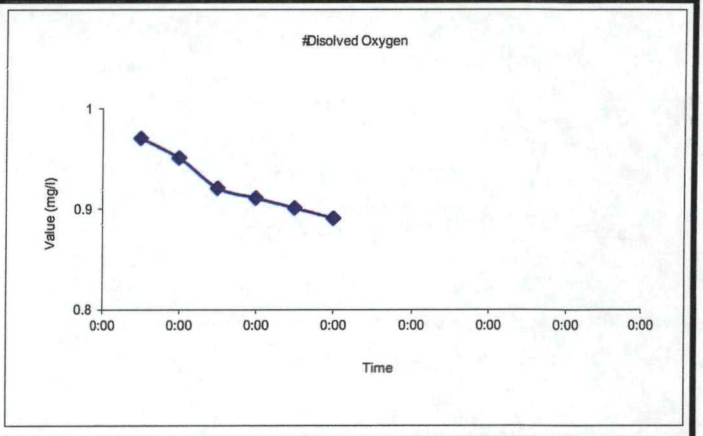

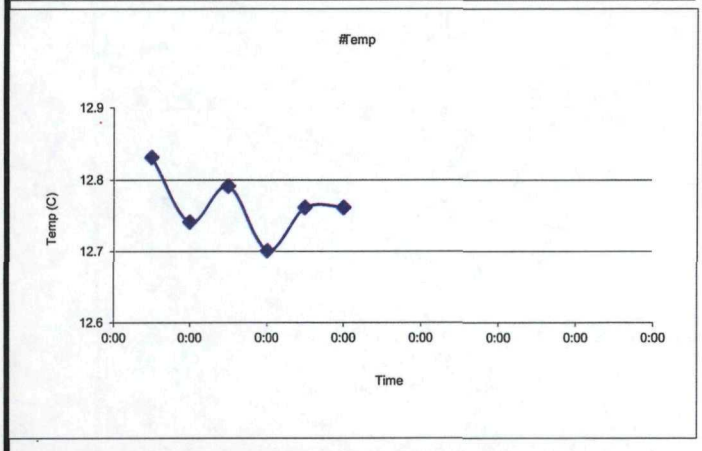

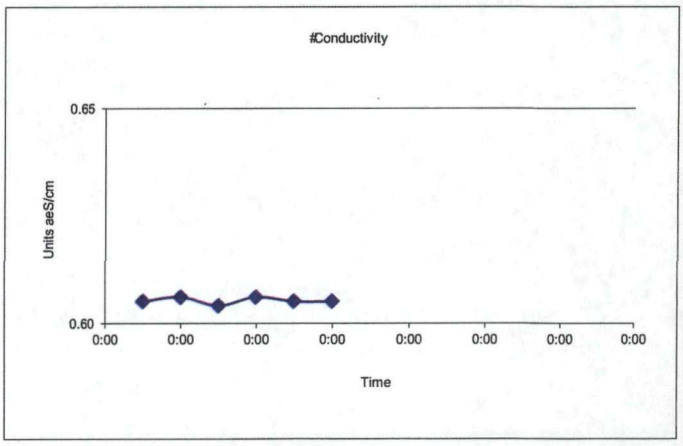

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site
Groundwater Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	88	**Lab Analysis**	VOC per Target Conpound List	Well ID:	**MW 207**
Casing Stickup (Ft.)	-0.3	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	26-Jun-12
Total Well Depth (Ft.) TOC	90.81	**Purge Equip**	QED Air Diaphram	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	36.09	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	54.72	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Spring 2012		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
13:50							0	36.09	Static
14:01	7.50	5.32	13.83	-1	1.03		380		redish brown cloudy
14:05	7.56	5.66	13.53	-4	1.04		380	36.12	redish brown cloudy
14:09	7.55	5.69	13.10	-2	1.04		380		clear
14:12	7.54	5.76	12.90	1	1.04		380		clear
14:15	7.51	5.69	12.81	3	1.03	62	380	36.12	clear
MINUTES							**TOTAL LITERS**		
14.0	-0.04	0.00%	-2.26%	5.00	-0.58%		**5.32**		

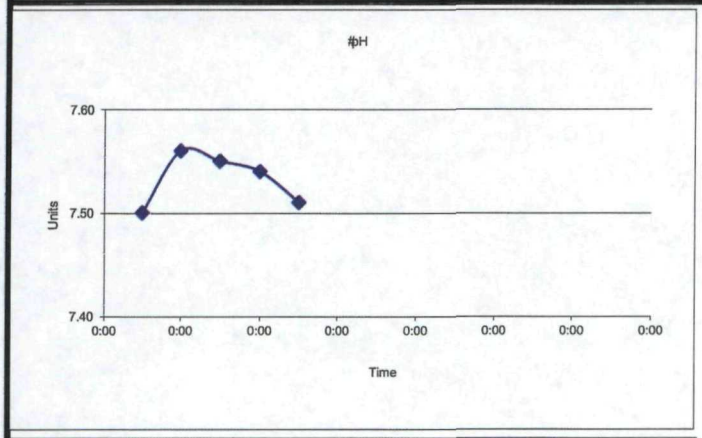

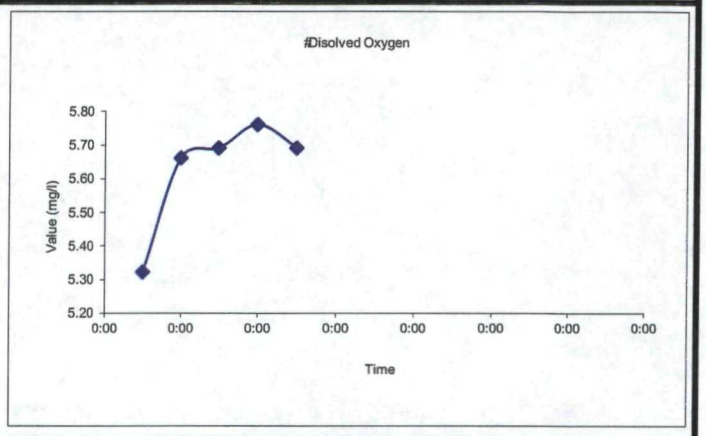

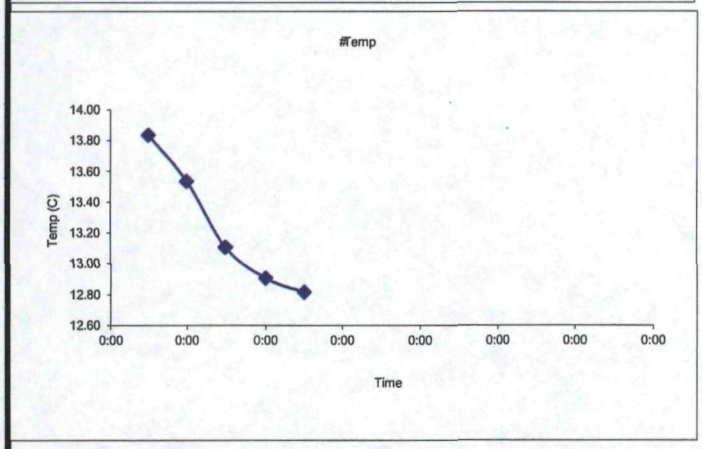

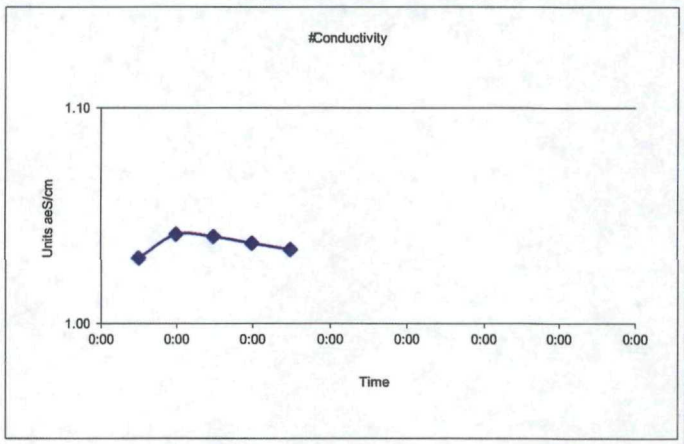

Remarks: (well condition, maintenance, etc...)