SCHLUMBERGER WELL SURVEYING CORPORATION

electrical log

Company	DEW PET CORP
Well	GAREE AREA REALTY NO 48-2
Field	
County	
State	
Other Services	
Permanent Datum	
Log Measured From	
Drilling Measured From	
Date	
Run No.	
Depth-Driller	4786'
Depth-Logger	
Bottom Log Interval	
Top Log Interval	
Casing-Driller	
Casing-Logger	
Bit Size	
Type Fluid in Hole	
Density	
Viscosity	
Fluid Loss	
Source of Sample	
Rm @ Meas. Temp.	
Rmf @ Meas. Temp.	
Rmc @ Meas. Temp.	
Source Rmf / Rmc	
Rm @ BHT	
Time Since Circ.	
Max. Rec. Temp.	
Equipment Location	
Recorded by	
Witnessed by	

REMARKS

SCHLUMBERGER FOR DIRECTIONAL DRILLING

SPONTANEOUS POTENTIAL millivolts		RESISTIVITY ohms, m²/m		RESISTIVITY ohms, m²/m
20		0.2 16" 40	0.2	16" 40
		0.2	40	0.2
		0.2 16" 40	0.2	16" 40
		0.2	40	0.2

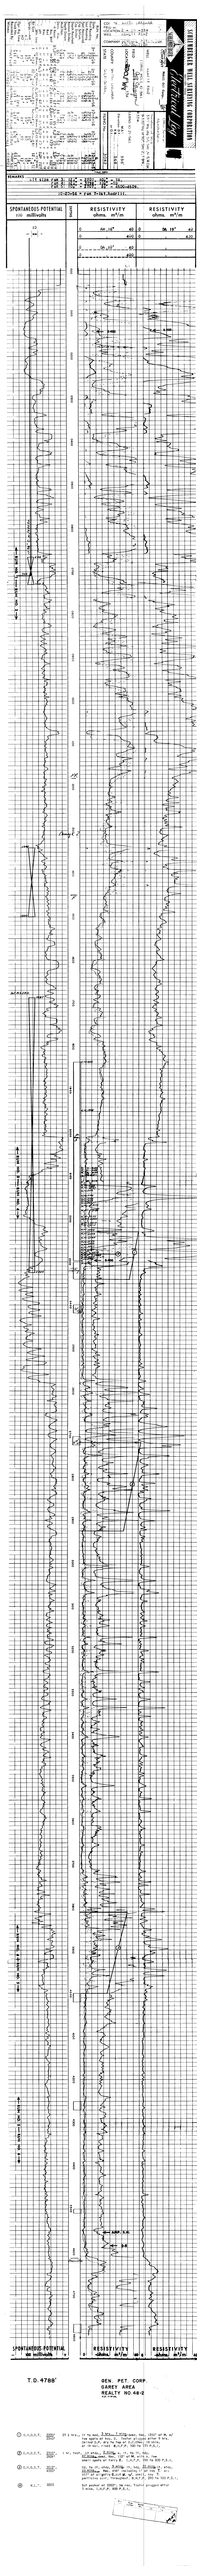

T.D. 4786'

DEW PET CORP
GAREE AREA
REALTY NO 48-2

Ⓐ G.R.N.D.L. 2000 20 ft W.L. 12 in. mud. 8 3/4 in. 7 5/8 in. casing. Log 1207 ft of 8 3/4 in. hole. Logged at 1207 ft. Tester at 1207 ft. Log 1207 ft to 4786 ft. Tester at 4786 ft. Log 4786 ft to 1207 ft. Log 1207 ft to 4786 ft. Log 4786 ft to 1207 ft.

Ⓑ G.R.N.D.L. 2000 1 ft W.L. 12 in. mud. 8 3/4 in. 7 5/8 in. 1207 ft. Log 1207 ft to 4786 ft. Log 4786 ft to 1207 ft. Log 1207 ft to 4786 ft. Log 4786 ft to 1207 ft. Log 1207 ft to 4786 ft. Log 4786 ft to 1207 ft. Log 1207 ft to 4786 ft. Log 4786 ft to 1207 ft.

Ⓒ G.R.N.D.L. 2000 20 ft W.L. 12 in. mud. 8 3/4 in. 7 5/8 in. 1207 ft. Log 1207 ft to 4786 ft. Log 4786 ft to 1207 ft. Log 1207 ft to 4786 ft. Log 4786 ft to 1207 ft. Log 1207 ft to 4786 ft. Log 4786 ft to 1207 ft. Log 1207 ft to 4786 ft. Log 4786 ft to 1207 ft.

Ⓓ M.L.T. 2000 Set packer at 2000 ft. Log 1207 ft to 4786 ft. Log 4786 ft to 1207 ft. Log 1207 ft to 4786 ft. Log 4786 ft to 1207 ft.