BGWBF
4.1
10/26/07

RECEIVED
OCT 29 2007
Environmental
Cleanup Office

PRELIMINARY UPLAND ASSESSMENT REPORT
MCCONKEY/SESKO SITE
1725 PENNSYLVANIA AVENUE
BREMERTON, WASHINGTON

OCTOBER 26, 2007

FOR
CITY OF BREMERTON

GEOENGINEERS

USEPA SF
1306366

PRELIMINARY UPLAND ASSESSMENT REPORT
MCCONKEY/SESKO BROWNFIELD SITE
BREMERTON, WASHINGTON

File No. 00892-017-00

October 26, 2007

Prepared for:

City of Bremerton
Department of Public Works
3027 Olympus Drive
Bremerton, Washington 98130

Attention: Dan Miller

Prepared by:

GeoEngineers, Inc.
Plaza 600 Building
600 Stewart Street, Suite 1700
Seattle, Washington 98101
(206) 728-2674

GeoEngineers, Inc.

Sean P. Trimble, LG
Senior Project Manager

David A. Cook, LG, RBP
Principal

State of Washington
346
Licensed Geologist
David A. Cook

SPT:DAC:bmw
SEAT:\0\0892017\00\Finals\0089201700PhaseIIR.doc

Disclaimer: Any electronic form, facsimile or hard copy of the original document (email, text, table, and/or figure), if provided, and any attachments are only a copy of the original document. The original document is stored by GeoEngineers, Inc. and will serve as the official document of record.

Copyright© 2007 by GeoEngineers, Inc. All rights reserved.

TABLE OF CONTENTS

Page No.

1.0 INTRODUCTION 1

2.0 SCOPE OF SERVICES 1

3.0 SITE CONDITIONS 2
- 3.1 GENERAL 2
- 3.2 SUBSURFACE CONDITIONS AND CHEMICAL ANALYTICAL RESULTS 3
  - 3.2.1 General 3
  - 3.2.2 Soil 3
  - 3.2.3 Groundwater 4

4.0 FINDINGS 4

5.0 LIMITATIONS 5

List of Tables

Table 1. Summary of Site Characterization Soil Data – Petroleum Hydrocarbons and Volatile Organic Compounds

Table 2. Summary of Site Characterization Soil Data – Metals and Polychlorinated Biphenyls

Table 3. Summary of Site Characterization Soil Data – Polycyclic Aromatic Hydrocarbons

Table 4. Summary of Site Characterization Groundwater Data – Petroleum Hydrocarbons and Volatile Organic Compounds

Table 5. Summary of Site Characterization Groundwater Data – Metals and Polychlorinated Biphenyls

Table 6. Summary of Site Characterization Groundwater Data – Semivolatile Organic Compounds and Polycyclic Aromatic Hydrocarbons

List of Figures

Figure 1. Site and Vicinity Map
Figure 2. Site Plan
Figure 3. Summary of Petroleum Hydrocarbon and VOC Data for Soil
Figure 4. Summary of CPAH and Arsenic Data for Soil
Figure 5. Summary of Petroleum Hydrocarbon and VOC Data for Groundwater
Figure 6. Summary of CPAH and Dissolved Metals Data for Groundwater
Figure 7. Groundwater Elevation Map (June 1, 2007)

APPENDICES

APPENDIX A – FIELD PROCEDURES

Appendix A Figures

Figure A-1. Key to Exploration Logs
Figures A-2...A-12. Log of Borings

APPENDIX B – CHEMICAL ANALYTICAL DATA

APPENDIX C – REPORT LIMITATIONS AND GUIDELINES FOR USE

PRELIMINARY UPLAND ASSESSMENT REPORT
MCCONKEY/SESKO BROWNFIELD SITE
BREMERTON, WASHINGTON

1.0 INTRODUCTION

This report summarizes the results of the Preliminary Upland Assessment conducted at the McConkey/Sesko Site (herein referred to as the "Site") located at 1725 Pennsylvania Avenue in Bremerton, Kitsap County, Washington. The location of the Site relative to surrounding physical features is shown on Figure 1. The general layout of the Site is shown on Figure 2. Additional Site information, including ownership and history, is presented in Section 3.0 of this report.

The Washington Department of Ecology ("Ecology") has given the Site a priority ranking of "1" using the Washington Ranking Method (WARM), indicating the greatest assessed risk of potential impacts to public health and the environment. We understand the City of Bremerton and one or more of the current Site owners are considering cleanup and redevelopment of the Site.

The City of Bremerton was the recipient of an EPA Brownfields Assessment Grant (EPA Project No. BF-9604651-0) for this Site in 2006. EPA has also offered to conduct a Targeted Brownfields Assessment (TBA) at the Site. Based on earlier meetings between the City, EPA, the property owners and other stakeholders, it was decided that the best way to maximize the EPA assessment grant and TBA was for GeoEngineers to complete a preliminary assessment at areas of highest concem, including groundwater. The EPA will then complete the TBA focusing on delineating soil and groundwater contamination identified in the upland portion of the Site. It is then planned that GeoEngineers will prepare a Remedial Investigation/Feasibility Study (RI/FS) based on the results of the preliminary and TBA results.

It is our understanding that the City of Bremerton and the property owners intend to enter this Site into Ecology's Voluntary Cleanup Program (VCP). Ecology will be the lead regulatory agency and will review and comment on documents and will provide technical support, and ultimately, an opinion through the Voluntary Cleanup Program.

2.0 SCOPE OF SERVICES

The primary objective of our proposed scope of work was to assess soil and shallow groundwater quality in potential contaminant source areas that have been identified in previous studies. A description of the field methods and detailed sampling protocol is included in Appendix A.

GeoEngineers completed the following specific scope of services for the preliminary soil and groundwater assessment:

1. Prepared a site-specific health and safety plan, which was used by GeoEngineers personnel during activities conducted at the site.
2. Conducted a site visit to mark proposed exploration locations.
3. Arranged for utilities to be located in the vicinity of the proposed explorations by public and private locating services.
4. Monitored the completion of eight soil explorations to depths down to 45 feet below ground surface (bgs), refusal or five feet below the initial water table, whichever occured first.. The eight soil explorations were advanced using a truck-mounted hollow-stem auger (HSA) drilling rig, and

were converted into permanent 2-inch diameter polyvinyl chloride (PVC) groundwater monitoring wells.

5. Collected soil samples from each of the soil boring explorations and screened soil samples for evidence of impact by hazardous substances using visual, headspace vapor, and water sheen screening methods.
6. Submitted selected soil and groundwater samples for laboratory analysis of:
    a. Gasoline- and diesel-range petroleum hydrocarbons by Methods NWTPH-Gx and NWTPH-Dx (with silica gel cleanup);
    b. Volatile organic compounds (VOCs) by EPA Method 5035/8260B;
    c. Semivolatile organic compounds (SVOCs) by EPA Method 8270 SIM;
    d. Polychlorinated biphenyls (PCBs) by EPA Method 8082; and
    e. Priority pollutant list (PPL) metals and chromium VI by EPA 6000/7000 series methods and tributyltin (TBT) by Krone (GC/MS).
7. Evaluated chemical analytical resuhs relative to Ecology's Model Toxics Control Act (MTCA) Method A or Method B cleanup levels.

Please note that due to the current zoning, and based on our understanding of the future Site use (as a possible marina and boat maintenance facility) it is likely that other cleanup levels may be applicable for this Site. Appropriate cleanup levels will be developed as part of the RI/FS process. For the purpose of this report, we have elected to reference MTCA Method A and Method B cleanup levels for comparative purposes only. The actual cleanup levels that are determined to be protective of human health and the environment could be greater than or less than the cleanup levels referenced in this report.

3.0 SITE CONDITIONS

3.1 GENERAL

The Site is comprised of tax parcel numbers 3711-000-001-0409 and 3711-000-001-0607 (McConkey parcels) and tax parcel number 3711-000-022-0101 (Sesko parcel). The Site is located at 1725 Pennsylvania Avenue approximately one mile north-northwest of downtown Bremerton and immediately south of Port Washington Narrows in Bremerton, Kitsap County, Washington. The Site is bounded by Thompson Drive to the west, Pennsylvania Avenue and residential properties to the east, the Port Washington Narrows waterway to the north, and a third McConkey-owned parcel to the south.

The three tax parcels total approximately 3.7 acres. Two of the parcels are currently owned by Paul and Margaret McConkey. The third parcel is currently owned by Natacha Sesko. The City of Bremerton has an easement for the City's storm drain within the Site boundary and a Right-of Way adjacent to the east of the Sesko parcel. Several warehouse structures are present on the Site, which is currently used for light industrial purposes and storage of various materials, including boat parts and metal debris. According to the November 10, 2006 Phase I Environmental Site Assessments (ESAs) prepared by TechLaw, Inc. for the Site, each of the tax parcels is zoned as "Marine Industrial."

The available historical information indicates the Site has an extensive history of industrial use. The most notable historical industrial occupants include a coal gasification plant, petroleum bulk storage and distribution plant, sheet metal fabricator, drum storage facilities, boat and vehicle repair facilities, sandblasting and painting operation, and salvage yard. A concrete manufacturing plant was formerly

located off-Site to the south. A petroleum bulk storage facility (SC Fuels) currently is located adjacent to the east of the north portion of the Site, and a former petroleum bulk storage facility (ARCO) is located west of the north portion of the Site.

GeoEngineers completed preliminary site characterization activities to evaluate soil and groundwater conditions beneath the property.

3.2 SUBSURFACE CONDITIONS AND CHEMICAL ANALYTICAL RESULTS

3.2.1 General

GeoEngineers monitored the completion of eight groundwater monitoring wells (MW-1 through MW-8) between May 21, and May 24, 2007. The soil borings/monitoring wells were advanced to depths ranging from 20 to 45 feet bgs. The approximate boring locations are shown on Figure 2. Details of the field exploration program, and logs for the borings are presented in Appendix A.

Field screening was performed on soil samples obtained from the borings. A description of the field methods is included in Appendix A. Field screening results are presented in the boring logs.

3.2.2 Soil

Soil samples were collected at five-foot intervals in each boring and observed to document soil lithology, color, moisture content, and field-screened for physical evidence of contamination. The general soil lithology encountered during soil boring completion consisted of silty sand and sandy silt fill overlying silty sand and glacial till with variable gravel. The fill layer was present across the Site and varied from approximately 5 to 15 feet thick.

As described in Appendix A, a minimum of two soil samples collected from each soil boring location were submitted for chemical analysis. Soil sample depths were selected based on field screening evidence. Selected soil samples obtained from the borings were submitted to TestAmerica Laboratory in Botheil, Washington for chemical analysis.

Gasoline-, diesel-, and oil-range hydrocarbons and/or VOCs were reported in the soil samples tested from each of the eight soil borings completed at the Site. The gasoline- and diesel-range hydrocarbons concentrations reported in the soil samples collected from MW-3 (at 5 feet bgs), MW-4 (at 15 and 30 feet bgs), MW-6 (at 10 feet bgs), and MW-7 (at 25 feet bgs) exceeded the MTCA Method A cleanup levels for the constituents identified. In addition, the oil-range hydrocarbons concentration reported in the soil sample collected from MW-3 (at 5 feet bgs) exceeded the MTCA Method A cleanup level for oil-range hydrocarbons. Benzene, naphthalene, and xylenes were also reported at concentrations exceeding their respective MTCA Method A cleanup levels at multiple locations throughout the Site (see Figure 3).

Arsenic was reported at a concentration of 48.4 milligrams per kilogram (mg/kg) in 1 of the 17 samples submitted for analysis for this constituent. This reported concentration exceeds the MTCA Method A cleanup level for arsenic of 20 mg/kg. The remaining metals were either not identified at concentrations above the laboratory's sample quantitation limit, or were reported at concentrations that do not exceed the applicable MTCA Method A cleanup levels. PCBs were not detected in any of the soil samples submitted for chemical analysis from the Site.

SVOCs and PAHs were reported in 14 of the 17 soil samples collected throughout the Site. Laboratory-reported carcinogenic polycyclic aromatic hydrocarbon (cPAH) concentrations from twelve of the sample

locations exceeded the MTCA Method A toxicity equivalent (TEQ) value for total cPAHs of 0.1 mg/kg. The remaining detections did not exceed the MTCA Method A cleanup level. In addition, the naphthalene concentrations reported in 6 of the 17 soil samples exceeded the MTCA Method A cleanup level for naphthalene. Chemical analytical results for the soil samples are summarized in Table 1 through Table 3. Laboratory reports are presented in Appendix B.

3.2.3 Groundwater

Groundwater was encountered at depths ranging from 15 to 35 feet bgs (elevations of 10.35 to 2.92 feet above mean sea level) during groundwater monitoring of the eight monitoring wells installed on the Site between May 21, and May 24, 2007. Groundwater samples were obtained from the eight groundwater monitoring wells using low-flow sampling techniques and were submitted to TestAmerica Laboratory in Botheil, Washington for chemical analysis.

Gasoline-, diesel-, and oil-range hydrocarbons and/or VOCs were identified in each of the nine groundwater samples collected from the property. The gasoline- and diesel-range hydrocarbons concentrations reported in the groundwater samples collected from MW-4, MW-6, and MW-8 exceeded the MTCA Method A cleanup levels for the constituents identified. In addition, the gasoline-range hydrocarbons concentration reported in the groundwater sample collected from MW-3 exceeded the MTCA Method A cleanup level for gasoline-range hydrocarbons. Benzene, naphthalene, and carbon tetracholride were also reported at concentrations exceeding their respective MTCA Method A cleanup levels (or Method B cleanup level in the case of carbon tetrachloride) at multiple locations throughout the Site (see Figure 5).

Reported concentrations of arsenic, chromium, and lead (at MW-3 and MW-4) and hexavalent chromium (at MW-5 and MW-8) in groundwater samples submitted for analysis exceed the applicable MTCA Method A cleanup levels for these constituents. The remaining metals were either reported at concentrations that do not exceed the applicable MTCA Method A cleanup levels, or were not identified at concentrations above the laboratory's sample quantitation limit. PCBs were not identified in any of the groundwater samples collected at the property.

SVOCs and PAHs were reported in 6 of the 8 groundwater samples collected throughout the Site. Laboratory-reported cPAH concentrations from five of the sample locations (MW-3, MW-4, MW-5, MW-6, and MW-8) exceeded the MTCA Method A toxicity equivalent (TEQ) value for total cPAHs of 0.1 microgram per liter (μg/L). In addition, the naphthalene concentration reported in the groundwater sample collected from MW-4, and the pentachlorophenol concentration reported in the groundwater sample collected from MW-8 exceeded the MTCA Method A cleanup level for the constituents identified. The remaining detections did not exceed the applicable MTCA Method A cleanup levels. Chemical analytical results for the groundwater samples are summarized in Table 4 through Table 6. Laboratory reports are presented in Appendix B.

4.0 FINDINGS

A Preliminary Upland Assessment was conducted at the McConkey/Sesko Site located at 1725 Pennsylvania Avenue in Bremerton, Kitsap County, Washington from May through June 2007. The purpose of the study was to assess the potential presence of hazardous substances in soil and shallow groundwater at potential contaminant source areas that were identified in previous studies. The findings are:

- Soil at the Site is impacted with VOCs, gasoline-, diesel-, and oil-range hydrocarbons, arsenic and cPAHs at concentrations exceeding the applicable MTCA Method A Method B cleanup levels for these constituents. These contaminants were observed in the vicinity of former bulk fuel and gas plant facilities, generally from ground surface downward to depths greater than 30 feet bgs.
- Groundwater at the Site is impacted with VOCs, gasoline-, and diesel-range hydrocarbons, arsenic, chromium, hexavalent chromium, lead, SVOCs, and cPAHs at concentrations exceeding the applicable MTCA Method A or Method B cleanup levels for these constituents.

The objective of the assessment activities was to assess the potential presence of hazardous substances in soil and shallow groundwater at potential contaminant source areas. Additional site assessment activities would be required to evaluate the extent and magnitude of the documented release(s) identified.

5.0 LIMITATIONS

This Preliminary Upland Assessment has been prepared for the exclusive use of the City of Bremerton and their authorized agents. GeoEngineers has performed this Preliminary Upland Assessment at the McConkey/Sesko Site located at 1725 Pennsylvania Avenue in Bremerton, Kitsap County, Washington in general accordance with the scope and limitations of our services agreement dated December 20, 2006 (amended on May 29, 2007). No other party may rely on the product of our services unless we agree in advance and in writing to such reliance. Within the limitations of scope, schedule and budget, our services have been executed in accordance with generally accepted environmental science practices in this area at the time this report was prepared. No warranty or other conditions, express or implied, should be understood. No study can wholly eliminate uncertainty regarding environmental conditions at a site. There is always a potential that areas of contamination exist that were not identified during past studies.

Any electronic form, facsimile or hard copy of the original document (email, text, table, and/or figure), if provided, and any attachments are only a copy of the original document. The original document is stored by GeoEngineers, Inc. and will serve as the official document of record.

Please refer to Appendix C titled "Report Limitations and Guidelines for Use" for additional information pertaining to use of this report.

TABLE 1
SUMMARY OF SITE CHARACTERIZATION SOIL DATA
PETROLEUM HYDROCARBONS AND VOCs
OLD BREMERTON GASWORKS BROWNFIELD SITE
BREMERTON, WASHINGTON

Sample Name[1]	Sample Depth (feet bgs)	Sample Elevation (feet AMSL)	Date Sampled	Field Screening Results[2]		Petroleum Hydrocarbons (mg/kg)[3]			VOCs[4] (mg/kg)
				Headspace Vapors (ppm)	Sheen	Gasoline-Range	Diesel-Range	Heavy Oil-Range	
MW-1	5.0	40.5	5/21/2007	<1.0	NS	<13.2	<13.2	<32.9	ND
	35.0	10.5	5/21/2007	74.1	SS	<10.3	<12.1	<30.3	n-Hexane - 0.00121 Methylene Chloride - 0.0108 Trichloroethene - 0.00147
MW-2	10.0	33.0	5/21/2007	13.6	MS	21.9	617	965	**Benzene - 0.139** Ethylbenzene - 0.295 Naphthalene - 1.24 Total Xylenes - 0.353
	40.0	3.0	5/21/2007	25.0	NS	<12.3	<12.3	<30.7	ND
MW-3	5.0	34.7	5/22/2007	>2,000	SS	**645**	**6,710**	**2,250**	**Benzene - 1.93** Ethylbenzene - 3.29 p-Isopropyltoluene - 0.808 **Naphthalene - 465** Toluene - 1.41 1,2,4-Trimethylbenzene - 6.70 1,3,5-Trimethylbenzene - 2.41 Total Xylenes - 8.71
	25.0	14.7	5/22/2007	>2,000	NS	<10.8	<10.7	<26.6	Acetone - 0.0233 Naphthalene - 0.00914
MW-4	15.0	20.7	5/23/2007	76.9	HS	**185**	**2,960**	412	Ethylbenzene - 0.893 p-Isopropyltoluene - 0.493 **Naphthalene - 63.9** 1,2,4-Trimethylbenzene - 1.92 1,3,5-Trimethylbenzene - 0.426 Total Xylenes - 1.51
	30.0	5.7	5/23/2007	646	HS	**635**	**4,370**	<274	n-Butylbenzene - 1.96 sec-Butylbenzene - 0.748 Ethylbenzene - 1.80 Isopropylbenzene - 0.6 p-Isopropyltoluene - 1.49 **Naphthalene - 50.7** n-Propylbenzene - 0.952 1,2,4-Trimethylbenzene - 8.31 Total Xylenes - 2.60
MW-5	10.0	8.4	5/24/2007	1,426	SS	<5.62	402	232	Benzene - 0.00779 Ethylbenzene - 0.011 Naphthalene - 0.00841
	20.0	-1.60	5/24/2007	NM	NS	<5.69	<11.6	<29.0	**Benzene - 0.0416** Toluene - 0.143
MW-6	5.0		5/22/2007	>2,000	NS	<11.5	<11.4	<28.5	ND
	10.0	25.5	5/22/2007	186	MS	**541**	**3,770**	390	**Naphthalene - 2,290** Toluene - 5.0 1,2,4-Trimethylbenzene - 13.2 1,3,5-Trimethylbenzene - 3.67 **Total Xylenes - 16.7**
	35.0	0.5	5/22/2007	104	SS	<9.16	<11.2	<28.1	Benzene - 0.00722 Ethylbenzene - 0.00475 Naphthalene - 0.177
MW-7	5.0	28.6	5/23/2007	183	SS	10.6	17.1	<30.6	Toluene - 0.198 1,2,4-Trimethylbenzene - 0.103 Total Xylenes - 0.363
	25.0	8.6	5/23/2007	328	HS	**216**	**30,200**	<2,900	n-Butylbenzene - 1.78 sec-Butylbenzene - 0.915 Ethylbenzene - 0.25 Isopropylbenzene - 0.418 p-Isopropyltoluene - 1.65 **Naphthalene - 14.7** n-Propylbenzene - 0.792 1,2,4-Trimethylbenzene - 6.85 1,3,5-Trimethylbenzene - 0.927 Total Xylenes - 0.421
MW-8	10.0	25.6	5/22/2007	10.1	SS	<11.8	<11.6	<29.0	ND
	25.0	10.6	5/22/2007	22.0	SS	<11.9	336	138	Styrene - 0.814
MTCA Method A Cleanup Level[5]						30	2,000	2,000	Acetone - 8,000 [6] Benzene - 0.03 n-Butylbenzene - NE sec-Butylbenzene - NE Ethylbenzene - 6.0 n-Hexane - 4,800 [6] Isopropylbenzene - 8,000 [6] p-Isopropyltoluene - 1,200 [6] Methylene Chloride - 0.02 Naphthalene - 5.0 n-Propylbenzene - NE Styrene - 33.0 [6] Trichloroethene - 0.03 1,2,4-Trimethylbenzene - 4,000 [6] 1,3,5-Trimethylbenzene - 4,000 [6] Toluene - 7.0 Total Xylenes - 9.0

Notes:

[1]The approximate exploration locations are shown on Figure 2.

[2]Field screening using a photoionization detector (PID) and sheen pan. NS=no sheen; SS=slight sheen; MS=moderate sheen; HS=heavy sheen.

[3]Analyzed by Ecology Method NWTPH-Gx, and/or Dx with acid-silica gel cleanup.

[4]Volatile organic compounds analyzed by EPA Method 8060B. Only those constituents detected above the sample quantitation limit are shown.

[5]For unrestricted land use. MTCA Method B cleanup levels are referenced when Method A cleanup levels are not available.

[6]MTCA Method B cleanup level.

mg/kg = milligrams per kilogram bgs = below ground surface AMSL = above mean sea level

ppm = parts per million NM = not measured NE=not established

MTCA = Model Toxics Control Act

Chemical analyses performed by TestAmerica Laboratories of Bothell, Washington.

Bolding/shading indicates detected analyte concentration exceeds the MTCA cleanup level.

SEAT:P:\0\0892017\00\Finals\Data SummaryTables.xls

TABLE 2
SUMMARY OF SITE CHARACTERIZATION SOIL DATA
METALS AND PCBs
OLD BREMERTON GASWORKS BROWNFIELD SITE
BREMERTON, WASHINGTON

Sample Name[1]	Sample Depth (feet bgs)	Date Sampled	Total Metals[2] (mg/kg)															PCBs[3] (mg/kg)
			Antimony	Arsenic	Beryllium	Cadmium	Chromium	Chromium VI	Copper	Lead	Mercury	Nickel	Selenium	Silver	Thallium	Tributyltin	Zinc	
MW-1	5.0	5/21/2007	<1.98	3.49	<0.661	<0.661	39.5	<1.2	24.8	3.86	<0.134	48.3	<0.661	<0.661	<0.661	<0.00076	61.7	<0.0328
	35.0		<1.82	1.35	<0.607	<0.607	19.8	<1.2	8.01	1.58	<0.111	32.5	<0.607	<0.607	<0.607	<0.00074	23.9	<0.0304
MW-2	10.0	5/21/2007	<1.69	3.18	<0.563	<0.563	35.0	<1.1	18.4	41.3	<0.107	40.6	<0.563	<0.563	<0.563	<0.00081	44.3	<0.0281
	40.0		<1.84	0.797	<0.613	<0.613	24.7	<1.2	10.1	1.34	<0.131	32.0	<0.613	<0.613	<0.613	<0.00080	24.7	<0.0308
MW-3	5.0	5/22/2007	<1.80	**48.40**	<0.600	<0.600	26.3	<1.1	37.8	87.0	<0.129	37.5	<0.600	<0.600	<0.600	<0.00079	166.00	<0.0588
	25.0		<1.62	1.27	<0.540	<0.540	23.9	<1.1	11.0	1.54	<0.0976	36.2	<0.540	<0.540	<0.540	<0.00069	24.9	<0.0273
MW-4	15.0	5/23/2007	<1.63	2.58	<0.544	<0.544	31.8	<1.1	23.3	13.9	<0.101	38.1	<0.544	<0.544	<0.544	<0.0014	67.2	<0.0587
	30.0		<1.53	4.80	<0.509	<0.509	46.5	<1.0	22.0	2.12	<0.0937	44.6	<0.509	<0.509	<0.509	<0.0014	34.8	<0.0553
MW-5	10.0	5/24/2007	<1.86	3.81	<0.620	<0.620	33.1	<1.1	79.1	131	1.62	61.1	<0.620	<0.620	<0.620	<0.0016	204	<0.00642
	20.0		<1.53	0.83	<0.511	<0.511	26.3	<1.2	11.1	1.44	<0.0941	34.6	<0.511	<0.511	<0.511	<0.0015	27.0	<0.00289
MW-6	5.0	5/22/2007	<1.64	1.64	<0.547	<0.547	33.1	<1.1	15.5	2.78	<0.113	38.6	<0.547	<0.547	<0.547	<0.00074	30.5	<0.0288
	10.0		<1.58	1.26	<0.527	<0.527	19.9	<1.1	9.47	1.36	<0.104	28.8	<0.527	<0.527	<0.527	<0.00072	22.7	<0.0508
	35.0		<1.82	0.84	<0.605	<0.605	24.8	<1.0	16.4	1.30	<0.111	33.3	<0.605	<0.605	<0.605	<0.0016	31.7	<0.0554
MW-7	5.0	5/23/2007	<1.84	2.72	<0.614	<0.614	40.1	<1.2	18.2	5.75	<0.111	51.8	<0.614	<0.614	<0.614	<0.0016	48.1	<0.0301
	25.0		<1.81	1.01	<0.604	<0.604	25.2	<1.0	12.5	1.67	<0.0956	43.3	<0.604	<0.604	<0.604	<0.0014	26.2	<0.0289
MW-8	10.0	5/22/2007	<1.77	6.72	<0.589	0.966	36.0	<1.0	68.1	246	0.392	42.1	<0.589	<0.589	<0.589	<0.00072	291	<0.0291
	25.0		<1.69	2.25	<0.562	<0.562	39.4	<1.1	23.3	4.75	<0.105	37.2	<0.562	<0.562	<0.562	<0.00076	48.0	<0.0301
MTCA Method A Cleanup Level[4]			**32 [5]**	**20**	**160 [5]**	**2**	**2,000**	**19**	**3000 [5]**	**250**	**2**	**1600 [5]**	**400 [5]**	**400 [5]**	**5.6 [5]**	**2.4 [5]**	**24,000 [5]**	**1**

Notes:

[1]The approximate exploration locations are shown on Figure 2.

[2]Metals analyzed by EPA 6000/7000 series methods, except Tributyltin, which was analyzed by the Krone method.

[3]Polychlorinated biphenyls; analyzed by EPA Method 8082.

[4]For unrestricted land use. MTCA Method B cleanup levels are referenced when Method A cleanup levels are not available.

[5]MTCA Method B cleanup level.

bgs = below ground surface mg/kg = milligrams per kilogram

"--" = not analyzed MTCA = Model Toxics Control Act

Chemical analyses performed by TestAmerica Laboratories of Bothell, Washington.

Bolding/shading indicates detected analyte concentration exceeds the MTCA cleanup level.

SEAT:P:\0\0892017\00\Finals\Data SummaryTables.xls

TABLE 3
SUMMARY OF SITE CHARACTERIZATION SOIL DATA
POLYCYCLIC AROMATIC HYDROCARBONS (PAHs)
OLD BREMERTON GASWORKS BROWNFIELD SITE
BREMERTON, WASHINGTON

Sample Number[1]	Sample Depth (feet bgs)	Date Sampled	Non-carcinogenic PAHs[2] (mg/kg)								
			Acenaph-thene	Acenaph-thylene	Anthtra-cene	Benzo(ghi)-perylene	Fluoran-thene	Fluorene	Naph-thalenes	Phenan-threne	Pyrene
MW-1	5.0	5/21/2007	<0.0130	<0.0130	<0.0130	<0.0130	<0.0130	<0.0130	<0.0130	<0.0130	<0.0130
	35.0	5/21/2007	<0.0120	<0.0120	<0.0120	<0.0120	<0.0120	<0.0120	<0.0120	<0.0120	<0.0120
MW-2	10.0	5/21/2007	0.671	3.51	2.05	10.6	11.9	1.27	**6.48**	6.67	18.4
	40.0	5/21/2007	<0.0123	<0.0123	<0.0123	<0.0123	<0.0123	<0.0123	<0.0123	<0.0123	<0.0123
MW-3	5.0	5/22/2007	18.5	204	273	31.9	137	182	**835**	379	192
	25.0	5/22/2007	0.0108	0.0151	<0.0108	<0.0108	<0.0108	0.0130	0.0662	0.0122	<0.0108
MW-4	15.0	5/23/2007	6.12	2.19	23.6	8.66	33.6	20.2	**50**	65.7	53.1
	30.0	5/23/2007	18.3	1.49	11.6	4.04	15.6	13.4	**147.3**	37.3	24.9
MW-5	10.0	5/24/2007	<0.612	3.02	11.1	14.6	49.90	4.57	4.69	50.8	85.5
	20.0	5/24/2007	0.0205	<0.0114	0.0198	<0.0114	0.0122	<0.0114	0.0547	0.0843	0.0137
MW-6	5.0	5/22/2007	<0.0230	0.0490	0.0613	0.0398	0.123	0.0659	0.0245	0.253	0.161
	10.0	5/22/2007	31.2	303	233	79.0	321	313	**1,398**	856	428
	35.0	5/22/2007	<0.114	0.523	0.774	0.159	0.933	0.781	3.70	2.66	1.27
MW-7	5.0	5/23/2007	<0.243	<0.243	<0.243	1.98	3.22	<0.243	<0.243	0.648	3.87
	25.0	5/23/2007	<0.566	<0.566	<0.566	0.604	4.0	4.53	**84.7**	13.7	5.28
MW-8	10.0	5/22/2007	<1.47	<1.47	1.47	<1.47	<1.47	<1.47	<1.47	4.21	1.96
	25.0	5/22/2007	<1.48	6.24	14.9	39.5	65.2	<1.48	<1.48	17.2	147
MTCA Method A Cleanup Level[3]			**4,800 [4]**	**NE**	**24,000 [4]**	**NE**	**3,200 [4]**	**3,200 [4]**	**5**	**NE**	**2,400 [4]**

Sample Number[1]	Sample Depth (feet bgs)	Date Sampled	Carcinogenic PAHs[2] (mg/kg)							
			Benzo(a)-anthracene	Benzo(a)-pyrene	Benzo(b)-fluoranthene	Benzo(k)-fluoranthene	Chrysene	Dibenz(a,h)-anthracene	Indeno(1,2,3-cd)-pyrene	Total cPAHs (TEQ)[5]
MW-1	5.0	5/21/2007	<0.0130	<0.0130	<0.0130	<0.0130	<0.0130	<0.0130	<0.0130	---
	35.0	5/21/2007	<0.0120	<0.0120	<0.0120	<0.0120	<0.0120	<0.0120	<0.0120	---
MW-2	10.0	5/21/2007	**5.44**	**11.5**	**6.94**	**6.00**	**9.17**	**2.09**	**6.49**	**14.9**
	40.0	5/21/2007	<0.0123	<0.0123	<0.0123	<0.0123	<0.0123	<0.0123	<0.0123	---
MW-3	5.0	5/22/2007	**59.7**	**58.9**	**26.1**	**34.9**	**69.2**	**8.48**	**26.8**	**77.7**
	25.0	5/22/2007	<0.0108	<0.0108	<0.0108	0.0130	<0.0108	<0.0108	<0.0108	---
MW-4	15.0	5/23/2007	**11.8**	**11.9**	**5.93**	**7.93**	**13.7**	**2.35**	**6.31**	**16.2**
	30.0	5/23/2007	**5.03**	**6.81**	**2.62**	**3.83**	**6.66**	**1.28**	**2.91**	**8.83**
MW-5	10.0	5/24/2007	**21.0**	**16.7**	**12.5**	**14.6**	**28.90**	**4.37**	**11.1**	**24.7**
	20.0	5/24/2007	<0.0114	<0.0114	<0.0114	0.0129	<0.0114	<0.0114	<0.0114	---
MW-6	5.0	5/22/2007	0.0475	0.0782	0.0368	0.0536	0.0644	0.0245	0.0368	**0.11**
	10.0	5/22/2007	**113**	**116**	**57.4**	**60.6**	**146**	**22.8**	**58.5**	**155.5**
	35.0	5/22/2007	**0.265**	**0.394**	**0.152**	**0.250**	**0.349**	<0.114	0.129	**0.5**
MW-7	5.0	5/23/2007	**1.22**	**1.78**	**1.22**	**1.49**	**2.03**	**0.486**	**1.52**	**2.54**
	25.0	5/23/2007	**1.21**	**1.85**	**0.754**	**1.24**	**1.58**	**<0.566**	**0.604**	**2.35**
MW-8	10.0	5/22/2007	<1.47	**2.84**	<1.47	**1.76**	<1.47	<1.47	<1.47	**3.54**
	25.0	5/22/2007	**37.6**	**47.0**	**27.3**	**29.0**	**53.1**	**10.3**	**28.7**	**63.9**
MTCA Method A Cleanup Level[3]			**0.137 [4]**	**0.1**	**0.137 [4]**	**0.137 [4]**	**0.137 [4]**	**0.137 [4]**	**0.137 [4]**	**0.1**

Notes:
[1]The approximate exploration locations are shown in Figure 2.
[2]Analyzed by EPA Method 8270 SIM.
[3]For unrestricted land use. MTCA Method B cleanup levels are referenced when Method A cleanup levels are not available.
[4]MTCA Method B cleanup level.
[5]Cleanup level for total carcinogenic PAHs; calculated using toxic equivalent (TEQ) relative to benzo(a)pyrene per WAC 173-340-780(8). cPAHs that were not detected were assigned a value of one-half the detection limit for these calculations.
mg/kg = milligrams per kilogram bgs = below ground surface
NE = not established MTCA = Model Toxics Control Act
Chemical analyses performed by TestAmerica Laboratories of Bothell, Washington.
Bolding/shading indicates detected analyte concentration exceeds the MTCA cleanup level.

SEAT:P:\0\0892017\00\Finals\Data SummaryTables.xls

TABLE 4
SUMMARY OF SITE CHARACTERIZATION GROUNDWATER DATA
PETROLEUM HYDROCARBONS AND VOCs
OLD BREMERTON GASWORKS BROWNFIELD SITE
BREMERTON, WASHINGTON

Sample Name[1]	Date Sampled	Monitoring Well Top of Casing Elevation (feet AMSL)	Depth to Groundwater (feet bgs)	Groundwater Elevation (feet AMSL)	Petroleum Hydrocarbons (ug/L)[2]			VOCs[3] (ug/L)
					Gasoline-Range	Diesel-Range	Heavy Oil-Range	
MW-1	6/1/2007	45.03	34.68	10.35	<50.0	<236	<472	**Carbon Tetrachloride - 0.660** Chloroform - 2.84 Trichloroethene - 4.79
MW-2	6/1/2007	42.54	35.25	7.29	63.5	<236	<472	**Benzene - 18.4** Chloroform - 1.42 1,2-Dichloroethane - 4.72 Trichloroethene - 0.610
MW-3	6/1/2007	39.10	32.90	6.20	**2,800**	<236	<472	**Benzene - 826** n-Butylbenzene - 0.480 sec-Butylbenzene - 0.370 Chloroform - 0.20 1,2-Dichloroethane - 3.06 cis-1,2-Dichloroethene - 0.370 Ethylbenzene - 151 Isopropylbenzene - 5.29 p-Isopropyltoluene - 0.90 **Naphthalene - 345** n-Propylbenzene - 6.41 Toluene - 4.21 Trichloroethene - 0.330 1,2,4-Trimethylbenzene - 9.36 1,3,5-Trimethylbenzene - 1.87 Total Xylenes - 39.6
MW-4	6/1/2007	35.20	29.32	5.88	**10,600**	**18,500**	<2,360	**Benzene - 25.9** n-Butylbenzene - 6.10 sec-Butylbenzene - 4.80 cis-1,2-Dichloroethene - 1.29 Ethylbenzene - 308 Isopropylbenzene - 40.0 p-Isopropyltoluene - 8.90 **Naphthalene - 5,270** n-Propylbenzene - 9.70 Toluene - 45.4 Trichloroethene - 0.630 1,2,4-Trimethylbenzene - 176 1,3,5-Trimethylbenzene - 33.5 Total Xylenes - 536

Sample Name[1]	Date Sampled	Monitoring Well Top of Casing Elevation (feet AMSL)	Depth to Groundwater (feet bgs)	Groundwater Elevation (feet AMSL)	Petroleum Hydrocarbons (ug/L)[2]			VOCs[3] (ug/L)
					Gasoline-Range	Diesel-Range	Heavy Oil-Range	
MW-5	6/1/2007	18.51	15.21	3.30	481	<236	<472	**Benzene - 85.1** Ethylbenzene - 10.1 Isopropylbenzene - 5.25 Naphthalene - 25.5 Toluene - 0.450 1,2,4-Trimethylbenzene - 3.52 1,3,5-Trimethylbenzene - 0.530 Total Xylenes - 8.29
MW-6	6/1/2007	34.95	30.20	4.75	**3,450**	**540**	<472	**Benzene - 950** n-Butylbenzene - 0.590 sec-Butylbenzene - 0.360 1,2-Dichloroethane - 0.930 cis-1,2-Dichloroethene - 0.740 Ethylbenzene - 187 n-Hexane - 1.17 Isopropylbenzene - 8.93 p-Isopropyltoluene - 0.270 Naphthalene - 54.9 n-Propylbenzene - 3.14 Toluene - 3.07 1,2,4-Trimethylbenzene - 10.3 1,3,5-Trimethylbenzene - 1.26 Total Xylenes - 19.2
MW-6 (Duplicate)	6/1/2007	34.95	30.20	4.75	**3,400**	**646**	<0.472	**Benzene - 826** n-Butylbenzene - 0.520 sec-Butylbenzene - 0.400 1,2-Dichloroethane - 0.850 cis-1,2-Dichloroethene - 0.770 Ethylbenzene - 160 Isopropylbenzene - 8.90 p-Isopropyltoluene - 0.250 Naphthalene - 64.6 n-Propylbenzene - 3.29 Toluene - 3.17 1,2,4-Trimethylbenzene - 10.6 1,3,5-Trimethylbenzene - 1.22 Total Xylenes - 20.3
MW-7	6/1/2007	33.24	30.21	3.03	174	447	<472	Benzene - 2.23 sec-Butylbenzene - 0.320 Ethylbenzene - 0.530 Naphthalene - 3.19 Trichloroethene - 0.400

Sample Name[1]	Date Sampled	Monitoring Well Top of Casing Elevation (feet AMSL)	Depth to Groundwater (feet bgs)	Groundwater Elevation (feet AMSL)	Petroleum Hydrocarbons (ug/L)[2]			VOCs[3] (ug/L)
					Gasoline-Range	Diesel-Range	Heavy Oil-Range	
MW-8	6/1/2007	35.56	32.64	2.92	**4,850**	**1,860**	<472	**Benzene - 650** n-Butylbenzene - 0.580 sec-Butylbenzene - 0.570 Ethylbenzene - 244 Isopropylbenzene - 8.15 p-Isopropyltoluene - 1.17 **Naphthalene - 1,070** n-Propylbenzene - 2.38 Toluene - 1.49 1,2,4-Trimethylbenzene - 49.0 1,3,5-Trimethylbenzene - 5.60 Total Xylenes - 211
MTCA Method A Cleanup Level[4]					800	500	500	Benzene - 5.0 n-Butylbenzene - NE sec-Butylbenzene - NE Carbon Tetrachloride - 0.34 [5] Chloroform - 7.2 [5] 1,2-Dichloroethane - 5.0 cis-1,2-Dichloroethene - 80 [5] Ethylbenzene - 700 n-Hexane - 480 [5] Isopropylbenzene - 800 [5] p-Isopropyltoluene - NE Naphthalene - 160 n-Propylbenzene - NE Toluene - 1,000 Trichloroethene - 5.0 1,2,4-Trimethylbenzene - 400 [5] 1,3,5-Trimethylbenzene - 400 [5] Total Xylenes - 1,000

Notes:

[1]The approximate exploration locations are shown on Figure 2.

[2]Analyzed by Ecology Method NWTPH-Gx and NWTPH-Dx with silica gel cleanup.

[3]Volatile organic compounds analyzed by EPA Method 8060B. Only those constituents detected above the sample quantitation limit are reported.

[4]For unrestricted land use. MTCA Method B cleanup levels are referenced when Method A cleanup levels are not available.

[5]MTCA Method B cleanup level.

µg/L = micrograms per liter ND = not detected

feet AMSL = feet above mean sea level feet bgs = feet below ground surface

MTCA = Model Toxics Control Act

Chemical analyses performed by TestAmerica Laboratories of Bothell, Washington.

Bolding/shading indicates detected analyte concentration exceeds the MTCA cleanup level.

SEAT:P:\0\0892017\00\Finals\Data SummaryTables.xls

TABLE 5
SUMMARY OF SITE CHARACTERIZATION GROUNDWATER DATA
DISSOLVED METALS AND PCBs
OLD BREMERTON GASWORKS BROWNFIELD SITE
BREMERTON, WASHINGTON

Sample Name[1]	Date Sampled	Dissolved Metals[2] (ug/L)															PCBs[3]
		Antimony	Arsenic	Beryllium	Cadmium	Chromium	Chromium VI	Copper	Lead	Mercury	Nickel	Selenium	Silver	Thallium	Tributyltin	Zinc	(ug/L)
MW-1	6/1/2007	<3.0	1.54	<1.0	<1.0	11.8	6.0	10.1	1.55	<0.2	18.7	<1.0	<1.0	<1.0	<0.0019	13.4	<0.1
MW-2	6/1/2007	<3.0	1.08	<1.0	<1.0	5.15	<5.0	3.4	<1.0	<0.2	7.24	<1.0	<1.0	<1.0	<0.0019	<10.0	<0.1
MW-3	6/1/2007	<3.0	**14.2**	1.07	<1.0	**228**	48.0	130	**18.3**	0.246	232	<1.0	<1.0	<1.0	<0.0019	185	<0.1
MW-4	6/1/2007	<3.0	**26.0**	1.08	<1.0	**177**	33.0	143	**21.6**	<0.2	180	<1.0	<1.0	<1.0	<0.0019	155	<0.1
MW-5	6/1/2007	<3.0	2.83	<1.0	<1.0	6.07	**61.0**	9.0	5.12	<0.2	89.7	3.64	<1.0	<1.0	<0.0019	32.1	<0.1
MW-6	6/1/2007	<3.0	4.80	<1.0	<1.0	1.34	23.0	1.05	<1.0	<0.2	1.65	<1.0	<1.0	<1.0	<0.0019	<10.0	<0.1
MW-6 (Duplicate)	6/1/2007	<3.0	4.43	<1.0	<1.0	1.06	33.0	<1.0	<1.0	<0.2	1.32	<1.0	<1.0	<1.0	<0.0019	<10.0	<0.1
MW-7	6/1/2007	<3.0	1.43	<1.0	<1.0	15.6	11.0	13.1	2.23	<0.2	20.2	<1.0	<1.0	<1.0	<0.0019	18.0	<0.1
MW-8	6/1/2007	<3.0	4.69	<1.0	<1.0	9.28	**90.0**	8.94	4.47	<0.2	14.4	<1.0	<1.0	<1.0	<0.0019	12.7	<0.1
MTCA Method A Cleanup Level[4]		**6.4[5]**	**5**	**32[5]**	**5**	**100**	**50**	**590[5]**	**15**	**2**	**320[5]**	**80[5]**	**80[5]**	**1.1[5]**	**NE**	**4,800[5]**	**0.1**

Notes:

[1]The approximate exploration locations are shown on Figure 2.

[2] Metals analyzed by EPA 6000/7000 series methods, except Tributyltin, which was analyzed by the Krone method.

[3]Polychlorinated biphenyls; analyzed by EPA Method 8082.

[4]For unrestricted land use. MTCA Method B cleanup levels are referenced when Method A cleanup levels are not available.

[5]MTCA Method B cleanup level.

µg/l = micrograms per liter

MTCA = Model Toxics Control Act

Chemical analyses performed by TestAmerica Laboratories of Bothell, Washington.

Bolding/shading indicates detected analyte concentration exceeds the MTCA cleanup level.

SEAT:P:\0\0892017\00\Finals\Data SummaryTables.xls

TABLE 6
SUMMARY OF SITE CHARACTERIZATION GROUNDWATER DATA
SEMIVOLATILE ORGANIC COMPOUNDS (SVOCs) AND POLYCYCLIC AROMATIC HYDROCARBONS (PAHs)
OLD BREMERTON GASWORKS BROWNFIELD SITE
BREMERTON, WASHINGTON

Sample Number[1]	Date Sampled	Non-carcinogenic PAHs[2] (ug/L)									SVOCs (ug/L)		
		Acenaph-thene	Acenaph-thylene	Anthtra-cene	Benzo(ghi)-perylene	Fluoran-thene	Fluorene	Naph-thalenes	Phenan-threne	Pyrene	Dibenzo furan	Phenol	Pentachloro phenol
MW-1	6/1/2007	<0.102	<0.102	<0.102	<0.102	<0.102	<0.102	<0.102	<0.102	<0.102	<10.2	<10.2	<10.2
MW-2	6/1/2007	<0.0971	<0.0971	<0.0971	<0.0971	<0.0971	<0.0971	<0.0971	<0.0971	<0.0971	<9.71	<9.71	<9.71
MW-3	6/1/2007	1.1	3.26	4.72	0.0979	1.95	3.31	2.185	5.78	2.36	<9.71	75.5	<9.71
MW-4	6/1/2007	**361**	<94.3	120	<94.3	122	188	**5,612**	377	158	31.8	<9.43	<9.43
MW-5	6/1/2007	11.7	3.10	0.726	0.639	3.29	1.36	1.20	1.46	3.90	<9.43	<9.43	<9.43
MW-6	6/1/2007	13.5	23.5	4.23	0.221	8.33	9.43	67.0	5.73	9.39	<9.43	77.5	<9.43
MW-6 (Duplicate)	6/1/2007	11.0	18.9	1.32	0.104	7.38	5.10	0.445	<0.0943	8.13	<9.43	62.6	<9.43
MW-7	6/1/2007	<0.0943	0.222	<0.0943	<0.0943	<0.0943	0.102	0.184	<0.0943	0.174	<9.43	<9.43	<9.43
MW-8	6/1/2007	7.10	14.0	0.891	0.50	1.72	0.873	3.08	1.04	2.92	<9.90	81.6	**11.4**
MTCA Method A Cleanup Level[3]		160	NE	9600 [4]	640 [4]	NE	4800 [4]	640 [4]	480 [4]	NE	32 [4]	4800 [4]	0.73 [4]

Sample Number[1]	Date Sampled	Carcinogenic PAHs[2] (ug/L)							
		Benzo(a)-anthracene	Benzo(a)-pyrene	Benzo(b)-fluoranthene	Benzo(k)-fluoranthene	Chrysene	Dibenz(a,h)-anthracene	Indeno(1,2,3-cd)-pyrene	Total cPAHs (TEQ)[3]
MW-1	6/1/2007	<0.0102	<0.0102	<0.0102	<0.0102	<0.0102	<0.0102	<0.0102	---
MW-2	6/1/2007	<0.00971	<0.00971	<0.00971	<0.00971	<0.00971	<0.00971	<0.00971	---
MW-3	6/1/2007	**0.389**	**0.217**	**0.0968**	**0.227**	**0.432**	**0.0437**	**0.0874**	**0.32**
MW-4	6/1/2007	**39.3**	**37.6**	**<9.43**	**<9.43**	**40.8**	**<9.43**	**<9.43**	**45.24**
MW-5	6/1/2007	**0.884**	**0.905**	**0.637**	**0.615**	**1.16**	**0.189**	**0.467**	**1.25**
MW-6	6/1/2007	**0.727**	**0.345**	**0.272**	**0.281**	**0.772**	**0.0678**	**0.167**	**0.52**
MW-6 (Duplicate)	6/1/2007	**0.430**	**0.158**	**0.115**	**0.189**	**0.392**	**0.0723**	**0.0985**	**0.27**
MW-7	6/1/2007	**0.0168**	**0.0247**	<0.00943	**0.0602**	0.0372	<0.00943	<0.00943	0.0331
MW-8	6/1/2007	**0.694**	**0.878**	**0.657**	**0.494**	**0.836**	**0.170**	**0.433**	**1.18**
MTCA Method A Cleanup Level[3]		0.012 [4]	0.1	0.012 [4]	0.012 [4]	0.012 [4]	0.012 [4]	0.012 [4]	0.1

Notes:

[1]The approximate exploration locations are shown in Figure 2.

[2]Analyzed by EPA Method 8270 SIM.

[3]For unrestricted land use. MTCA Method B cleanup levels are referenced when Method A cleanup levels are not available.

[4]MTCA Method B cleanup level

µg/L = micrograms per liter

MTCA = Model Toxics Control Act

NE = not established

Chemical analyses performed by TestAmerica Laboratories of Bothell, Washington.

Bolding/shading indicates detected analyte concentration exceeds the MTCA cleanup level.

SEAT:P:\0\0892017\00\Finals\Data SummaryTables.xls

Notes:
1. The locations of all features shown are approximate.
2. This drawing is for information purposes. It is intended to assist in showing features discussed in an attached document. GeoEngineers, Inc. can not guarantee the accuracy and content of electronic files. The master file is stored by GeoEngineers, Inc. and will serve as the official record of this communication.
3. It is unlawful to copy or reproduce all or any part thereof, whether for personal use or resale, without permission.

Data Sources: ESRI Data & Maps, Street Maps 2005

Transverse Mercator, Zone 10 N North, North American Datum 1983
North arrow oriented to grid north

Site and Vicinity Map

Old Bremerton Gas Works Site
Bremerton, Washington

GEOENGINEERS

Figure 1

Map Revised: March 16, 2007

Office: SEAT Path: P:\0\0892017\00\GIS\089201700Figure1.mxd

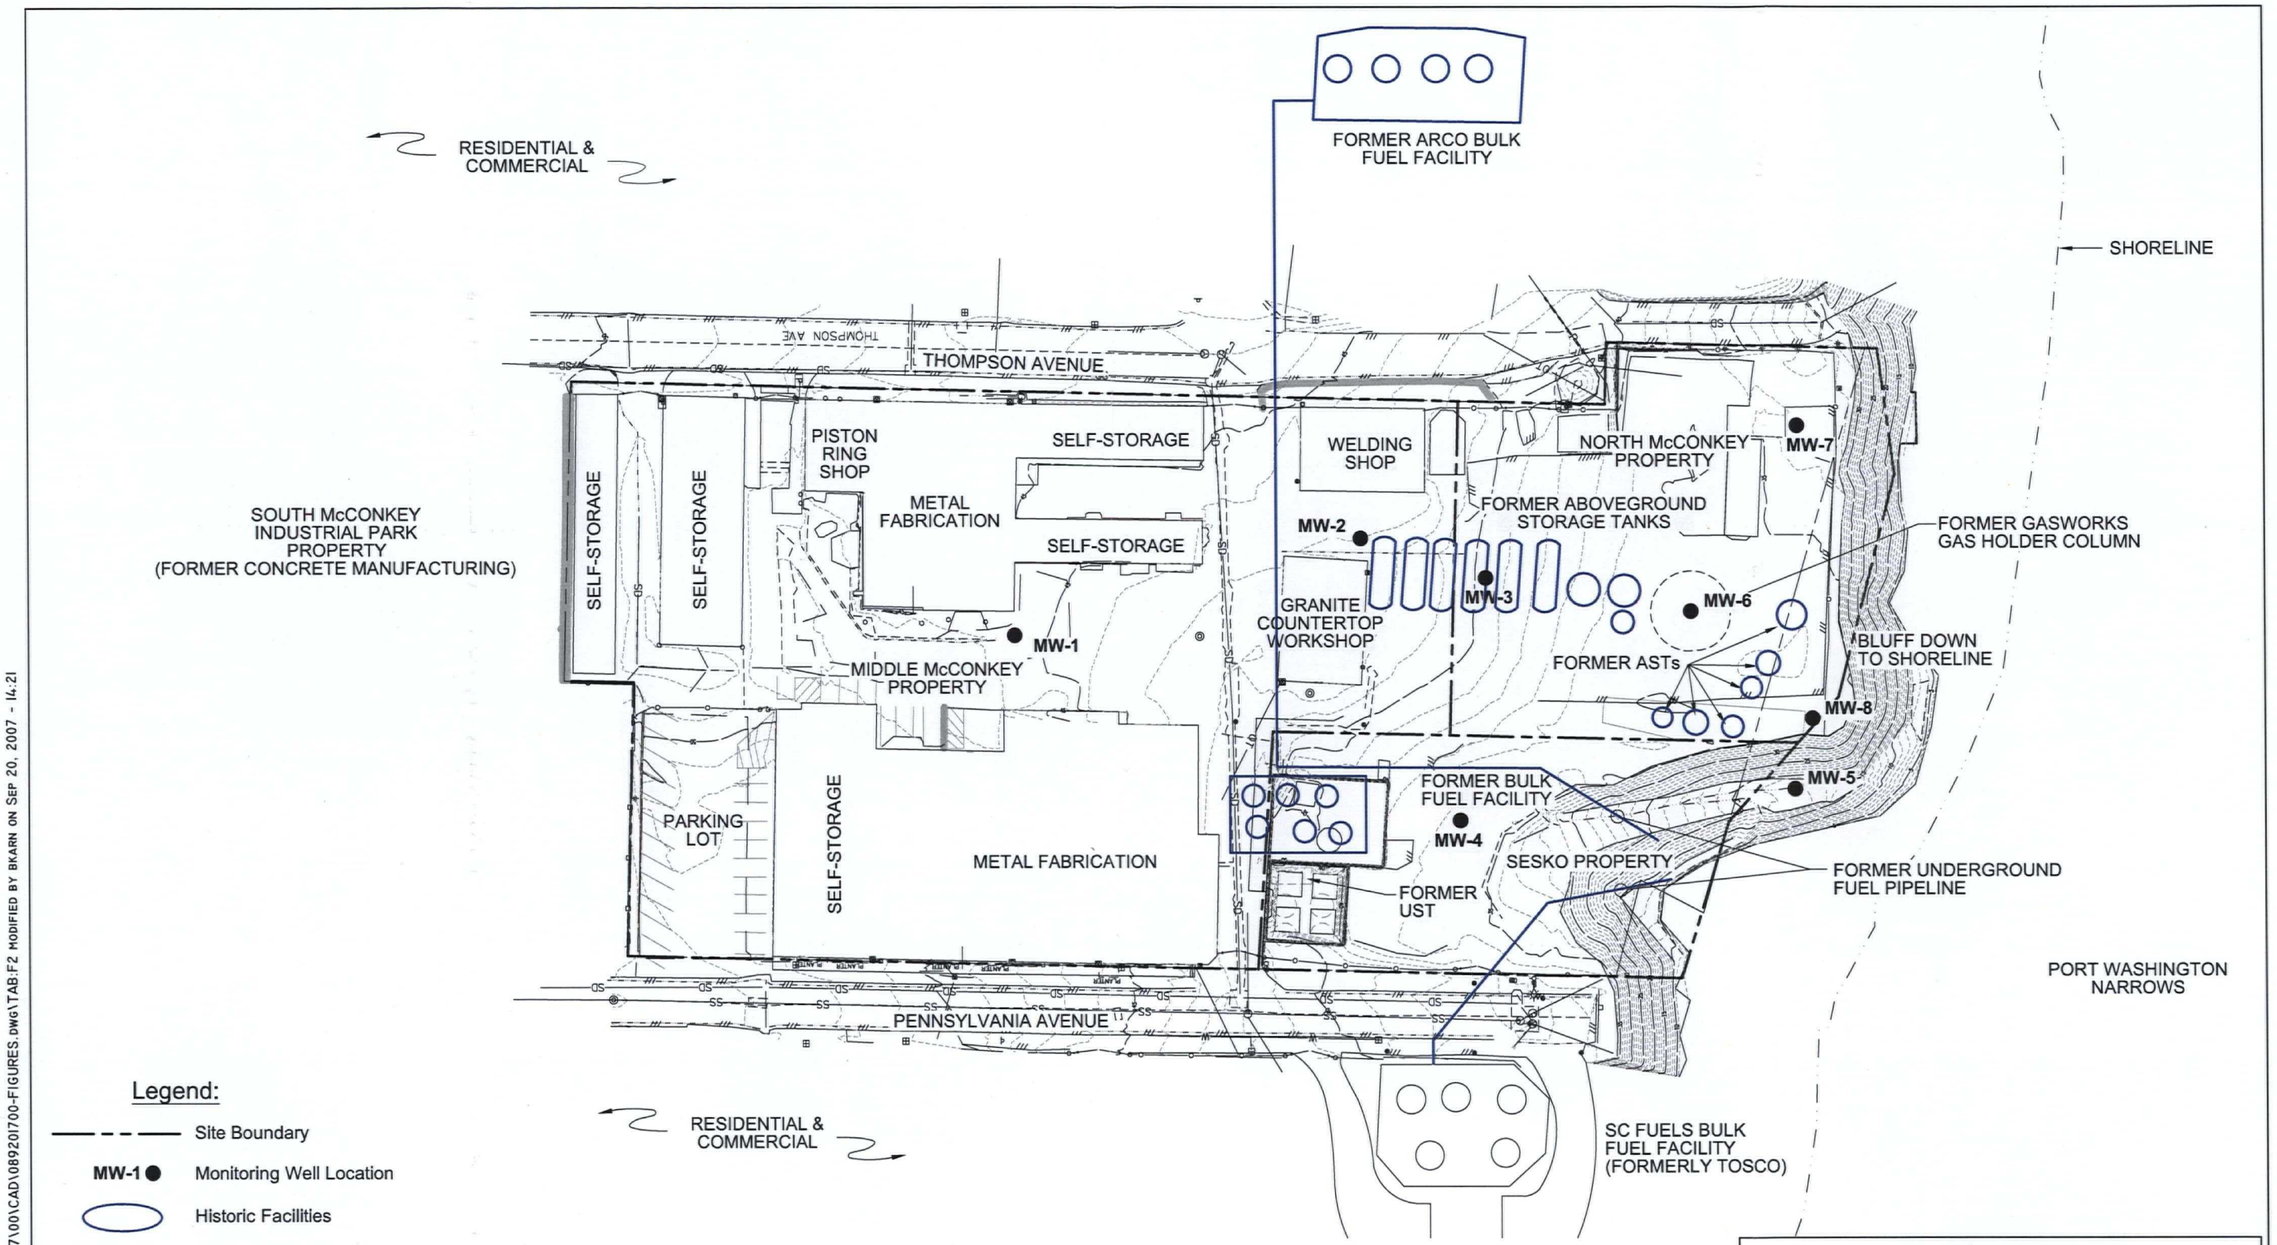

Notes:

1. The locations of all features shown are approximate.
2. This drawing is for information purposes. It is intended to assist in showing features discussed in an attached document. GeoEngineers, Inc. can not guarantee the accuracy and content of electronic files. The master file is stored by GeoEngineers, Inc. and will serve as the official record of this communication.

Reference: Base drawing provided by Parametrix (May 2007) and historic features provided by ECI and Techlaw, untitled and undated.

Site Plan

McConkey/Sesko Site
Bremerton, Washington

GEOENGINEERS

Figure 2

W:\SEATTLE\PROJECTS\0\0892017\00\CAD\0892017\00-FIGURES.DWG\TAB:F2 MODIFIED BY BKARN ON SEP 20, 2007 - 14:21

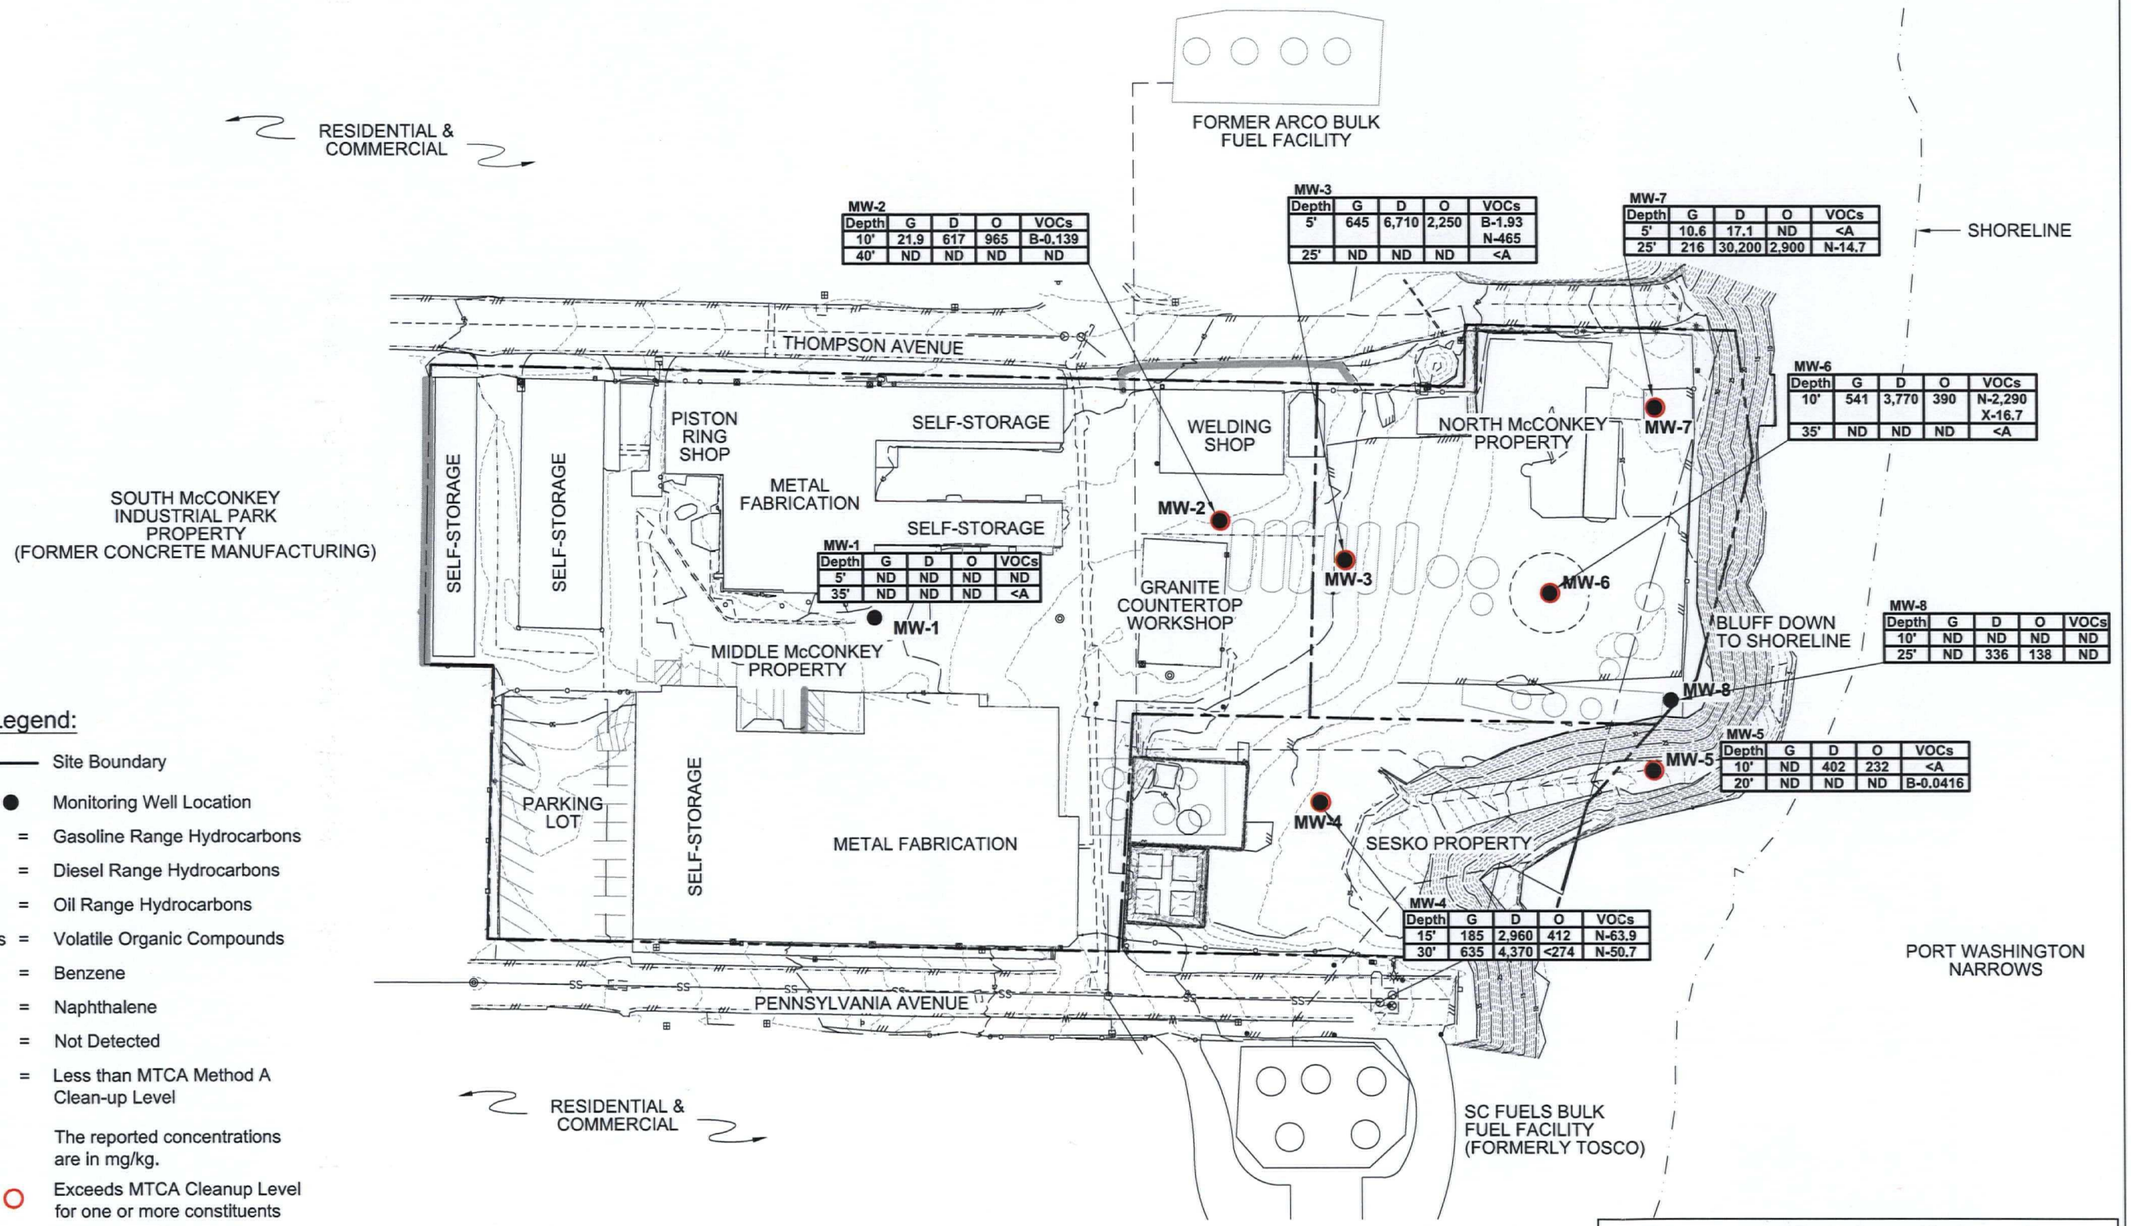

MW-2

Depth	G	D	O	VOCs
10'	21.9	617	965	B-0.139
40'	ND	ND	ND	ND

MW-3

Depth	G	D	O	VOCs
5'	645	6,710	2,250	B-1.93 N-465
25'	ND	ND	ND	<A

MW-7

Depth	G	D	O	VOCs
5'	10.6	17.1	ND	<A
25'	216	30,200	2,900	N-14.7

MW-6

Depth	G	D	O	VOCs
10'	541	3,770	390	N-2,290 X-16.7
35'	ND	ND	ND	<A

MW-1

Depth	G	D	O	VOCs
5'	ND	ND	ND	ND
35'	ND	ND	ND	<A

MW-8

Depth	G	D	O	VOCs
10'	ND	ND	ND	ND
25'	ND	336	138	ND

MW-5

Depth	G	D	O	VOCs
10'	ND	402	232	<A
20'	ND	ND	ND	B-0.0416

MW-4

Depth	G	D	O	VOCs
15'	185	2,960	412	N-63.9
30'	635	4,370	<274	N-50.7

Legend:

- Site Boundary
- MW-1 ● Monitoring Well Location
- G = Gasoline Range Hydrocarbons
- D = Diesel Range Hydrocarbons
- O = Oil Range Hydrocarbons
- VOCs = Volatile Organic Compounds
- B = Benzene
- N = Naphthalene
- ND = Not Detected
- <A = Less than MTCA Method A Clean-up Level

The reported concentrations are in mg/kg.

○ Exceeds MTCA Cleanup Level for one or more constituents

Notes:

1. The locations of all features shown are approximate.
2. This drawing is for information purposes. It is intended to assist in showing features discussed in an attached document. GeoEngineers, Inc. can not guarantee the accuracy and content of electronic files. The master file is stored by GeoEngineers, Inc. and will serve as the official record of this communication.

Reference: Base drawing provided by Parametrix (May 2007) and historic features provided by ECI and Techlaw, untitled and undated.

70 0 70
FEET

Summary of Petroleum Hydrocarbon and VOC Data for Soil

McConkey/Sesko Site
Bremerton, Washington

GEOENGINEERS

Figure 3

W:\SEATTLE\PROJECTS\0\0892017\00\CAD\089201700-FIGURES.DWG\TAB:F3 MODIFIED BY BKARN ON SEP 20, 2007 - 14:22

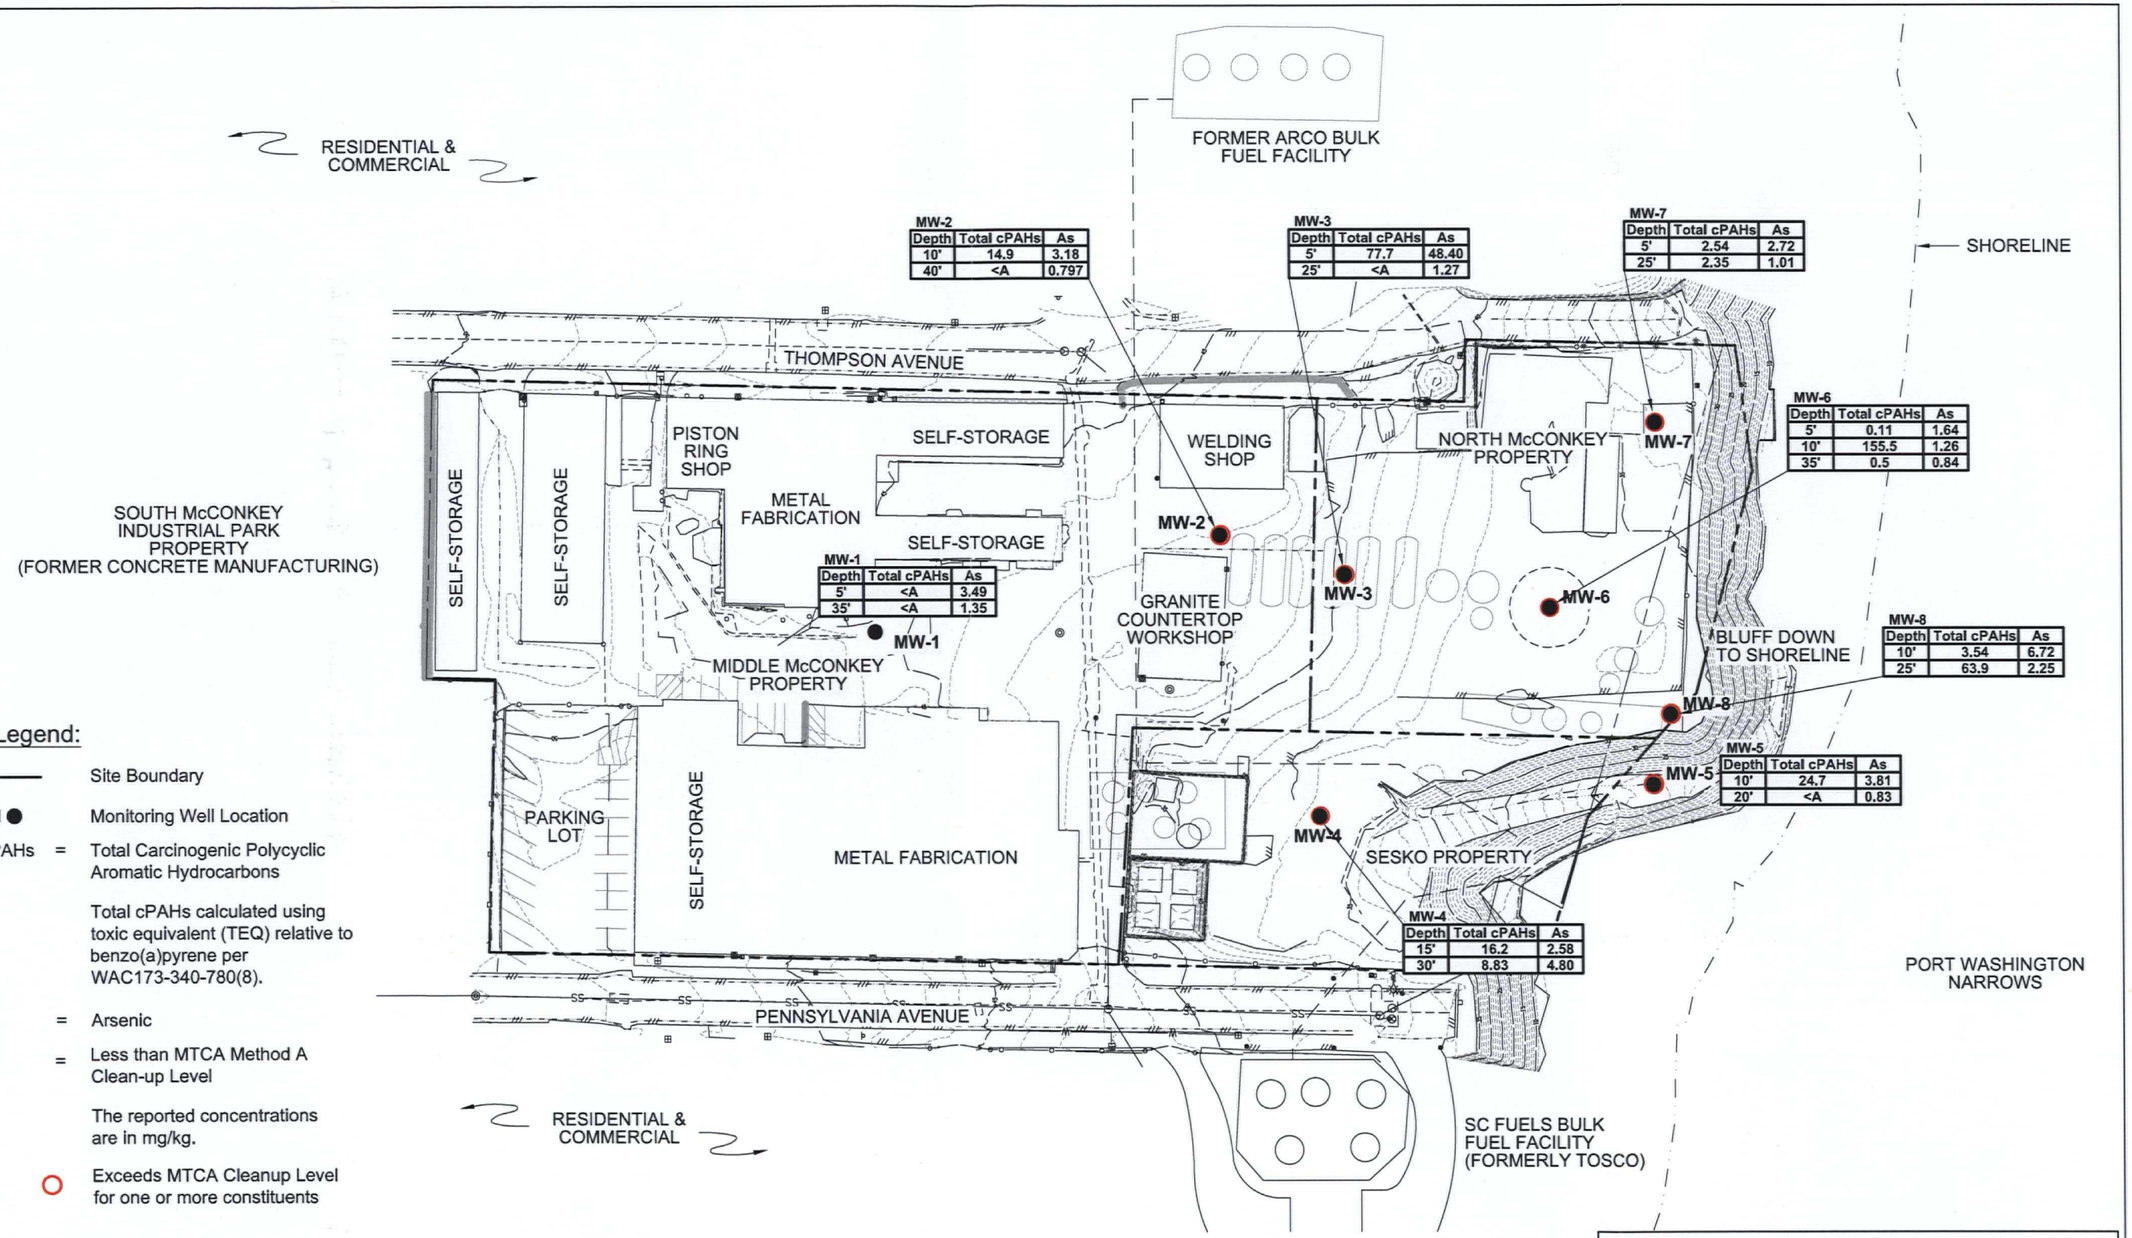

MW-2

Depth	Total cPAHs	As
10'	14.9	3.18
40'	<A	0.797

MW-3

Depth	Total cPAHs	As
5'	77.7	48.40
25'	<A	1.27

MW-7

Depth	Total cPAHs	As
5'	2.54	2.72
25'	2.35	1.01

MW-6

Depth	Total cPAHs	As
5'	0.11	1.64
10'	155.5	1.26
35'	0.5	0.84

MW-1

Depth	Total cPAHs	As
5'	<A	3.49
35'	<A	1.35

MW-8

Depth	Total cPAHs	As
10'	3.54	6.72
25'	63.9	2.25

MW-5

Depth	Total cPAHs	As
10'	24.7	3.81
20'	<A	0.83

MW-4

Depth	Total cPAHs	As
15'	16.2	2.58
30'	8.83	4.80

Legend:

— — —		Site Boundary
MW-1 ●		Monitoring Well Location
Total cPAHs	=	Total Carcinogenic Polycyclic Aromatic Hydrocarbons
		Total cPAHs calculated using toxic equivalent (TEQ) relative to benzo(a)pyrene per WAC173-340-780(8).
As	=	Arsenic
<A	=	Less than MTCA Method A Clean-up Level
		The reported concentrations are in mg/kg.
○		Exceeds MTCA Cleanup Level for one or more constituents

Notes:

1. The locations of all features shown are approximate.
2. This drawing is for information purposes. It is intended to assist in showing features discussed in an attached document. GeoEngineers, Inc. can not guarantee the accuracy and content of electronic files. The master file is stored by GeoEngineers, Inc. and will serve as the official record of this communication.

Reference: Base drawing provided by Parametrix (May 2007) and historic features provided by ECI and Techlaw, untitled and undated.

70 0 70
FEET

Summary of cPAH and Arsenic Data for Soil

McConkey/Sesko Site
Bremerton, Washington

GEOENGINEERS

Figure 4

W:\SEATTLE\PROJECTS\0\0892017\00\CAD\0892017\00-FIGURES.DWG\TAB:F4 MODIFIED BY BKARN ON SEP 20, 2007 - 14:22

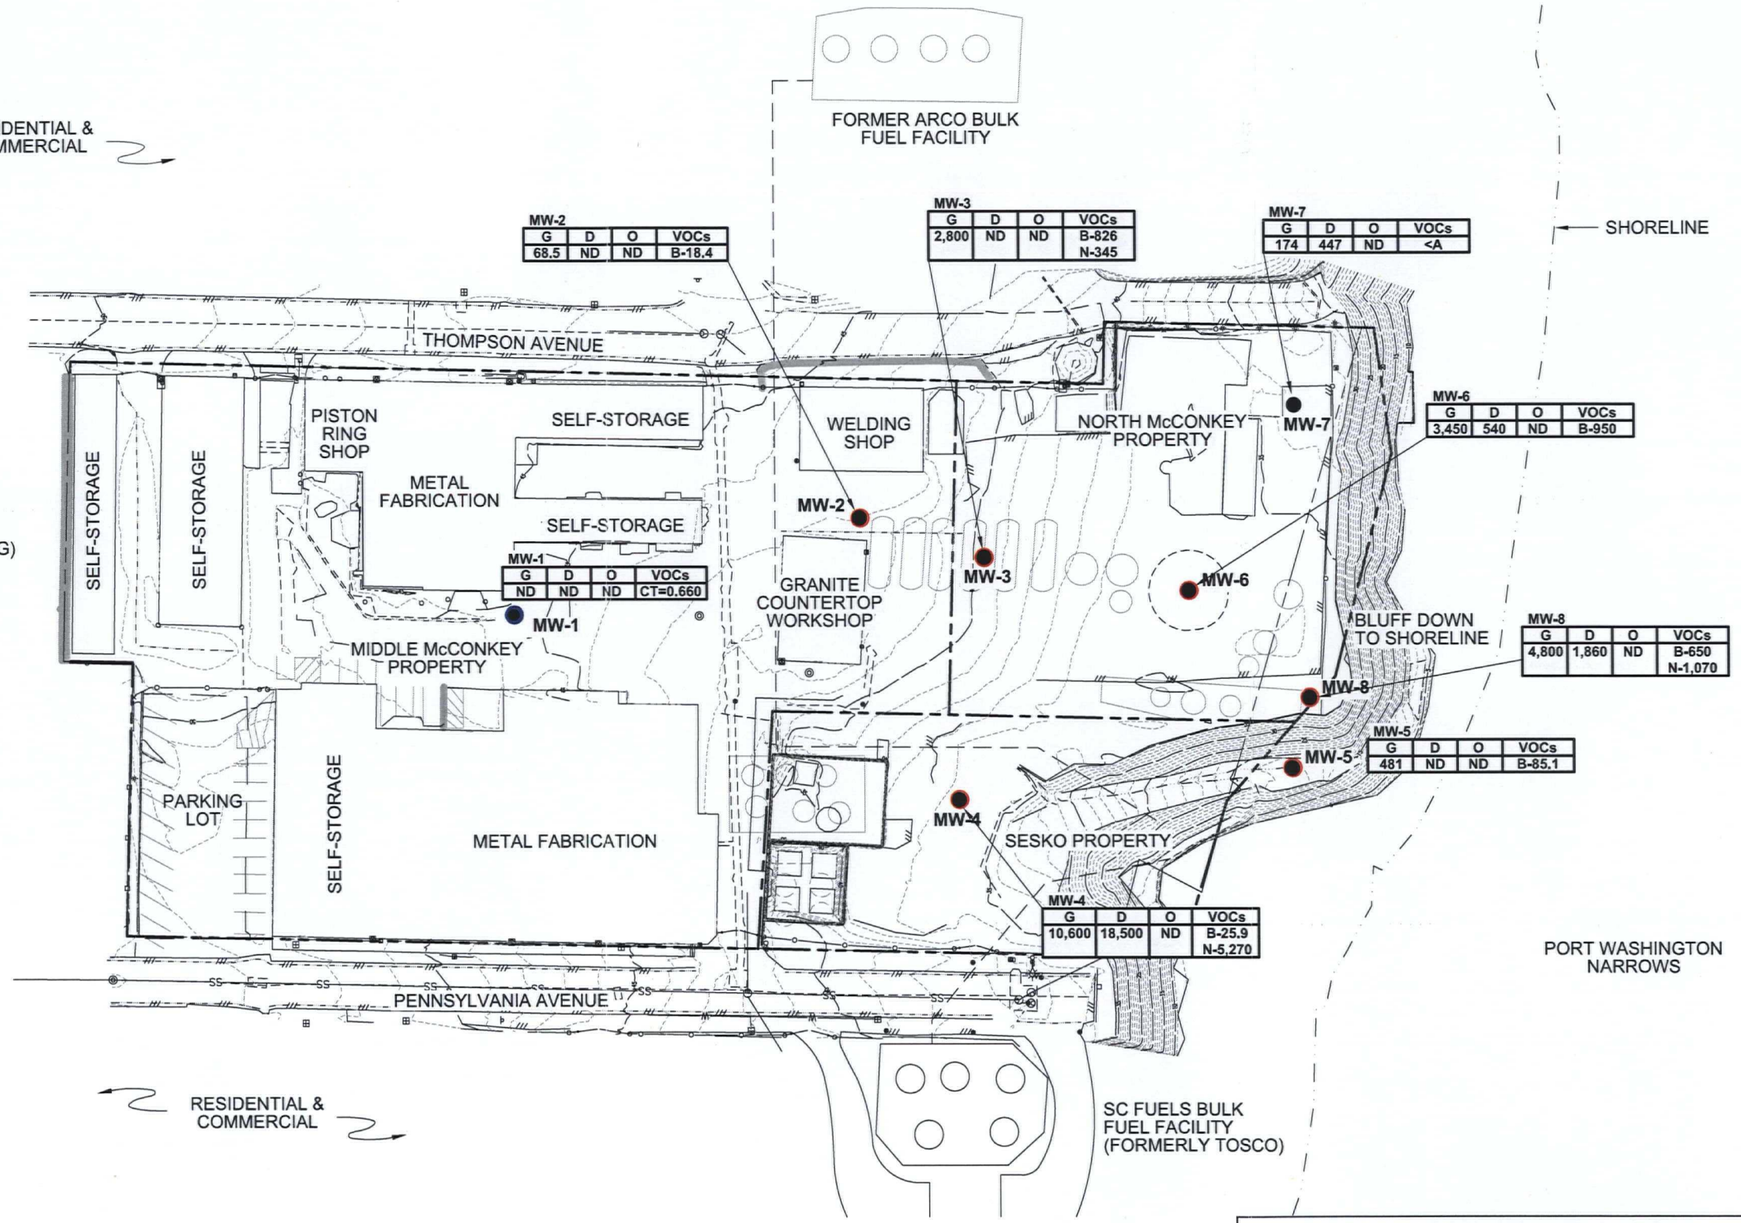

Legend:

- Site Boundary
- MW-1 ● Monitoring Well Location
- G = Gasoline Range Hydrocarbons
- D = Diesel Range Hydrocarbons
- O = Oil Range Hydrocarbons
- CT = Carbon Tetracholride
- VOCs = Volatile Organic Compounds
- B = Benzene
- N = Naphthalene
- ND = Not Detected
- <A = Less than MTCA Method A Clean-up Level

The reported concentrations are in µg/L.

- ○ Exceeds MTCA Cleanup Level for hydrocarbons
- ○ Exceeds MTCA Cleanup Level for carbon tetrachloride

Notes:

1. The locations of all features shown are approximate.
2. This drawing is for information purposes. It is intended to assist in showing features discussed in an attached document. GeoEngineers, Inc. can not guarantee the accuracy and content of electronic files. The master file is stored by GeoEngineers, Inc. and will serve as the official record of this communication.

Reference: Base drawing provided by Parametrix (May 2007) and historic features provided by ECI and Techlaw, untitled and undated.

Summary of Petroleum Hydrocarbon and VOC Data for Groundwater

McConkey/Sesko Site
Bremerton, Washington

GEOENGINEERS

Figure 5

W:\SEATTLE\PROJECTS\0\0892017\00\CAD\089201700-FIGURES.DWG\TAB:F5 MODIFIED BY BKARN ON SEP 20, 2007 - 14:22

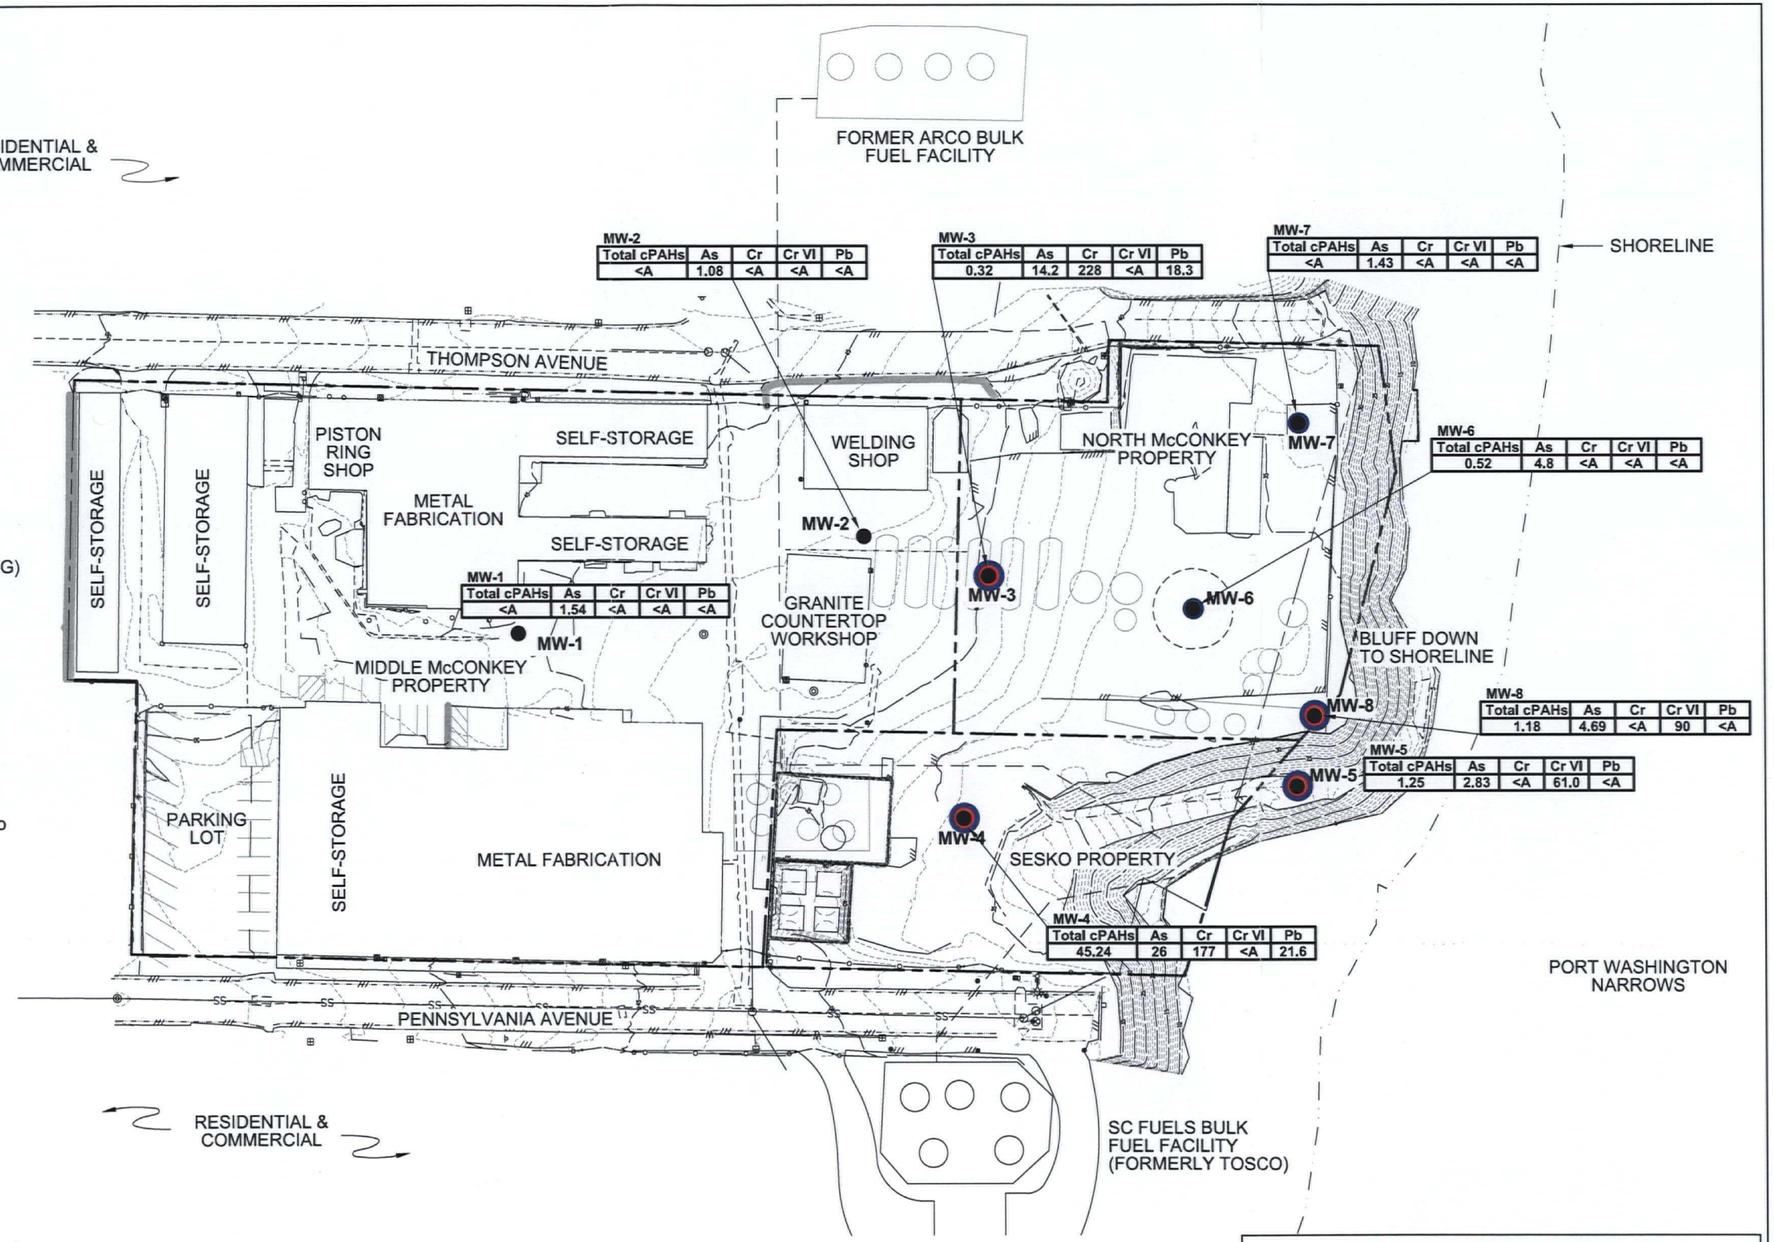

MW-2				
Total cPAHs	As	Cr	Cr VI	Pb
<A	1.08	<A	<A	<A

MW-3				
Total cPAHs	As	Cr	Cr VI	Pb
0.32	14.2	228	<A	18.3

MW-7				
Total cPAHs	As	Cr	Cr VI	Pb
<A	1.43	<A	<A	<A

MW-6				
Total cPAHs	As	Cr	Cr VI	Pb
0.52	4.8	<A	<A	<A

MW-1				
Total cPAHs	As	Cr	Cr VI	Pb
<A	1.54	<A	<A	<A

MW-8				
Total cPAHs	As	Cr	Cr VI	Pb
1.18	4.69	<A	90	<A

MW-5				
Total cPAHs	As	Cr	Cr VI	Pb
1.25	2.83	<A	61.0	<A

MW-4				
Total cPAHs	As	Cr	Cr VI	Pb
45.24	26	177	<A	21.6

Legend:

- Site Boundary
- MW-1 ● Monitoring Well Location
- Total cPAHs = Total Carcinogenic Polycyclic Aromatic Hydrocarbons
- Total cPAHs calculated using toxic equivalent (TEQ) relative to benzo(a)pyrene per WAC173-340-780(8).
- As = Arsenic
- <A = Less than MTCA Method A Clean-up Level
- The reported concentrations are in µg/L.
- Cr = Chromium
- Cr VI = Hexavalent Chromium
- Pb = Lead
- ○ Exceeds MTCA Cleanup Level for metals
- ○ Exceeds MTCA Cleanup Level for CPAHs

Notes:

1. The locations of all features shown are approximate.
2. This drawing is for information purposes. It is intended to assist in showing features discussed in an attached document. GeoEngineers, Inc. can not guarantee the accuracy and content of electronic files. The master file is stored by GeoEngineers, Inc. and will serve as the official record of this communication.

Reference: Base drawing provided by Parametrix (May 2007) and historic features provided by ECI and Techlaw, untitled and undated.

70 0 70
FEET

Summary of cPAH and Dissolved Metals Data for Groundwater

McConkey/Sesko Site
Bremerton, Washington

GEOENGINEERS

Figure 6

W:\SEATTLE\PROJECTS\0\089201\00\CAD\089201700-FIGURES.DWG\TAB:F6 MODIFIED BY BKARN ON SEP 20, 2007 - 14:23

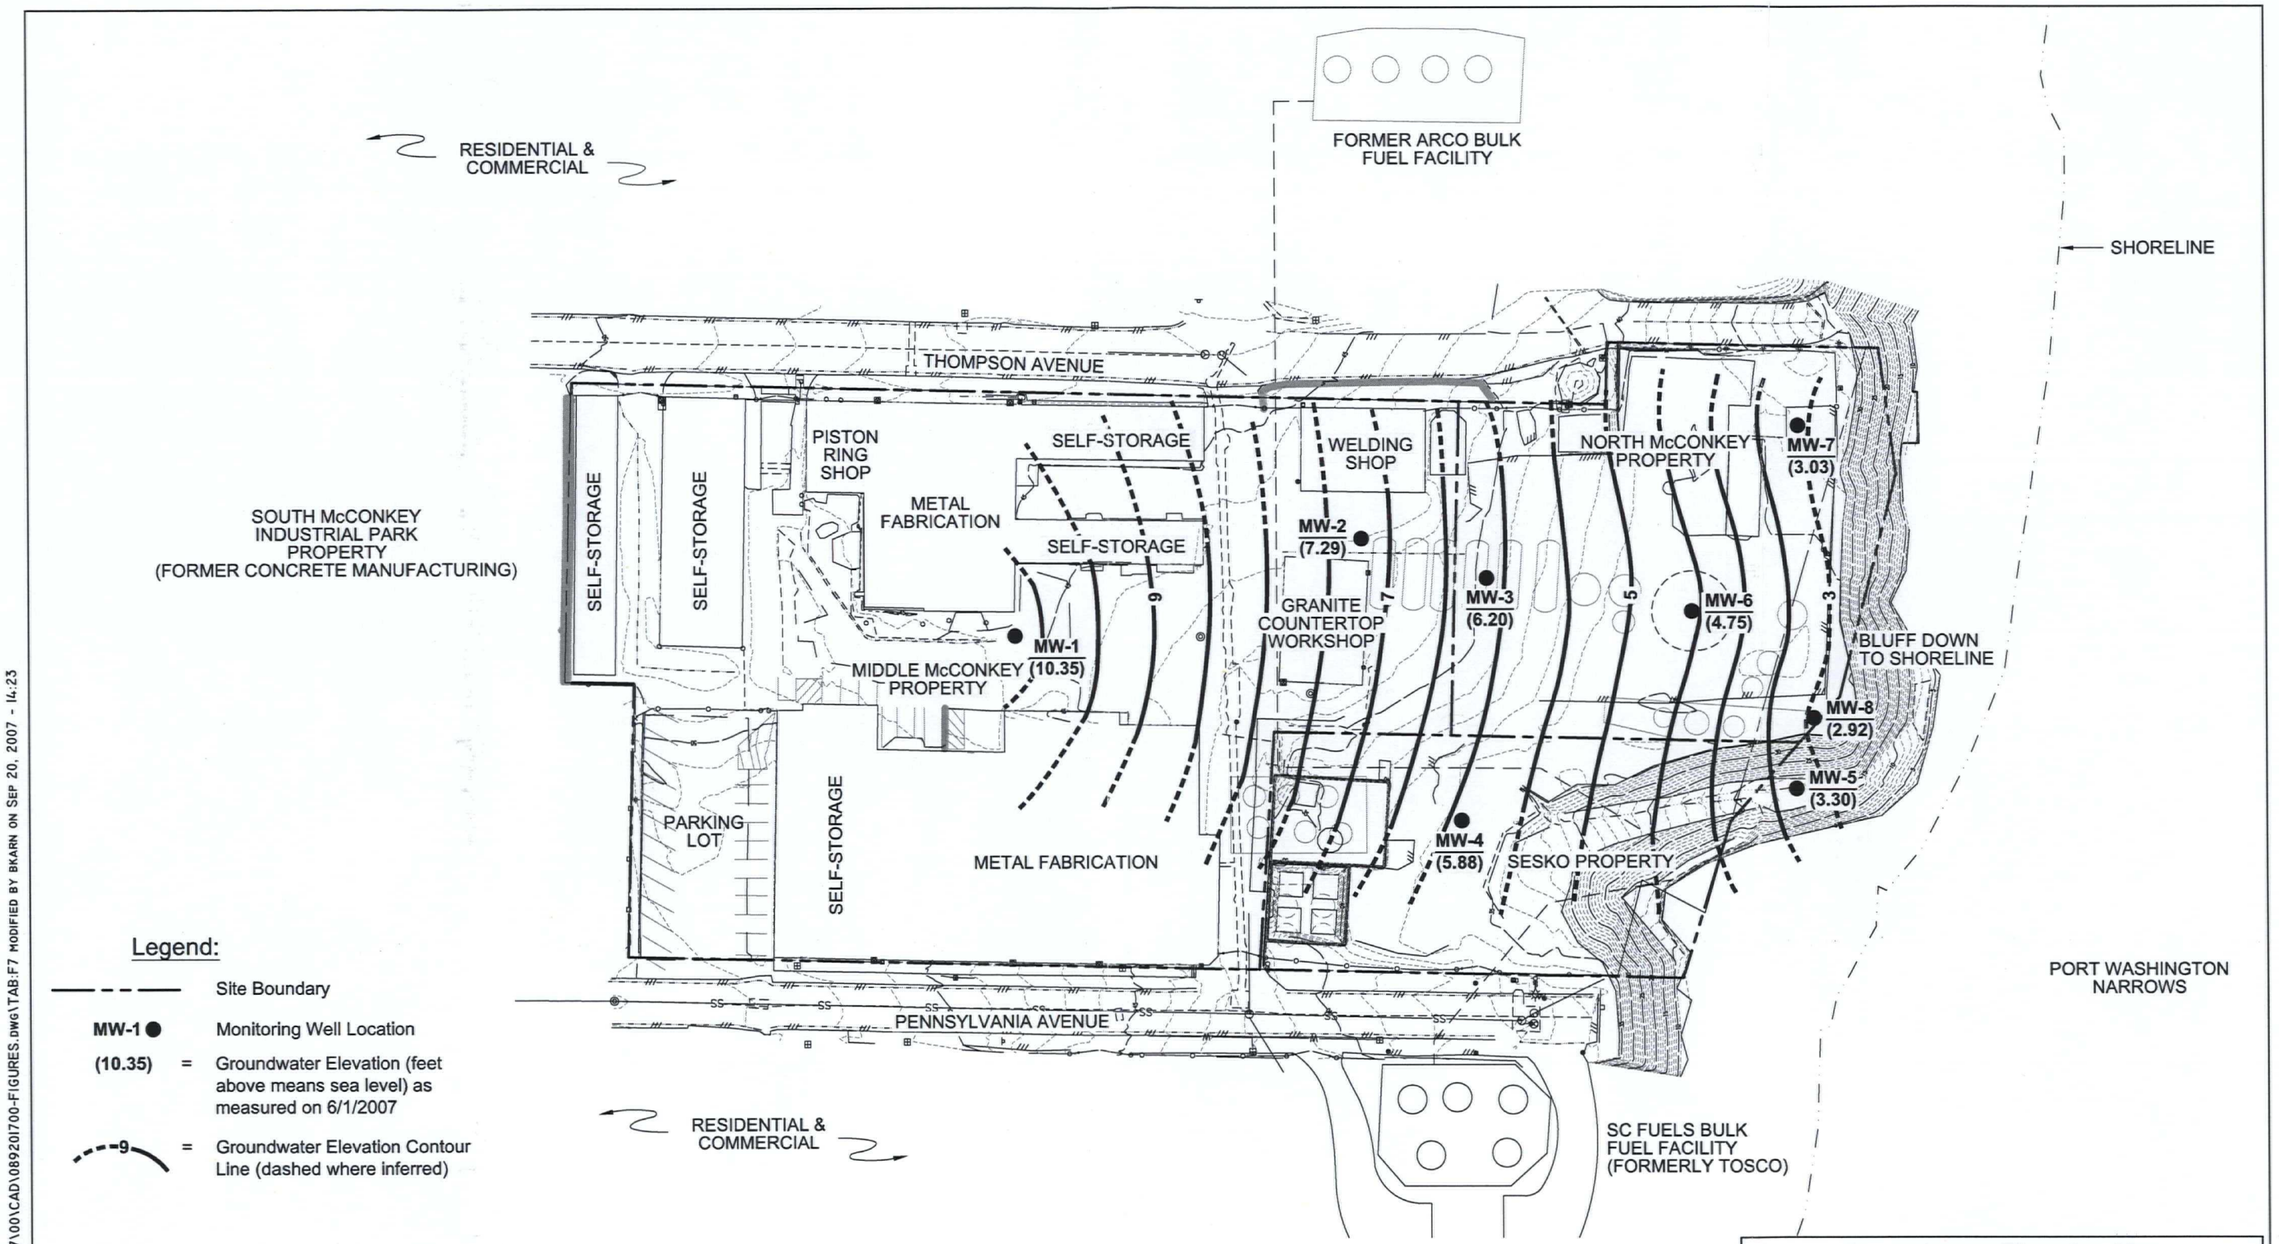

Legend:

— — — —		Site Boundary
MW-1 ●		Monitoring Well Location
(10.35)	=	Groundwater Elevation (feet above means sea level) as measured on 6/1/2007
9	=	Groundwater Elevation Contour Line (dashed where inferred)

Notes:

1. The locations of all features shown are approximate.
2. This drawing is for information purposes. It is intended to assist in showing features discussed in an attached document. GeoEngineers, Inc. can not guarantee the accuracy and content of electronic files. The master file is stored by GeoEngineers, Inc. and will serve as the official record of this communication.

Reference: Base drawing provided by Parametrix (May 2007) and historic features provided by ECI and Techlaw, untitled and undated.

Groundwater Elevation Map (June 1, 2007)

McConkey/Sesko Site
Bremerton, Washington

GEOENGINEERS

Figure 7

W:\SEATTLE\PROJECTS\0\0892017\00\CAD\0892017 00-FIGURES.DWG\TAB:F7 MODIFIED BY BKARN ON SEP 20, 2007 - 14:23

GeoEngineers

Appendix A
Field Procedures

APPENDIX A
FIELD PROCEDURES

GENERAL

Subsurface conditions at the Site were explored by completing eight soil borings and constructing groundwater monitoring wells in these borings using hollow-stem auger drilling equipment. Drilling services were provided by Cascade Drilling, Inc. of Botheil, Washington. A representative from our staff selected the exploration locations, examined and classified the soils encountered, and prepared a detailed log of each exploration. Soils encountered were visually classified in general accordance with ASTM D-2488-94, which is described in Figure A-1. The boring logs are presented in Figures A-2 through A-9. At the request of the State of Washington Department of Archaeology and Historic Preservation, a professional archaeologist from the Army Corps of Engineers was present at the site during the drilling and soil sampling activities. The archaeologist examined the soil cuttings as they were generated during the soil boring operations to evaluate the presence of potential cultural resources at the Site. Based on the archaeological soil screening, no cultural resources were identified.

Drilling and Soil Sampling

The soil borings were completed to depths ranging from approximately 20 to 45 feet bgs. The sampling equipment was decontaminated before each sampling attempt with a Liqui-Nox® solution wash and a distilled water rinse. Soil samples were obtained at 5-foot depth intervals for field screening.

Soil samples obtained from the borings were collected from the sampler with a stainless steel knife or new gloves. The sampler was driven a maximum of 48 inches using a pneumatic hammer. A portion of each sample was placed in a laboratory-prepared sample jar for potential chemical analysis. The sample containers were completely filled to minimize headspace. The remaining portion of each sample was used for field screening. The sampling equipment was decontaminated prior to each use with a Liqui-Nox® soap solution, a tap water initial rinse and a distilled water final rinse.

At least two samples from each boring were selected for chemical analysis based on field screening results and/or the sample location relative to potential sources of contamination. The soil samples were placed in a cooler with ice for transport to the laboratory. Standard chain-of-custody procedures were followed in transporting the soil samples to the laboratory.

FIELD SCREENING OF SOIL SAMPLES

Soil samples obtained from the borings were screened in the field for evidence of contamination using (1) visual examination; (2) sheen screening; and (3) headspace vapor screening with a photo-ionization detector (PID). The results of headspace and sheen screening are included in the boring logs and in Table 1 for soil samples tested by chemical analysis.

Visual screening consists of inspecting the soil for stains indicative of petroleum-related contamination. Visual screening is generally more effective when contamination is related to heavy petroleum hydrocarbons, such as motor oil or hydraulic oil, or when hydrocarbon concentrations are high. Sheen screening and headspace vapor screening are more sensitive methods that have been effective in detecting contamination at concentrations less than regulatory cleanup guidelines.

Sheen screening involves placing soil in a pan of water and observing the water surface for signs of sheen. Sheen classifications are as follows:

No Sheen (NS)	No visible sheen on water surface.
Slight Sheen (SS)	Light, colorless, dull sheen; spread is irregular, not rapid; sheen dissipates rapidly.
Moderate Sheen (MS)	Light to heavy sheen, may have some color/iridescence; spread is irregular to flowing; few remaining areas of no sheen on water surface.
Heavy Sheen (HS)	Heavy sheen with color/iridescence; spread is rapid; entire water surface may be covered with sheen.

Headspace vapor screening involves placing a soil sample in a plastic sample bag. Air is captured in the bag and the bag is shaken to expose the soil to the air trapped in the bag. The probe of a PID is inserted in the bag and the instrument measures the concentration of combustible vapor in the air removed from the sample headspace. The PID measures concentrations in ppm but is calibrated with to isobutylene. The PID is designed to quantify combustible gas and organic vapor concentrations in the range between 100 2,500 ppm. Field screening results are site-specific and vary with soil type, soil moisture content, temperature and type of contaminant.

GROUNDWATER SAMPLE COLLECTION

Groundwater samples were obtained from monitoring wells MW-1 through MW-8 using low-flow groundwater sampling methods. New downhole polyethylene tubing and a peristaltic pump were used to obtain the water samples. Prior to sample collection, each monitoring well was purged until consistent values (i.e., less than 10% variance between consecutive readings) were obtained for pH, temperature, dissolved oxygen, and conductivity. The water samples were transferred to clean laboratory-prepared containers provided by the analytical laboratory. Laboratory prepared bottles were completely filled to eliminate headspace and were kept cool during transport to the testing laboratory. Chain-of-custody procedures were observed during transport of the samples to the testing laboratory.

SOIL CLASSIFICATION CHART

MAJOR DIVISIONS			SYMBOLS GRAPH	SYMBOLS LETTER	TYPICAL DESCRIPTIONS
COARSE GRAINED SOILS MORE THAN 50% RETAINED ON NO. 200 SIEVE	GRAVEL AND GRAVELLY SOILS MORE THAN 50% OF COARSE FRACTION RETAINED ON NO. 4 SIEVE	CLEAN GRAVELS (LITTLE OR NO FINES)		GW	WELL-GRADED GRAVELS, GRAVEL - SAND MIXTURES
				GP	POORLY-GRADED GRAVELS, GRAVEL - SAND MIXTURES
		GRAVELS WITH FINES (APPRECIABLE AMOUNT OF FINES)		GM	SILTY GRAVELS, GRAVEL - SAND - SILT MIXTURES
				GC	CLAYEY GRAVELS, GRAVEL - SAND - CLAY MIXTURES
	SAND AND SANDY SOILS MORE THAN 50% OF COARSE FRACTION PASSING NO. 4 SIEVE	CLEAN SANDS (LITTLE OR NO FINES)		SW	WELL-GRADED SANDS, GRAVELLY SANDS
				SP	POORLY-GRADED SANDS, GRAVELLY SAND
		SANDS WITH FINES (APPRECIABLE AMOUNT OF FINES)		SM	SILTY SANDS, SAND - SILT MIXTURES
				SC	CLAYEY SANDS, SAND - CLAY MIXTURES
FINE GRAINED SOILS MORE THAN 50% PASSING NO. 200 SIEVE	SILTS AND CLAYS	LIQUID LIMIT LESS THAN 50		ML	INORGANIC SILTS, ROCK FLOUR, CLAYEY SILTS WITH SLIGHT PLASTICITY
				CL	INORGANIC CLAYS OF LOW TO MEDIUM PLASTICITY, GRAVELLY CLAYS, SANDY CLAYS, SILTY CLAYS, LEAN CLAYS
				OL	ORGANIC SILTS AND ORGANIC SILTY CLAYS OF LOW PLASTICITY
	SILTS AND CLAYS	LIQUID LIMIT GREATER THAN 50		MH	INORGANIC SILTS, MICACEOUS OR DIATOMACEOUS SILTY SOILS
				CH	INORGANIC CLAYS OF HIGH PLASTICITY
				OH	ORGANIC CLAYS AND SILTS OF MEDIUM TO HIGH PLASTICITY
HIGHLY ORGANIC SOILS				PT	PEAT, HUMUS, SWAMP SOILS WITH HIGH ORGANIC CONTENTS

NOTE: Multiple symbols are used to indicate borderline or dual soil classifications

ADDITIONAL MATERIAL SYMBOLS

SYMBOLS GRAPH	SYMBOLS LETTER	TYPICAL DESCRIPTIONS
	CC	Cement Concrete
	AC	Asphalt Concrete
	CR	Crushed Rock/ Quarry Spalls
	TS	Topsoil/ Forest Duff/Sod

Measured groundwater level in exploration, well, or piezometer

Groundwater observed at time of exploration

Perched water observed at time of exploration

Measured free product in well or piezometer

Stratigraphic Contact

Distinct contact between soil strata or geologic units

Gradual change between soil strata or geologic units

Approximate location of soil strata change within a geologic soil unit

Sampler Symbol Descriptions

2.4-inch I.D. split barrel

Standard Penetration Test (SPT)

Shelby tube

Piston

Direct-Push

Bulk or grab

Blowcount is recorded for driven samplers as the number of blows required to advance sampler 12 inches (or distance noted). See exploration log for hammer weight and drop.

A "P" indicates sampler pushed using the weight of the drill rig.

Laboratory / Field Tests

%F	Percent fines
AL	Atterberg limits
CA	Chemical analysis
CP	Laboratory compaction test
CS	Consolidation test
DS	Direct shear
HA	Hydrometer analysis
MC	Moisture content
MD	Moisture content and dry density
OC	Organic content
PM	Permeability or hydraulic conductivity
PP	Pocket penetrometer
SA	Sieve analysis
TX	Triaxial compression
UC	Unconfined compression
VS	Vane shear

Sheen Classification

NS	No Visible Sheen
SS	Slight Sheen
MS	Moderate Sheen
HS	Heavy Sheen
NT	Not Tested

NOTE: The reader must refer to the discussion in the report text and the logs of explorations for a proper understanding of subsurface conditions. Descriptions on the logs apply only at the specific exploration locations and at the time the explorations were made; they are not warranted to be representative of subsurface conditions at other locations or times.

KEY TO EXPLORATION LOGS

GEOENGINEERS

FIGURE A-1

Date(s) Drilled	05/21/07	Logged By	MSL	Checked By	MSL
Drilling Contractor	Cascade Drilling	Drilling Method	HSA	Sampling Methods	Dames & Moore
Auger Data	4¼-inch ID	Hammer Data	300 lb hammer/30 in drop	Drilling Equipment	OME 75
Total Depth (ft)	46.5	Surface Elevation (ft)	45.03	Groundwater Elevation (ft)	7.03
Vertical Datum		Datum/ System	NAVD88	Easting(x): Northing(y):	

Elevation feet	Depth feet	SAMPLES Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
45	0								AS	Asphalt			
									ML	Brown silt with fine sand and fine gravel (loose, wet) (fill)			
40	5		18	30	1	CA			ML	Brown silt with fine sand (very stiff, moist) (fill)	NS	0.0	
35	10		18	48	2				SM	Brown silty fine to medium sand (very dense, moist)	NS	42.9	
30	15		18	65	3						NS	17.3	
25	20		18	44	4				SM	Brown silty fine to medium sand (very dense, moist)	NS-SS	26.0	
20	25		18	72	5				SP-SM	Brown fine to medium sand with silt (very dense, moist)	NS	42.3	
	30												

Note: See Figure A-1 for explanation of symbols.

LOG OF MONITORING WELL MW-1

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-2
Sheet 1 of 2

V6_ENVBORING W:\SEATTLE\PROJECTS\0\0892017\00\FINALS\0892017 00.GPJ GEIV6_1.GDT 9/20/07

Elevation feet	Depth feet	SAMPLES Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
15	30		18	65	6						NS	49.4	
10	35		18	68	7	CA			SM	Brown silty fine sand (very dense, moist)	NS-SS	74.1	
									SP-SM	Brown fine to medium sand with silt (very dense, moist)			
5	40		18	10	8				GM	Brown fine to coarse gravel with well-graded sand and silt (very dense, wet)	SS	21.0	
									GM	Brown silty fine gravel with well graded sand (very dense, wet)			
0	45		18	6	9						NS-SS	23.7	
-5	50												
-10	55												
-15	60												
-20	65												

V6_ENVBORING W:\SEATTLE\PROJECTS\0892017\00\FINALS\0892017 00.GPJ GEIV6_1.GDT 9/20/07

LOG OF MONITORING WELL MW-1 (continued)

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-2
Sheet 2 of 2

Date(s) Drilled	05/21/07	Logged By	MSL	Checked By	MSL
Drilling Contractor	Cascade Drilling	Drilling Method	HSA	Sampling Methods	Dames & Moore
Auger Data	4¼-Inch ID	Hammer Data	300 lb hammer/30 in drop	Drilling Equipment	CME 75
Total Depth (ft)	46.5	Surface Elevation (ft)	42.54	Groundwater Elevation (ft)	4.54
Vertical Datum		Datum/ System	NAVD88	Easting(x): Northing(y):	

Elevation feet	Depth feet	SAMPLES Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
	0								AS	Asphalt			
									ML	Gray to brown silt with fine sand and trace gravel (stiff, moist) (fill)			
40													
	5		18	13	1	CA					SS	81.8	Creosote-like odor
35													
									SM	Brown silty fine to medium sand (medium dense, moist) (fill)			
	10		18	15	2						MS	13.6	Black staining; creosote-like odor
									SM	Light brown silty fine sand with trace coarse gravel (medium dense, moist) (fill)			
30													
									SM	Brown silty fine to medium sand (dense, moist)			
	15		18	45	3						NS-SS	9.1	
25													
	20		18	52	4					Becomes very dense	NS	19.4	
20													
	25		18	65	5	CA					NS	18.3	
15													
									GM	Brown well-graded silty gravel with sand (very dense, moist)			
	30												

Note: See Figure A-1 for explanation of symbols.

V6_ENVBORING W:\SEATTLE\PROJECTS\0892017\00\FINALS\089201700.GPJ GEIV6_1.GDT 9/20/07

LOG OF MONITORING WELL MW-2

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-3
Sheet 1 of 2

Elevation feet	Depth feet	SAMPLES: Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
	30		10		6						NS	35.2	
10									SM	Brown silty fine sand with trace fine gravel (very dense, wet)			
	35		2		7						NS	8.6	
5							▼						
	40		10		8						NS	25.0	
0													
	45		10		9						NS	43.3	
-5													
	50												
-10													
	55												
-15													
	60												
-20													
	65												

V6_ENVBORING W:\SEATTLE\PROJECTS\0\0892017\00\FINALS\089201700.GPJ GEIV6_1.GDT 9/20/07

LOG OF MONITORING WELL MW-2 (continued)

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-3
Sheet 2 of 2

Date(s) Drilled	05/22/07	Logged By	MSL	Checked By	MSL
Drilling Contractor	Cascade Drilling	Drilling Method	HSA	Sampling Methods	Dames & Moore
Auger Data	4¼-inch ID	Hammer Data	300 lb hammer/30 in drop	Drilling Equipment	CME 75
Total Depth (ft)	46.5	Surface Elevation (ft)	39.10	Groundwater Elevation (ft)	4.1
Vertical Datum		Datum/ System	NAVD88	Easting(x): Northing(y):	

Elevation feet	Depth feet	SAMPLES Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
	0								AS	Asphalt			
									SM	Brown silty fine to medium sand with occasional gravel (dense, moist) (fill)			
35													
	5		18	25	1	CA					SS	>2,000	Dark staining creosote-like/solvent odor
									ML	Gray silt with fine sand and occasional gravel (very stiff, moist) (fill)			
30													
	10		18	48	2				SM	Brown silty fine to medium sand (very dense, moist)	SS-NS	469	Dark staining
									MH	Brown silt with fine to medium sand (hard, moist)			
25													
	15		18	45	3				SM	Brown silty fine to medium sand with occasional gravel (very dense, moist)	NS-SS	32.1	
20													
	20		18	52	4						NS	903	
15													
	25		18	62	5	CA			SP-SM	Gray fine to medium sand with silt (very dense, moist)	NS	>2,000	
10									SM	Gray silty fine to medium sand (very dense, moist)			
	30												

Note: See Figure A-1 for explanation of symbols.

LOG OF MONITORING WELL MW-3

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-4
Sheet 1 of 2

V6_ENVBORING W:\SEATTLE\PROJECTS\0\0892017\00\FINALS\0892017 00.GPJ GEIV6_1.GDT 9/20/07

Elevation feet	Depth feet	SAMPLES Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
	30		18	63	6						NS	500	
-5													
	35		18	50/6"	7		▼		ML	Brown sandy silt (very stiff, moist)	NS	872	(very little recovery)
									SP-SM	Gray fine to medium sand with silt (very dense, wet)			
-0													
	40		18	50/4"	8						NS	42.5	
-5													
	45		ND	50/4"	9						NS	63.0	
-10	50												
-15	55												
-20	60												
-25	65												

V6_ENVBORING W:\SEATTLE\PROJECTS\0892017\00\FINALS\0892017\00.GPJ GEIV6_1.GDT 9/20/07

LOG OF MONITORING WELL MW-3 (continued)

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-4
Sheet 2 of 2

Date(s) Drilled	05/23/07	Logged By	MSL	Checked By	MSL
Drilling Contractor	Cascade Drilling	Drilling Method	HSA	Sampling Methods	Dames & Moore
Auger Data	4¼-inch ID	Hammer Data	300 lb hammer/30 in drop	Drilling Equipment	CME 75
Total Depth (ft)	41.5	Surface Elevation (ft)	35.20	Groundwater Elevation (ft)	6.2
Vertical Datum		Datum/ System	NAVD88	Easting(x): Northing(y):	

Elevation feet	Depth feet	SAMPLES Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
35	0								GM	Brown silty well-graded gravel with well-graded sand (medium dense, moist) (fill)			
30	5		16	18	1						SS	35.9	
25	10		18	18	2						NS-SS	94.9	
									SM	Dark brown to black silty fine to medium sand with gravel (very dense, moist) (fill)			
20	15		18	58	3	CA					HS	76.9	
									ML	Black to gray silt with sand and gravel (very stiff, moist)			
									ML	Brown to gray sandy silt (hard, moist)			
15	20		18	63	4						NS-SS	12.2	
									ML	Gray silt with trace fine sand (hard, moist)			
10	25		18	65	5						NS	128	(diesel odor)
									GM	Gray silty well-graded gravel with well-graded sand (very dense, wet)			
	30												

Note: See Figure A-1 for explanation of symbols.

LOG OF MONITORING WELL MW-4

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-5
Sheet 1 of 2

V6_ENVBORING W:\SEATTLE\PROJECTS\0\0892017\00\FINALS\089201700.GPJ GEIV6_1.GDT 9/20/07

Elevation feet	Depth feet	SAMPLES: Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
-5	30		ND	50/3"	6	CA					HS	646	(strong gas/diesel odor, product observed on grains)
									SM	Gray silty fine to medium sand (very dense, wet)			
0	35		ND	50/	7						MS	129	
									ML	3 inches gray silt (hard, wet)			
									SP-SM	Gray fine to medium sand with silt (very dense, wet)			
-5	40		ND	50/	8						SS-MS	40.9	
-10	45												
-15	50												
-20	55												
-25	60												
-30	65												

V6_ENVBORING W:\SEATTLE\PROJECTS\0\0892017\00\FINALS\0892017 00.GPJ GEIV6_1.GDT 9/20/07

LOG OF MONITORING WELL MW-4 (continued)

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-5
Sheet 2 of 2

Date(s) Drilled	05/24/07	Logged By	MSL	Checked By	MSL
Drilling Contractor	Cascade Drilling	Drilling Method	HSA	Sampling Methods	Dames & Moore
Auger Dala	4¼-inch ID	Hammer Data	300 lb hammer/30 in drop	Drilling Equipment	OME 75
Tolal Depth (ft)	21.5	Surface Elevation (ft)	18.51	Groundwater Elevation (ft)	Not Encountered
Vertical Datum		Datum/ Syslem	NAVD88	Easling(x): Northing(y):	

Elevation feet	Depth feet	SAMPLES Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspaoe Vapor PID (ppb)	NOTES
	0								OL ML	Organic silt with sand and roots (loose, moist) (topsoil) Brown to dark brown sandy silt with occasional gravel (stiff, moist) (fill)			
15													
	5	■	18	14	1						SS-NS	1,426	(bricks, roots)
10									SM	Brown to black silty fine to coarse sand with gravel (medium dense, moist) (fill)			
	10	■	18	22	2	CA					NS-SS		(2 inch layer of fill with charcoal pieces)
5									GM SP	Gray to black concrete pieces and fine to coarse gravel with coarse sand and silt (very dense, moist) (fill) Brown fine to medium sand with trace silt (very dense, wet)			
	15	■	18	50	3						NS		
0									SP	Gray fine to medium sand with trace silt (very dense, wet)			
	20	■	18	50/3"	4	CA					NS		(faint diesel odor)
-5													
	25												
-10													
	30												

Note: See Figure A-1 for explanation of symbols.

LOG OF MONITORING WELL MW-5

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-6
Sheet 1 of 1

V6_ENVBORING W:\SEATTLE\PROJECTS\0892017\00\FINALS\0892017 00.GPJ GEIV6_1.GDT 9/20/07

Date(s) Drilled	05/22/07	Logged By	MSL	Checked By	MSL
Drilling Contractor	Cascade Drilling	Drilling Method	HSA	Sampling Methods	Dames & Moore
Auger Data	4¼-inch ID	Hammer Data	300 lb hammer/30 in drop	Drilling Equipment	CME 75
Total Depth (ft)	36.5	Surface Elevation (ft)	34.95	Groundwater Elevation (ft)	7.95
Vertical Datum		Datum/ System	NAVD88	Easting(x): Northing(y):	

Elevation feet	Depth feet	SAMPLES Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
	0								AC	Concrete			
									CR	Crushed rock mixed with treated wood			
									SM	Brown silty fine to medium sand (dense, moist)			Creosote-like odor and black tar-like substance
30	5		18	32	1	CA					NS	>2,000	
									ML	Brown sandy silt (very stiff, moist)			
25	10		18	50	2	CA					SS-MS	186	Black staining
									SM	Dark brown to black silty fine to medium sand (very dense, moist)			
20	15		18	50	3						SS-MS	151	Sheen with dark black creosote-like staining
									SM	Brown silty fine to medium sand (very dense, moist)			
15	20		18	50	4						NS-SS	28.0	
									ML	Brown to gray interbedded sandy silt with trace gravel (very stiff, moist)			
									GM	Light brown fine to coarse gravel with silt and sand (very dense, moist)			
10	25		14	50/4"	5						NS-SS	108	(diesel odor)
									ML	Brown sandy silt with gravel (hard, moist)			
									SM	Gray fine to medium silty sand (very dense, wet)			
5	30												

Note: See Figure A-1 for explanation of symbols.

LOG OF MONITORING WELL MW-6

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-7
Sheet 1 of 2

V6_ENVBORING W:\SEATTLE\PROJECTS\0\0892017\00\FINALS\08920170O.GPJ GEIV6_1.GDT 9/20/07

Elevation feet	Depth feet	SAMPLES Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
	30		16	76	6						NS-SS	55	(strong gas/diesel odor observed on product grains)
0	35		14	50/4"	7	CA			GM	Gray fine to coarse gravel with sand and silt (very dense, wet)	NS-SS	104.0	
-5	40												
-10	45												
-15	50												
-20	55												
-25	60												
-30	65												

V6_ENVBORING W:\SEATTLE\PROJECTS\0\0892017\00\FINALS\0892017 00.GPJ GEIV6_1.GDT 9/20/07

LOG OF MONITORING WELL MW-6 (continued)

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-7
Sheet 2 of 2

Date(s) Drilled	05/23/07	Logged By	MSL	Checked By	MSL
Drilling Contractor	Cascade Drilling	Drilling Method	HSA	Sampling Methods	Dames & Moore
Auger Data	4¼-inch ID	Hammer Data	300 lb hammer/30 in drop	Drilling Equipment	CME 75
Total Depth (ft)	36.5	Surface Elevation (ft)	33.24	Groundwater Elevation (ft)	6.24
Vertical Datum		Datum/ System	NAVD88	Easting(x): Northing(y):	

Elevation feet	Depth feet	SAMPLES Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
	0								AS	Asphalt			
									GM	Dark brown silty fine gravel with sand (loose, moist) (fill)			
30													
	5	■	18	21	1	CA					SS	183	(strong odor-coal pieces throughout)
									ML	Brown sandy silt with occasional gravel (stiff, moist)			
									SM	Brown silty fine to medium sand with trace gravel (dense, moist)			
25													
									ML	Brown sandy silt with trace coarse gravel (very stiff, moist) (fill)			
	10	■	8	27	2						NS	15.7	
20													
									SM	Brown silty fine to medium sand with occasional fine gravel (very dense, moist)			
	15	■	18	43	3						SS	601	
15													
	20	■	18	63	4						SS	1,086	
10													
									SP-SM	Gray fine to medium sand with silt (very dense, moist)			
	25	■	18	48	5	CA					HS	328	(very strong dieset odor)
							▼		ML	Brown silt with fine sand (very stiff, moist)			
5													
									GM	Brown silty well-graded gravel with sand (very dense, wet)			
	30												

Note: See Figure A-1 for explanation of symbols.

V6_ENVBORING W:\SEATTLE\PROJECTS\0892017\00\FINALS\0892017 00.GPJ GEIV6_1.GDT 9/20/07

LOG OF MONITORING WELL MW-7

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-8
Sheet 1 of 2

Elevation feet	Depth feet	SAMPLES: Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
	30		ND	50/5"	6						NS	50.3	
0													
	35		ND	50/6"	7						NS		
-5													
	40												
-10													
	45												
-15													
	50												
-20													
	55												
-25													
	60												
-30													
	65												

V6_ENVBORING W:\SEATTLE\PROJECTS\0\0892017\00\FINALS\0892017 00.GPJ GEIV6_1.GDT 9/20/07

LOG OF MONITORING WELL MW-7 (continued)

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-8
Sheet 2 of 2

Date(s) Drilled	05/22/07	Logged By	MSL	Checked By	MSL
Drilling Contractor	Cascade Drilling	Drilling Method	HSA	Sampling Methods	Dames & Moore
Auger Data	4¼-inch ID	Hammer Data	300 lb hammer/30 in drop	Drilling Equipment	CME 75
Total Depth (ft)	41.5	Surface Elevation (ft)	35.56	Groundwater Elevation (ft)	6.56
Vertical Datum		Datum/ System	NAVD88	Easting(x): Northing(y):	

Elevation feet	Depth feet	SAMPLES Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
35	0								OL	Organic top soil (loose, moist)			
									SM	Light brown silty fine to medium sand with gravel (medium dense, moist) (fill)			
30	5		18	11	1				SM	Dark brown silty fine to medium sand with gravel (medium dense, moist) (fill)	SS	4.0	
25	10		18	5	2	CA					SS	10.1	(pieces of charcoal)
20	15		18	16	3						SS	14.7	(pieces of charcoal)
									SM	Brown silty fine to medium sand with gravel (dense, moist) (fill)			
15	20		18	20	4						SS	17.6	
									SM	Brown silty well-graded sand with occasional gravel (very dense, moist)			
10	25		18	70	5	CA					SS	22.0	
									ML	Gray to brown mottled silt with fine sand (hard, moist)			
							▼		GM	Gray silty well-graded gravel with fine to coarse sand (very dense, wet)	NS-SS		
	30												

Note: See Figure A-1 for explanation of symbols.

LOG OF MONITORING WELL MW-8

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-9
Sheet 1 of 2

V6_ENVBORING W:\SEATTLE\PROJECTS\0\0892017\001\FINALS\0892017001.GPJ GEIV6_1.GDT 9/20/07

Elevation feet	Depth feet	SAMPLES Interval	Recovered (in)	Blows/foot	Sub-Sample Number	Testing	Water Level	Graphic Log	Group Symbol	MATERIAL DESCRIPTION	Sheen	Headspace Vapor PID (ppb)	NOTES
	30		10	50/5"	6						(org)	40.0	(strong gas/diesel odor observed on product grains)
-5									SP-SM	Gray fine to medium sand with silt (very dense, wet)			
	35		6	50/4"	7						SS-MS	71.8	
-0													
	40		6	50/4"	8						SS-MS	105	
-5													
	45												
-10													
	50												
-15													
	55												
-20													
	60												
-25													
	65												
-30													

V6_ENVBORING W:\SEATTLE\PROJECTS\0\0892017\00\FINALS\089201700.GPJ GEIV6_1.GDT 9/20/07

LOG OF MONITORING WELL MW-8 (continued)

GEOENGINEERS

Project: McConkey/Sesko
Project Location: Bremerton, Washington
Project Number: 0892-017-00

Figure A-9
Sheet 2 of 2

GeoEngineers

Appendix B
Chemical Analytical Data

APPENDIX B
CHEMICAL ANALYTICAL DATA

SAMPLES

Chain-of-custody procedures were followed during the transport of the field samples to the accredited analytical laboratory. The samples were held in cold storage pending extraction and/or analysis. The analytical results and quality control records are included in this attachment.

ANALYTICAL DATA REVIEW

The laboratory maintains an internal quality assurance program as documented in its laboratory quality assurance manual. The laboratory uses a combination of blanks, surrogate recoveries, duplicates, matrix spike recoveries, matrix spike duplicate recoveries, blank spike recoveries and blank spike duplicate recoveries to evaluate the analytical results. The laboratory also uses data quality goals for individual chemicals or groups of chemicals based on the long-term performance of the test methods. The data quality goals were included in the laboratory reports. The laboratory compared each group of samples with the existing data quality goals and noted any exceptions in the laboratory report. Any data quality exceptions documented by the accredited laboratory were reviewed by GeoEngineers and are addressed in the data quality exception section of this attachment.

DATE QUALITY EXCEPTION SUMMARY

No significant data quality exceptions were noted in the laboratory report or during our review. Based on the data quality review, it is our opinion that the analytical data are of acceptable quality for their intended use in this report.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

June 11, 2007

Sean Trimble
Geo Engineers - Seattle
600 Stewart St, Suite 1700
Seattle, WA/USA 98101

RE: Old Bremerton Gas Works

Enclosed are the results of analyses for samples received by the laboratory on 05/21/07 18:10. The following list is a summary of the Work Orders contained in this report, generated on 06/11/07 17:46.

If you have any questions concerning this report, please feel free to contact me.

Work Order	Project	ProjectNumber
BQE0352	Old Bremerton Gas Works	Old Bremerton Gas Works

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
MW-1-5.0	BQE0352-01	Soil	05/21/07 10:50	05/21/07 18:10
MW-1-35.0	BQE0352-07	Soil	05/21/07 11:35	05/21/07 18:10
MW-2-10.0	BQE0352-11	Soil	05/21/07 13:40	05/21/07 18:10
MW-2-40.0	BQE0352-14	Soil	05/21/07 14:25	05/21/07 18:10

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Petroleum Products by NWTPH-Dx with Acid/Silica Gel Clean-up

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01 (MW-1-S.0)		Soil			Sampled: 05/21/07 10:50					
Diesel Range Hydrocarbons	NWTPH-Dx	ND	-----	13.2	mg/kg dry	1x	7E22055	05/22/07 14:49	05/23/07 23:50	
Lube Oil Range Hydrocarbons	"	ND	-----	32.9	"	"	"	"	"	
Surrogate(s): 2-FBP			*83.2%*		*54 - 148 %*	"			"	
Octacosane			*100%*		*62 - 142 %*	"			"	
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
Diesel Range Hydrocarbons	NWTPH-Dx	ND	-----	12.1	mg/kg dry	1x	7E22055	05/22/07 14:49	05/24/07 00:17	
Lube Oil Range Hydrocarbons	"	ND	-----	30.3	"	"	"	"	"	
Surrogate(s): 2-FBP			*84.3%*		*54 - 148 %*	"			"	
Octacosane			*102%*		*62 - 142 %*	"			"	
BQE0352-11RE1 (MW-2-10.0)		Soil			Sampled: 05/21/07 13:40					
Diesel Range Hydrocarbons	NWTPH-Dx	617	-----	56.5	mg/kg dry	5x	7E22055	05/22/07 14:49	05/24/07 20:25	
Lube Oil Range Hydrocarbons	"	965	-----	141	"	"	"	"	"	
Surrogate(s): 2-FBP			*82.0%*		*54 - 148 %*	"			"	
Octacosane			*89.4%*		*62 - 142 %*	"			"	
BQE0352-14 (MW-2-40.0)		Soil			Sampled: 05/21/07 14:25					
Diesel Range Hydrocarbons	NWTPH-Dx	ND	-----	12.3	mg/kg dry	1x	7E22055	05/22/07 14:49	05/24/07 01:10	
Lube Oil Range Hydrocarbons	"	ND	-----	30.7	"	"	"	"	"	
Surrogate(s): 2-FBP			*79.9%*		*54 - 148 %*	"			"	
Octacosane			*101%*		*62 - 142 %*	"			"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Total Metals by EPA 6000/7000 Series Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Antimony	EPA 6020	ND	-----	1.98	mg/kg dry	1x	7E22062	05/22/07 15:45	05/24/07 11:07	
Arsenic	"	3.49	-----	0.661	"	"	"	"	05/23/07 18:08	
Beryllium	"	ND	-----	0.661	"	"	"	"	"	
Cadmium	"	ND	-----	0.661	"	"	"	"	"	
Chromium	"	39.5	-----	0.661	"	"	"	"	"	
Copper	"	24.8	-----	0.661	"	"	"	"	"	
Lead	"	3.86	-----	0.661	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.134	"	"	7E29055	05/29/07 15:13	05/30/07 12:38	
Nickel	EPA 6020	48.3	-----	0.661	"	"	7E22062	05/22/07 15:45	05/23/07 18:08	
Selenium	"	ND	-----	0.661	"	"	"	"	"	
Silver	"	ND	-----	0.661	"	"	"	"	"	
Thallium	"	ND	-----	0.661	"	"	"	"	"	
Zinc	"	61.7	-----	6.61	"	"	"	"	"	
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
Antimony	EPA 6020	ND	-----	1.82	mg/kg dry	1x	7E22062	05/22/07 15:45	05/24/07 11:11	
Arsenic	"	1.35	-----	0.607	"	"	"	"	05/23/07 18:14	
Beryllium	"	ND	-----	0.607	"	"	"	"	"	
Cadmium	"	ND	-----	0.607	"	"	"	"	"	
Chromium	"	19.8	-----	0.607	"	"	"	"	"	
Copper	"	8.01	-----	0.607	"	"	"	"	"	
Lead	"	1.58	-----	0.607	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.111	"	"	7E29055	05/29/07 15:13	05/30/07 12:40	
Nickel	EPA 6020	32.5	-----	0.607	"	"	7E22062	05/22/07 15:45	05/23/07 18:14	
Selenium	"	ND	-----	0.607	"	"	"	"	"	
Silver	"	ND	-----	0.607	"	"	"	"	"	
Thallium	"	ND	-----	0.607	"	"	"	"	"	
Zinc	"	23.9	-----	6.07	"	"	"	"	"	
BQE0352-11 (MW-2-10.0)		Soil			Sampled: 05/21/07 13:40					
Antimony	EPA 6020	ND	-----	1.69	mg/kg dry	1x	7E22062	05/22/07 15:45	05/24/07 11:16	
Arsenic	"	3.18	-----	0.563	"	"	"	"	05/23/07 18:20	
Beryllium	"	ND	-----	0.563	"	"	"	"	"	
Cadmium	"	ND	-----	0.563	"	"	"	"	"	
Chromium	"	35.0	-----	0.563	"	"	"	"	"	
Copper	"	18.4	-----	0.563	"	"	"	"	"	
Lead	"	41.3	-----	0.563	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.107	"	"	7E29055	05/29/07 15:13	05/30/07 12:43	
Nickel	EPA 6020	40.6	-----	0.563	"	"	7E22062	05/22/07 15:45	05/23/07 18:20	
Selenium	"	ND	-----	0.563	"	"	"	"	"	
Silver	"	ND	-----	0.563	"	"	"	"	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Total Metals by EPA 6000/7000 Series Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-11 (MW-2-10.0)		Soil			Sampled: 05/21/07 13:40					
Thallium	EPA 6020	ND	-----	0.563	mg/kg dry	1x	7E22062	05/22/07 15:45	05/23/07 18:20	
Zinc	"	44.3	-----	5.63	"	"	"	"	"	
BQE0352-14 (MW-2-40.0)		Soil			Sampled: 05/21/07 14:25					
Antimony	EPA 6020	ND	-----	1.84	mg/kg dry	1x	7E22062	05/22/07 15:45	05/24/07 11:21	
Arsenic	"	0.797	-----	0.613	"	"	"	"	05/23/07 18:26	
Beryllium	"	ND	-----	0.613	"	"	"	"	"	
Cadmium	"	ND	-----	0.613	"	"	"	"	"	
Chromium	"	24.7	-----	0.613	"	"	"	"	"	
Copper	"	10.1	-----	0.613	"	"	"	"	"	
Lead	"	1.34	-----	0.613	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.131	"	"	7E29055	05/29/07 15:13	05/30/07 12:45	
Nickel	EPA 6020	32.0	-----	0.613	"	"	7E22062	05/22/07 15:45	05/23/07 18:26	
Selenium	"	ND	-----	0.613	"	"	"	"	"	
Silver	"	ND	-----	0.613	"	"	"	"	"	
Thallium	"	ND	-----	0.613	"	"	"	"	"	
Zinc	"	24.7	-----	6.13	"	"	"	"	"	

TestAmerica - Seanle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Polychlorinated Biphenyls by EPA Method 8082

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Aroclor 1016	EPA 8082	ND	-----	32.8	ug/kg dry	1x	7E30046	05/30/07 14:09	06/01/07 23:20	
Aroclor 1221	"	ND	-----	65.6	"	"	"	"	"	
Aroclor 1232	"	ND	-----	32.8	"	"	"	"	"	
Aroclor 1242	"	ND	-----	32.8	"	"	"	"	"	
Aroclor 1248	"	ND	-----	32.8	"	"	"	"	"	
Aroclor 1254	"	ND	-----	32.8	"	"	"	"	"	
Aroclor 1260	"	ND	-----	32.8	"	"	"	"	"	
Aroclor 1262	"	ND	-----	32.8	"	"	"	"	"	
Aroclor 1268	"	ND	-----	32.8	"	"	"	"	"	
Surrogate(s): *TCX*			*94.9%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*95.9%*		*33 - 163 %*	"			"	
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
Aroclor 1016	EPA 8082	ND	-----	30.4	ug/kg dry	1x	7E30046	05/30/07 14:09	06/01/07 23:37	
Aroclor 1221	"	ND	-----	60.9	"	"	"	"	"	
Aroclor 1232	"	ND	-----	30.4	"	"	"	"	"	
Aroclor 1242	"	ND	-----	30.4	"	"	"	"	"	
Aroclor 1248	"	ND	-----	30.4	"	"	"	"	"	
Aroclor 1254	"	ND	-----	30.4	"	"	"	"	"	
Aroclor 1260	"	ND	-----	30.4	"	"	"	"	"	
Aroclor 1262	"	ND	-----	30.4	"	"	"	"	"	
Aroclor 1268	"	ND	-----	30.4	"	"	"	"	"	
Surrogate(s): *TCX*			*92.9%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*94.1%*		*33 - 163 %*	"			"	
BQE0352-11 (MW-2-10.0)		Soil			Sampled: 05/21/07 13:40					
Aroclor 1016	EPA 8082	ND	-----	28.1	ug/kg dry	1x	7E30046	05/30/07 14:09	06/03/07 02:13	
Aroclor 1221	"	ND	-----	56.1	"	"	"	"	"	
Aroclor 1232	"	ND	-----	28.1	"	"	"	"	"	
Aroclor 1242	"	ND	-----	28.1	"	"	"	"	"	
Aroclor 1248	"	ND	-----	28.1	"	"	"	"	"	
Aroclor 1254	"	ND	-----	28.1	"	"	"	"	"	
Aroclor 1260	"	ND	-----	28.1	"	"	"	"	"	
Aroclor 1262	"	ND	-----	28.1	"	"	"	"	"	
Aroclor 1268	"	ND	-----	28.1	"	"	"	"	"	
Surrogate(s): *TCX*			*67.9%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*75.7%*		*33 - 163 %*	"			"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Polychlorinated Biphenyls by EPA Method 8082

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-14 (MW-2-40.0)		Soil			Sampled: 05/21/07 14:25					
Aroclor 1016	EPA 8082	ND	-----	30.8	ug/kg dry	1x	7E30046	05/30/07 14:09	06/01/07 23:55	
Aroclor 1221	"	ND	-----	61.7	"	"	"	"	"	
Aroclor 1232	"	ND	-----	30.8	"	"	"	"	"	
Aroclor 1242	"	ND	-----	30.8	"	"	"	"	"	
Aroclor 1248	"	ND	-----	30.8	"	"	"	"	"	
Aroclor 1254	"	ND	-----	30.8	"	"	"	"	"	
Aroclor 1260	"	ND	-----	30.8	"	"	"	"	"	
Aroclor 1262	"	ND	-----	30.8	"	"	"	"	"	
Aroclor 1268	"	ND	-----	30.8	"	"	"	"	"	
Surrogate(s): *TCX*			*94.9%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*98.1%*		*33 - 163 %*	"			"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Acetone	EPA 8260B	ND	-----	18.2	ug/kg dry	1x	7E22049	05/22/07 13:26	05/22/07 20:39	
Benzene	"	ND	-----	0.911	"	"	"	"	"	
Bromobenzene	"	ND	-----	3.04	"	"	"	"	"	
Bromochloromethane	"	ND	-----	3.04	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	3.04	"	"	"	"	"	
Bromoform	"	ND	-----	3.04	"	"	"	"	"	
Bromomethane	"	ND	-----	6.07	"	"	"	"	"	
2-Butanone	"	ND	-----	9.11	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	3.04	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	3.04	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	3.04	"	"	"	"	"	
Carbon disulfide	"	ND	-----	1.82	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	3.04	"	"	"	"	"	
Chlorobenzene	"	ND	-----	1.21	"	"	"	"	"	
Chloroethane	"	ND	-----	3.04	"	"	"	"	"	
Chloroform	"	ND	-----	1.52	"	"	"	"	"	
Chloromethane	"	ND	-----	6.07	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	3.04	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	3.04	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	3.04	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	6.07	"	"	"	"	"	
1,2-Dibromoethane (EDB)	"	ND	-----	3.04	"	"	"	"	"	
Dibromomethane	"	ND	-----	3.04	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	3.04	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	3.04	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	3.04	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	3.04	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	1.21	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.759	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	1.82	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	1.82	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	1.52	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	3.04	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	3.04	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	6.07	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	3.04	"	"	"	"	"	
cis-1,3-Dichioropropene	"	ND	-----	3.04	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.759	"	"	"	"	"	
Ethylbenzene	"	ND	-----	2.43	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	6.07	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	0.607	"	"	"	"	"	
n-Hexane	"	ND	-----	1.21	"	"	"	"	"	
2-Hexanone	"	ND	-----	12.1	"	"	"	"	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Isopropylbenzene	EPA 8260B	ND	-----	3.04	ug/kg dry	1x	7E22049	05/22/07 13:26	05/22/07 20:39	
p-Isopropyltoluene	"	ND	-----	3.04	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	12.1	"	"	"	"	"	
Methylene chloride	"	ND	-----	2.12	"	"	"	"	"	
Naphthalene	"	ND	-----	6.07	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	3.04	"	"	"	"	"	
Styrene	"	ND	-----	0.607	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	6.07	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	6.07	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	3.04	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	3.04	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	1.21	"	"	"	"	"	
Toluene	"	ND	-----	0.911	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	1.52	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.759	"	"	"	"	"	
Trichloroethene	"	ND	-----	1.52	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	3.04	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	3.04	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	3.04	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	3.04	"	"	"	"	"	
Vinyl chloride	"	ND	-----	1.52	"	"	"	"	"	
o-Xylene	"	ND	-----	3.04	"	"	"	"	"	
m,p-Xylene	"	ND	-----	3.04	"	"	"	"	"	
Total Xylenes	"	ND	-----	6.07	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*130%*		*60 - 140 %*	"			"	
Toluene-d8			*103%*		*60 - 140 %*	"			"	
4-BFB			*103%*		*60 - 140 %*	"			"	
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
Acetone	EPA 8260B	ND	-----	16.5	ug/kg dry	1x	7E24024	05/24/07 17:17	05/24/07 17:43	
Benzene	"	ND	-----	0.827	"	"	"	"	"	
Bromobenzene	"	ND	-----	2.76	"	"	"	"	"	
Bromochloromethane	"	ND	-----	2.76	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	2.76	"	"	"	"	"	
Bromoform	"	ND	-----	2.76	"	"	"	"	"	
Bromomethane	"	ND	-----	5.52	"	"	"	"	"	
2-Butanone	"	ND	-----	8.27	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	2.76	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	2.76	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	2.76	"	"	"	"	"	
Carbon disulfide	"	ND	-----	1.65	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	2.76	"	"	"	"	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
Chlorobenzene	EPA 8260B	ND	-----	1.10	ug/kg dry	1x	7E24024	05/24/07 17:17	05/24/07 17:43	
Chloroethane	"	ND	-----	2.76	"	"	"	"	"	
Chloroform	"	ND	-----	1.38	"	"	"	"	"	
Chloromethane	"	ND	-----	5.52	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	2.76	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	2.76	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	2.76	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	5.52	"	"	"	"	"	
1,2-Dibromoethane (EDB)	"	ND	-----	2.76	"	"	"	"	"	
Dibromomethane	"	ND	-----	2.76	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	2.76	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	2.76	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	2.76	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	2.76	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	1.10	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.690	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	1.65	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	1.65	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	1.38	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	2.76	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	2.76	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	5.52	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	2.76	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	2.76	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.690	"	"	"	"	"	
Ethylbenzene	"	ND	-----	2.21	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	5.52	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	0.552	"	"	"	"	"	
n-Hexane	"	1.21	-----	1.10	"	"	"	"	"	
2-Hexanone	"	ND	-----	11.0	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	2.76	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	2.76	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	11.0	"	"	"	"	"	
Methylene chloride	"	10.8	-----	1.93	"	"	"	"	"	
Naphthalene	"	ND	-----	5.52	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	2.76	"	"	"	"	"	
Styrene	"	ND	-----	0.552	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	5.52	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	5.52	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	2.76	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	2.76	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	1.10	"	"	"	"	"	
Toluene	"	ND	-----	0.827	"	"	"	"	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
1,1,1-Trichloroethane	EPA 8260B	ND	-----	1.38	ug/kg dry	1x	7E24024	05/24/07 17:17	05/24/07 17:43	
1,1,2-Trichloroethane	"	ND	-----	0.690	"	"	"	"	"	
Trichloroethene	"	1.47	-----	1.38	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	2.76	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	2.76	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	2.76	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	2.76	"	"	"	"	"	
Vinyl chloride	"	ND	-----	1.38	"	"	"	"	"	
o-Xylene	"	ND	-----	2.76	"	"	"	"	"	
m,p-Xylene	"	ND	-----	2.76	"	"	"	"	"	
Total Xylenes	"	ND	-----	5.52	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*127%*		*60 - 140 %*	"			"	
Toluene-d8			*105%*		*60 - 140 %*	"			"	
4-BFB			*103%*		*60 - 140 %*	"			"	
BQE0352-14 (MW-2-40.0)		Soil			Sampled: 05/21/07 14:25					
Acetone	EPA 8260B	ND	-----	17.3	ug/kg dry	1x	7E23026	05/23/07 09:00	05/23/07 17:48	
Benzene	"	ND	-----	0.864	"	"	"	"	"	
Bromobenzene	"	ND	-----	2.88	"	"	"	"	"	
Bromochloromethane	"	ND	-----	2.88	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	2.88	"	"	"	"	"	
Bromoform	"	ND	-----	2.88	"	"	"	"	"	
Bromomethane	"	ND	-----	5.76	"	"	"	"	"	
2-Butanone	"	ND	-----	8.64	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	2.88	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	2.88	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	2.88	"	"	"	"	"	
Carbon disulfide	"	ND	-----	1.73	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	2.88	"	"	"	"	"	
Chlorobenzene	"	ND	-----	1.15	"	"	"	"	"	
Chloroethane	"	ND	-----	2.88	"	"	"	"	"	
Chloroform	"	ND	-----	1.44	"	"	"	"	"	
Chloromethane	"	ND	-----	5.76	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	2.88	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	2.88	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	2.88	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	5.76	"	"	"	"	"	
1,2-Dibromoethane (EDB)	"	ND	-----	2.88	"	"	"	"	"	
Dibromomethane	"	ND	-----	2.88	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	2.88	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	2.88	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	2.88	"	"	"	"	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-14 (MW-2-40.0)		Soil			Sampled: 05/21/07 14:25					
Dichlorodifluoromethane	EPA 8260B	ND	-----	2.88	ug/kg dry	1x	7E23026	05/23/07 09:00	05/23/07 17:48	
1,1-Dichloroethane	"	ND	-----	1.15	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.720	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	1.73	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	1.73	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	1.44	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	2.88	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	2.88	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	5.76	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	2.88	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	2.88	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.720	"	"	"	"	"	
Ethylbenzene	"	ND	-----	2.30	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	5.76	"	"	"	"	"	L
Methyl tert-butyl ether	"	ND	-----	0.576	"	"	"	"	"	
n-Hexane	"	ND	-----	1.15	"	"	"	"	"	
2-Hexanone	"	ND	-----	11.5	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	2.88	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	2.88	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	11.5	"	"	"	"	"	
Methylene chloride	"	ND	-----	2.02	"	"	"	"	"	
Naphthalene	"	ND	-----	5.76	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	2.88	"	"	"	"	"	
Styrene	"	ND	-----	0.576	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	5.76	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	5.76	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	2.88	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	2.88	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	1.15	"	"	"	"	"	
Toluene	"	ND	-----	0.864	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	1.44	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.720	"	"	"	"	"	
Trichloroethene	"	ND	-----	1.44	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	2.88	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	2.88	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	2.88	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	2.88	"	"	"	"	"	
Vinyl chloride	"	ND	-----	1.44	"	"	"	"	"	
o-Xylene	"	ND	-----	2.88	"	"	"	"	"	
m,p-Xylene	"	ND	-----	2.88	"	"	"	"	"	
Total Xylenes	"	ND	-----	5.76	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*115%*		*60 - 140 %*	"			"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte		Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-14	(MW-2-40.0)		Soil			Sampled: 05/21/07 14:25					
	Toluene-d8			*98.3%*		*60 - 140 %*	*1x*			*05/23/07 17:48*	
	4-BFB			*104%*		*60 - 140 %*	*"*			*"*	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-11 (MW-2-10.0)		Soil			Sampled: 05/21/07 13:40					
1,2-Dibromoethane (EDB)	EPA 8260B	ND	----	0.101	mg/kg dry	1x	7E25034	05/25/07 10:00	05/25/07 22:47	
Acetone	"	ND	----	1.01	"	"	"	"	"	
Benzene	"	0.139	----	0.0202	"	"	"	"	"	
Bromobenzene	"	ND	----	0.101	"	"	"	"	"	
Bromochloromethane	"	ND	----	0.101	"	"	"	"	"	
Bromodichloromethane	"	ND	----	0.101	"	"	"	"	"	
Bromofonn	"	ND	----	0.101	"	"	"	"	"	
Bromomethane	"	ND	----	0.101	"	"	"	"	"	
2-Butanone	"	ND	----	1.01	"	"	"	"	"	
n-Butylbenzene	"	ND	----	0.101	"	"	"	"	"	
sec-Butylbenzene	"	ND	----	0.101	"	"	"	"	"	
tert-Butylbenzene	"	ND	----	0.101	"	"	"	"	"	
Carbon disulfide	"	ND	----	0.101	"	"	"	"	"	
Carbon tetrachloride	"	ND	----	0.101	"	"	"	"	"	
Chlorobenzene	"	ND	----	0.101	"	"	"	"	"	
Chloroethane	"	ND	----	0.101	"	"	"	"	"	
Chloroform	"	ND	----	0.101	"	"	"	"	"	
Chloromethane	"	ND	----	0.504	"	"	"	"	"	
2-Chlorotoluene	"	ND	----	0.101	"	"	"	"	"	
4-Chlorotoluene	"	ND	----	0.101	"	"	"	"	"	
Dibromochloromethane	"	ND	----	0.101	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	----	0.504	"	"	"	"	"	
Dibromomethane	"	ND	----	0.101	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	----	0.101	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	----	0.101	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	----	0.101	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	----	0.101	"	"	"	"	"	
1,1-Dichloroethane	"	ND	----	0.101	"	"	"	"	"	
1,2-Dichloroethane	"	ND	----	0.101	"	"	"	"	"	
1,1-Dichloroethene	"	ND	----	0.101	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	----	0.101	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	----	0.101	"	"	"	"	"	
1,2-Dichloropropane	"	ND	----	0.101	"	"	"	"	"	
1,3-Dichloropropane	"	ND	----	0.101	"	"	"	"	"	
2,2-Dichloropropane	"	ND	----	0.101	"	"	"	"	"	
1,1-Dichloropropene	"	ND	----	0.101	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	----	0.101	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	----	0.101	"	"	"	"	"	
Ethylbenzene	"	0.295	----	0.101	"	"	"	"	"	
Hexachlorobutadiene	"	ND	----	0.504	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	----	0.504	"	"	"	"	"	
n-Hexane	"	ND	----	1.01	"	"	"	"	"	
2-Hexanone	"	ND	----	1.01	"	"	"	"	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-11 (MW-2-10.0)		Soil			Sampled: 05/21/07 13:40					
Isopropylbenzene	EPA 8260B	ND	-----	0.101	mg/kg dry	1x	7E25034	05/25/07 10:00	05/25/07 22:47	
p-Isopropyltoluene	"	ND	-----	0.101	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	1.01	"	"	"	"	"	
Methylene chloride	"	ND	-----	1.01	"	"	"	"	"	
Naphthalene	"	1.24	-----	0.504	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	0.101	"	"	"	"	"	
Styrene	"	ND	-----	0.101	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	0.504	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.504	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.101	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.101	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.101	"	"	"	"	"	
Toluene	"	ND	-----	0.101	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.101	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.101	"	"	"	"	"	
Trichloroethene	"	ND	-----	0.101	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.101	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.101	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	0.101	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	0.101	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.101	"	"	"	"	"	
Total Xylenes	"	0.353	-----	0.302	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*105%*		*75 - 125 %*	"			"	
Toluene-d8			*100%*		*75 - 125 %*	"			"	
4-BFB			*101%*		*75 - 125 %*	"			"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Acenaphthene	EPA 8270C	ND	-----	0.429	mg/kg dry	1x	7E23005	05/23/07 08:41	06/05/07 02:19	
Acenaphthylene	"	ND	-----	0.429	"	"	"	"	"	
Aniline	"	ND	-----	0.429	"	"	"	"	"	
Anthracene	"	ND	-----	0.429	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.429	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.429	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.429	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.429	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.429	"	"	"	"	"	
Benzoic Acid	"	ND	-----	1.30	"	"	"	"	"	C5
Benzyl alcohol	"	ND	-----	0.429	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	0.429	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	0.429	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	0.429	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	0.429	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	0.429	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	0.429	"	"	"	"	"	
Carbazole	"	ND	-----	0.429	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	0.650	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	0.429	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	0.429	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	0.429	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	0.429	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	0.429	"	"	"	"	"	
2-Methylphenoi (o-Cresol)	"	ND	-----	0.429	"	"	"	"	"	
Chrysene	"	ND	-----	0.429	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	0.429	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.429	"	"	"	"	"	
Dibenzofuran	"	ND	-----	0.429	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.429	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.429	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.429	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	6.50	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	0.429	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	0.429	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	0.429	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	0.429	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	0.650	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	0.650	"	"	"	"	"	
2,4-Dinitrotoluene	"	ND	-----	0.650	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	0.650	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	0.429	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.429	"	"	"	"	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Fluorene	EPA 8270C	ND	-----	0.429	mg/kg dry	1x	7E23005	05/23/07 08:41	06/05/07 02:19	
Hexachlorobenzene	"	ND	-----	0.429	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.429	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	0.650	"	"	"	"	"	C5
Hexachloroethane	"	ND	-----	0.429	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.429	"	"	"	"	"	
Isophorone	"	ND	-----	0.429	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.429	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.429	"	"	"	"	"	
Naphthalene	"	ND	-----	0.429	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	0.650	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	0.650	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	0.650	"	"	"	"	"	
Nitrobenzene	"	ND	-----	0.429	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	0.429	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	0.650	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	0.429	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	0.429	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	0.650	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.429	"	"	"	"	"	
Phenol	"	ND	-----	0.429	"	"	"	"	"	
Pyrene	"	ND	-----	0.429	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.429	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	0.429	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	0.429	"	"	"	"	"	
Surrogate(s):	*2-FBP*		*25.4%*		*27 - 126 %*	"			"	*Z6*
	2-FP		*22.5%*		*16 - 121 %*	"			"	
	Nitrobenzene-d5		*26.1%*		*26 - 125 %*	"			"	
	Phenol-d6		*15.7%*		*10 - 120 %*	"			"	
	p-Terphenyl-d14		*40.6%*		*26 - 150 %*	"			"	
	2,4,6-TBP		*20.0%*		*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01RE1 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Acenaphthene	EPA 8270C	ND	-----	0.436	mg/kg dry	1x	7E25030	05/31/07 11:12	06/06/07 14:04	
Acenaphthylene	"	ND	-----	0.436	"	"	"	"	"	
Aniline	"	ND	-----	0.436	"	"	"	"	"	
Anthracene	"	ND	-----	0.436	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.436	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.436	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.436	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.436	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.436	"	"	"	"	"	
Benzoic Acid	"	ND	-----	1.32	"	"	"	"	"	C5
Benzyl alcohol	"	ND	-----	0.436	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	0.436	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	0.436	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	0.436	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	0.436	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	0.436	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	0.436	"	"	"	"	"	
Carbazole	"	ND	-----	0.436	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	0.661	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	0.436	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	0.436	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	0.436	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	0.436	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	0.436	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	0.436	"	"	"	"	"	
Chrysene	"	ND	-----	0.436	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	0.436	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.436	"	"	"	"	"	
Dibenzofuran	"	ND	-----	0.436	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.436	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.436	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.436	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	6.61	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	0.436	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	0.436	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	0.436	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	0.436	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	0.661	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	0.661	"	"	"	"	"	
2,4-Dinitrotoluene	"	ND	-----	0.661	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	0.661	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	0.436	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.436	"	"	"	"	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01RE1 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Fluorene	EPA 8270C	ND	-----	0.436	mg/kg dry	1x	7E25030	05/31/07 11:12	06/06/07 14:04	
Hexachlorobenzene	"	ND	-----	0.436	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.436	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	0.661	"	"	"	"	"	CS
Hexachloroethane	"	ND	-----	0.436	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.436	"	"	"	"	"	
Isophorone	"	ND	-----	0.436	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.436	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.436	"	"	"	"	"	
Naphthalene	"	ND	-----	0.436	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	0.661	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	0.661	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	0.661	"	"	"	"	"	
Nitrobenzene	"	ND	-----	0.436	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	0.436	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	0.661	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	0.436	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	0.436	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	0.661	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.436	"	"	"	"	"	
Phenol	"	ND	-----	0.436	"	"	"	"	"	
Pyrene	"	ND	-----	0.436	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.436	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	0.436	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	0.436	"	"	"	"	"	
Surrogate(s):	*2-FBP*		*60.7%*		*27 - 126 %*	"			"	
	2-FP		*67.3%*		*16 - 121 %*	"			"	
	Nitrobenzene-d5		*75.2%*		*26 - 125 %*	"			"	
	Phenol-d6		*44.1%*		*10 - 120 %*	"			"	
	p-Terphenyl-d14		*72.3%*		*26 - 150 %*	"			"	
	2,4,6-TBP		*63.2%*		*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
Acenaphthene	EPA 8270C	ND	-----	0.395	mg/kg dry	1x	7E23005	05/23/07 08:41	06/05/07 02:52	
Acenaphthylene	"	ND	-----	0.395	"	"	"	"	"	
Aniline	"	ND	-----	0.395	"	"	"	"	"	
Anthracene	"	ND	-----	0.395	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.395	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.395	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.395	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.395	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.395	"	"	"	"	"	
Benzoic Acid	"	ND	-----	1.20	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	0.395	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	0.395	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	0.395	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	0.395	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	0.395	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	0.395	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	0.395	"	"	"	"	"	
Carbazole	"	ND	-----	0.395	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	0.599	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	0.395	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	0.395	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	0.395	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	0.395	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	0.395	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	0.395	"	"	"	"	"	
Chrysene	"	ND	-----	0.395	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	0.395	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.395	"	"	"	"	"	
Dibenzofuran	"	ND	-----	0.395	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.395	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.395	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.395	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	5.99	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	0.395	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	0.395	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	0.395	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	0.395	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	0.599	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	0.599	"	"	"	"	"	
2,4-Dinitrotoluene	"	ND	-----	0.599	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	0.599	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	0.395	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.395	"	"	"	"	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
Fluorene	EPA 8270C	ND	-----	0.395	mg/kg dry	1x	7E23005	05/23/07 08:41	06/05/07 02:52	
Hexachlorobenzene	"	ND	-----	0.395	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.395	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	0.599	"	"	"	"	"	
Hexachloroethane	"	ND	-----	0.395	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.395	"	"	"	"	"	
Isophorone	"	ND	-----	0.395	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.395	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.395	"	"	"	"	"	
Naphthalene	"	ND	-----	0.395	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	0.599	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	0.599	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	0.599	"	"	"	"	"	
Nitrobenzene	"	ND	-----	0.395	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	0.395	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	0.599	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	0.395	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	0.395	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	0.599	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.395	"	"	"	"	"	
Phenol	"	ND	-----	0.395	"	"	"	"	"	
Pyrene	"	ND	-----	0.395	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.395	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	0.395	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	0.395	"	"	"	"	"	
Surrogate(s):	*2-FBP*		*59.6%*		*27 - 126 %*	"			"	
	2-FP		*61.9%*		*16 - 121 %*	"			"	
	Nitrobenzene-d5		*65.7%*		*26 - 125 %*	"			"	
	Phenol-d6		*42.4%*		*10 - 120 %*	"			"	
	p-Terphenyl-d14		*85.5%*		*26 - 150 %*	"			"	
	2,4,6-TBP		*62.2%*		*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-11 (MW-2-10.0)		Soil			Sampled: 05/21/07 13:40					
Acenaphthene	EPA 8270C	ND	-----	1.85	mg/kg dry	2x	7E23005	05/23/07 08:41	06/05/07 03:58	
Acenaphthylene	"	4.36	-----	1.85	"	"	"	"	"	
Aniline	"	ND	-----	1.85	"	"	"	"	"	
Anthracene	"	2.36	-----	1.85	"	"	"	"	"	
Benzo (a) anthracene	"	7.56	-----	1.85	"	"	"	"	"	
Benzo (a) pyrene	"	14.0	-----	1.85	"	"	"	"	"	
Benzo (b) fluoranthene	"	8.09	-----	1.85	"	"	"	"	"	
Benzo (k) fluoranthene	"	9.28	-----	1.85	"	"	"	"	"	
Benzo (ghi) perylene	"	2.57	-----	1.85	"	"	"	"	"	
Benzoic Acid	"	ND	-----	5.59	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	1.85	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	1.85	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	1.85	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	1.85	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	1.85	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	1.85	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	1.85	"	"	"	"	"	
Carbazole	"	ND	-----	1.85	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	2.80	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	1.85	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	1.85	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	1.85	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	1.85	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	1.85	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	1.85	"	"	"	"	"	
Chrysene	"	10.3	-----	1.85	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	1.85	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	1.85	"	"	"	"	"	
Dibenzofuran	"	ND	-----	1.85	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	1.85	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	1.85	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	1.85	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	28.0	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	1.85	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	1.85	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	1.85	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	1.85	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	2.80	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	2.80	"	"	"	"	"	
2,4-Dinitrotoluene	"	ND	-----	2.80	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	2.80	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	1.85	"	"	"	"	"	

TestAmerica - Seattle, WA

Blake Meinert

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-11 (MW-2-10.0)		Soil			Sampled: 05/21/07 13:40					
Fluoranthene	EPA 8270C	15.0	-----	1.85	mg/kg dry	2x	7E23005	05/23/07 08:41	06/05/07 03:58	
Fluorene	"	ND	-----	1.85	"	"	"	"	"	
Hexachlorobenzene	"	ND	-----	1.85	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	1.85	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	2.80	"	"	"	"	"	
Hexachloroethane	"	ND	-----	1.85	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	9.16	-----	1.85	"	"	"	"	"	
Isophorone	"	ND	-----	1.85	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	1.85	"	"	"	"	"	
2-Methylnapbthalene	"	2.96	-----	1.85	"	"	"	"	"	
Naphthalene	"	4.62	-----	1.85	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	2.80	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	2.80	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	2.80	"	"	"	"	"	
Nitrobenzene	"	ND	-----	1.85	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	1.85	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	2.80	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	1.85	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	1.85	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	2.80	"	"	"	"	"	
Phenanthrene	"	9.16	-----	1.85	"	"	"	"	"	
Phenol	"	ND	-----	1.85	"	"	"	"	"	
Pyrene	"	27.3	-----	1.85	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	1.85	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	1.85	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	1.85	"	"	"	"	"	
Surrogate(s): *2-FBP*			*80.7%*		*27 - 126 %*	"			"	
2-FP			*45.6%*		*16 - 121 %*	"			"	
Nitrobenzene-d5			*85.5%*		*26 - 125 %*	"			"	
Phenol-d6			*39.4%*		*10 - 120 %*	"			"	
p-Terphenyl-d14			*87.1%*		*26 - 150 %*	"			"	
2,4,6-TBP			*74.0%*		*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-14 (MW-2-40.0)		Soil			Sampled: 05/21/07 14:25					
Acenaphthene	EPA 8270C	ND	-----	0.404	mg/kg dry	1x	7E23005	05/23/07 08:41	06/05/07 03:25	
Acenaphthylene	"	ND	-----	0.404	"	"	"	"	"	
Aniline	"	ND	-----	0.404	"	"	"	"	"	
Anthracene	"	ND	-----	0.404	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.404	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.404	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.404	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.404	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.404	"	"	"	"	"	
Benzoic Acid	"	ND	-----	1.23	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	0.404	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	0.404	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	0.404	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	0.404	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	0.404	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	0.404	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	0.404	"	"	"	"	"	
Carbazole	"	ND	-----	0.404	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	0.613	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	0.404	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	0.404	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	0.404	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	0.404	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	0.404	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	0.404	"	"	"	"	"	
Chrysene	"	ND	-----	0.404	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	0.404	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.404	"	"	"	"	"	
Dibenzofuran	"	ND	-----	0.404	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.404	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.404	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.404	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	6.13	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	0.404	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	0.404	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	0.404	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	0.404	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	0.613	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	0.613	"	"	"	"	"	
2,4-Dinitrotoluene	"	ND	-----	0.613	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	0.613	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	0.404	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.404	"	"	"	"	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-14 (MW-2-40.0)		**Soil**			**Sampled: 05/21/07 14:25**					
Fluorene	EPA 8270C	ND	-----	0.404	mg/kg dry	1x	7E23005	05/23/07 08:41	06/05/07 03:25	
Hexachlorobenzene	"	ND	-----	0.404	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.404	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	0.613	"	"	"	"	"	
Hexachloroethane	"	ND	-----	0.404	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.404	"	"	"	"	"	
Isophorone	"	ND	-----	0.404	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.404	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.404	"	"	"	"	"	
Naphthalene	"	ND	-----	0.404	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	0.613	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	0.613	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	0.613	"	"	"	"	"	
Nitrobenzene	"	ND	-----	0.404	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	0.404	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	0.613	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	0.404	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	0.404	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	0.613	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.404	"	"	"	"	"	
Phenol	"	ND	-----	0.404	"	"	"	"	"	
Pyrene	"	ND	-----	0.404	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.404	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	0.404	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	0.404	"	"	"	"	"	
Surrogate(s): *2-FBP*		*66.9%*			*27 - 126 %*	"			"	
2-FP		*71.6%*			*16 - 121 %*	"			"	
Nitrobenzene-d5		*73.8%*			*26 - 125 %*	"			"	
Phenol-d6		*48.5%*			*10 - 120 %*	"			"	
p-Terphenyl-d14		*87.7%*			*26 - 150 %*	"			"	
2,4,6-TBP		*67.9%*			*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Projeel Manager:	Sean Trimble	06/11/07 17:46

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01RE1 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Acenaphthene	EPA 8270-SIM	ND	-----	0.0132	mg/kg dry	1x	7E25030	05/31/07 11:12	06/06/07 14:27	
Acenaphthylene	"	ND	-----	0.0132	"	"	"	"	"	
Anthracene	"	ND	-----	0.0132	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.0132	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.0132	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.0132	"	"	"	"	"	
Benzo (k) fluoranthene	"	0.0176	-----	0.0132	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.0132	"	"	"	"	"	
Chrysene	"	ND	-----	0.0132	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.0132	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.0132	"	"	"	"	"	
Fluorene	"	ND	-----	0.0132	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.0132	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.0132	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.0132	"	"	"	"	"	
Naphthalene	"	ND	-----	0.0132	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.0132	"	"	"	"	"	
Pyrene	"	ND	-----	0.0132	"	"	"	"	"	
Surrogate(s): p-*Terphenyl-d14*			*69.1%*		*50 - 147 %*	"			"	
BQE0352-01RE2 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Acenaphthene	EPA 8270-SIM	ND	-----	0.0130	mg/kg dry	1x	7E23005	05/23/07 08:41	05/30/07 13:02	
Acenaphthylene	"	ND	-----	0.0130	"	"	"	"	"	
Anthracene	"	ND	-----	0.0130	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.0130	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.0130	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.0130	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.0130	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.0130	"	"	"	"	"	
Chrysene	"	ND	-----	0.0130	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.0130	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.0130	"	"	"	"	"	
Fluorene	"	ND	-----	0.0130	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.0130	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.0130	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.0130	"	"	"	"	"	
Naphthalene	"	ND	-----	0.0130	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.0130	"	"	"	"	"	
Pyrene	"	ND	-----	0.0130	"	"	"	"	"	
Surrogate(s): p-*Terphenyl-d14*			*28.6%*		*50 - 147 %*	"			"	*Z6*

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
Acenaphthene	EPA 8270-SIM	ND	-----	0.0120	mg/kg dry	1x	7E23005	05/23/07 08:41	05/25/07 18:31	
Acenaphthylene	"	ND	-----	0.0120	"	"	"	"	"	
Anthracene	"	ND	-----	0.0120	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.0120	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.0120	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.0120	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.0120	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.0120	"	"	"	"	"	
Chrysene	"	ND	-----	0.0120	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.0120	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.0120	"	"	"	"	"	
Fluorene	"	ND	-----	0.0120	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.0120	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.0120	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.0120	"	"	"	"	"	
Naphthalene	"	ND	-----	0.0120	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.0120	"	"	"	"	"	
Pyrene	"	ND	-----	0.0120	"	"	"	"	"	
Surrogate(s): p-Terphenyl-d14			*87.2%*		*50 - 147 %*	"			"	
BQE0352-11 (MW-2-10.0)		Soil			Sampled: 05/21/07 13:40					
Acenaphthene	EPA 8270-SIM	0.671	-----	0.559	mg/kg dry	20x	7E23005	05/23/07 08:41	05/30/07 19:25	
Acenaphthylene	"	3.51	-----	0.559	"	"	"	"	"	
Anthracene	"	2.05	-----	0.559	"	"	"	"	"	
Benzo (a) anthracene	"	5.44	-----	0.559	"	"	"	"	"	
Benzo (a) pyrene	"	11.5	-----	0.559	"	"	"	"	"	
Benzo (b) fluoranthene	"	6.94	-----	0.559	"	"	"	"	"	
Benzo (k) fluoranthene	"	6.00	-----	0.559	"	"	"	"	"	
Benzo (ghi) perylene	"	10.6	-----	0.559	"	"	"	"	"	
Chrysene	"	9.17	-----	0.559	"	"	"	"	"	
Dibenz (a,h) anthracene	"	2.09	-----	0.559	"	"	"	"	"	
Fluoranthene	"	11.9	-----	0.559	"	"	"	"	"	
Fluorene	"	1.27	-----	0.559	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	6.49	-----	0.559	"	"	"	"	"	
1-Methylnaphthalene	"	1.23	-----	0.559	"	"	"	"	"	
2-Methylnaphthalene	"	1.86	-----	0.559	"	"	"	"	"	
Naphthalene	"	3.39	-----	0.559	"	"	"	"	"	
Phenanthrene	"	6.67	-----	0.559	"	"	"	"	"	
Pyrene	"	18.4	-----	0.559	"	"	"	"	"	
Surrogate(s): p-Terphenyl-d14			*49.9%*		*50 - 147 %*	"			"	*Z3*

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-14 (MW-2-40.0)		Soil			Sampled: 05/21/07 14:25					
Acenaphthene	EPA 8270-SIM	ND	-----	0.0123	mg/kg dry	1x	7E23005	05/23/07 08:41	05/25/07 19:05	
Acenaphthylene	"	ND	-----	0.0123	"	"	"	"	"	
Anthracene	"	ND	-----	0.0123	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.0123	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.0123	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.0123	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.0123	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.0123	"	"	"	"	"	
Chrysene	"	ND	-----	0.0123	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.0123	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.0123	"	"	"	"	"	
Fluorene	"	ND	-----	0.0123	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.0123	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.0123	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.0123	"	"	"	"	"	
Naphthalene	"	ND	-----	0.0123	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.0123	"	"	"	"	"	
Pyrene	"	ND	-----	0.0123	"	"	"	"	"	
Surrogate(s): p-*Terphenyl-d14*			*90.9%*		*50 - 147 %*	"			"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Conventional Chemistry Parameters by APHA/EPA Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Hexavalent Chromium	EPA 7196A	ND	-----	1.2	mg/kg dry	1x	7E24020	05/24/07 10:52	05/25/07 12:23	
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
Hexavalent Chromium	EPA 7196A	ND	-----	1.2	mg/kg dry	1x	7E24020	05/24/07 10:52	05/25/07 12:23	
BQE0352-11 (MW-2-10.0)		Soil			Sampled: 05/21/07 13:40					
Hexavalent Chromium	EPA 7196A	ND	-----	1.1	mg/kg dry	1x	7E24020	05/24/07 10:52	05/25/07 12:23	
BQE0352-14 (MW-2-40.0)		Soil			Sampled: 05/21/07 14:25					
Hexavalent Chromium	EPA 7196A	ND	-----	1.2	mg/kg dry	1x	7E24020	05/24/07 10:52	05/25/07 12:23	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Physical Parameters by APHA/ASTM/EPA Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Dry Weight	BSOPSPL003R08	75.7	-----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
Dry Weight	BSOPSPL003R08	82.4	-----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	
BQE0352-11 (MW-2-10.0)		Soil			Sampled: 05/21/07 13:40					
Dry Weight	BSOPSPL003R08	88.8	-----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	
BQE0352-14 (MW-2-40.0)		Soil			Sampled: 05/21/07 14:25					
Dry Weight	BSOPSPL003R08	81.6	-----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Gasoline Hydrocarbons by NWTPH-Gx and BTEX by EPA Method 8021B

TestAmerica - Spokane, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	ND	-----	13.2	mg/kg dry	1x	7060006	06/01/07 12:05	06/01/07 13:15	
Surrogate(s): 4-BFB (FID)			*101%*		*50 - 150 %*	"			"	
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	ND	-----	10.3	mg/kg dry	1x	7060006	06/01/07 12:05	06/01/07 13:40	
Surrogate(s): 4-BFB (FID)			*97.7%*		*50 - 150 %*	"			"	
BQE0352-11 (MW-2-10.0)		Soil			Sampled: 05/21/07 13:40					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	**21.9**	-----	20 2	mg/kg dry	2x	7060006	06/01/07 12:05	06/01/07 14:05	
Surrogate(s): 4-BFB (FID)			*114%*		*50 - 150 %*	"			"	
BQE0352-14 (MW-2-40.0)		Soil			Sampled: 05/21/07 14:25					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	ND	-----	12.3	mg/kg dry	1x	7060006	06/01/07 12:05	06/01/07 14:30	
Surrogate(s): 4-BFB (FID)			*85.1%*		*50 - 150 %*	"			"	

TestAmerica - Seattle, WA

Blake Meinert

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Conventional Chemistry Parameters by APHA/EPA Methods

TestAmerica - Spokane, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01 (MW-1-5.0)		**Soil**			**Sampled: 05/21/07 10:50**					
% Solids	TA SOP	75.7	----	0.0100	% by Weight	1x	7060021	05/25/07 16:43	05/29/07 00:00	
BQE0352-07 (MW-1-35.0)		**Soil**			**Sampled: 05/21/07 11:35**					
% Solids	TA SOP	82.4	----	0.0100	% by Weight	1x	7060021	05/25/07 16:43	05/29/07 00:00	
BQE0352-11 (MW-2-10.0)		**Soil**			**Sampled: 05/21/07 13:40**					
% Solids	TA SOP	88.8	----	0.0100	% by Weight	1x	7060021	05/25/07 16:43	05/29/07 00:00	
BQE0352-14 (MW-2-40.0)		**Soil**			**Sampled: 05/21/07 14:25**					
% Solids	TA SOP	81.6	----	0.0100	% by Weight	1x	7060021	05/25/07 16:43	05/29/07 00:00	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Organotins

STL Seattle

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0352-01 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Tributyltin	Organotins	ND	-----	0.76	ug/Kg dry	1x	19029	05/25/07 02:36	05/30/07 11:54	
Surrogate(s): Tripentyltin			*95%*		*42 - 192 %*	"			"	
BQE0352-011 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Tributyltin	Organotins	ND	-----	0.74	ug/Kg dry	1x	19029	05/25/07 02:36	05/31/07 12:41	
Surrogate(s): Tripentyltin			*115%*		*42 - 192 %*	"			"	
BQE0352-014 (MW-1-5.0)		Soil			Sampled: 05/21/07 10:50					
Tributyltin	Organotins	ND	-----	0.81	ug/Kg dry	1x	19029	05/25/07 02:36	05/31/07 01:04	
Surrogate(s): Tripentyltin			*145%*		*42 - 192 %*	"			"	
BQE0352-07 (MW-1-35.0)		Soil			Sampled: 05/21/07 11:35					
Tributyltin	Organotins	ND	-----	0.80	ug/Kg dry	1x	19029	05/25/07 02:36	05/31/07 12:17	
Surrogate(s): Tripentyltin			*86%*		*42 - 192 %*	"			"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Petroleum Products by NWTPH-Dx with Acid/Silica Gel Clean-up - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7E22055 **Soil Preparation Method: EPA 3550B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E22055-BLK1)								Extracted: 05/22/07 14:49						
Diesel Range Hydrocarbons	NWTPH-Dx	ND	---	10.0	mg/kg wet	1x	--	--	--	--	--	--	05/23/07 02:38	
Lube Oil Range Hydrocarbons	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Surrogate(s): 2-FBP		*Recovery:*	*89.1%*		*Limits:*	*54-148%*	"						*05/23/07 02:38*	
Octacosane			*100%*			*62-142%*	"						"	
LCS (7E22055-BS1)								Extracted: 05/22/07 14:49						
Diesel Range Hydrocarbons	NWTPH-Dx	69.3	---	10.0	mg/kg wet	1x	--	66.7	104%	(78-129)	--	--	05/23/07 03:04	
Surrogate(s): 2-FBP		*Recovery:*	*92.1%*		*Limits:*	*54-148%*	"						*05/23/07 03:04*	
Octacosane			*93.9%*			*62-142%*	"						"	
Duplicate (7E22055-DUP1)					QC Source: BQE0269-13			Extracted: 05/22/07 14:49						
Diesel Range Hydrocarbons	NWTPH-Dx	ND	---	10.6	mg/kg dry	1x	ND	--	--	--	21.3%	(50)	05/23/07 03:30	
Lube Oil Range Hydrocarbons	"	ND	---	26.6	"	"	ND	--	--	--	58.0%	"	"	R4
Surrogate(s): 2-FBP		*Recovery:*	*76.1%*		*Limits:*	*54-148%*	"						*05/23/07 03:30*	
Octacosane			*94.3%*			*62-142%*	"						"	
Duplicate (7E22055-DUP2)					QC Source: BQE0352-07			Extracted: 05/22/07 14:49						
Diesel Range Hydrocarbons	NWTPH-Dx	ND	---	12.2	mg/kg dry	1x	ND	--	--	--	NR	(50)	05/23/07 03:56	
Lube Oil Range Hydrocarbons	"	ND	---	30.4	"	"	ND	--	--	--	NR	"	"	
Surrogate(s): 2-FBP		*Recovery:*	*79.6%*		*Limits:*	*54-148%*	"						*05/23/07 03:56*	
Octacosane			*94.7%*			*62-142%*	"						"	
Matrix Spike (7E22055-MS1)					QC Source: BQE0269-13			Extracted: 05/22/07 14:49						
Diesel Range Hydrocarbons	NWTPH-Dx	61.8	---	10.8	mg/kg dry	1x	2.18	72.2	82.6%	(46-155)	--	--	05/23/07 04:22	
Surrogate(s): 2-FBP		*Recovery:*	*92.1%*		*Limits:*	*54-148%*	"						*05/23/07 04:22*	
Octacosane			*94.7%*			*62-142%*	"						"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Total Metals by EPA 6000/7000 Series Methods - Labpratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E22062 Soil Preparation Method: EPA 3050B

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E22062-BLK1)								Extracted: 05/22/07 15:45						
Thallium	EPA 6020	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	05/23/07 17:09	
Zinc	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Silver	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Chromium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Copper	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Beryllium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Arsenic	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Selenium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Nickel	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Lead	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Antimony	"	ND	---	1.50	"	"	--	--	--	--	--	--	05/24/07 10:31	
Cadmium	"	ND	---	0.500	"	"	--	--	--	--	--	--	05/23/07 17:09	
LCS (7E22062-BS1)								Extracted: 05/22/07 15:45						
Lead	EPA 6020	44.2	---	0.500	mg/kg wet	1x	--	40.0	110%	(80-120)	--	--	05/23/07 17:14	
Nickel	"	40.3	---	0.500	"	"	--	"	101%	"	--	--	"	
Antimony	"	32.7	---	1.50	"	"	--	30.0	109%	"	--	--	05/24/07 10:40	
Zinc	"	40.4	---	5.00	"	"	--	40.0	101%	"	--	--	05/23/07 17:14	
Arsenic	"	41.4	---	0.500	"	"	--	"	104%	"	--	--	"	
Beryllium	"	43.1	---	0.500	"	"	--	"	108%	"	--	--	"	
Copper	"	39.8	---	0.500	"	"	--	"	99.5%	"	--	--	"	
Thallium	"	43.0	---	0.500	"	"	--	"	108%	"	--	--	"	
Cadmium	"	41.7	---	0.500	"	"	--	"	104%	"	--	--	"	
Chromium	"	43.3	---	0.500	"	"	--	"	108%	"	--	--	"	
Silver	"	41.1	---	0.500	"	"	--	"	103%	"	--	--	"	
Selenium	"	41.3	---	0 500	"	"	--	"	103%	"	--	--	"	
Duplicate (7E22062-DUP1)							QC Source: BQE0352-07		Extracted: 05/22/07 15:45					
Lead	EPA 6020	1.48	---	0.607	mg/kg dry	1x	1.58	--	--	--	6.54%	(30)	05/23/07 17:44	
Chromium	"	21.2	---	0.607	"	"	19.8	--	--	--	6.83%	"	"	
Cadmium	"	ND	---	0.607	"	"	ND	--	--	--	NR	"	"	R4
Antimony	"	ND	---	1.82	"	"	ND	--	--	--	NR	"	05/24/07 11:02	
Copper	"	7.87	---	0.607	"	"	8.01	--	--	--	1.76%	"	05/23/07 17:44	
Thallium	"	ND	---	0.607	"	"	ND	--	--	--	NR	"	"	
Nickel	"	30.3	---	0.607	"	"	32.5	--	--	--	7.01%	"	"	
Selenium	"	ND	---	0.607	"	"	ND	--	--	--	NR	"	"	R4
Silver	"	ND	---	0.607	"	"	ND	--	--	--	NR	(50)	"	R4
Arsenic	"	1.32	---	0.607	"	"	1.35	--	--	--	2.25%	(30)	"	
Zinc	"	22.8	---	6.07	"	"	23.9	--	--	--	4.71%	"	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E22062 **Soil Preparation Method: EPA 3050B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Duplicate (7E22062-DUP1)				QC Source: BQE0352-07				Extracted: 05/22/07 15:45						
Beryllium	EPA 6020	ND	---	0.607	mg/kg dry	1x	ND	--	--	--	3.73%	(30)	05/23/07 17:44	R4
Matrix Spike (7E22062-MS1)				QC Source: BQE0352-07				Extracted: 05/22/07 15:45						
Nickel	EPA 6020	80.6	---	0.607	mg/kg dry	1x	32.5	48.5	99.2%	(35-150)	--	--	05/23/07 17:26	
Silver	"	47.6	---	0.607	"	"	ND	"	98.1%	(54-126)	--	--	"	
Cadmium	"	50.3	---	0.607	"	"	ND	"	104%	(80-120)	--	--	"	
Arsenic	"	50.4	---	0.607	"	"	1.35	"	101%	(57-125)	--	--	"	
Beryllium	"	51.8	---	0.607	"	"	0.164	"	106%	(72-122)	--	--	"	
Copper	"	55.8	---	0.607	"	"	8.01	"	98.5%	(20-148)	--	--	"	
Chromium	"	72.2	---	0.607	"	"	19.8	"	108%	(30-163)	--	--	"	
Zinc	"	70.0	---	6.07	"	"	23.9	"	95.1%	(20-160)	--	--	"	
Selenium	"	49.3	---	0.607	"	"	ND	"	102%	(61-120)	--	--	"	
Thallium	"	51.6	---	0.607	"	"	ND	"	106%	(75-120)	--	--	"	
Antimony	"	3.34	---	1.82	"	"	ND	36.4	9.18%	(10-120)	--	--	05/24/07 10:58	M2
Lead	"	54.1	---	0.607	"	"	1.58	48.5	108%	(29-166)	--	--	05/23/07 17:26	
Post Spike (7E22062-PS1)				QC Source: BQE0352-07				Extracted: 05/22/07 15:45						
Thallium	EPA 6020	0.100	---		ug/ml	1x	-0.0000200	0.100	100%	(75-125)	--	--	05/23/07 17:20	
Arsenic	"	0.104	---		"	"	0.00223	"	102%	"	--	--	"	
Selenium	"	0.0974	---		"	"	0.000100	"	97.3%	"	--	--	"	
Beryllium	"	0.102	---		"	"	0.000270	"	102%	"	--	--	"	
Copper	"	0.106	---		"	"	0.0132	0.101	91.9%	"	--	--	"	
Silver	"	0.0958	---		"	"	-0.0000500	0.100	95.8%	"	--	--	"	
Zinc	"	0.130	---		"	"	0.0394	0.0995	91.1%	"	--	--	"	
Nickel	"	0.144	---		"	"	0.0535	"	91.0%	"	--	--	"	
Chromium	"	0.134	---		"	"	0.0326	0.100	101%	"	--	--	"	
Cadmium	"	0.0956	---		"	"	0.0000200	"	95.6%	"	--	--	"	
Antimony	"	0.0503	---		"	"	0.0000100	0.0500	101%	"	--	--	05/24/07 10:53	
Lead	"	0.104	---		"	"	0.00260	0.0995	102%	"	--	--	05/23/07 17:20	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY H, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7E29055 **Soil Preparation Method: EPA 7471A**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29055-BLK1)								Extracted: 05/29/07 15:13						
Mercury	EPA 7471A	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/30/07 11:55	
LCS (7E29055-BS1)								Extracted: 05/29/07 15:13						
Mercury	EPA 7471A	0.697	---	0.100	mg/kg wet	1x	--	0.667	104%	(80-120)	--	--	05/30/07 11:57	
LCS Dup (7E29055-BSD1)								Extracted: 05/29/07 15:13						
Mercury	EPA 7471A	0.690	---	0.100	mg/kg wet	1x	--	0.667	103%	(80-120)	1.01%	(20)	05/30/07 11:59	
Duplicate (7E29055-DUP1)				QC Source: BQE0338-51				Extracted: 05/29/07 15:13						
Mercury	EPA 7471A	ND	---	0.106	mg/kg dry	1x	ND	--	--	--	NR	(30)	05/30/07 12:05	R4
Matrix Spike (7E29055-MS1)				QC Source: BQE0338-51				Extracted: 05/29/07 15:13						
Mercury	EPA 7471A	0.777	---	0.106	mg/kg dry	1x	ND	0.707	110%	(70-130)	--	--	05/30/07 12:02	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Polychlorinated Biphenyls by EPA Method 8082 - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E30046 **Soil Preparation Method: EPA 3S50B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E30046-BLK1)								Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	ND	---	25.0	ug/kg wet	1x	--	--	--	--	--	--	05/30/07 20:50	
Areclor 1221	"	ND	---	50.0	"	"	--	--	--	--	--	--	"	
Aroclor 1232	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1242	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1248	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1254	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1260	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1262	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1268	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Surrogate(s): TCX		*Recovery: 95.1%*			*Limits: 39-139%*	"							*05/30/07 20:50*	
Decachlorobiphenyl		*97.3%*			*33-163%*	"							"	
LCS (7E30046-BS1)								Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	78.6	---	25.0	ug/kg wet	1x	--	83.3	94.4%	(54-125)	--	--	05/30/07 22:34	
Aroclor 1260	"	82.3	---	25.0	"	"	--	"	98.8%	(58-128)	--	--	"	
Surrogate(s): TCX		*Recovery: 92.8%*			*Limits: 39-139%*	"							*05/30/07 22:34*	
Decachlorobiphenyl		*101%*			*33-163%*	"							"	
Matrix Spike (7E30046-MS1)				QC Source: BQE0504-01				Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	92.1	---	27.5	ug/kg dry	1x	ND	91.6	101%	(47-134)	--	--	05/30/07 21:58	
Aroclor 1260	"	130	---	27.5	"	"	43.6	"	94.3%	(22-171)	--	--	"	
Surrogate(s): TCX		*Recovery: 92.1%*			*Limits: 39-139%*	"							*05/30/07 21:58*	
Decachlorobiphenyl		*89.2%*			*33-163%*	"							"	
Matrix Spike Dup (7E30046-MSD1)				QC Source: BQE0504-01				Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	90.2	---	27.5	ug/kg dry	1x	ND	91.6	98.5%	(47-134)	2.08%	(35)	05/30/07 22:16	
Aroclor 1260	"	128	---	27.5	"	"	43.6	"	92.1%	(22-171)	1.55%	"	"	
Surrogate(s): TCX		*Recovery: 93.0%*			*Limits: 39-139%*	"							*05/30/07 22:16*	
Decachlorobiphenyl		*98 1%*			*33-163%*	"							"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E22049 Soil Preparation Method: EPA 5035

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E22049-BLK1)								Extracted: 05/22/07 13:26						
Acetone	EPA 8260B	ND	---	30.0	ug/kg wet	1x	--	--	--	--	--	--	05/22/07 15:15	
Benzene	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	15.0	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	10 0	"	"	--	--	--	--	--	--	"	
1,2-Dibromoethane (EDB)	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethaoe	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	4.00	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E22049 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E22049-BLK1)								Extracted: 05/22/07 13:26						
Hexachlorobutadiene	EPA 8260B	ND	---	10.0	ug/kg wet	1x	--	--	--	--	--	--	05/22/07 15:15	
Methyl tert-butyl ether	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	3.50	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
o-Xylene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
m,p-Xylene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*1,2-DCA-d4*	*Recovery:*	*107%*	*Limits:*	*60-140%*	*" 05/22/07 15:15*
	Toluene-d8		*106%*		*60-140%*	*" "*
	4-BFB		*112%*		*60-140%*	*" "*

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E22049 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E22049-BS1)								Extracted: 05/22/07 13:26						
Acetone	EPA 8260B	303	---	30.0	ug/kg wet	1x	--	400	75.8%	(70-130)	--	--	05/22/07 14:09	
Benzene	"	40.2	---	1.50	"	"	--	40.0	100%	"	--	--	"	
2-Butanone	"	329	---	15.0	"	"	--	400	82.2%	"	--	--	"	
Carbon disulfide	"	37.8	---	3.00	"	"	--	40.0	94.5%	"	--	--	"	
Chlorobenzene	"	40.6	---	2.00	"	"	--	"	102%	"	--	--	"	
1,1-Dichloroethane	"	39.3	---	2.00	"	"	--	"	98.2%	"	--	--	"	
1,1-Dichloroethene	"	37.0	---	3.00	"	"	--	"	92.5%	"	--	--	"	
cis-1,2-Dichloroethene	"	40.5	---	3.00	"	"	--	"	101%	"	--	--	"	
Ethylbenzene	"	40.8	---	4.00	"	"	--	"	102%	"	--	--	"	
Hexachlorobutadiene	"	40.1	---	10.0	"	"	--	"	100%	"	--	--	"	
4-Methyl-2-pentanone	"	352	---	20.0	"	"	--	400	88.0%	"	--	--	"	
Tetrachloroethene	"	39.6	---	2.00	"	"	--	40.0	99.0%	"	--	--	"	
Toluene	"	41.0	---	1.50	"	"	--	"	102%	"	--	--	"	
1,1,1-Trichloroethane	"	39.1	---	2.50	"	"	--	"	97.8%	"	--	--	"	
Trichloroethene	"	42.6	---	2.50	"	"	--	"	106%	"	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*105%*		*Limits:*	*60-140%*	"						*05/22/07 14:09*	
Toluene-d8			*110%*			*60-140%*	"						"	
4-BFB			*100%*			*60-140%*	"						"	
LCS Dup (7E22049-BSD1)								Extracted: 05/22/07 13:26						
Acetone	EPA 8260B	360	---	30.0	ug/kg wet	1x	--	400	90.0%	(70-130)	17.2%	(30)	05/22/07 14:33	
Benzene	"	36.2	---	1.50	"	"	--	40.0	90.5%	"	10.5%	"	"	
2-Butanone	"	365	---	15.0	"	"	--	400	91.2%	"	10.4%	"	"	
Carbon disulfide	"	34.1	---	3.00	"	"	--	40.0	85.2%	"	10.3%	"	"	
Chlorobenzene	"	39.5	---	2.00	"	"	--	"	98.8%	"	2.75%	"	"	
1,1-Dichloroethane	"	35.4	---	2.00	"	"	--	"	88.5%	"	10.4%	"	"	
1,1-Dichloroethene	"	35.5	---	3.00	"	"	--	"	88.8%	"	4.14%	"	"	
cis-1,2-Dichloroethene	"	40.1	---	3.00	"	"	--	"	100%	"	0.993%	"	"	
Ethylbenzene	"	41.0	---	4.00	"	"	--	"	102%	"	0.489%	"	"	
Hexachlorobutadiene	"	35.3	---	10.0	"	"	--	"	88.2%	"	12.7%	"	"	
4-Methyl-2-pentanone	"	368	---	20.0	"	"	--	400	92.0%	"	4.44%	"	"	
Tetrachloroethene	"	39.9	---	2.00	"	"	--	40.0	99.8%	"	0.755%	"	"	
Toluene	"	40.8	---	1.50	"	"	--	"	102%	"	0.489%	"	"	
1,1,1-Trichloroethane	"	37.9	---	2.50	"	"	--	"	94.8%	"	3.12%	"	"	
Trichloroethene	"	37.3	---	2.50	"	"	--	"	93.2%	"	13.3%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*103%*		*Limits:*	*60-140%*	"						*05/22/07 14:33*	
Toluene-d8			*112%*			*60-140%*	"						"	
4-BFB			*101%*			*60-140%*	"						"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E23026 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E23026-BLK1)								Extracted: 05/23/07 09:00						
Acetone	EPA 8260B	ND	---	30.0	ug/kg wet	1x	--	--	--	--	--	--	05/23/07 11:13	
Benzene	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	15.0	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2-Dibromoethane (EDB)	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobeozene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	4.00	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E23026 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E23026-BLK1)								Extracted: 05/23/07 09:00						
Hexachlorobutadiene	EPA 8260B	ND	---	10.0	ug/kg wet	1x	--	--	--	--	--	--	05/23/07 11:13	
Methyl tert-butyl ether	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	3.50	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbeazene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
o-Xylene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
m,p-Xylene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*1,2-DCA-d4*	*Recovery:*	*118%*	*Limits:* *60-140%*	*"*	*05/23/07 11:13*
	Toluene-d8		*102%*	*60-140%*	*"*	*"*
	4-BFB		*115%*	*60-140%*	*"*	*"*

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Sod Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E23026 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E23026-BS1)								Extracted: 05/23/07 09:00						
Acetone	EPA 8260B	300	---	30.0	ug/kg wet	1x	--	400	75.0%	(70-130)	--	--	05/23/07 10:05	
Benzene	"	40.6	---	1.50	"	"	--	40.0	102%	"	--	--	"	
2-Butanone	"	303	---	15.0	"	"	--	400	75.8%	"	--	--	"	
Carbon disulfide	"	40.4	---	3.00	"	"	--	40.0	101%	"	--	--	"	
Chlorobenzene	"	42.7	---	2.00	"	"	--	"	107%	"	--	--	"	
1,1-Dichloroethane	"	40.5	---	2.00	"	"	--	"	101%	"	--	--	"	
1,1-Dichloroethene	"	40.4	---	3.00	"	"	--	"	101%	"	--	--	"	
cis-1,2-Dichloroetheac	"	42.1	---	3.00	"	"	--	"	105%	"	--	--	"	
Ethylbenzene	"	44.4	---	4.00	"	"	--	"	111%	"	--	--	"	
Hexachlorobutadiene	"	47.8	---	10.0	"	"	--	"	120%	"	--	--	"	
4-Methyl-2-pentanone	"	313	---	20.0	"	"	--	400	78.2%	"	--	--	"	
Tetrachloroethene	"	47.1	---	2.00	"	"	--	40.0	118%	"	--	--	"	
Toluene	"	45.2	---	1.50	"	"	--	"	113%	"	--	--	"	
1,1,1-Trichloroethane	"	43.1	---	2.50	"	"	--	"	108%	"	--	--	"	
Trichloroethene	"	39.8	---	2.50	"	"	--	"	99.5%	"	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*100%*		*Limits:*	*60-140%*	*"*						*05/23/07 10:05*	
Toluene-d8			*112%*			*60-140%*	*"*						*"*	
4-BFB			*104%*			*60-140%*	*"*						*"*	
LCS Dup (7E23026-BSD1)								Extracted: 05/23/07 09:00						
Acetone	EPA 8260B	355	---	30.0	ug/kg wet	1x	--	400	88.8%	(70-130)	16.8%	(30)	05/23/07 10:29	
Benzene	"	39.8	---	1.50	"	"	--	40.0	99.5%	"	1.99%	"	"	
2-Butanone	"	362	---	15.0	"	"	--	400	90.5%	"	17.7%	"	"	
Carbon disulfide	"	37.8	---	3.00	"	"	--	40.0	94.5%	"	6.65%	"	"	
Chlorobenzene	"	45.6	---	2.00	"	"	--	"	114%	"	6.57%	"	"	
1,1-Dichloroethane	"	38.6	---	2.00	"	"	--	"	96.5%	"	4.80%	"	"	
1,1-Dichloroethene	"	38.0	---	3.00	"	"	--	"	95.0%	"	6.12%	"	"	
cis-1,2-Dichloroethene	"	41.3	---	3.00	"	"	--	"	103%	"	1.92%	"	"	
Ethylbenzene	"	45.7	---	4.00	"	"	--	"	114%	"	2.89%	"	"	
Hexachlorobutadiene	"	52.8	---	10.0	"	"	--	"	132%	"	9.94%	"	"	
4-Methyl-2-pentanone	"	375	---	20.0	"	"	--	400	93.8%	"	18.0%	"	"	
Tetrachloroethene	"	40.4	---	2.00	"	"	--	40.0	101%	"	15.3%	"	"	
Toluene	"	41.6	---	1.50	"	"	--	"	104%	"	8.29%	"	"	
1,1,1-Trichloroethane	"	39.3	---	2.50	"	"	--	"	98.2%	"	9.22%	"	"	
Trichloroethene	"	38.0	---	2.50	"	"	--	"	95.0%	"	4.63%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*104%*		*Limits:*	*60-140%*	*"*						*05/23/07 10:29*	
Toluene-d8			*102%*			*60-140%*	*"*						*"*	
4-BFB			*100%*			*60-140%*	*"*						*"*	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E24024 **Soil Preparation Method: EPA 503S**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E24024-BLK1)								Extracted: 05/24/07 08:26						
Acetone	EPA 8260B	ND	---	30.0	ug/kg wet	1x	--	--	--	--	--	--	05/24/07 11:36	
Benzene	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	15.0	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2-Dibromoethane (EDB)	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	4.00	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E24024 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E24024-BLK1)								Extracted: 05/24/07 08:26						
Hexachlorobutadiene	EPA 8260B	ND	---	10.0	ug/kg wet	1x	--	--	--	--	--	--	05/24/07 11:36	
Methyl tert-butyl ether	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	3.50	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Tetrachloroethcoe	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
o-Xylene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
m,p-Xylene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	

Surragate(s):	*1,2-DCA-d4*	*Recovery: 114%*	*Limits: 60-140%*	"	*05/24/07 11:36*
	Toluene-d8	*98.8%*	*60-140%*	"	"
	4-BFB	*107%*	*60-140%*	"	"

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E24024 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E24024-BS1)								Extracted: 05/24/07 08:26						
Acetone	EPA 8260B	315	---	30.0	ug/kg wet	1x	--	400	78.8%	(70-130)	--	--	05/24/07 10:17	
Benzene	"	39.0	---	1.50	"	"	--	40.0	97.5%	"	--	--	"	
2-Butanone	"	323	---	15.0	"	"	--	400	80.8%	"	--	--	"	
Carbon disulfide	"	40.4	---	3.00	"	"	--	40.0	101%	"	--	--	"	
Chlorobenzene	"	41.9	---	2.00	"	"	--	"	105%	"	--	--	"	
1,1-Dichloroethane	"	38.4	---	2.00	"	"	--	"	96.0%	"	--	--	"	
1,1-Dichloroethene	"	39.4	---	3.00	"	"	--	"	98.5%	"	--	--	"	
cis-1,2-Dichloroethene	"	39.6	---	3.00	"	"	--	"	99.0%	"	--	--	"	
Ethylbenzene	"	44.4	---	4.00	"	"	--	"	111%	"	--	--	"	
Hexachlorobutadiene	"	43.8	---	10.0	"	"	--	"	110%	"	--	--	"	
4-Methyl-2-pentanone	"	328	---	20.0	"	"	--	400	82.0%	"	--	--	"	
Tetrachloroethene	"	41.5	---	2.00	"	"	--	40.0	104%	"	--	--	"	
Toluene	"	41.6	---	1.50	"	"	--	"	104%	"	--	--	"	
1,1,1-Trichloroethane	"	38.4	---	2.50	"	"	--	"	96.0%	"	--	--	"	
Trichloroethene	"	36.6	---	2.50	"	"	--	"	91.5%	"	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 94.5%*			*Limits: 60-140%*	"							*05/24/07 10:17*	
Toluene-d8		*104%*			*60-140%*	"							"	
4-BFB		*97.5%*			*60-140%*	"							"	
LCS Dup (7E24024-BSD1)								Extracted: 05/24/07 08:26						
Acetone	EPA 8260B	340	---	30.0	ug/kg wet	1x	--	400	85.0%	(70-130)	7.63%	(30)	05/24/07 10:41	
Benzene	"	37.4	---	1.50	"	"	--	40.0	93.5%	"	4.19%	"	"	
2-Butanone	"	363	---	15.0	"	"	--	400	90.8%	"	11.7%	"	"	
Carbon disulfide	"	38.0	---	3.00	"	"	--	40.0	95.0%	"	6.12%	"	"	
Chlorobenzene	"	40.2	---	2.00	"	"	--	"	100%	"	4.14%	"	"	
1,1-Dichloroethane	"	38.2	---	2.00	"	"	--	"	95.5%	"	0.522%	"	"	
1,1-Dichloroethene	"	37.5	---	3.00	"	"	--	"	93.8%	"	4.94%	"	"	
cis-1,2-Dichloroethene	"	39.7	---	3.00	"	"	--	"	99.2%	"	0.252%	"	"	
Ethylbenzene	"	40.6	---	4.00	"	"	--	"	102%	"	8.94%	"	"	
Hexachlorobutadiene	"	41.8	---	10.0	"	"	--	"	104%	"	4.67%	"	"	
4-Methyl-2-pentanone	"	377	---	20.0	"	"	--	400	94.2%	"	13.9%	"	"	
Tetrachloroethene	"	40.1	---	2.00	"	"	--	40.0	100%	"	3.43%	"	"	
Toluene	"	41.0	---	1.50	"	"	--	"	102%	"	1.45%	"	"	
1,1,1-Trichloroethane	"	37.5	---	2.50	"	"	--	"	93.8%	"	2.37%	"	"	
Trichloroethene	"	36.3	---	2.50	"	"	--	"	90.8%	"	0.823%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 105%*			*Limits: 60-140%*	"							*05/24/07 10:41*	
Toluene-d8		*107%*			*60-140%*	"							"	
4-BFB		*108%*			*60-140%*	"							"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25034 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25034-BLK1)								Extracted: 05/25/07 10:00						
1,2-Dibromoethane (EDB)	EPA 8260B	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/25/07 13:57	
Acetone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzene	"	ND	---	0.0200	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	**Old Bremerton Gas Works**	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25034 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25034-BLK1)								Extracted: 05/25/07 10:00						
Hexachlorobutadiene	EPA 8260B	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	05/25/07 13:57	
Methyl tert-butyl ether	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	0.300	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*1,2-DCA-d4*	*Recovery:*	*98.5%*	*Limits: 75-125%*	*"*	*05/25/07 13:57*
	Toluene-d8		*102%*	*75-125%*	*"*	*"*
	4-BFB		*103%*	*75-125%*	*"*	*"*

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25034 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E25034-BS1)								Extracted: 05/25/07 10:00						
Benzene	EPA 8260B	1.91	---	0.0200	mg/kg wet	1x	--	2.00	95.5%	(75-125)	--	--	05/25/07 12:23	
Chlorobenzene	"	1.95	---	0.100	"	"	--	"	97.5%	"	--	--	"	
1,1-Dichloroethene	"	1.97	---	0.100	"	"	--	"	98.5%	(69-128)	--	--	"	
Trichloroethene	"	1.98	---	0.100	"	"	--	"	99.0%	(75-125)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 100%*			*Limits: 75-125%*	"							05/25/07 12:23	
Toluene-d8		*101%*			*75-125%*	"							"	
4-BFB		*98.5%*			*75-125%*	"							"	
LCS Dup (7E25034-BSD1)								Extracted: 05/25/07 10:00						
Benzene	EPA 8260B	2.04	---	0.0200	mg/kg wet	1x	--	2.00	102%	(75-125)	6.58%	(20)	05/25/07 12:50	
Chlorobenzene	"	2.05	---	0.100	"	"	--	"	102%	"	5.00%	"	"	
1,1-Dichloroethene	"	1.98	---	0.100	"	"	--	"	99.0%	(69-128)	0.506%	"	"	
Trichloroethene	"	2.09	---	0.100	"	"	--	"	104%	(75-125)	5.41%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 102%*			*Limits: 75-125%*	"							05/25/07 12:50	
Toluene-d8		*102%*			*75-125%*	"							"	
4-BFB		*97.0%*			*75-125%*	"							"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E23005 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E2300S-BLK1)								Extracted: 05/23/07 08:41						
Acenaphthene	EPA 8270C	ND	---	0.330	mg/kg wet	1x	--	--	--	--	--	--	05/31/07 20:25	
Acenaphthylene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Aniline	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (a) anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (a) pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (b) fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (k) fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (ghi) perylene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzoic Acid	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	C5
Benzyl alcohol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroethoxy)methane	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroethyl)ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroisopropyl)ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-ethylhexyl)phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Bromophenyl phenyl ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Butyl benzyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Carbazole	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Chloroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
4-Chloro-3-methylphenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Chloronaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Chlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Chlorophenyl phenyl ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Methylphenol (o-Cresol)	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Chrysene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Di-n-butyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dibenz (a,h) anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dibenzofuran	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
3,3'-Dichlorobenzidine	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
2,4-Dichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Diethyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4-Dimethylphenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dimethyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4,6-Dinitro-2-methylphenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2,4-Dinitrophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E23005 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E23005-BLK1)								Extracted: 05/23/07 08:41						
2,4-Dinitrotoluene	EPA 8270C	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	05/31/07 20:25	
2,6-Dinitrotoluene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
N-Nitrosodiphenylamine	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Fluorene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorobutadiene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorocyclopentadiene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	C5
Hexachloroethane	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Indeno (1,2,3-cd) pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Isophorone	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1-Methylnaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Methylnaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
3-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
4-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Nitrobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Nitrophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Nitrophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
N-Nitrosodi-n-propylamine	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Di-n-octyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Pentachlorophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Phenanthrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Phenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4,5-Trichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4,6-Trichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*2-FBP*	*Recovery: 102%*	*Limits: 27-126%*	"	*05/31/07 20:25*
	2-FP	*82.9%*	*16-121%*	"	"
	Nitrobenzene-d5	*111%*	*26-125%*	"	"
	Phenol-d6	*61.9%*	*10-120%*	"	"
	p-Terphenyl-d14	*108%*	*26-150%*	"	"
	2,4,6-TBP	*55.0%*	*10-152%*	"	"

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E23005 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E23005-BS1)								Extracted: 05/23/07 08:41						
Acenaphthene	EPA 8270C	2.80	---	0.330	mg/kg wet	1x	--	3.33	84.1%	(47-128)	--	--	05/30/07 04:32	
4-Chloro-3-methylphenol	"	2.86	---	0.330	"	"	--	"	85.9%	(49-130)	--	--	"	
2-Chlorophenol	"	2.83	---	0.330	"	"	--	"	85.0%	(51-120)	--	--	"	
1,4-Dichlorobenzene	"	2.61	---	0.330	"	"	--	"	78.4%	"	--	--	"	
2,4-Dinitrotoluene	"	2.70	---	0.500	"	"	--	"	81.1%	(51-135)	--	--	"	
4-Nitrophenol	"	3.21	---	0.500	"	"	--	"	96.4%	(32-155)	--	--	"	
N-Nitrosodi-n-propylamine	"	2.84	---	0.330	"	"	--	"	85.3%	(51-120)	--	--	"	
Pentachlorophenol	"	3.44	---	0.500	"	"	--	"	103%	(46-163)	--	--	"	
Phenol	"	2.84	---	0.330	"	"	--	"	85.3%	(50-122)	--	--	"	
Pyrene	"	3.76	---	0.330	"	"	--	"	113%	(45-138)	--	--	"	
1,2,4-Trichlorobenzene	"	2.64	---	0.330	"	"	--	"	79.3%	(47-120)	--	--	"	
Surrogate(s): *2-FBP*		*Recovery:*	*92.8%*		*Limits:*	*27-126%*	"						05/30/07 04:32	
2-FP			*86.8%*			*16-121%*	"						"	
Nitrobenzene-d5			*84.4%*			*26-125%*	"						"	
Phenol-d6			*59.2%*			*10-120%*	"						"	
p-Terphenyl-d14			*124%*			*26-150%*	"						"	
2,4,6-TBP			*103%*			*10-152%*	"						"	
Matrix Spike (7E23005-MS1)					QC Source: BQE0338-01			Extracted: 05/23/07 08:41						
Acenaphthene	EPA 8270C	2.92	---	0.877	mg/kg dry	1x	ND	3.54	82.5%	(47-128)	--	--	05/30/07 05:05	
4-Chloro-3-methylphenol	"	3.35	---	0.877	"	"	ND	"	94.6%	(45-130)	--	--	"	
2-Chlorophenol	"	3.22	---	0.877	"	"	ND	"	91.0%	(48-120)	--	--	"	
1,4-Dichlorobenzene	"	3.05	---	0.877	"	"	ND	"	86.2%	(50-120)	--	--	"	
2,4-Dinitrotoluene	"	2.42	---	1.33	"	"	ND	"	68.4%	(34-154)	--	--	"	
4-Nitrophenol	"	2.71	---	1.33	"	"	ND	"	76.6%	(17-164)	--	--	"	
N-Nitrosodi-n-propylamine	"	3.12	---	0.877	"	"	ND	"	88.1%	(49-120)	--	--	"	
Pentachlorophenol	"	3.64	---	1.33	"	"	ND	"	103%	(22-183)	--	--	"	
Phenol	"	3.23	---	0.877	"	"	ND	"	91.2%	(32-132)	--	--	"	
Pyrene	"	4.52	---	0.877	"	"	0.542	"	112%	(31-147)	--	--	"	
1,2,4-Trichlorobenzene	"	3.16	---	0.877	"	"	ND	"	89.3%	(47-120)	--	--	"	
Surrogate(s): *2-FBP*		*Recovery:*	*88.7%*		*Limits:*	*27-126%*	"						05/30/07 05:05	
2-FP			*92.4%*			*16-121%*	"						"	
Nitrobenzene-d5			*91.8%*			*26-125%*	"						"	
Phenol-d6			*61.9%*			*10-120%*	"						"	
p-Terphenyl-d14			*119%*			*26-150%*	"						"	
2,4,6-TBP			*92.4%*			*10-152%*	"						"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Tritnble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E23005 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Matrix Spike Dup (7E23005-MSD1)				QC Source: BQE0338-01				Extracted: 05/23/07 08:41						
Acenaphthene	EPA 8270C	3.05	---	0.877	mg/kg dry	1x	ND	3.54	86.2%	(47-128)	4.36%	(24)	05/30/07 05:37	
4-Chloro-3-methylpheool	"	3.55	---	0.877	"	"	ND	"	100%	(45-130)	5.80%	(23)	"	
2-Chlorophenol	"	3.31	---	0.877	"	"	ND	"	93.5%	(48-120)	2.76%	(27)	"	
1,4-Dichlorobenzene	"	3.09	---	0.877	"	"	ND	"	87.3%	(50-120)	1.30%	(34)	"	
2,4-Dinitrotoluene	"	2.43	---	1.33	"	"	ND	"	68.6%	(34-154)	0.412%	(24)	"	
4-Ninophenol	"	2.95	---	1.33	"	"	ND	"	83.3%	(17-164)	8.48%	(31)	"	
N-Nitrosodi-n-propylamine	"	3.22	---	0.877	"	"	ND	"	91.0%	(49-120)	3.15%	"	"	
Pentachlorophenol	"	3.89	---	1.33	"	"	ND	"	110%	(22-183)	6.64%	(26)	"	
Phenol	"	3.28	---	0.877	"	"	ND	"	92.7%	(32-132)	1.54%	(31)	"	
Pyrene	"	4.83	---	0.877	"	"	0.542	"	121%	(31-147)	6.63%	(26)	"	
1,2,4-Trichlorobenzene	"	3.34	---	0.877	"	"	ND	"	94.4%	(47-120)	5.54%	(25)	"	

Surrogate(s):		*Recovery:*		*Limits:*		
	2-FBP	92.4%	27-126%	"		05/30/07 05:37
	2-FP	92.1%	16-121%	"		"
	Nitrobenzene-d5	93.8%	26-125%	"		"
	Phenol-d6	63.3%	10-120%	"		"
	p-Terphenyl-d14	125%	26-150%	"		"
	2,4,6-TBP	98.0%	10-152%	"		"

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25030-BLK1)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	ND	---	0.330	mg/kg wet	1x	--	--	--	--	--	--	06/07/07 01:12	
Acenaphthylene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Aniline	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (a) anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (a) pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (b) fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (k) fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (ghi) perylene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzoic Acid	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzyl alcohol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroethoxy)methane	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroethyl)ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroisopropyl)ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-ethylhexyl)phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Bromophenyl phenyl ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Butyl benzyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Carbazole	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Chloroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
4-Chloro-3-methylphenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Chloronaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Chlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Chlorophenyl phenyl ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Methylphenol (o-Cresol)	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Chrysene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Di-n-butyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dibenz (a,h) anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dibenzofuran	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
3,3'-Dichlorobenzidine	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
2,4-Dichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Diethyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4-Dimethylphenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dimethyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4,6-Dinitro-2-methylphenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2,4-Dinitrophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E2S030-BLK1)								Extracted: 05/31/07 11:12						
2,4-Dinitrotoluene	EPA 8270C	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	06/07/07 01:12	
2,6-Dinitrotoluene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
N-Nitrosodiphenylamine	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Fluorene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorobutadiene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorocyclopentadiene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	C5
Hexachloroethane	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Indeno (1,2,3-cd) pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Isophorone	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1-Methylnaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Methylnaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
3-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
4-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Nitrobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Nitrophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Nitrophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
N-Nitrosodi-o-propylamine	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Di-n-octyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Pentachlorophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Phenanthrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Phenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4,5-Trichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4,6-Trichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	

Surrogate(s):		*Recovery:*	*Limits:*		
	2-FBP	*99.1%*	*27-126%*	"	*06/07/07 01:12*
	2-FP	*95.2%*	*16-121%*	"	"
	Nitrobenzene-d5	*111%*	*26-125%*	"	"
	Phenol-d6	*61.6%*	*10-120%*	"	"
	p-Terphenyl-d14	*105%*	*26-150%*	"	"
	2,4,6-TBP	*88.9%*	*10-152%*	"	"

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270G - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E25030-BS1)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	2.78	---	0.330	mg/kg wet	1x	--	3.33	83.5%	(47-128)	--	--	06/07/07 01:45	
4-Chloro-3-methylphenol	"	2.86	---	0.330	"	"	--	"	85.9%	(49-130)	--	--	"	
2-Chlorophenol	"	2.89	---	0.330	"	"	--	"	86.8%	(51-120)	--	--	"	
1,4-Dichlorobenzene	"	2.79	---	0.330	"	"	--	"	83.8%	"	--	--	"	
2,4-Dinitrotoluene	"	2.97	---	0.500	"	"	--	"	89.2%	(51-135)	--	--	"	
4-Nitrophenol	"	2.78	---	0.500	"	"	--	"	83.5%	(32-155)	--	--	"	
N-Nitrosodi-n-propylamine	"	2.87	---	0.330	"	"	--	"	86.2%	(51-120)	--	--	"	
Pentachlorophenol	"	3.47	---	0.500	"	"	--	"	104%	(46-163)	--	--	"	
Phenol	"	2.86	---	0.330	"	"	--	"	85.9%	(50-122)	--	--	"	
Pyrene	"	3.09	---	0.330	"	"	--	"	92.8%	(45-138)	--	--	"	
1,2,4-Trichlorobenzene	"	2.89	---	0.330	"	"	--	"	86.8%	(47-120)	--	--	"	
Surrogate(s): 2-FBP		*Recovery:* 97.3%			*Limits:* 27-126%	"							06/07/07 01:45	
2-FP		90.7%			16-121%	"							"	
Nitrobenzene-d5		91.6%			26-125%	"							"	
Phenol-d6		59.5%			10-120%	"							"	
p-Terphenyl-d14		102%			26-150%	"							"	
2,4,6-TBP		105%			10-152%	"							"	
Matrix Spike (7E25030-MS1)					QC Source: BQE0385-04			Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	2.07	---	0.356	mg/kg dry	1x	ND	3.60	57.5%	(47-128)	--	--	06/07/07 02:18	
4-Chloro-3-methylphenol	"	2.19	---	0.356	"	"	ND	"	60.8%	(45-130)	--	--	"	
2-Chlorophenol	"	2.15	---	0.356	"	"	ND	"	59.7%	(48-120)	--	--	"	
1,4-Dichlorobenzene	"	2.12	---	0.356	"	"	ND	"	58.9%	(50-120)	--	--	"	
2,4-Dinitrotoluene	"	2.19	---	0.540	"	"	ND	"	60.8%	(34-154)	--	--	"	
4-Nitrophenol	"	1.97	---	0.540	"	"	ND	"	54.7%	(17-164)	--	--	"	
N-Nitrosodi-n-propylamine	"	2.22	---	0.356	"	"	ND	"	61.7%	(49-120)	--	--	"	
Pentachlorophenol	"	2.14	---	0.540	"	"	ND	"	59.4%	(22-183)	--	--	"	
Phenol	"	2.13	---	0.356	"	"	ND	"	59.2%	(32-132)	--	--	"	
Pyrene	"	2.19	---	0.356	"	"	ND	"	60.8%	(31-147)	--	--	"	
1,2,4-Trichlorobenzene	"	2.24	---	0.356	"	"	ND	"	62.2%	(47-120)	--	--	"	
Surrogate(s): 2-FBP		*Recovery:* 60.0%			*Limits:* 27-126%	"							06/07/07 02:18	
2-FP		56.9%			16-121%	"							"	
Nitrobenzene-d5		60.6%			26-125%	"							"	
Phenol-d6		38.1%			10-120%	"							"	
p-Terphenyl-d14		59.7%			26-150%	"							"	
2,4,6-TBP		62.2%			10-152%	"							"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Matrix Spike Dup (7E25030-MSD1)				QC Source: BQE0385-04				Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	1.87	---	0.356	mg/kg dry	1x	ND	3.60	51.9%	(47-128)	10.2%	(24)	06/07/07 02:51	
4-Chloro-3-methylphenol	"	2.00	---	0.356	"	"	ND	"	55.6%	(45-130)	9.07%	(23)	"	
2-Chlorophenol	"	1.92	---	0.356	"	"	ND	"	53.3%	(48-120)	11.3%	(27)	"	
1,4-Dichlorobenzene	"	1.88	---	0.356	"	"	ND	"	52.2%	(50-120)	12.0%	(34)	"	
2,4-Dinitrotoluene	"	1.99	---	0.540	"	"	ND	"	55.3%	(34-154)	9.57%	(24)	"	
4-Nitrophenol	"	1.75	---	0.540	"	"	ND	"	48.6%	(17-164)	11.8%	(31)	"	
N-Nitrosodi-n-propylamine	"	1.96	---	0.356	"	"	ND	"	54.4%	(49-120)	12.4%	"	"	
Pentachlorophenol	"	1.95	---	0.540	"	"	ND	"	54.2%	(22-183)	9.29%	(26)	"	
Phenol	"	1.88	---	0.356	"	"	ND	"	52.2%	(32-132)	12.5%	(31)	"	
Pyrene	"	1.99	---	0.356	"	"	ND	"	55.3%	(31-147)	9.57%	(26)	"	
1,2,4-Trichlorobenzene	"	2.04	---	0.356	"	"	ND	"	56.7%	(47-120)	9.35%	(25)	"	
Surrogate(s):	*2-FBP*	*Recovery:*	*53.6%*		*Limits:*	*27-126%*	"						*06/07/07 02:51*	
	2-FP		*49.7%*			*16-121%*	"						"	
	Nitrobenzene-d5		*53.9%*			*26-125%*	"						"	
	Phenol-d6		*33.6%*			*10-120%*	"						"	
	p-Terphenyl-d14		*54.2%*			*26-150%*	"						"	
	2,4,6-TBP		*54.7%*			*10-152%*	"						"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7E23005 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E2300S-BLK2)								Extracted: 05/23/07 08:41						
Acenaphthene	EPA 8270-SIM	ND	---	0.0100	mg/kg wet	1x	--	--	--	--	--	--	05/25/07 12:41	
Acenaphthylene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (a) anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (a) pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (b) fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (k) fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (ghi) perylene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Chrysene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Dibenz (a,h) anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Fluorene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Indeno (1,2,3-cd) pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
1-Methylnaphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
2-Methylnaphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Phenanthrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Surrogate(s): p-Terphenyl-d14		*Recovery: 93.1%*			*Limits: 50-147%*	"							05/25/07 12:41	
LCS (7E23005-BS2)								Extracted: 05/23/07 08:41						
Acenaphthene	EPA 8270-SIM	0.587	---	0.0100	mg/kg wet	1x	--	0.667	88.0%	(70-125)	--	--	05/25/07 13:16	
Acenaphthylene	"	0.626	---	0.0100	"	"	--	"	93.9%	(70-133)	--	--	"	
Anthracene	"	0.576	---	0.0100	"	"	--	"	86.4%	(70-152)	--	--	"	
Benzo (a) anthracene	"	0.505	---	0.0100	"	"	--	"	75.7%	(60-125)	--	--	"	
Benzo (a) pyrene	"	0.588	---	0.0100	"	"	--	"	88.2%	(64-134)	--	--	"	
Benzo (b) fluoranthene	"	0.511	---	0.0100	"	"	--	"	76.6%	(62-147)	--	--	"	
Benzo (k) fluoranthene	"	0.607	---	0.0100	"	"	--	"	91.0%	(60-144)	--	--	"	
Benzo (ghi) perylene	"	0.499	---	0.0100	"	"	--	"	74.8%	(57-137)	--	--	"	
Chrysene	"	0.582	---	0.0100	"	"	--	"	87.3%	(70-139)	--	--	"	
Dibenz (a,h) anthracene	"	0.449	---	0.0100	"	"	--	"	67.3%	(56-140)	--	--	"	
Fluoranthene	"	0.538	---	0.0100	"	"	--	"	80.7%	(70-141)	--	--	"	
Fluorene	"	0.589	---	0.0100	"	"	--	"	88.3%	(76-132)	--	--	"	
Indeno (1,2,3-cd) pyrene	"	0.449	---	0.0100	"	"	--	"	67.3%	(55-138)	--	--	"	
1-Methylnaphthalene	"	0.577	---	0.0100	"	"	--	"	86.5%	(46-128)	--	--	"	
2-Methylnaphthalene	"	0.583	---	0.0100	"	"	--	"	87.4%	(41-125)	--	--	"	
Naphthalene	"	0.588	---	0.0100	"	"	--	"	88.2%	(43-125)	--	--	"	
Phenanthrene	"	0.491	---	0.0100	"	"	--	"	73.6%	(73-125)	--	--	"	

TestAmerica - Seattle, WA

Blake Meinert

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E23005 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E23005-BS2)								Extracted: 05/23/07 08:41						
Pyrene	EPA 8270-SIM	0.498	---	0.0100	mg/kg wet	1x	--	0.667	74.7%	(68-140)	--	--	05/25/07 13:16	
Surrogate(s): p-Terphenyl-d14		*Recovery:* 85.3%			*Limits: 50-147%*	"							*05/25/07 13:16*	
Matrix Spike (7E23005-MS2)				QC Source: BQE03S2-07				Extracted: 05/23/07 08:41						
Acenaphthene	EPA 8270-SIM	0.663	---	0.0120	mg/kg dry	1x	ND	0.798	83.1%	(67-132)	--	--	05/25/07 19:40	
Acenaphthylene	"	0.761	---	0.0120	"	"	ND	"	95.4%	(65-142)	--	--	"	
Anthracene	"	0.762	---	0.0120	"	"	ND	"	95.5%	(66-158)	--	--	"	
Benzo (a) anthracene	"	0.639	---	0.0120	"	"	ND	"	80.1%	(41-156)	--	--	"	
Benzo (a) pyrene	"	0.742	---	0.0120	"	"	ND	"	93.0%	(52-148)	--	--	"	
Benzo (b) fluoranthene	"	0.666	---	0.0120	"	"	ND	"	83.5%	(53-151)	--	--	"	
Benzo (k) fluoranthene	"	0.738	---	0.0120	"	"	ND	"	92.5%	(46-161)	--	--	"	
Benzo (ghi) perylene	"	0.681	---	0.0120	"	"	ND	"	85.3%	(26-154)	--	--	"	
Chrysene	"	0.734	---	0.0120	"	"	ND	"	92.0%	(55-155)	--	--	"	
Dibenz (a,h) anthracene	"	0.608	---	0.0120	"	"	ND	"	76.2%	(27-157)	--	--	"	
Fluoranthene	"	0.727	---	0.0120	"	"	ND	"	91.1%	(46-172)	--	--	"	
Fluorene	"	0.718	---	0.0120	"	"	ND	"	90.0%	(66-143)	--	--	"	
Indeno (1,2,3-cd) pyrene	"	0.604	---	0.0120	"	"	ND	"	75.7%	(24-159)	--	--	"	
1-Methylnaphthalene	"	0.663	---	0.0120	"	"	ND	"	83.1%	(39-140)	--	--	"	
2-Methylnaphthalene	"	0.674	---	0.0120	"	"	0.00240	"	84.2%	(32-139)	--	--	"	
Naphthalene	"	0.671	---	0.0120	"	"	0.00240	"	83.8%	(38-134)	--	--	"	
Phenanthrene	"	0.660	---	0.0120	"	"	ND	"	82.7%	(63-139)	--	--	"	
Pyrene	"	0.628	---	0.0120	"	"	ND	"	78.7%	(51-172)	--	--	"	
Surrogate(s): p-Terphenyl-d14		*Recovery:* 88.5%			*Limits: 50-147%*	"							*05/25/07 19:40*	
Matrix Spike Dup (7E23005-MSD2)				QC Source: BQE0352-07				Extracted: 05/23/07 08:41						
Acenaphthene	EPA 8270-SIM	0.541	---	0.0120	mg/kg dry	1x	ND	0.798	67.8%	(67-132)	20.3%	(50)	05/25/07 20:15	
Acenaphthylene	"	0.622	---	0.0120	"	"	ND	"	77.9%	(65-142)	20.1%	"	"	
Anthracene	"	0.655	---	0.0120	"	"	ND	"	82.1%	(66-158)	15.1%	"	"	
Benzo (a) anthracene	"	0.558	---	0.0120	"	"	ND	"	69.9%	(41-156)	13.5%	"	"	
Benzo (a) pyrene	"	0.663	---	0.0120	"	"	ND	"	83.1%	(52-148)	11.2%	"	"	
Benzo (b) fluoranthene	"	0.604	---	0.0120	"	"	ND	"	75.7%	(53-151)	9.76%	"	"	
Benzo (k) fluoranthene	"	0.628	---	0.0120	"	"	ND	"	78.7%	(46-161)	16.1%	"	"	
Benzo (ghi) perylene	"	0.602	---	0.0120	"	"	ND	"	75.4%	(26-154)	12.3%	"	"	
Chrysene	"	0.651	---	0.0120	"	"	ND	"	81.6%	(55-155)	12.0%	(44)	"	
Dibenz (a,h) anthracene	"	0.533	---	0.0120	"	"	ND	"	66.8%	(27-157)	13.1%	(50)	"	
Fluoranthene	"	0.648	---	0.0120	"	"	ND	"	81.2%	(46-172)	11.5%	"	"	
Fluorene	"	0.593	---	0.0120	"	"	ND	"	74.3%	(66-143)	19.1%	(52)	"	
Indeno (1,2,3-cd) pyrene	"	0.533	---	0.0120	"	"	ND	"	66.8%	(24-159)	12.5%	(43)	"	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E23005 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Matrix Spike Dup (7E23005-MSD2)					QC Source: BQE03S2-07				Extracted: 05/23/07 08:41					
1-Methylnaphthalene	EPA 8270-SIM	0.565	---	0.0120	mg/kg dry	1x	ND	0.798	70.8%	(39-140)	16.0%	(50)	05/25/07 20:15	
2-Methylnaphthalene	"	0.608	---	0.0120	"	"	0.00240	"	75.9%	(32-139)	10.3%	"	"	
Naphthalene	"	0.583	---	0.0120	"	"	0.00240	"	72.8%	(38-134)	14.0%	"	"	
Phenanthrene	"	0.570	---	0.0120	"	"	ND	"	71.4%	(63-139)	14.6%	"	"	
Pyrene	"	0.541	---	0.0120	"	"	ND	"	67.8%	(51-172)	14.9%	"	"	
Surrogate(s): p-Terphenyl-d14		*Recovery: 73.7%*			*Limits: 50-147%*	"							*05/25/07 20:15*	

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25030-BLK2)									Extracted: 05/31/07 11:12					
Acenaphthene	EPA 8270-SIM	ND	---	0.0100	mg/kg wet	1x	--	--	--	--	--	--	06/06/07 13:17	
Acenaphthylene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (a) anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (a) pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (b) fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (k) fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (ghi) perylene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Chrysene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Dibenz (a,h) anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Fluorene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Indeno (1,2,3-cd) pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
1-Methylnaphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
2-Methylnaphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Phenanthrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Surrogate(s): p-Terphenyl-d14		*Recovery: 83.8%*			*Limits: 50-147%*	"							*06/06/07 13:17*	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E25030-BS2)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	0.613	---	0.0100	mg/kg wet	1x	--	0.667	91.9%	(70-125)	--	--	06/06/07 13:53	
Acenaphthylene	"	0.619	---	0.0100	"	"	--	"	92.8%	(70-133)	--	--	"	
Anthracene	"	0.653	---	0.0100	"	"	--	"	97.9%	(70-152)	--	--	"	
Benzo (a) anthracene	"	0.577	---	0.0100	"	"	--	"	86.5%	(60-125)	--	--	"	
Benzo (a) pyrene	"	0.600	---	0.0100	"	"	--	"	90.0%	(64-134)	--	--	"	
Benzo (b) fluoranthene	"	0.571	---	0.0100	"	"	--	"	85.6%	(62-147)	--	--	"	
Benzo (k) fluoranthene	"	0.551	---	0.0100	"	"	--	"	82.6%	(60-144)	--	--	"	
Benzo (ghi) perylene	"	0.695	---	0.0100	"	"	--	"	104%	(57-137)	--	--	"	
Chrysene	"	0.646	---	0.0100	"	"	--	"	96.9%	(70-139)	--	--	"	
Dibenz (a,h) anthracene	"	0.682	---	0.0100	"	"	--	"	102%	(56-140)	--	--	"	
Fluoranthene	"	0.609	---	0.0100	"	"	--	"	91.3%	(70-141)	--	--	"	
Fluorene	"	0.651	---	0.0100	"	"	--	"	97.6%	(76-132)	--	--	"	
Indeno (1,2,3-cd) pyrene	"	0.669	---	0.0100	"	"	--	"	100%	(55-138)	--	--	"	
1-Methylnaphthalene	"	0.615	---	0.0100	"	"	--	"	92.2%	(46-128)	--	--	"	
2-Methylnaphthalene	"	0.622	---	0.0100	"	"	--	"	93.3%	(41-125)	--	--	"	
Naphthalene	"	0.599	---	0.0100	"	"	--	"	89.8%	(43-125)	--	--	"	
Phenanthrene	"	0.576	---	0.0100	"	"	--	"	86.4%	(73-125)	--	--	"	
Pyrene	"	0.570	---	0.0100	"	"	--	"	85.5%	(68-140)	--	--	"	
Surrogate(s): p-Terphenyl-d14		*Recovery: 83.2%*			*Limits: 50-147%*	"							06/06/07 13:53	
Matrix Spike (7E25030-MS2)						QC Source: BQE0445-05		Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	1.89	---	1.42	mg/kg dry	50x	2.37	0.758	-63.3%	(67-132)	--	--	06/07/07 15:37	M4
Acenaphthylene	"	0.947	---	1.42	"	"	0.284	"	87.5%	(65-142)	--	--	"	
Anthracene	"	2.84	---	1.42	"	"	3.50	"	-87.1%	(66-158)	--	--	"	M4
Benzo (a) anthracene	"	10.5	---	1.42	"	"	14.3	"	-501%	(41-156)	--	--	"	M4
Benzo (a) pyrene	"	15.2	---	1.42	"	"	19.8	"	-607%	(52-148)	--	--	"	M4
Benzo (b) fluoranthene	"	13.6	---	1.42	"	"	17.3	"	-488%	(53-151)	--	--	"	M4
Benzo (k) fluoranthene	"	13.4	---	1.42	"	"	15.5	"	-277%	(46-161)	--	--	"	M4
Benzo (ghi) perylene	"	9.66	---	1.42	"	"	15.1	"	-718%	(26-154)	--	--	"	M4
Chrysene	"	15.5	---	1.42	"	"	20.8	"	-699%	(55-155)	--	--	"	M4
Dibenz (a,h) anthracene	"	4.64	---	1.42	"	"	6.34	"	-224%	(27-157)	--	--	"	M4
Fluoranthene	"	15.2	---	1.42	"	"	22.0	"	-897%	(46-172)	--	--	"	M4
Fluorene	"	1.23	---	1.42	"	"	1.04	"	25.1%	(66-143)	--	--	"	M4
Indeno (1,2,3-cd) pyrene	"	8.90	---	1.42	"	"	12.6	"	-488%	(24-159)	--	--	"	M4
1-Methylnaphthalene	"	0.852	---	1.42	"	"	0.284	"	74.9%	(39-140)	--	--	"	
2-Methylnaphthalene	"	0.852	---	1.42	"	"	0.473	"	50.0%	(32-139)	--	--	"	
Naphthalene	"	1.04	---	1.42	"	"	0.568	"	62.3%	(38-134)	--	--	"	
Phenanthrene	"	6.16	---	1.42	"	"	11.0	"	-639%	(63-139)	--	--	"	M4

TestAmerica - Seattle, WA

Blake Meinert

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Matrix Spike (7E25030-MS2)				QC Source: BQE0445-05				Extracted: 05/31/07 11:12						
Pyrene	EPA 8270-SIM	15.8	---	1.42	mg/kg dry	50x	24.5	0.758	-1150%	(51-172)	--	--	06/07/07 15:37	M4
Surrogate(s): p-Terphenyl-d14		*Recovery: 117%*		*Limits: 50-147%*	"								*06/07/07 15:37*	*Z3*
Matrix Spike Dup (7E25030-MSD2)				QC Source: BQE0445-0S				Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	1.89	---	1.42	mg/kg dry	50x	2.37	0.758	-63.3%	(67-132)	0.00%	(50)	06/07/07 16:11	M4
Acenaphthylene	"	0.852	---	1.42	"	"	0.284	"	74.9%	(65-142)	10.6%	"	"	
Anthracene	"	3.03	---	1.42	"	"	3.50	"	-62.0%	(66-158)	6.47%	"	"	M4
Benzo (a) anthracene	"	10.2	---	1.42	"	"	14.3	"	-541%	(41-156)	2.90%	"	"	M4
Benzo (a) pyrene	"	15.5	---	1.42	"	"	19.8	"	-567%	(52-148)	1.95%	"	"	M4
Benzo (b) fluoranthene	"	14.7	---	1.42	"	"	17.3	"	-343%	(53-151)	7.77%	"	"	M4
Benzo (k) fluoranthene	"	12.7	---	1.42	"	"	15.5	"	-369%	(46-161)	5.36%	"	"	M4
Benzo (ghi) perylene	"	9.56	---	1.42	"	"	15.1	"	-731%	(26-154)	1.04%	"	"	M4
Chrysene	"	15.2	---	1.42	"	"	20.8	"	-739%	(55-155)	1.95%	(44)	"	M4
Dibenz (a,h) anthracene	"	4.83	---	1.42	"	"	6.34	"	-199%	(27-157)	4.01%	(50)	"	M4
Fluoranthene	"	15.3	---	1.42	"	"	22.0	"	-884%	(46-172)	0 656%	"	"	M4
Fluorene	"	1.23	---	1.42	"	"	1.04	"	25.1%	(66-143)	0.00%	(52)	"	M4
Indeno (1,2,3-cd) pyrene	"	9.09	---	1.42	"	"	12.6	"	-463%	(24-159)	2.11%	(43)	"	M4
1-Methylnaphthalene	"	0.758	---	1.42	"	"	0.284	"	62.5%	(39-140)	11.7%	(50)	"	
2-Methylnaphthalene	"	0.852	---	1.42	"	"	0.473	"	50.0%	(32-139)	0.00%	"	"	
Naphthalene	"	1.04	---	1.42	"	"	0.568	"	62.3%	(38-134)	0.00%	"	"	
Phenanthrene	"	6.06	---	1.42	"	"	11.0	"	-652%	(63-139)	1.64%	"	"	M4
Pyrene	"	15.3	---	1.42	"	"	24.5	"	-1210%	(51-172)	3.22%	"	"	M4
Surrogate(s): p-Terphenyl-d14		*Recovery: 107%*		*Limits: 50-147%*	"								*06/07/07 16:11*	*Z3*

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Conventional Chemistry Parameters by APHA/EPA Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E24020 **Soil Preparation Method: Special Procedure**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E24020-BLK1)								Extracted: 05/24/07 10:52						
Hexavalent Chromium	EPA 7196A	ND	---	1.0	mg/kg wet	1x	--	--	--	--	--	--	05/25/07 12:23	
LCS (7E24020-BS1)								Extracted: 05/24/07 10:52						
Hexavalent Chromium	EPA 7196A	22	---	1.0	mg/kg wet	1x	--	25.0	88.0%	(80-120)	--	--	05/25/07 12:23	
Duplicate (7E24020-DUP1)				QC Source: BQE0352-14				Extracted: 05/24/07 10:52						
Hexavalent Chromium	EPA 7196A	ND	---	1.2	mg/kg dry	1x	ND	--	--	--	NR	(30)	05/25/07 12:23	
Matrix Spike (7E24020-MS1)				QC Source: BQE0352-14				Extracted: 05/24/07 10:52						
Hexavalent Chromium	EPA 7196A	26	---	1.2	mg/kg dry	1x	ND	30.6	85.0%	(75-125)	--	--	05/25/07 12:23	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Physical Parameters by APHA/ASTM/EPA Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25053 **Soil Preparation Method: Dry Weight**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25053-BLK1)								Extracted: 05/25/07 16:40						
Dry Weight	BSOPSPL00 3R08	100	---	1.00	%	1x	--	--	--	--	--	--	05/29/07 00:00	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Gasoline Hydrocarbons by NWTPH-Gx and BTEX by EPA Method 8021B - Laboratory Quality Control Results

TestAmerica - Spokane, WA

QC Batch: 7060006 **Soil Preparation Method: GC Volatiles**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7060006-BLK1)								Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	ND	---	10.0	mg/kg wet	1x	--	--	--	--	--	--	06/01/07 12:26	
Surrogate(s): 4-BFB (FID)		*Recovery:*	*92.0%*		*Limits: 50-150%*	"							*06/01/07 12:26*	
LCS (7060006-BS1)								Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	44.0	---	10.0	mg/kg wet	1x	--	50.0	88.0%	(80-120)	--	--	06/01/07 12:50	
Surrogate(s): 4-BFB (FID)		*Recovery:*	*132%*		*Limits: 50-150%*	"							*06/01/07 12:50*	
Duplicate (7060006-DUP1)					QC Source: SQF0003-02			Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	ND	---	20.8	mg/kg dry	1x	ND	--	--	--	1.55%	(20)	06/01/07 15:44	
Surrogate(s): 4-BFB (FID)		*Recovery:*	*17.0%*		*Limits: 50-150%*	"							*06/01/07 15:44*	ZX
Duplicate (7060006-DUP2)					QC Source: SQF0004-05			Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	ND	---	9.16	mg/kg dry	2x	ND	--	--	--	94.3%	(20)	06/01/07 19:03	R4
Surrogate(s): 4-BFB (FID)		*Recovery:*	*65.1%*		*Limits: 50-150%*	"							*06/01/07 19:03*	
Matrix Spike (7060006-MS1)					QC Source: SQF0003-02			Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarboos	NWTPH-Gx/ 8021B	11.1	---	20.8	mg/kg dry	1x	1.92	104	8.83%	(70-130)	--	--	06/01/07 16:09	M2
Surrogate(s): 4-BFB (FID)		*Recovery:*	*18.0%*		*Limits: 50-150%*	"							*06/01/07 16:09*	ZX

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Organotins - Laboratory Quality Control Results
STL Seattle

QC Batch: 19029 Soil Preparation Method: Organotin Prep

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (580-19160-1)				QC Source:				Extracted: 05/25/07 02:36						
Tributyltin	Organotins	ND	---	0.67	ug/Kg dry	1x	--	--	--	--	--	--	05/30/07 09:36	
Surrogate(s): Tripentyltin		*Recovery: 81%*			*Limits: 42-192%*	"							05/30/07 09:36	
LCS (580-19160-2)				QC Source:				Extracted: 05/25/07 02:36						
Tributyltin	Organotins	98.1	---	0.67	ug/Kg dry	1x	--	119	83%	(29-110)	--	--	05/30/07 09:59	
Surrogate(s): Tripentyltin		*Recovery: 100%*			*Limits: 42-192%*	"							05/30/07 09:59	
LCS Dup (580-19160-3)				QC Source:				Extracted: 05/25/07 02:36						
Tributyltin	Organotins	95.3	---	0.67	ug/Kg dry	1x	--	119	80%	(29-110)	3%	(28)	05/30/07 10:22	
Surrogate(s): Tripentyltin		*Recovery: 101%*			*Limits: 42-192%*	"							05/30/07 10:22	

TestAmerica - Seattle, WA

Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/11/07 17:46

Notes and Definitions

Report Specific Notes:

C5	-	Calibration Verification recovery was below the method control limit for this analyte. An additional check standard was analyzed at the reporting limit to ensure instrument sensitivity at the reporting limit. Samples ND.
L	-	Laboratory Control Sample and/or Laboratory Control Sample Duplicate recovery was above the acceptance limits. Analyte not detected, data not impacted.
M2	-	The MS and/or MSD were below the acceptance limits due to sample matrix interference. See Blank Spike (LCS).
M4	-	The sample required a dilution due to matrix interference. Because of this dilution, the matrix spike concentrations in the sample were reduced to a level where the recovery calculation does not provide useful information. See Blank Spike (LCS).
R4	-	Due to the low levels of analyte in the sample, the duplicate RPD calculation does not provide useful information.
Z3	-	The sample required a dilution due to the nature of the sample matrix. Because of this dilution, the surrogate spike concentration in the sample was reduced to a level where the recovery calculation does not provide useful information.
Z6	-	Surrogate recovery was below acceptance limits.
ZX	-	Due to sample matrix effects, the surrogate recovery was outside the acceptance limits.

Laboratory Reporting Conventions:

DET	-	Analyte DETECTED at or above the Reporting Limit. Qualitative Analyses only.
ND	-	Analyte NOT DETECTED at or above the reporting limit (MDL or MRL, as appropriate).
NR/NA	-	Not Reported / Not Available
dry	-	Sample results reported on a Dry Weight Basis. Results and Reporting Limits have been corrected for Percent Dry Weight.
wet	-	Sample results and reporting limits reported on a Wet Weight Basis (as received). Results with neither 'wet' nor 'dry' are reported on a Wet Weight Basis.
RPD	-	RELATIVE PERCENT DIFFERENCE (RPDs calculated using Results, not Percent Recoveries).
MRL	-	METHOD REPORTING LIMIT. Reporting Level at, or above, the lowest level standard of the Calibration Table.
MDL*	-	METHOD DETECTION LIMIT. Reporting Level at, or above, the statistically derived limit based on 40CFR, Part 136, Appendix B. *MDLs are listed on the report only if the data has been evaluated below the MRL. Results between the MDL and MRL are reported as Estimated Results.
Dil	-	Dilutions are calculated based on deviations from the standard dilution performed for an analysis, and may not represent the dilution found on the analytical raw data.
Reporting Limits	-	Reporting limits (MDLs and MRLs) are adjusted based on variations in sample preparation amounts, analytical dilutions and percent solids, where applicable.
Electronic Signature	-	Electronic Signature added in accordance with TestAmerica's *Electronic Reporting and Electronic Signatures Policy*. Application of electronic signature indicates that the report has been reviewed and approved for release by the laboratory. Electronic signature is intended to be the legally binding equivalent of a traditionally handwritten signature.

TestAmerica
ANALYTICAL TESTING CORPORATION

11720 North Creek Pkwy N Suite 400, Bothell, WA 98011-8244 425-420-9200 FAX 420-9210
11922 E. First Ave, Spokane, WA 99206-5302 509-924-9200 FAX 924-9290
9405 SW Nimbus Ave, Beaverton, OR 97008-7145 503-906-9200 FAX 906-9210
2000 W International Airport Rd Ste A10, Anchorage, AK 99502-1119 907-563-9200 FAX 563-9210

CHAIN OF CUSTODY REPORT

Work Order #: BUE0352

CLIENT: GeoEngineers
REPORT TO: SEAN TRIMBLE
ADDRESS: 600 Stewart, Ste. 1700 Seattle, WA
PHONE: (206) 239-3230 FAX: (206) 728-2732
PROJECT NAME: Old Bremerton Gas Works
PROJECT NUMBER: 0892-017-01
SAMPLED BY: Missy Leone

INVOICE TO:
P.O. NUMBER: 0892-017-00

TURNAROUND REQUEST
In Business Days *
Organic & inorganic Analyses: 10 (STD) | 7 | 5 | 4 | 3 | 2 | 1 | <1
Petroleum Hydrocarbon Analyses: 10 (STD) | 4 | 3 | 2 | 1 | <1
OTHER Specify:
* Turnaround Requests less than standard may incur Rush Charges.

PRESERVATIVE

REQUESTED ANALYSES

CLIENT SAMPLE IDENTIFICATION	SAMPLING DATE/TIME	NWTPH-Gx	NWTPH-Dx w/Sg cleanup	VOCs	PCBs	SVOCs (incl. PAHs)	PPL metals	Chromium VI	Tributyltin (TBT)	MATRIX (W, S, O)	# OF CONT.	LOCATION / COMMENTS	TA WO.#
1 SB-1-5.0	5/21/08 10:50	X	X	X	X	X	X	X	X	S	5		01
2 -10.0	11:05										5		02
3 -15.0	11:10										5		03
4 -20.0	11:15										5		04
5 -25.0	11:20										5		05
6 -30.0	11:30										5		06
7 -35.0	11:35	X	X	X	X	X	X	X	X		5		07
8 -40.0	11:45										2		08
9 -45.0	12:00										2		09
10 SB-2-5.0	13:33										5		10

RELEASED BY: Melissa A. Leone
PRINT NAME: MELISSA LEONE FIRM: GEI DATE: 05/21/07 TIME:
RECEIVED BY: Shanna Bay
PRINT NAME: FIRM: DATE: 5/21 TIME: 1810
RELEASED BY: PRINT NAME: FIRM: DATE: TIME:
RECEIVED BY: PRINT NAME: FIRM: DATE: TIME:

AUDITORIAL REMARKS: Please rename all "SB-" sample numbers with "MW-". For example: "SB-1-5.0" will be "MW-1-5.0". Thanks!

TEMP: 4°C PAGE 1 OF 2

MW
SB

x maybe?

w/o

TestAmerica
ANALYTICAL TESTING CORPORATION

11720 North Creek Pkwy N Suite 400, Bothell, WA 98011-8244 425-420-9200 FAX 420-9210
11922 E. First Ave, Spokane, WA 99206-5302 509-924-9200 FAX 924-9290
9405 SW Nimbus Ave, Beaverton, OR 97008-7145 503-906-9200 FAX 906-9210
2000 W International Airport Rd Ste A10, Anchorage, AK 99502-1119 907-563-9200 FAX 563-9210

CHAIN OF CUSTODY REPORT

Work Order #: BQE0352

CLIENT: GeoEngineers
REPORT TO: SEAN TRIMBLE
ADDRESS: 600 Stewart, Ste. 1700 Seattle, WA
PHONE: (206) 239-3230 FAX: (206) 728-2732
PROJECT NAME: Old Bremerton Gas Works
PROJECT NUMBER: 0892-017-01
SAMPLED BY: Missy Leone

INVOICE TO:
P.O. NUMBER:

TURNAROUND REQUEST
In Business Days *
Organic & Inorganic Analyses: 10 (STD) 7 5 4 3 2 1 <1
Petroleum Hydrocarbon Analyses: 5 (STD) 4 3 2 1 <1
OTHER Specify:
* Turnaround Requests less than standard may incur Rush Charges.

PRESERVATIVE

REQUESTED ANALYSES

CLIENT SAMPLE IDENTIFICATION	SAMPLING DATE/TIME	NWTPH-Gx	NWTPH-Dx w/SG cleanup	VOCs	PCBs	SVOCs (incl. PAHs)	PPL metals	Chromium VI	TBT	MATRIX (W, S, O)	# OF CONT.	LOCATION / COMMENTS	TA WO ID
SB-2 -10.0	5/21 13:40	X	X	X	X	X	X	X	X	S	5		11
-15.0	5/21 13:50										5		12
-30.0	14:10										2		13
-40.0	14:25	X	X	X	X	X	X	X	X		5		14
-45.0	14:30										5		15

RELEASED BY: Melissa A. Leone DATE: 05/21/07
PRINT NAME: MELISSA LEONE FIRM: GEI TIME:
RECEIVED BY: [signature] DATE: 5/21
PRINT NAME: Shannae Bong FIRM: TA TIME: 1810
RELEASED BY: DATE:
PRINT NAME: FIRM: TIME:
RECEIVED BY: DATE:
PRINT NAME: FIRM: TIME:

ADDITIONAL REMARKS:
TEMP: 4.1
PAGE 2 OF 2

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

June 13, 2007

Sean Trimble
Geo Engineers - Seattle
600 Stewart St, Suite 1700
Seattle, WA/USA 98101

RE: Old Bremerton Gas Works

Enclosed are the results of analyses for samples received by the laboratory on 05/23/07 17:00. The following list is a summary of the Work Orders contained in this report, generated on 06/13/07 10:31.

If you have any questions conceming this report, please feel free to contact me.

Work Order	Project	ProjectNumber
BOE0417	Old Bremerton Gas Works	Old Bremerton Gas Works

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	**Old Bremerton Gas Works**	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
MW-4-15.0	BQE0417-02	Soil	05/23/07 12:00	05/23/07 17:00
MW-4-30.0	BQE0417-03	Soil	05/23/07 12:55	05/23/07 17:00
MW-7-5.0	BQE0417-05	Soil	05/23/07 09:35	05/23/07 17:00
MW-7-25.0	BQE0417-06	Soil	05/23/07 09:55	05/23/07 17:00

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Petroleum Products by NWTPH-Dx with Acid/Silica Gel Clean-up

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		Soil			Sampleii: 05/23/07 12:00					
Diesel Range Hydrocarbons	NWTPH-Dx	2960	-----	114	mg/kg dry	10x	7E29047	05/29/07 13:36	05/30/07 07:26	QP
Lube Oil Range Hydrocarbons	"	412	-----	284	"	"	"	"	"	
Surrogate(s): 2-FBP			*160%*		*54 - 148 %*	"			"	*ZX*
Octacosane			*314%*		*62 - 142 %*	"			"	*ZX*
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
Diesel Range Hydrocarbons	NWTPH-Dx	4370	-----	110	mg/kg dry	10x	7E29047	05/29/07 13:36	05/30/07 07:55	
Lube Oil Range Hydrocarbons	"	ND	-----	274	"	"	"	"	"	
Surrogate(s): 2-FBP			*114%*		*54 - 148 %*	"			"	
Octacosane			*102%*		*62 - 142 %*	"			"	
BQE0417-05 (MW-7-5.0)		Soil			Sampletl: 05/23/07 09:35					
Diesel Range Hydrocarbons	NWTPH-Dx	17.1	-----	12.2	mg/kg dry	1x	7E29047	05/29/07 13:36	05/30/07 08:24	QP
Lube Oil Range Hydrocarbons	"	ND	-----	30.6	"	"	"	"	"	
Surrogate(s): 2-FBP			*62.7%*		*54 - 148 %*	"			"	
Octacosane			*107%*		*62 - 142 %*	"			"	
BQE0417-06RE1 (MW-7-25.0)		Soil			Sampled: 05/23/07 09:55					
Diesel Range Hydrocarbons	NWTPH-Dx	30200	-----	1160	mg/kg dry	100x	7E29047	05/29/07 13:36	05/30/07 14:47	
Lube Oil Range Hydrocarbons	"	ND	-----	2900	"	"	"	"	"	
Surrogate(s): 2-FBP			*NR*		*54 - 148 %*	"			"	*Z3*
Octacosane			*NR*		*62 - 142 %*	"			"	*Z3*

TestAmerica - Seanle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Total Metals by EPA 6000/7000 Series Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		Soil			Sampled: 05/23/07 12:00					
Antimony	EPA 6020	ND	-----	1.63	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 11:25	
Arsenic	"	**2.58**	-----	0.544	"	"	"	"	"	
Beryllium	"	ND	-----	0.544	"	"	"	"	"	
Cadmium	"	ND	-----	0.544	"	"	"	"	"	
Chromium	"	**31.8**	-----	0.544	"	"	"	"	"	
Copper	"	**23.3**	-----	0.544	"	"	"	"	"	
Lead	"	**13.9**	-----	0.544	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.101	"	"	7E29064	05/29/07 18:21	05/30/07 15:04	
Nickel	EPA 6020	**38.1**	-----	0.544	"	"	7E25029	05/25/07 10:36	05/29/07 11:25	
Selenium	"	ND	-----	0.544	"	"	"	"	"	
Silver	"	ND	-----	0.544	"	"	"	"	"	
Thallium	"	ND	-----	0.544	"	"	"	"	"	
Zinc	"	**67.2**	-----	5.44	"	"	"	"	"	
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
Antimony	EPA 6020	ND	-----	1.53	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 11:43	
Arsenic	"	**4.80**	-----	0.509	"	"	"	"	"	
Beryllium	"	ND	-----	0.509	"	"	"	"	"	
Cadmium	"	ND	-----	0.509	"	"	"	"	"	
Chromium	"	**46.5**	-----	0.509	"	"	"	"	"	
Copper	"	**22.0**	-----	0.509	"	"	"	"	"	
Lead	"	**2.12**	-----	0.509	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.0937	"	"	7E29064	05/29/07 18:21	05/30/07 15:07	
Nickel	EPA 6020	**44.6**	-----	0.509	"	"	7E25029	05/25/07 10:36	05/29/07 11:43	
Selenium	"	ND	-----	0.509	"	"	"	"	"	
Silver	"	ND	-----	0.509	"	"	"	"	"	
Thallium	"	ND	-----	0.509	"	"	"	"	"	
Zinc	"	**34.8**	-----	5.09	"	"	"	"	"	
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
Antimony	EPA 6020	ND	-----	1.84	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 11:49	
Arsenic	"	**2.72**	-----	0.614	"	"	"	"	"	
Beryllium	"	ND	-----	0.614	"	"	"	"	"	
Cadmium	"	ND	-----	0.614	"	"	"	"	"	
Chromium	"	**40.1**	-----	0.614	"	"	"	"	"	
Copper	"	**18.2**	-----	0.614	"	"	"	"	"	
Lead	"	**5.75**	-----	0.614	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.111	"	"	7E29064	05/29/07 18:21	05/30/07 15:09	
Nickel	EPA 6020	**51.8**	-----	0.614	"	"	7E25029	05/25/07 10:36	05/29/07 11:49	
Selenium	"	ND	-----	0.614	"	"	"	"	"	
Silver	"	ND	-----	0.614	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Total Metals by EPA 6000/7000 Series Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
Thallium	EPA 6020	ND	-----	0.614	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 11:49	
Zinc	"	48.1	-----	6.14	"	"	"	"	"	
BQE0417-06 (MW-7-25.0)		Soil			Sampled: 05/23/07 09:55					
Antimony	EPA 6020	ND	-----	1.81	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 11:55	
Arsenic	"	1.01	-----	0.604	"	"	"	"	"	
Beryllium	"	ND	-----	0.604	"	"	"	"	"	
Cadmium	"	ND	-----	0.604	"	"	"	"	"	
Chromium	"	25.2	-----	0.604	"	"	"	"	"	
Copper	"	12.5	-----	0.604	"	"	"	"	"	
Lead	"	1.67	-----	0.604	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.0956	"	"	7E29064	05/29/07 18:21	05/30/07 15:12	
Nickel	EPA 6020	43.3	-----	0.604	"	"	7E25029	05/25/07 10:36	05/29/07 11:55	
Selenium	"	ND	-----	0.604	"	"	"	"	"	
Silver	"	ND	-----	0.604	"	"	"	"	"	
Thallium	"	ND	-----	0.604	"	"	"	"	"	
Zinc	"	26.2	-----	6.04	"	"	"	"	"	

TestAmerica - Seanle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Polychlorinated Biphenyls by EPA Method 8082

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		Soil			Sampled: 05/23/07 12:00					
Aroclor 1016	EPA 8082	ND	-----	58.7	ug/kg dry	1x	7E30046	05/30/07 14:09	06/03/07 03:24	
Aroclor 1221	"	ND	-----	117	"	"	"	"	"	
Aroclor 1232	"	ND	-----	58.7	"	"	"	"	"	
Aroclor 1242	"	ND	-----	58.7	"	"	"	"	"	
Aroclor 1248	"	ND	-----	58.7	"	"	"	"	"	
Aroclor 1254	"	ND	-----	58.7	"	"	"	"	"	
Aroclor 1260	"	ND	-----	58.7	"	"	"	"	"	
Aroclor 1262	"	ND	-----	58.7	"	"	"	"	"	
Aroclor 1268	"	ND	-----	58.7	"	"	"	"	"	
Surrogate(s): *TCX*			*68.2%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*99.4%*		*33 - 163 %*	"			"	
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
Aroclor 1016	EPA 8082	ND	-----	55.3	ug/kg dry	1x	7E30046	05/30/07 14:09	06/03/07 03:41	
Aroclor 1221	"	ND	-----	111	"	"	"	"	"	
Aroclor 1232	"	ND	-----	55.3	"	"	"	"	"	
Aroclor 1242	"	ND	-----	55.3	"	"	"	"	"	
Aroclor 1248	"	ND	-----	55.3	"	"	"	"	"	
Aroclor 1254	"	ND	-----	55.3	"	"	"	"	"	
Aroclor 1260	"	ND	-----	55.3	"	"	"	"	"	
Aroclor 1262	"	ND	-----	55.3	"	"	"	"	"	
Aroclor 1268	"	ND	-----	55.3	"	"	"	"	"	
Surrogate(s): *TCX*			*73.0%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*77.0%*		*33 - 163 %*	"			"	
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
Aroclor 1016	EPA 8082	ND	-----	30.1	ug/kg dry	1x	7E30046	05/30/07 14:09	06/03/07 03:59	
Aroclor 1221	"	ND	-----	60.2	"	"	"	"	"	
Aroclor 1232	"	ND	-----	30.1	"	"	"	"	"	
Aroclor 1242	"	ND	-----	30.1	"	"	"	"	"	
Aroclor 1248	"	ND	-----	30.1	"	"	"	"	"	
Aroclor 1254	"	ND	-----	30.1	"	"	"	"	"	
Aroclor 1260	"	ND	-----	30.1	"	"	"	"	"	
Aroclor 1262	"	ND	-----	30.1	"	"	"	"	"	
Aroclor 1268	"	ND	-----	30.1	"	"	"	"	"	
Surrogate(s): *TCX*			*86.4%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*101%*		*33 - 163 %*	"			"	

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Polychlorinated Biphenyls by EPA Method 8082

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-06 (MW-7-25.0)		Soil			Sampled: 05/23/07 09:55					
Aroclor 1016	EPA 8082	ND	-----	28.9	ug/kg dry	1x	7E30046	05/30/07 14:09	06/02/07 01:59	
Aroclor 1221	"	ND	-----	57.7	"	"	"	"	"	
Aroclor 1232	"	ND	-----	28.9	"	"	"	"	"	
Aroclor 1242	"	ND	-----	28.9	"	"	"	"	"	
Aroclor 1248	"	ND	-----	28.9	"	"	"	"	"	
Aroclor 1254	"	ND	-----	28.9	"	"	"	"	"	
Aroclor 1260	"	ND	-----	28.9	"	"	"	"	"	
Aroclor 1262	"	ND	-----	28.9	"	"	"	"	"	
Aroclor 1268	"	ND	-----	28.9	"	"	"	"	"	
Surrogate(s): *TCX*			*50.8%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*73.0%*		*33 - 163 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		Soil			Sampled: 05/23/07 12:00					RL7
1,2-Dibromoethane (EDB)	EPA 8260B	ND	-----	0.417	mg/kg dry	5x	7E29028	05/25/07 10:00	05/31/07 12:48	
Acetone	"	ND	-----	4.17	"	"	"	"	"	
Benzene	"	ND	-----	0.417	"	"	"	"	"	
Bromobenzene	"	ND	-----	0.417	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.417	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.417	"	"	"	"	"	
Bromoform	"	ND	-----	0.417	"	"	"	"	"	
Bromomethane	"	ND	-----	0.417	"	"	"	"	"	
2-Butanone	"	ND	-----	4.17	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	0.417	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	0.417	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.417	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.417	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.417	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.417	"	"	"	"	"	
Chloroethane	"	ND	-----	0.417	"	"	"	"	"	
Chloroform	"	ND	-----	0.417	"	"	"	"	"	
Chloromethane	"	ND	-----	2.09	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.417	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.417	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.417	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	2.09	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.417	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.417	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.417	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.417	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.417	"	"	"	"	"	
1,1-Dichlorocthane	"	ND	-----	0.417	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.417	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.417	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	0.417	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.417	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.417	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.417	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.417	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.417	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.417	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.417	"	"	"	"	"	
Ethylbenzene	"	0.893	-----	0.417	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	2.09	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	2.09	"	"	"	"	"	
n-Hexane	"	ND	-----	4.17	"	"	"	"	"	
2-Hexanone	"	ND	-----	4.17	"	"	"	"	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		Soil			Sampled: 05/23/07 12:00					RL7
Isopropylbenzene	EPA 8260B	ND	-----	0.417	mg/kg dry	5x	7E29028	05/25/07 10:00	05/31/07 12:48	
p-Isopropyltoluene	"	0.493	-----	0.417	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	4.17	"	"	"	"	"	
Methylene chloride	"	ND	-----	4.17	"	"	"	"	"	
Naphthalene	"	63.9	-----	2.09	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	0.417	"	"	"	"	"	
Styrene	"	ND	-----	0.417	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	2.09	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	2.09	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.417	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.417	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.417	"	"	"	"	"	
Toluene	"	ND	-----	0.417	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.417	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.417	"	"	"	"	"	
Trichloroethene	"	ND	-----	0.417	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.417	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.417	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	1.92	-----	0.417	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	0.426	-----	0.417	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.417	"	"	"	"	"	
Total Xylenes	"	1.51	-----	1.25	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*109%*		*75 - 125 %*	*1x*			"	
Toluene-d8			*104%*		*75 - 125 %*	"			"	
4-BFB			*90.4%*		*75 - 125 %*	"			"	
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
1,2-Dibromoethane (EDB)	EPA 8260B	ND	-----	0.0833	mg/kg dry	1x	7E29028	05/25/07 10:00	05/31/07 03:40	
Acetone	"	ND	-----	0.833	"	"	"	"	"	
Benzene	"	ND	-----	0.0167	"	"	"	"	"	
Bromobenzene	"	ND	-----	0.0833	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.0833	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.0833	"	"	"	"	"	
Bromoform	"	ND	-----	0.0833	"	"	"	"	"	
Bromomethane	"	ND	-----	0.0833	"	"	"	"	"	
2-Butanone	"	ND	-----	0.833	"	"	"	"	"	
n-Butylbenzene	"	1.96	-----	0.0833	"	"	"	"	"	
sec-Butylbenzene	"	0.748	-----	0.0833	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.0833	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.0833	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.0833	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.0833	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
Chloroethane	EPA 8260B	ND	-----	0.0833	mg/kg dry	1x	7E29028	05/25/07 10:00	05/31/07 03:40	
Chloroform	"	ND	-----	0.0833	"	"	"	"	"	
Chloromethane	"	ND	-----	0.416	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.0833	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.0833	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.0833	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.416	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.0833	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.0833	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.0833	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.0833	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.0833	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.0833	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.0833	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.0833	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	0.0833	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.0833	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.0833	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.0833	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.0833	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.0833	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.0833	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.0833	"	"	"	"	"	
Ethylbenzene	"	1.80	-----	0.0833	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.416	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	0.416	"	"	"	"	"	
n-Hexane	"	ND	-----	0.833	"	"	"	"	"	
2-Hexanone	"	ND	-----	0.833	"	"	"	"	"	
Isopropylbenzene	"	0.600	-----	0.0833	"	"	"	"	"	
p-Isopropyltoluene	"	1.49	-----	0.0833	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	0.833	"	"	"	"	"	
Methylene chloride	"	ND	-----	0.833	"	"	"	"	"	
Naphthalene	"	50.9	-----	0.416	"	"	"	"	"	E
n-Propylbenzene	"	0.952	-----	0.0833	"	"	"	"	"	
Styrene	"	ND	-----	0.0833	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	0.416	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.416	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.0833	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.0833	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.0833	"	"	"	"	"	
Toluene	"	ND	-----	0.0833	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.0833	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.0833	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bretnerton Gas Works	Report Created:
Seattle, WA/USA 98101	Projeel Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
Trichloroethene	EPA 8260B	ND	-----	0.0833	mg/kg dry	1x	7E29028	05/25/07 10:00	05/31/07 03:40	
Trichlorofluoromethane	"	ND	-----	0.0833	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.0833	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	8.31	-----	0.0833	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	0.0833	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.0833	"	"	"	"	"	
Total Xylenes	"	2.60	-----	0.250	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*109%*		*75 - 125 %*	"			"	
Toluene-d8			*98.2%*		*75 - 125 %*	"			"	
4-BFB			*86.8%*		*75 - 125 %*	"			"	
BQE0417-03RE1 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
Naphthalene	EPA 8260B	50.7	-----	4.16	mg/kg dry	10x	7E29028	05/25/07 10:00	05/31/07 13:18	
Surrogate(s): 1,2-DCA-d4			*110%*		*75 - 125 %*	*1x*			"	
Toluene-d8			*102%*		*75 - 125 %*	"			"	
4-BFB			*88.0%*		*75 - 125 %*	"			"	
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
1,2-Dibromoethane (EDB)	EPA 8260B	ND	-----	0.102	mg/kg dry	1x	7E31007	05/31/07 09:00	05/31/07 18:12	
Acetone	"	ND	-----	1.02	"	"	"	"	"	
Benzene	"	ND	-----	0.102	"	"	"	"	"	
Bromobenzene	"	ND	-----	0.102	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.102	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.102	"	"	"	"	"	
Bromoform	"	ND	-----	0.102	"	"	"	"	"	
Bromomethane	"	ND	-----	0.102	"	"	"	"	"	
2-Butanone	"	ND	-----	1.02	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	0.102	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	0.102	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.102	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.102	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.102	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.102	"	"	"	"	"	
Chloroethane	"	ND	-----	0.102	"	"	"	"	"	
Chloroform	"	ND	-----	0.102	"	"	"	"	"	
Chloromethane	"	ND	-----	0.511	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.102	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.102	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.102	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.511	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.102	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
1,2-Dichlorobenzene	EPA 8260B	ND	-----	0.102	mg/kg dry	1x	7E31007	05/31/07 09:00	05/31/07 18:12	
1,3-Dichlorobenzene	"	ND	-----	0.102	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.102	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.102	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.102	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.102	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.102	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	0.102	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.102	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.102	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.102	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.102	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.102	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.102	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.102	"	"	"	"	"	
Ethylbenzene	"	ND	-----	0.102	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.511	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	0.511	"	"	"	"	"	
n-Hexane	"	ND	-----	1.02	"	"	"	"	"	
2-Hexanone	"	ND	-----	1.02	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	0.102	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	0.102	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	1.02	"	"	"	"	"	
Methylene chloride	"	ND	-----	1.02	"	"	"	"	"	
Naphthalene	"	ND	-----	0.511	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	0.102	"	"	"	"	"	
Styrene	"	ND	-----	0.102	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	0.511	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.511	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.102	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.102	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.102	"	"	"	"	"	
Toluene	"	0.198	-----	0.102	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.102	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.102	"	"	"	"	"	
Trichloroethene	"	ND	-----	0.102	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.102	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.102	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	0.103	-----	0.102	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	0.102	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.102	"	"	"	"	"	
Total Xylenes	"	0.363	-----	0.307	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
Surrogate(s): 1,2-DCA-d4			*108%*		*75 - 125 %*	*1x*			*05/31/07 18:12*	
Toluene-d8			*101%*		*75 - 125 %*	"			"	
4-BFB			*93.2%*		*75 - 125 %*	"			"	
BQE0417-06 (MW-7-25.0)		Soil			Sampled: 05/23/07 09:55					
1,2-Dibromoethane (EDB)	EPA 8260B	ND	-----	0.117	mg/kg dry	1x	7E29028	05/25/07 10:00	05/31/07 13:47	
Acetone	"	ND	-----	1.17	"	"	"	"	"	
Benzene	"	ND	-----	0.117	"	"	"	"	"	
Bromobenzene	"	ND	-----	0.117	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.117	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.117	"	"	"	"	"	
Bromoform	"	ND	-----	0.117	"	"	"	"	"	
Bromomethane	"	ND	-----	0.117	"	"	"	"	"	
2-Butanone	"	ND	-----	1.17	"	"	"	"	"	
n-Butylbenzene	"	1.78	-----	0.117	"	"	"	"	"	
sec-Butylbenzene	"	0.915	-----	0.117	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.117	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.117	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.117	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.117	"	"	"	"	"	
Chloroethane	"	ND	-----	0.117	"	"	"	"	"	
Chloroform	"	ND	-----	0.117	"	"	"	"	"	
Chloromethane	"	ND	-----	0.587	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.117	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.117	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.117	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.587	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.117	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.117	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.117	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.117	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.117	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.117	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.117	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.117	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	0.117	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.117	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.117	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.117	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.117	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.117	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.117	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-06 (MW-7-25.0)		**Soil**			**Sampled: 05/23/07 09:55**					
trans-1,3-Dichloropropene	EPA 8260B	ND	-----	0.117	mg/kg dry	1x	7E29028	05/25/07 10:00	05/31/07 13:47	
Ethylbenzene	"	0.250	-----	0.117	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.587	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	0.587	"	"	"	"	"	
n-Hexane	"	ND	-----	1.17	"	"	"	"	"	
2-Hexanone	"	ND	-----	1.17	"	"	"	"	"	
Isopropylbenzene	"	0.418	-----	0.117	"	"	"	"	"	
p-Isopropyltoluene	"	1.65	-----	0.117	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	1.17	"	"	"	"	"	
Methylene chloride	"	ND	-----	1.17	"	"	"	"	"	
Naphthalene	"	14.7	-----	0.587	"	"	"	"	"	
n-Propylbenzene	"	0.792	-----	0.117	"	"	"	"	"	
Styrene	"	ND	-----	0.117	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	0.587	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.587	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.117	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.117	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.117	"	"	"	"	"	
Toluene	"	ND	-----	0.117	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.117	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.117	"	"	"	"	"	
Trichloroethene	"	ND	-----	0.117	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.117	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.117	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	6.85	-----	0.117	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	0.927	-----	0.117	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.117	"	"	"	"	"	
Total Xylenes	"	0.421	-----	0.352	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*109%*		*75 - 125 %*	"			"	
Toluene-d8			*100%*		*75 - 125 %*	"			"	
4-BFB			*87.2%*		*75 - 125 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		Soil			Sampled: 05/23/07 12:00					
Acenaphthene	EPA 8270C	7.31	-----	3.81	mg/kg dry	10x	7E25030	05/31/07 11:12	06/07/07 22:33	
Acenaphthylene	"	5.16	-----	3.81	"	"	"	"	"	
Aniline	"	ND	-----	3.81	"	"	"	"	"	
Anthracene	"	29.9	-----	3.81	"	"	"	"	"	
Benzo (a) anthracene	"	17.3	-----	3.81	"	"	"	"	"	
Benzo (a) pyrene	"	17.5	-----	3.81	"	"	"	"	"	
Benzo (b) fluoranthene	"	9.59	-----	3.81	"	"	"	"	"	
Benzo (k) fluoranthene	"	13.1	-----	3.81	"	"	"	"	"	
Benzo (ghi) perylene	"	9.03	-----	3.81	"	"	"	"	"	
Benzoic Acid	"	ND	-----	11.5	"	"	"	"	"	C5
Benzyl alcohol	"	ND	-----	3.81	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	3.81	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	3.81	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	3.81	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	3.81	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	3.81	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	3.81	"	"	"	"	"	
Carbazole	"	ND	-----	3.81	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	5.77	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	3.81	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	3.81	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	3.81	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	3.81	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	3.81	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	3.81	"	"	"	"	"	
Chrysene	"	17.5	-----	3.81	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	3.81	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	3.81	"	"	"	"	"	
Dibenzofuran	"	ND	-----	3.81	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	3.81	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	3.81	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	3.81	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	57 7	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	3.81	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	3.81	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	3.81	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	3.81	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	5.77	"	"	"	"	"	C5
2,4-Dinitrophenol	"	ND	-----	5.77	"	"	"	"	"	C5
2,4-Dinitrotoluene	"	ND	-----	5.77	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	5.77	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	3.81	"	"	"	"	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		Soil			Sampled: 05/23/07 12:00					
Fluoranthene	EPA 8270C	56.2	----	3.81	mg/kg dry	10x	7E25030	05/31/07 11:12	06/07/07 22:33	
Fluorene	"	23.8	----	3.81	"	"	"	"	"	
Hexachlorobenzene	"	ND	----	3.81	"	"	"	"	"	
Hexachlorobutadiene	"	ND	----	3.81	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	----	5.77	"	"	"	"	"	C5
Hexachloroethane	"	ND	----	3.81	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	7.06	----	3.81	"	"	"	"	"	
Isophorone	"	ND	----	3.81	"	"	"	"	"	
1-Methylnaphthalene	"	21.2	----	3.81	"	"	"	"	"	
2-Methylnaphthalene	"	35.1	----	3.81	"	"	"	"	"	
Naphthalene	"	16.5	----	3.81	"	"	"	"	"	
2-Nitroaniline	"	ND	----	5.77	"	"	"	"	"	
3-Nitroaniline	"	ND	----	5.77	"	"	"	"	"	
4-Nitroaniline	"	ND	----	5.77	"	"	"	"	"	
Nitrobenzene	"	ND	----	3.81	"	"	"	"	"	
2-Nitrophenol	"	ND	----	3.81	"	"	"	"	"	
4-Nitrophenol	"	ND	----	5.77	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	----	3.81	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	----	3.81	"	"	"	"	"	
Pentachlorophenol	"	ND	----	5.77	"	"	"	"	"	
Phenanthrene	"	105	----	3.81	"	"	"	"	"	E
Phenol	"	ND	----	3.81	"	"	"	"	"	
Pyrene	"	79.8	----	3.81	"	"	"	"	"	E
1,2,4-Trichlorobenzene	"	ND	----	3.81	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	----	3.81	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	----	3.81	"	"	"	"	"	
Surrogate(s): 2-FBP		*76.9%*			*27 - 126 %*	"			"	
2-FP		*76.9%*			*16 - 121 %*	"			"	
Nitrobenzene-d5		*88.3%*			*26 - 125 %*	"			"	
Phenol-d6		*50.6%*			*10 - 120 %*	"			"	
p-Terphenyl-d14		*79.2%*			*26 - 150 %*	"			"	
2,4,6-TBP		*58.7%*			*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02RE1 (MW-4-15.0)		Soil			Sampled: 05/23/07 12:00					
Phenanthrene	EPA 8270C	114	-----	15.2	mg/kg dry	40x	7E25030	05/31/07 11:12	06/09/07 18:55	
Pyrene	"	93.8	-----	15.2	"	"	"	"	"	
Surrogate(s): 2-FBP			*83.1%*		*27 - 126 %*	"			"	
2-FP			*67.3%*		*16 - 121 %*	"			"	
Nitrobenzene-d5			*90.4%*		*26 - 125 %*	"			"	
Phenol-d6			*43.9%*		*10 - 120 %*	"			"	
p-Terphenyl-d14			*91.9%*		*26 - 150 %*	"			"	
2,4,6-TBP			*52.7%*		*10 - 152 %*	"			"	
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
Acenaphthene	EPA 8270C	22.0	-----	7.02	mg/kg dry	10x	7E25030	05/31/07 11:12	06/07/07 23:06	
Acenaphthylene	"	ND	-----	7.02	"	"	"	"	"	
Aniline	"	ND	-----	7.02	"	"	"	"	"	
Anthracene	"	13.0	-----	7.02	"	"	"	"	"	
Benzo (a) anthracene	"	7.98	-----	7.02	"	"	"	"	"	
Benzo (a) pyrene	"	9.22	-----	7.02	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	7.02	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	7.02	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	7.02	"	"	"	"	"	
Benzoic Acid	"	ND	-----	21.3	"	"	"	"	"	C5
Benzyl alcohol	"	ND	-----	7.02	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	7.02	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	7.02	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	7.02	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	7.02	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	7.02	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	7.02	"	"	"	"	"	
Carbazole	"	ND	-----	7.02	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	10.6	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	7.02	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	7.02	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	7.02	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	7.02	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	7.02	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	7.02	"	"	"	"	"	
Chrysene	"	8.41	-----	7.02	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	7.02	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	7.02	"	"	"	"	"	
Dibenzofuran	"	ND	-----	7.02	"	"	"	"	"	
1,2-Dichiorobenzene	"	ND	-----	7.02	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	7.02	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	7.02	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-03 (MW-4-30.0)		**Soil**			**Sampled: 05/23/07 12:55**					
3,3'-Dichlorobenzidine	EPA 8270C	ND	-----	106	mg/kg dry	10x	7E25030	05/31/07 11:12	06/07/07 23:06	
2,4-Dichlorophenol	"	ND	-----	7.02	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	7.02	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	7.02	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	7.02	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	10.6	"	"	"	"	"	C5
2,4-Dinitrophenol	"	ND	-----	10.6	"	"	"	"	"	C5
2,4-Dinitrotoluene	"	ND	-----	10.6	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	10.6	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	7.02	"	"	"	"	"	
Fluoranthene	"	23.6	-----	7.02	"	"	"	"	"	
Fluorene	"	15.7	-----	7.02	"	"	"	"	"	
Hexachlorobenzene	"	ND	-----	7.02	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	7.02	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	10.6	"	"	"	"	"	C5
Hexachloroethane	"	ND	-----	7.02	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	7.02	"	"	"	"	"	
Isophorone	"	ND	-----	7.02	"	"	"	"	"	
1-Methylnaphthalene	"	51.8	-----	7.02	"	"	"	"	"	
2-Methylnaphthalene	"	91.0	-----	7.02	"	"	"	"	"	
Naphthalene	"	79.8	-----	7.02	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	10.6	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	10.6	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	10.6	"	"	"	"	"	
Nitrobenzene	"	ND	-----	7.02	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	7.02	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	10.6	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	7.02	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	7.02	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	10.6	"	"	"	"	"	
Phenanthrene	"	55.2	-----	7.02	"	"	"	"	"	
Phenol	"	ND	-----	7.02	"	"	"	"	"	
Pyrene	"	34.0	-----	7.02	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	7.02	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	7.02	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	7.02	"	"	"	"	"	
Surrogate(s):	*2-FBP*		*84.2%*		*27 - 126 %*	"			"	
	2-FP		*80.8%*		*16 - 121 %*	"			"	
	Nitrobenzene-d5		*140%*		*26 - 125 %*	"			"	Z2
	Phenol-d6		*54.4%*		*10 - 120 %*	"			"	
	p-Terphenyl-d14		*82.2%*		*26 - 150 %*	"			"	
	2,4,6-TBP		*23.8%*		*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
Acenaphthene	EPA 8270C	ND	-----	0.401	mg/kg dry	1x	7E25030	05/31/07 11:12	06/07/07 07:47	
Acenaphthylene	"	ND	-----	0.401	"	"	"	"	"	
Aniline	"	ND	-----	0.401	"	"	"	"	"	
Anthracene	"	ND	-----	0.401	"	"	"	"	"	
Benzo (a) anthracene	"	1.29	-----	0.401	"	"	"	"	"	
Benzo (a) pyrene	"	1.64	-----	0.401	"	"	"	"	"	
Benzo (b) lluoranthene	"	1.52	-----	0.401	"	"	"	"	"	
Benzo (k) fluoranthene	"	1.46	-----	0.401	"	"	"	"	"	
Benzo (ghi) perylene	"	1.53	-----	0.401	"	"	"	"	"	
Benzoic Acid	"	ND	-----	1.22	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	0.401	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	0.401	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	0.401	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	0.401	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	0.401	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	0.401	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	0.401	"	"	"	"	"	
Carbazole	"	ND	-----	0.401	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	0.608	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	0.401	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	0.401	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	0.401	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	0.401	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	0.401	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	0.401	"	"	"	"	"	
Chrysene	"	1.80	-----	0.401	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	0.401	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.401	"	"	"	"	"	
Dibenzofuran	"	ND	-----	0.401	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.401	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.401	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.401	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	6.08	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	0.401	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	0.401	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	0.401	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	0.401	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	0.608	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	0.608	"	"	"	"	"	
2,4-Dinitrotoluene	"	ND	-----	0.608	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	0.608	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	0.401	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
Fluoranthene	EPA 8270C	3.21	-----	0.401	mg/kg dry	1x	7E25030	05/31/07 11:12	06/07/07 07:47	
Fluorene	"	ND	-----	0.401	"	"	"	"	"	
Hexachlorobenzene	"	ND	-----	0.401	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.401	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	0.608	"	"	"	"	"	C5
Hexachloroethane	"	ND	-----	0.401	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	1.16	-----	0.401	"	"	"	"	"	
Isophorone	"	ND	-----	0.401	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.401	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.401	"	"	"	"	"	
Naphthalene	"	ND	-----	0.401	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	0.608	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	0.608	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	0.608	"	"	"	"	"	
Nitrobenzene	"	ND	-----	0.401	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	0.401	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	0.608	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	0.401	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	0.401	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	0.608	"	"	"	"	"	
Phenanthrene	"	0.633	-----	0.401	"	"	"	"	"	
Phenol	"	ND	-----	0.401	"	"	"	"	"	
Pyrene	"	4.33	-----	0.401	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.401	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	0.401	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	0.401	"	"	"	"	"	
Surrogate(s): *2-FBP*			*67.2%*		*27 - 126 %*	"			"	
2-FP			*63.5%*		*16 - 121 %*	"			"	
Nitrobenzene-d5			*73.3%*		*26 - 125 %*	"			"	
Phenol-d6			*42.7%*		*10 - 120 %*	"			"	
p-Terphenyl-d14			*76.5%*		*26 - 150 %*	"			"	
2,4,6-TBP			*67.9%*		*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-06 (MW-7-25.0)		Soil			Sampled: 05/23/07 09:55					
Acenaphthene	EPA 8270C	ND	-----	3.73	mg/kg dry	10x	7E25030	05/31/07 11:12	06/07/07 23:39	
Acenaphthylene	"	ND	-----	3.73	"	"	"	"	"	
Aniline	"	ND	-----	3.73	"	"	"	"	"	
Anthracene	"	ND	-----	3.73	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	3.73	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	3.73	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	3.73	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	3.73	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	3.73	"	"	"	"	"	
Benzoic Acid	"	ND	-----	11.3	"	"	"	"	"	CS
Benzyl alcohol	"	ND	-----	3.73	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	3.73	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	3.73	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	3.73	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	3.73	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	3.73	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	3.73	"	"	"	"	"	
Carbazole	"	ND	-----	3.73	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	5.66	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	3.73	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	3.73	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	3.73	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	3.73	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	3.73	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	3.73	"	"	"	"	"	
Chrysene	"	ND	-----	3.73	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	3.73	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	3.73	"	"	"	"	"	
Dibenzofuran	"	ND	-----	3.73	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	3.73	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	3.73	"	"	"	"	"	
1,4-Dicblorobenzene	"	ND	-----	3.73	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	56.6	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	3.73	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	3.73	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	3.73	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	3.73	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	5.66	"	"	"	"	"	CS
2,4-Dinitrophenol	"	ND	-----	5.66	"	"	"	"	"	CS
2,4-Dinitrotoluene	"	ND	-----	5.66	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	5.66	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	3.73	"	"	"	"	"	
Fluoranthene	"	ND	-----	3.73	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-06 (MW-7-25.0)		Soil			Sampled: 05/23/07 09:55					
Fluorene	EPA 8270C	4.06	-----	3.73	mg/kg dry	10x	7E25030	05/31/07 11:12	06/07/07 23:39	
Hexachlorobenzene	"	ND	-----	3.73	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	3.73	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	5.66	"	"	"	"	"	C5
Hexachloroethane	"	ND	-----	3.73	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	3.73	"	"	"	"	"	
Isophorone	"	6.30	-----	3.73	"	"	"	"	"	
1-Methylnaphthalene	"	45.2	-----	3.73	"	"	"	"	"	
2-Methylnaphthalene	"	59.2	-----	3.73	"	"	"	"	"	
Naphthalene	"	11.4	-----	3.73	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	5.66	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	5.66	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	5.66	"	"	"	"	"	
Nitrobenzene	"	ND	-----	3.73	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	3.73	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	5.66	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	3.73	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	3.73	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	5.66	"	"	"	"	"	
Phenanthrene	"	12.4	-----	3.73	"	"	"	"	"	
Phenol	"	ND	-----	3.73	"	"	"	"	"	
Pyrene	"	5.77	-----	3.73	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	3.73	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	3.73	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	3.73	"	"	"	"	"	
Surrogate(s): *2-FBP*		*94.2%*		*27 - 126 %*	"				"	
2-FP		*84.4%*		*16 - 121 %*	"				"	
Nitrobenzene-d5		*106%*		*26 - 125 %*	"				"	
Phenol-d6		*57.6%*		*10 - 120 %*	"				"	
p-Terphenyl-d14		*86.7%*		*26 - 150 %*	"				"	
2,4,6-TBP		*36.3%*		*10 - 152 %*	"				"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		Soil			Sampled: 05/23/07 12:00					
Acenaphthene	EPA 8270-SIM	6.12	-----	0.577	mg/kg dry	50x	7E25030	05/31/07 11:12	06/06/07 20:48	
Acenaphthylene	"	2.19	-----	0.577	"	"	"	"	"	
Anthracene	"	23.6	-----	0.577	"	"	"	"	"	
Benzo (a) anthracene	"	11.8	-----	0.577	"	"	"	"	"	
Benzo (a) pyrene	"	11.9	-----	0.577	"	"	"	"	"	
Benzo (b) fluoranthene	"	5.93	-----	0.577	"	"	"	"	"	
Benzo (k) fluoranthene	"	7.93	-----	0.577	"	"	"	"	"	
Benzo (ghi) perylene	"	8.66	-----	0.577	"	"	"	"	"	
Chrysene	"	13.7	-----	0.577	"	"	"	"	"	
Dibenz (a,h) anthracene	"	2.35	-----	0.577	"	"	"	"	"	
Fluoranthene	"	33.6	-----	0.577	"	"	"	"	"	
Fluorene	"	20.2	-----	0.577	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	6.31	-----	0.577	"	"	"	"	"	
1-Methylnaphthalene	"	14.9	-----	0.577	"	"	"	"	"	
2-Methylnaphthalene	"	23.1	-----	0.577	"	"	"	"	"	
Naphthalene	"	12.0	-----	0.577	"	"	"	"	"	
Phenanthrene	"	65.7	-----	0.577	"	"	"	"	"	
Pyrene	"	53.1	-----	0.577	"	"	"	"	"	
Surrogate(s): p-Terphenyl-d14		54.0%			50 - 147 %	"			"	Z3
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
Acenaphthene	EPA 8270-SIM	18.3	-----	1.06	mg/kg dry	50x	7E25030	05/31/07 11:12	06/06/07 21:22	
Acenaphthylene	"	1.49	-----	1.06	"	"	"	"	"	
Anthracene	"	11.6	-----	1.06	"	"	"	"	"	
Benzo (a) anthracene	"	5.03	-----	1.06	"	"	"	"	"	
Benzo (a) pyrene	"	6.81	-----	1.06	"	"	"	"	"	
Benzo (b) fluoranthene	"	2.62	-----	1.06	"	"	"	"	"	
Benzo (k) fluoranthene	"	3.83	-----	1.06	"	"	"	"	"	
Benzo (ghi) perylene	"	4.04	-----	1.06	"	"	"	"	"	
Chrysene	"	6.66	-----	1.06	"	"	"	"	"	
Dibenz (a,h) anthracene	"	1.28	-----	1.06	"	"	"	"	"	
Fluoranthene	"	15.6	-----	1.06	"	"	"	"	"	
Fluorene	"	13.4	-----	1.06	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	2.91	-----	1.06	"	"	"	"	"	
1-Methylnaphthalene	"	34.6	-----	1.06	"	"	"	"	"	
2-Methylnaphthalene	"	57.3	-----	1.06	"	"	"	"	"	
Naphthalene	"	55.4	-----	1.06	"	"	"	"	"	
Phenanthrene	"	37.3	-----	1.06	"	"	"	"	"	
Pyrene	"	24.9	-----	1.06	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
Surrogate(s): p-Terphenyl-d14			66.0%		50 - 147 %	50x			06/06/07 21:22	Z3
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
Acenaphthene	EPA 8270-SIM	ND	-----	0.243	mg/kg dry	20x	7E25030	05/31/07 11:12	06/06/07 17:58	
Acenaphthylene	"	ND	-----	0.243	"	"	"	"	"	
Anthracene	"	ND	-----	0.243	"	"	"	"	"	
Benzo (a) anthracene	"	1.22	-----	0.243	"	"	"	"	"	
Benzo (a) pyrene	"	1.78	-----	0.243	"	"	"	"	"	
Benzo (b) fluoranthene	"	1.22	-----	0.243	"	"	"	"	"	
Benzo (k) fluoranthene	"	1.49	-----	0.243	"	"	"	"	"	
Benzo (ghi) perylene	"	1.98	-----	0.243	"	"	"	"	"	
Chrysene	"	2.03	-----	0.243	"	"	"	"	"	
Dibenz (a,h) anthracene	"	0.486	-----	0.243	"	"	"	"	"	
Fluoranthene	"	3.22	-----	0.243	"	"	"	"	"	
Fluorene	"	ND	-----	0.243	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	1.52	-----	0.243	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.243	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.243	"	"	"	"	"	
Naphthalene	"	ND	-----	0.243	"	"	"	"	"	
Phenanthrene	"	0.648	-----	0.243	"	"	"	"	"	
Pyrene	"	3.87	-----	0.243	"	"	"	"	"	
Surrogate(s): p-Terphenyl-d14			65.9%		50 - 147 %	"			"	
BQE0417-06 (MW-7-25.0)		Soil			Sampled: 05/23/07 09:55					
Acenaphthene	EPA 8270-SIM	ND	-----	0.566	mg/kg dry	50x	7E25030	05/31/07 11:12	06/07/07 13:17	
Acenaphthylene	"	ND	-----	0.566	"	"	"	"	"	
Anthracene	"	ND	-----	0.566	"	"	"	"	"	I
Benzo (a) anthracene	"	1.21	-----	0.566	"	"	"	"	"	
Benzo (a) pyrene	"	1.85	-----	0.566	"	"	"	"	"	
Benzo (b) fluoranthene	"	0.754	-----	0.566	"	"	"	"	"	
Benzo (k) fluoranthene	"	1.24	-----	0.566	"	"	"	"	"	
Benzo (ghi) perylene	"	0.604	-----	0.566	"	"	"	"	"	
Chrysene	"	1.58	-----	0.566	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.566	"	"	"	"	"	
Fluoranthene	"	4.00	-----	0.566	"	"	"	"	"	I
Fluorene	"	4.53	-----	0.566	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	0.604	-----	0.566	"	"	"	"	"	
1-Methylnaphthalene	"	32.9	-----	0.566	"	"	"	"	"	
2-Methylnaphthalene	"	41.8	-----	0.566	"	"	"	"	"	
Naphthalene	"	10.0	-----	0.566	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA · 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-06 (MW-7-25.0)		Soil			Sampled: 05/23/07 09:55					
Phenanthrene	EPA 8270-SIM	13.7	-----	0.566	mg/kg dry	50x	7E25030	05/31/07 11:12	06/07/07 13:17	1
Pyrene	"	5.28	-----	0.566	"	"	"	"	"	
Surrogate(s): p-Terphenyl-d14			*1.56%*		*50 - 147 %*	*1x*			"	*Z3*

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Conventional Chemistry Parameters by APHA/EPA Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		**Soil**			**Sampled: 05/23/07 12:00**					
Hexavalent Chromium	EPA 7196A	ND	-----	1.1	mg/kg dry	1x	7F05026	06/05/07 11:31	06/07/07 20:30	
BQE0417-03 (MW-4-30.0)		**Soil**			**Sampled: 05/23/07 12:55**					
Hexavalent Chromium	EPA 7196A	ND	-----	1.0	mg/kg dry	1x	7F05026	06/05/07 11:31	06/07/07 20:30	
BQE0417-05 (MW-7-5.0)		**Soil**			**Sampled: 05/23/07 09:35**					
Hexavalent Chromium	EPA 7196A	ND	-----	1.2	mg/kg dry	1x	7F05026	06/05/07 11:31	06/07/07 20:30	
BQE0417-06 (MW-7-25.0)		**Soil**			**Sampled: 05/23/07 09:55**					
Hexavalent Chromium	EPA 7196A	ND	-----	1.0	mg/kg dry	1x	7F05026	06/05/07 11:31	06/07/07 20:30	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Physical Parameters by APHA/ASTM/EPA Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		Soil			Sampled: 05/23/07 12:00					
Dry Weight	BSOPSPL003R08	87.5	----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
Dry Weight	BSOPSPL003R08	91.0	----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
Dry Weight	BSOPSPL003R08	82.3	----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	
BQE0417-06 (MW-7-25.0)		Soil			Sampled: 05/23/07 09:55					
Dry Weight	BSOPSPL003R08	87.2	----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Gasoline Hydrocarbons by NWTPH-Gx and BTEX by EPA Method 8021B

TestAmerica - Spokane, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		Soil			Sampled: 05/23/07 12:00					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	185	----	33.9	mg/kg dry	4x	7060006	06/01/07 12:05	06/01/07 20:17	
Surrogate(s): 4-BFB (FID)			308%		50 - 150 %	"			"	ZX
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	635	----	83.3	mg/kg dry	10x	7060006	06/01/07 12:05	06/04/07 13:42	
Surrogate(s): 4-BFB (FID)			319%		50 - 150 %	"			"	ZX
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	10.6	----	10.2	mg/kg dry	1x	7060006	06/01/07 12:05	06/01/07 21:07	
Surrogate(s): 4-BFB (FID)			112%		50 - 150 %	"			"	
BQE0417-06 (MW-7-25.0)		Soil			Sampled: 05/23/07 09:55					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	216	----	11.5	mg/kg dry	1x	7060006	06/01/07 12:05	06/01/07 21:32	
Surrogate(s): 4-BFB (FID)			799%		50 - 150 %	"			"	ZX

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Conventional Chemistry Parameters by APHA/EPA Methods

TestAmerica - Spokane, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		Soil			Sampled: 05/23/07 12:00					
% Solids	TA SOP	87.5	----	0.0100	% by Weight	1x	7060037	05/25/07 16:43	05/29/07 00:00	
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
% Solids	TA SOP	91.0	----	0.0100	% by Weight	1x	7060037	05/25/07 16:43	05/29/07 00:00	
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
% Solids	TA SOP	82.3	----	0.0100	% by Weight	1x	7060037	05/25/07 16:43	05/29/07 00:00	
BQE0417-06 (MW-7-25.0)		Soil			Sampled: 05/23/07 09:55					
% Solids	TA SOP	87.2	----	0.0100	% by Weight	1x	7060037	05/25/07 16:43	05/29/07 00:00	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Organotins

STL Seattle

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0417-02 (MW-4-15.0)		Soil			Sampled: 05/23/07 12:00					
Tributyltin	Organotins	ND	-----	1.4	ug/Kg dry	1x	19127	05/30/07 02:10	05/31/07 10:29	
Surrogate(s): Tripentyltin			*117%*		*42 - 192 %*	"			"	
BQE0417-03 (MW-4-30.0)		Soil			Sampled: 05/23/07 12:55					
Tributyltin	Organotins	ND	-----	1.4	ug/Kg dry	1x	19127	05/30/07 02:10	05/31/07 10:52	
Surrogate(s): Tripentyltin			*127%*		*42 - 192 %*	"			"	
BQE0417-05 (MW-7-5.0)		Soil			Sampled: 05/23/07 09:35					
Tributyltin	Organotins	ND	-----	1.6	ug/Kg dry	1x	19127	05/30/07 02:10	05/31/07 11:15	
Surrogate(s): Tripentyltin			*98%*		*42 - 192 %*	"			"	
BQE0417-06 (MW-7-25.0)		Soil			Sampled: 05/23/07 09:55					
Tributyltin	Organotins	ND	-----	1.4	ug/Kg dry	1x	19127	05/30/07 02:10	06/01/07 09:24	
Surrogate(s): Tripentyltin			*117%*		*42 - 192 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Petroleum Products by NWTPH-Dx with Acid/Silica Gel Clean-up - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29047 **Soil Preparation Method: EPA 3550B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29047-BLK1)								Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	ND	---	10.0	mg/kg wet	1x	--	--	--	--	--	--	05/29/07 23:07	
Lube Oil Range Hydrocarbons	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Surrogate(s): 2-FBP		*Recovery:*	*69.9%*		*Limits:*	*54-148%*	"						*05/29/07 23:07*	
Octacosane			*91.8%*			*62-142%*	"						"	
LCS (7E29047-BS1)								Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	71.2	---	10.0	mg/kg wet	1x	--	66.7	107%	(78-129)	--	--	05/29/07 23:37	
Surrogate(s): 2-FBP		*Recovery:*	*80.4%*		*Limits:*	*54-148%*	"						*05/29/07 23:37*	
Octacosane			*90.8%*			*62-142%*	"						"	
Duplicate (7E29047-DUP1)					QC Source: BQE0385-08			Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	6040	---	107	mg/kg dry	10x	3770	--	--	--	46.3%	(50)	05/30/07 00:06	QP
Lube Oil Range Hydrocarbons	"	703	---	269	"	"	390	--	--	--	57.3%	"	"	QP, R3
Surrogate(s): 2-FBP		*Recovery:*	*98.2%*		*Limits:*	*54-148%*	"						*05/30/07 00:06*	
Octacosane			*277%*			*62-142%*	"						"	*ZX*
Duplicate (7E29047-DUP2)					QC Source: BQE0417-03			Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	5110	---	111	mg/kg dry	10x	4370	--	--	--	15.6%	(50)	05/30/07 00:35	
Lube Oil Range Hydrocarbons	"	ND	---	277	"	"	ND	--	--	--	12.1%	"	"	R4
Surrogate(s): 2-FBP		*Recovery:*	*112%*		*Limits:*	*54-148%*	"						*05/30/07 00:35*	
Octacosane			*140%*			*62-142%*	"						"	
Matrix Spike (7E29047-MS1)					QC Source: BQE0385-08			Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	6140	---	107	mg/kg dry	10x	3770	71.6	3310%	(46-155)	--	--	05/30/07 01:04	M1
Surrogate(s): 2-FBP		*Recovery:*	*96.8%*		*Limits:*	*54-148%*	"						*05/30/07 01:04*	
Octacosane			*305%*			*62-142%*	"						"	*ZX*

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25029 **Soil Preparation Method: EPA 3050B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25029-BLK1)								Extracted: 05/25/07 10:36						
Zinc	EPA 6020	ND	---	5.00	mg/kg wet	1x	--	--	--	--	--	--	05/29/07 07:57	
Thallium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Antimony	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
Lead	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Cadmium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Nickel	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Chromium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Silver	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Selenium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Beryllium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Copper	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Arsenic	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
LCS (7E25029-BS1)								Extracted: 05/25/07 10:36						
Nickel	EPA 6020	42.3	---	0.500	mg/kg wet	1x	--	40.0	106%	(80-120)	--	--	05/29/07 08:03	
Thallium	"	41.7	---	0.500	"	"	--	"	104%	"	--	--	"	
Chromium	"	42.4	---	0.500	"	"	--	"	106%	"	--	--	"	
Beryllium	"	43.0	---	0.500	"	"	--	"	108%	"	--	--	"	
Silver	"	43.3	---	0.500	"	"	--	"	108%	"	--	--	"	
Copper	"	43.3	---	0.500	"	"	--	"	108%	"	--	--	"	
Zinc	"	42.3	---	5.00	"	"	--	"	106%	"	--	--	"	
Antimony	"	34.1	---	1.50	"	"	--	30.0	114%	"	--	--	"	
Cadmium	"	43.0	---	0.500	"	"	--	40.0	108%	"	--	--	"	
Selenium	"	41.2	---	0.500	"	"	--	"	103%	"	--	--	"	
Lead	"	42.9	---	0.500	"	"	--	"	107%	"	--	--	"	
Arsenic	"	42.3	---	0.500	"	"	--	"	106%	"	--	--	"	
Duplicate (7E25029-DUP1)				QC Source: BQE0385-04				Extracted: 05/25/07 10:36						
Lead	EPA 6020	1.50	---	0.540	mg/kg dry	1x	1.54	--	--	--	2.63%	(30)	05/29/07 08:20	
Antimony	"	ND	---	1.62	"	"	ND	--	--	--		"	"	R4
Copper	"	10.7	---	0.540	"	"	11.0	--	--	--	2.76%	"	"	
Nickel	"	35.5	---	0.540	"	"	36.2	--	--	--	1.95%	"	"	
Thallium	"	ND	---	0.540	"	"	ND	--	--	--	NR	"	"	R4
Silver	"	ND	---	0.540	"	"	ND	--	--	--	13.3%	(50)	"	R4
Zinc	"	24.8	---	5.40	"	"	24.9	--	--	--	0.402%	(30)	"	
Beryllium	"	ND	---	0.540	"	"	ND	--	--	--	6.16%	"	"	R4
Chromium	"	23.9	---	0.540	"	"	23.9	--	--	--	0.00%	"	"	
Arsenic	"	1.30	---	0.540	"	"	1.27	--	--	--	2.33%	"	"	
Selenium	"	ND	---	0.540	"	"	ND	--	--	--	NR	"	"	R4

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Tritnble	06/13/07 10:31

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25029 **Soil Preparation Method: EPA 3050B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Duplicate (7E25029-DUP1)				QC Source: BQE0385-04				Extracted: 05/25/07 10:36						
Cadmium	EPA 6020	ND	---	0.540	mg/kg dry	1x	ND	--	--	--	19.4%	(30)	05/29/07 08:20	R4
Matrix Spike (7E25029-MS1)				QC Source: BQE0385-04				Extracted: 05/25/07 10:36						
Beryllium	EPA 6020	45.1	---	0.540	mg/kg dry	1x	0.173	43.2	104%	(72-122)	--	--	05/29/07 08:15	
Nickel	"	80.7	---	0.540	"	"	36.2	"	103%	(35-150)	--	--	"	
Chromium	"	66.2	---	0.540	"	"	23.9	"	97.9%	(30-163)	--	--	"	
Arsenic	"	44.6	---	0.540	"	"	1.27	"	100%	(57-125)	--	--	"	
Copper	"	54.8	---	0.540	"	"	11.0	"	101%	(20-148)	--	--	"	
Cadmium	"	45.4	---	0.540	"	"	0.0756	"	105%	(80-120)	--	--	"	
Silver	"	44.1	---	0.540	"	"	0.0756	"	102%	(54-126)	--	--	"	
Zinc	"	67.3	---	5.40	"	"	24.9	"	98.1%	(20-160)	--	--	"	
Antimony	"	4.07	---	1.62	"	"	ND	32.4	12.6%	(10-120)	--	--	"	
Thallium	"	42.7	---	0.540	"	"	ND	43.2	98.8%	(75-120)	--	--	"	
Selenium	"	42.0	---	0.540	"	"	ND	"	97.2%	(61-120)	--	--	"	
Lead	"	45.6	---	0.540	"	"	1.54	"	102%	(29-166)	--	--	"	
Post Spike (7E25029-PS1)				QC Source: BQE0385-04				Extracted: 05/25/07 10:36						
Copper	EPA 6020	0.120	---		ug/ml	1x	0.0204	0.101	98.6%	(75-125)	--	--	05/29/07 08:09	
Chromium	"	0.144	---		"	"	0.0442	0.100	99.8%	"	--	--	"	
Arsenic	"	0.105	---		"	"	0.00235	"	103%	"	--	--	"	
Silver	"	0.0994	---		"	"	0.000140	"	99.3%	"	--	--	"	
Selenium	"	0.0959	---		"	"	0.000170	"	95.7%	"	--	--	"	
Beryllium	"	0.0988	---		"	"	0.000320	"	98.5%	"	--	--	"	
Thallium	"	0.0957	---		"	"	0.0000500	"	95.6%	"	--	--	"	
Cadmium	"	0.100	---		"	"	0.000140	"	99.9%	"	--	--	"	
Nickel	"	0.164	---		"	"	0.0670	0.0995	97.5%	"	--	--	"	
Antimony	"	0.0486	---		"	"	0.0000700	0.0500	97.1%	"	--	--	"	
Lead	"	0.101	---		"	"	0.00285	0.0995	98.6%	"	--	--	"	
Zinc	"	0.144	---		"	"	0.0461	"	98.4%	"	--	--	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29064 Soil Preparation Method: EPA 7471A

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29064-BLK1)								Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/30/07 13:44	
LCS (7E29064-BS1)								Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	0.694	---	0.100	mg/kg wet	1x	--	0.667	104%	(80-120)	--	--	05/30/07 13:46	
LCS Dup (7E29064-BSD1)								Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	0.649	---	0.100	mg/kg wet	1x	--	0.667	97.3%	(80-120)	6.70%	(20)	05/30/07 13:49	
Duplicate (7E29064-DUP1)				QC Source: BQE0473-01				Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	ND	---	0.106	mg/kg dry	1x	ND	--	--	--	1.32%	(30)	05/30/07 13:54	R4
Matrix Spike (7E29064-MS1)				QC Source: BQE0473-01				Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	0.810	---	0.106	mg/kg dry	1x	0.0229	0.709	111%	(70-130)	--	--	05/30/07 13:51	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Polychlorinated Biphenyls by EPA Method 8082 - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E30046 **Soil Preparation Method: EPA 3550B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E30046-BLK1)								Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	ND	---	25.0	ug/kg wet	1x	--	--	--	--	--	--	05/30/07 20:50	
Aroclor 1221	"	ND	---	50.0	"	"	--	--	--	--	--	--	"	
Aroclor 1232	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1242	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1248	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1254	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1260	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1262	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1268	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Surrogate(s): TCX		*Recovery: 95.1%*			*Limits: 39-139%*	"							*05/30/07 20:50*	
Decachlorobiphenyl		*97.3%*			*33-163%*	"							"	
LCS (7E30046-BS1)								Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	78.6	---	25.0	ug/kg wet	1x	--	83.3	94.4%	(54-125)	--	--	05/30/07 22:34	
Aroclor 1260	"	82.3	---	25.0	"	"	--	"	98.8%	(58-128)	--	--	"	
Surrogate(s): TCX		*Recovery: 92.8%*			*Limits: 39-139%*	"							*05/30/07 22:34*	
Decachlorobiphenyl		*101%*			*33-163%*	"							"	
Matrix Spike (7E30046-MS1)				QC Source: BQE0504-01				Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	92.1	---	27.5	ug/kg dry	1x	ND	91.6	101%	(47-134)	--	--	05/30/07 21:58	
Aroclor 1260	"	130	---	27.5	"	"	43.6	"	94.3%	(22-171)	--	--	"	
Surrogate(s): TCX		*Recovery: 92.1%*			*Limits: 39-139%*	"							*05/30/07 21:58*	
Decachlorobiphenyl		*89.2%*			*33-163%*	"							"	
Matrix Spike Dup (7E30046-MSD1)				QC Source: BQE0504-01				Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	90.2	---	27.5	ug/kg dry	1x	ND	91.6	98.5%	(47-134)	2.08%	(35)	05/30/07 22:16	
Aroclor 1260	"	128	---	27.5	"	"	43.6	"	92.1%	(22-171)	1.55%	"	"	
Surrogate(s): TCX		*Recovery: 93.0%*			*Limits: 39-139%*	"							*05/30/07 22:16*	
Decachlorobiphenyl		*98.1%*			*33-163%*	"							"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Tritnble	06/13/07 10:31

Volatile Organic Compounds (Special List) by LPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29028 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29028-BLK1)								Extracted: 05/30/07 12:08						
1,2-Dibromoethane (EDB)	EPA 8260B	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/30/07 19:15	
Acetone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzene	"	ND	---	0.0200	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29028 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29028-BLK1)								Extracted: 05/30/07 12:08						
Hexachlorobutadiene	EPA 8260B	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	05/30/07 19:15	
Methyl tert-butyl ether	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	0.300	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*1,2-DCA-d4*	*Recovery:*	*100%*	*Limits: 75-125%*	"	*05/30/07 19:15*
	Toluene-d8		*104%*	*75-125%*	"	"
	4-BFB		*103%*	*75-125%*	"	"

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29028 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29028-BLK2)								Extracted: 05/30/07 12:08						
1,2-Dibromoethane (EDB)	EPA 8260B	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/31/07 11:18	
Acetone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	**Old Bremerton Gas Works**	
600 Stewart St, Suite 1700	Project Number:	Old Bremetton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29028 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29028-BLK2)								Extracted: 05/30/07 12:08						
Hexachlorobutadiene	EPA 8260B	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	05/31/07 11:18	
Methyl tert-butyl ether	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	0.300	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*1,2-DCA-d4*	*Recovery:*	*104%*	*Limits: 75-125%*	"	*05/31/07 11:18*
	Toluene-d8		*103%*	*75-125%*	"	"
	4-BFB		*99.0%*	*75-125%*	"	"

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 96011-6244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29028 **Soil Preparation Method: EPA S030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E29028-BS1)								Extracted: 05/30/07 12:08						
Benzene	EPA 8260B	2.13	---	0.0200	mg/kg wet	1x	--	2.00	106%	(75-125)	--	--	05/30/07 18:38	
Chlorobenzene	"	2.31	---	0.100	"	"	--	"	116%	"	--	--	"	
1,1-Dichloroethene	"	2.19	---	0.100	"	"	--	"	110%	(69-128)	--	--	"	
Trichloroethene	"	2.13	---	0.100	"	"	--	"	106%	(75-125)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 103%*			*Limits: 75-125%*	"							*05/30/07 18:38*	
Toluene-d8		*101%*			*75-125%*	"							"	
4-BFB		*99.0%*			*75-125%*	"							"	
Matrix Spike (7E29028-MS1)				QC Source: BQE0445-01				Extracted: 05/30/07 12:08						
Benzene	EPA 8260B	2.14	---	0.0193	mg/kg dry	1x	ND	1.93	111%	(75-131)	--	--	05/30/07 21:13	
Chlorobenzene	"	2.23	---	0.0965	"	"	ND	"	116%	(75-125)	--	--	"	
1,1-Dichloroethene	"	2.37	---	0.0965	"	"	ND	"	123%	(69-142)	--	--	"	
Trichloroethene	"	2.06	---	0.0965	"	"	ND	"	107%	(75-134)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 103%*			*Limits: 75-125%*	"							*05/30/07 21:13*	
Toluene-d8		*99.0%*			*75-125%*	"							"	
4-BFB		*93.8%*			*75-125%*	"							"	
Matrix Spike Dup (7E29028-MSD1)				QC Source: BQE0445-01				Extracted: 05/30/07 12:08						
Benzene	EPA 8260B	2.19	---	0.0194	mg/kg dry	1x	ND	1.94	113%	(75-131)	2.31%	(25)	05/30/07 21:42	
Chlorobenzene	"	2.33	---	0.0969	"	"	ND	"	120%	(75-125)	4.39%	"	"	
1,1-Dichloroethene	"	2.40	---	0.0969	"	"	ND	"	124%	(69-142)	1.26%	"	"	
Trichloroethene	"	2.15	---	0.0969	"	"	ND	"	111%	(75-134)	4.28%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 105%*			*Limits: 75-125%*	"							*05/30/07 21:42*	
Toluene-d8		*102%*			*75-125%*	"							"	
4-BFB		*91.8%*			*75-125%*	"							"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E31007 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil.	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E31007-BLK1)								Extracted: 05/31/07 09:00						
1,2-Dibromoethane (EDB)	EPA 8260B	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/31/07 10:37	
Acetone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	**Old Bremerton Gas Works**	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E31007 **Soil Preparation Method: EPA S030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E31007-BLK1)								Extracted: 05/31/07 09:00						
Hexachlorobutadiene	EPA 8260B	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	05/31/07 10:37	
Methyl tert-butyl ether	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	0.300	"	"	--	--	--	--	--	--	"	

Surrogate(s):		*Recovery:*	*Limits:*		
	1,2-DCA-d4	*102%*	*75-125%*	"	*05/31/07 10:37*
	Toluene-d8	*103%*	*75-125%*	"	"
	4-BFB	*94.5%*	*75-125%*	"	"

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E31007 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E31007-BS1)								Extracted: 05/31/07 09:00						
Benzene	EPA 8260B	2.06	---	0.100	mg/kg wet	1x	--	2.00	103%	(75-125)	--	--	05/31/07 09:31	
Chlorobenzene	"	2.18	---	0.100	"	"	--	"	109%	"	--	--	"	
1,1-Dichloroethene	"	2.28	---	0.100	"	"	--	"	114%	(69-128)	--	--	"	
Trichloroethene	"	2.00	---	0.100	"	"	--	"	100%	(75-125)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*106%*		*Limits:*	*75-125%*	"						*05/31/07 09:31*	
Toluene-d8			*101%*			*75-125%*	"						"	
4-BFB			*92.5%*			*75-125%*	"						"	
LCS Dup (7E31007-BSD1)								Extracted: 05/31/07 09:00						
Benzene	EPA 8260B	2.00	---	0.100	mg/kg wet	1x	--	2.00	100%	(75-125)	2.96%	(20)	05/31/07 10:00	
Chlorobenzene	"	2.15	---	0.100	"	"	--	"	108%	"	1.39%	"	"	
1,1-Dichloroethene	"	2.16	---	0.100	"	"	--	"	108%	(69-128)	5.41%	"	"	
Trichloroetheoe	"	1.95	---	0.100	"	"	--	"	97.5%	(75-125)	2.53%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*104%*		*Limits:*	*75-125%*	"						*05/31/07 10:00*	
Toluene-d8			*102%*			*75-125%*	"						"	
4-BFB			*95.0%*			*75-125%*	"						"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25030-BLK1)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	ND	---	0.330	mg/kg wet	1x	--	--	--	--	--	--	06/07/07 01:12	
Acenaphthylene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Aniline	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (a) anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (a) pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (b) fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (k) fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (ghi) perylene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzoic Acid	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzyl alcohol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroethoxy)methane	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroethyl)ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroisopropyl)ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-ethylhexyl)phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Bromophenyl phenyl ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Butyl benzyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Carbazole	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Chloroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
4-Chloro-3-methylphenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Chloronaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Chlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Chlorophenyl phenyl ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Methylphenol (o-Cresol)	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Chrysene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Di-n-butyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dibenz (a,h) anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dibenzofuran	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
3,3'-Dichlorobenzidine	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
2,4-Dichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Diethyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4-Dimethylphenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dimethyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4,6-Dinitro-2-methylphenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2,4-Dinitrophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bretherton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25030-BLK1)								Extracted: 05/31/07 11:12						
2,4-Dinitrotoluene	EPA 8270C	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	06/07/07 01:12	
2,6-Dinitrotoluene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
N-Nitrosodiphenylamine	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Fluorene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorobutadiene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorocyclopentadiene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	C5
Hexachloroethane	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Indeno (1,2,3-cd) pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Isophorone	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1-Methylnaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Methylnaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
3-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
4-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Nitrobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Nitrophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Nitrophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
N-Nitrosodi-n-propylamine	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Di-n-octyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Pentachlorophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Phenanthrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Phenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4,5-Trichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4,6-Trichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*2-FBP*	*Recovery: 99.1%*	*Limits: 27-126%*	"	06/07/07 01:12
	2-FP	*95.2%*	*16-121%*	"	"
	Nitrobenzene-d5	*111%*	*26-125%*	"	"
	Phenol-d6	*61.6%*	*10-120%*	"	"
	p-Terphenyl-d14	*105%*	*26-150%*	"	"
	2,4,6-TBP	*88.9%*	*10-152%*	"	"

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Projeet Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E25030-BS1)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	2.78	---	0.330	mg/kg wet	1x	--	3.33	83.5%	(47-128)	--	--	06/07/07 01:45	
4-Chloro-3-methylphenol	"	2.86	---	0.330	"	"	--	"	85.9%	(49-130)	--	--	"	
2-Chlorophenol	"	2.89	---	0.330	"	"	--	"	86.8%	(51-120)	--	--	"	
1,4-Dichlorobenzene	"	2.79	---	0.330	"	"	--	"	83.8%	"	--	--	"	
2,4-Dinitrotoluene	"	2.97	---	0.500	"	"	--	"	89.2%	(51-135)	--	--	"	
4-Nitrophenol	"	2.78	---	0.500	"	"	--	"	83.5%	(32-155)	--	--	"	
N-Nitrosodi-n-propylamine	"	2.87	---	0.330	"	"	--	"	86.2%	(51-120)	--	--	"	
Pentachlorophenol	"	3.47	---	0.500	"	"	--	"	104%	(46-163)	--	--	"	
Phenol	"	2.86	---	0.330	"	"	--	"	85.9%	(50-122)	--	--	"	
Pyrene	"	3.09	---	0.330	"	"	--	"	92.8%	(45-138)	--	--	"	
1,2,4-Trichlorobenzene	"	2.89	---	0.330	"	"	--	"	86.8%	(47-120)	--	--	"	
Surrogate(s):	*2-FBP*	*Recovery:*	*97.3%*		*Limits:*	*27-126%*	"						*06/07/07 01:45*	
	2-FP		*90.7%*			*16-121%*	"						"	
	Nitrobenzene-d5		*91.6%*			*26-125%*	"						"	
	Phenol-d6		*59.5%*			*10-120%*	"						"	
	p-Terphenyl-d14		*102%*			*26-150%*	"						"	
	2,4,6-TBP		*105%*			*10-152%*	"						"	
Matrix Spike (7E25030-MS1)					QC Source: *BQE0385-04*				Extracted: 05/31/07 11:12					
Acenaphthene	EPA 8270C	2.07	---	0.356	mg/kg dry	1x	ND	3.60	57.5%	(47-128)	--	--	06/07/07 02:18	
4-Chloro-3-methylphenol	"	2.19	---	0.356	"	"	ND	"	60.8%	(45-130)	--	--	"	
2-Chlorophenol	"	2.15	---	0.356	"	"	ND	"	59.7%	(48-120)	--	--	"	
1,4-Dichlorobenzene	"	2.12	---	0.356	"	"	ND	"	58.9%	(50-120)	--	--	"	
2,4-Dinitrotoluene	"	2.19	---	0.540	"	"	ND	"	60.8%	(34-154)	--	--	"	
4-Nitrophenol	"	1.97	---	0.540	"	"	ND	"	54.7%	(17-164)	--	--	"	
N-Nitrosodi-n-propylamine	"	2.22	---	0.356	"	"	ND	"	61.7%	(49-120)	--	--	"	
Pentachlorophenol	"	2.14	---	0.540	"	"	ND	"	59.4%	(22-183)	--	--	"	
Phenol	"	2.13	---	0.356	"	"	ND	"	59.2%	(32-132)	--	--	"	
Pyrene	"	2.19	---	0.356	"	"	ND	"	60.8%	(31-147)	--	--	"	
1,2,4-Trichlorobenzene	"	2.24	---	0.356	"	"	ND	"	62.2%	(47-120)	--	--	"	
Surrogate(s):	*2-FBP*	*Recovery:*	*60.0%*		*Limits:*	*27-126%*	"						*06/07/07 02:18*	
	2-FP		*56.9%*			*16-121%*	"						"	
	Nitrobenzene-d5		*60.6%*			*26-125%*	"						"	
	Phenol-d6		*38.1%*			*10-120%*	"						"	
	p-Terphenyl-d14		*59.7%*			*26-150%*	"						"	
	2,4,6-TBP		*62.2%*			*10-152%*	"						"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Matrix Spike Dup (7E25030-MSD1)				QC Source: BQE0385-04				Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	1.87	---	0.356	mg/kg dry	1x	ND	3.60	51.9%	(47-128)	10.2%	(24)	06/07/07 02:51	
4-Chloro-3-methylphenol	"	2.00	---	0.356	"	"	ND	"	55.6%	(45-130)	9.07%	(23)	"	
2-Chlorophenol	"	1.92	---	0.356	"	"	ND	"	53.3%	(48-120)	11.3%	(27)	"	
1,4-Dichlorobenzene	"	1.88	---	0.356	"	"	ND	"	52.2%	(50-120)	12.0%	(34)	"	
2,4-Dinitrotoluene	"	1.99	---	0.540	"	"	ND	"	55.3%	(34-154)	9.57%	(24)	"	
4-Nitrophenol	"	1.75	---	0.540	"	"	ND	"	48.6%	(17-164)	11.8%	(31)	"	
N-Nitrosodi-n-propylamine	"	1.96	---	0.356	"	"	ND	"	54.4%	(49-120)	12.4%	"	"	
Pentachlorophenol	"	1.95	---	0.540	"	"	ND	"	54.2%	(22-183)	9.29%	(26)	"	
Phenol	"	1.88	---	0.356	"	"	ND	"	52.2%	(32-132)	12.5%	(31)	"	
Pyrene	"	1.99	---	0.356	"	"	ND	"	55.3%	(31-147)	9.57%	(26)	"	
1,2,4-Trichlorobenzene	"	2.04	---	0.356	"	"	ND	"	56.7%	(47-120)	9.35%	(25)	"	
Surrogate(s):	*2-FBP*	*Recovery:*	53.6%		*Limits:*	*27-126%*	"						*06/07/07 02:51*	
	2-FP		49.7%			*16-121%*	"						"	
	Nitrobenzene-d5		53.9%			*26-125%*	"						"	
	Phenol-d6		33.6%			*10-120%*	"						"	
	p-Terphenyl-d14		*54.2%*			*26-150%*	"						"	
	2,4,6-TBP		*54.7%*			*10-152%*	"						"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 Soil Preparation Method: EPA 3545

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25030-BLK2)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	ND	---	0.0100	mg/kg wet	1x	--	--	--	--	--	--	06/06/07 13:17	
Acenaphthylene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (a) anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (a) pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (b) fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (k) fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (ghi) perylene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Chrysene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Dibenz (a,h) anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Fluorene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Indeno (1,2,3-cd) pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
1-Methylnaphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
2-Methylnaphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Phenanthrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Surrogate(s): p-Terphenyl-d14		*Recovery:* 83.8%			*Limits:* 50-147%	"							06/06/07 13:17	
LCS (7E25030-BS2)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	0.613	---	0.0100	mg/kg wet	1x	--	0.667	91.9%	(70-125)	--	--	06/06/07 13:53	
Acenaphthylene	"	0.619	---	0.0100	"	"	--	"	92.8%	(70-133)	--	--	"	
Anthracene	"	0.653	---	0.0100	"	"	--	"	97.9%	(70-152)	--	--	"	
Benzo (a) anthracene	"	0.577	---	0.0100	"	"	--	"	86.5%	(60-125)	--	--	"	
Benzo (a) pyrene	"	0.600	---	0.0100	"	"	--	"	90.0%	(64-134)	--	--	"	
Benzo (b) fluoranthene	"	0.571	---	0.0100	"	"	--	"	85.6%	(62-147)	--	--	"	
Benzo (k) fluoranthene	"	0.551	---	0.0100	"	"	--	"	82.6%	(60-144)	--	--	"	
Benzo (ghi) perylene	"	0.695	---	0.0100	"	"	--	"	104%	(57-137)	--	--	"	
Chrysene	"	0.646	---	0.0100	"	"	--	"	96.9%	(70-139)	--	--	"	
Dibenz (a,h) anthracene	"	0.682	---	0.0100	"	"	--	"	102%	(56-140)	--	--	"	
Fluoranthene	"	0.609	---	0.0100	"	"	--	"	91.3%	(70-141)	--	--	"	
Fluorene	"	0.651	---	0.0100	"	"	--	"	97.6%	(76-132)	--	--	"	
Indeno (1,2,3-cd) pyrene	"	0.669	---	0.0100	"	"	--	"	100%	(55-138)	--	--	"	
1-Methylnaphthalene	"	0.615	---	0.0100	"	"	--	"	92.2%	(46-128)	--	--	"	
2-Methylnaphthalene	"	0.622	---	0.0100	"	"	--	"	93.3%	(41-125)	--	--	"	
Naphthalene	"	0.599	---	0.0100	"	"	--	"	89.8%	(43-125)	--	--	"	
Phenanthrene	"	0.576	---	0.0100	"	"	--	"	86.4%	(73-125)	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E2S030 **Soil Preparation Metliod: EPA 354S**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E25030-BS2)								Extracted: 05/31/07 11:12						
Pyrene	EPA 8270-SIM	0.570	---	0.0100	mg/kg wet	1x	--	0.667	85.5%	(68-140)	--	--	06/06/07 13:53	
Surrogate(s): p-Terphenyl-d14		*Recovery:* 83.2%			*Limits:* 50-147%	"							06/06/07 13:53	
Matrix Spike (7E25030-MS2)					QC Source: BQE0445-0S			Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	1.89	---	1.42	mg/kg dry	50x	2.37	0.758	-63.3%	(67-132)	--	--	06/07/07 15:37	M4
Acenaphthylene	"	0.947	---	1.42	"	"	0.284	"	87.5%	(65-142)	--	--	"	
Anthracene	"	2.84	---	1.42	"	"	3.50	"	-87.1%	(66-158)	--	--	"	M4
Benzo (a) anthracene	"	10.5	---	1.42	"	"	14.3	"	-501%	(41-156)	--	--	"	M4
Benzo (a) pyrene	"	15.2	---	1.42	"	"	19.8	"	-607%	(52-148)	--	--	"	M4
Benzo (b) fluoranthene	"	13.6	---	1.42	"	"	17.3	"	-488%	(53-151)	--	--	"	M4
Benzo (k) fluoranthene	"	13.4	---	1.42	"	"	15.5	"	-277%	(46-161)	--	--	"	M4
Benzo (ghi) perylene	"	9.66	---	1.42	"	"	15.1	"	-718%	(26-154)	--	--	"	M4
Chrysene	"	15.5	---	1.42	"	"	20.8	"	-699%	(55-155)	--	--	"	M4
Dibenz (a,h) anthracene	"	4.64	---	1.42	"	"	6.34	"	-224%	(27-157)	--	--	"	M4
Fluoranthene	"	15.2	---	1.42	"	"	22.0	"	-897%	(46-172)	--	--	"	M4
Fluorene	"	1.23	---	1.42	"	"	1.04	"	25.1%	(66-143)	--	--	"	M4
Indeno (1,2,3-cd) pyrene	"	8.90	---	1.42	"	"	12.6	"	-488%	(24-159)	--	--	"	M4
1-Methylnaphthalene	"	0.852	---	1.42	"	"	0.284	"	74.9%	(39-140)	--	--	"	
2-Methylaaphthalene	"	0.852	---	1.42	"	"	0.473	"	50.0%	(32-139)	--	--	"	
Naphthalene	"	1.04	---	1.42	"	"	0.568	"	62.3%	(38-134)	--	--	"	
Phenanthrene	"	6.16	---	1.42	"	"	11.0	"	-639%	(63-139)	--	--	"	M4
Pyrene	"	15.8	---	1.42	"	"	24.5	"	-1150%	(51-172)	--	--	"	M4
Surrogate(s): p-Terphenyl-d14		*Recovery:* 117%			*Limits:* 50-147%	"							06/07/07 15:37	Z3
Matrix Spike Dup (7E25030-MSD2)					QC Source: BQE0445-05			Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	1.89	---	1.42	mg/kg dry	50x	2.37	0.758	-63.3%	(67-132)	0.00%	(50)	06/07/07 16:11	M4
Acenaphthylene	"	0.852	---	1.42	"	"	0.284	"	74.9%	(65-142)	10.6%	"	"	
Anthracene	"	3.03	---	1.42	"	"	3.50	"	-62.0%	(66-158)	6.47%	"	"	M4
Benzo (a) anthracene	"	10.2	---	1.42	"	"	14.3	"	-541%	(41-156)	2.90%	"	"	M4
Benzo (a) pyrene	"	15.5	---	1.42	"	"	19.8	"	-567%	(52-148)	1.95%	"	"	M4
Benzo (b) fluoranthene	"	14.7	---	1.42	"	"	17.3	"	-343%	(53-151)	7.77%	"	"	M4
Benzo (k) fluoranthene	"	12.7	---	1.42	"	"	15.5	"	-369%	(46-161)	5.36%	"	"	M4
Benzo (ghi) perylene	"	9.56	---	1.42	"	"	15.1	"	-731%	(26-154)	1.04%	"	"	M4
Chrysene	"	15.2	---	1.42	"	"	20.8	"	-739%	(55-155)	1.95%	(44)	"	M4
Dibenz (a,h) anthracene	"	4.83	---	1.42	"	"	6.34	"	-199%	(27-157)	4.01%	(50)	"	M4
Fluoranthene	"	15.3	---	1.42	"	"	22.0	"	-884%	(46-172)	0.656%	"	"	M4
Fluorene	"	1.23	---	1.42	"	"	1.04	"	25.1%	(66-143)	0.00%	(52)	"	M4
Indeno (1,2,3-cd) pyrene	"	9.09	---	1.42	"	"	12.6	"	-463%	(24-159)	2.11%	(43)	"	M4

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Projeet Manager:	Sean Trimble	06/13/07 10:31

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Matrix Spike Dup (7E25030-MSD2)					QC Source: BQE0445-05				Extracted: 05/31/07 11:12					
1-Methylnaphthalene	EPA 8270-SIM	0.758	---	1.42	mg/kg dry	50x	0.284	0.758	62.5%	(39-140)	11.7%	(50)	06/07/07 16:11	
2-Methylnaphthalene	"	0.852	---	1.42	"	"	0.473	"	50.0%	(32-139)	0.00%	"	"	
Naphthalene	"	1.04	---	1.42	"	"	0.568	"	62.3%	(38-134)	0.00%	"	"	
Phenanthrene	"	6.06	---	1.42	"	"	11.0	"	-652%	(63-139)	1.64%	"	"	M4
Pyrene	"	15.3	---	1.42	"	"	24.5	"	-1210%	(51-172)	3.22%	"	"	M4
Surrogate(s): p-Terphenyl-d14		*Recovery: 107%*			*Limits: 50-147%*	"							*06/07/07 16:11*	*Z3*

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Conventional Chemistry Parameters by APHA/EPA Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F05026 Soil Preparation Method: Special Procedure

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F05026-BLK1)								Extracted: 06/05/07 11:31						
Hexavalent Chromium	EPA 7196A	ND	---	1.0	mg/kg wet	1x	--	--	--	--	--	--	06/07/07 20:30	
LCS (7F05026-BS1)								Extracted: 06/05/07 11:31						
Hexavalent Chromium	EPA 7196A	20	---	1.0	mg/kg wet	1x	--	25.0	80.0%	(80-120)	--	--	06/07/07 20:30	
Duplicate (7F05026-DUP1)				QC Source: BQE0442-04				Extracted: 06/05/07 11:31						
Hexavalent Chromium	EPA 7196A	ND	---	1.2	mg/kg dry	1x	ND	--	--	--	NR	(30)	06/07/07 20:30	
Matrix Spike (7F05026-MS1)				QC Source: BQE0442-04				Extracted: 06/05/07 11:31						
Hexavalent Chromium	EPA 7196A	21	---	1.2	mg/kg dry	1x	ND	28.9	72.7%	(75-125)	--	--	06/07/07 20:30	M2

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Physical Parameters by APHA/ASTM/EPA Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25053 **Soil Preparation Method: Dry Weight**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E250S3-BLK1)								Extracted: 05/25/07 16:40						
Dry Weight	BSOPSPL003R08	100	---	1.00	%	1x	--	--	--	--	--	--	05/29/07 00:00	

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Gasoline Hydrocarbons by NWTPH-Gx and BTEX by EPA Method 8021B - Laboratory Quality Control Results

TestAmerica - Spokane, WA

QC Batch: 7060006 **Soil Preparation Method: GC Volatiles**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7060006-BLK1)								Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	ND	---	10.0	mg/kg wet	1x	--	--	--	--	--	--	06/01/07 12:26	
Surrogate(s): 4-BFB (FID)		*Recovery: 92.0%*			*Limits: 50-150%*	"							*06/01/07 12:26*	
LCS (7060006-BS1)								Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	44.0	---	10.0	mg/kg wet	1x	--	50.0	88.0%	(80-120)	--	--	06/01/07 12:50	
Surrogate(s): 4-BFB (FID)		*Recovery: 132%*			*Limits: 50-150%*	"							*06/01/07 12:50*	
Duplicate (7060006-DUP1)					QC Source: SQF0003-02			Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	ND	---	20.8	mg/kg dry	1x	ND	--	--	--	1.55%	(20)	06/01/07 15:44	
Surrogate(s): 4-BFB (FID)		*Recovery: 17.0%*			*Limits: 50-150%*	"							*06/01/07 15:44*	*ZX*
Duplicate (7060006-DUP2)					QC Source: SQF0004-05			Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	ND	---	9.16	mg/kg dry	2x	ND	--	--	--	94.3%	(20)	06/01/07 19:03	R4
Surrogate(s): 4-BFB (FID)		*Recovery: 65.1%*			*Limits: 50-150%*	"							*06/01/07 19:03*	
Matrix Spike (7060006-MS1)					QC Source: SQF0003-02			Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	11.1	---	20.8	mg/kg dry	1x	1.92	104	8.83%	(70-130)	--	--	06/01/07 16:09	M2
Surrogate(s): 4-BFB (FID)		*Recovery: 18.0%*			*Limits: 50-150%*	"							*06/01/07 16:09*	*ZX*

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Organotins - Laboratory Quality Control Results
STL Seattle

QC Batch: 19127 Soil Preparation Method: Organutin Prep

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (580-19216-1)				QC Source:				Extracted: 05/30/07 02:10						
Tributyltin	Organotins	ND	---	1.3	ug/Kg dry	1x	--	--	--	--	--	--	05/31/07 08:10	
Surrogate(s): Tripentyltin		*Recovery: 104%*		*Limits: 42-192%*		"							*05/31/07 08:10*	
LCS (580-19216-2)				QC Source:				Extracted: 05/30/07 02:10						
Tributyltin	Organotins	114	---	1.3	ug/Kg dry	1x	--	119	96%	(29-110)	--	--	05/31/07 08:33	
Surrogate(s): Tripentyltin		*Recovery: 104%*		*Limits: 42-192%*		"							*05/31/07 08:33*	
LCS Dup (580-19216-3)				QC Source:				Extracted: 05/30/07 02:10						
Tributyltin	Organotins	125	---	1.3	ug/Kg dry	1x	--	119	105%	(29-110)	10%	(28)	05/31/07 08:57	
Surrogate(s): Tripentyltin		*Recovery: 112%*		*Limits: 42-192%*		"							*05/31/07 08:57*	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:31

Notes and Definitions

Report Specific Notes:

C5	-	Calibration Verification recovery was below the method control limit for this analyte. An additional check standard was analyzed at the reporting limit to ensure instrument sensitivity at the reporting limit. Samples ND.
E	-	Concentration exceeds the calibration range and therefore result is semi-quantitative.
I	-	Internal Standard recovery was outside of method limits. Matrix interference was confirmed by reanalysis.
M1	-	The MS and/or MSD were above the acceptance limits due to sample matrix interference. See Blank Spike (LCS).
M2	-	The MS and/or MSD were below the acceptance limits due to sample matrix interference. See Blank Spike (LCS).
M4	-	The sample required a dilution due to matrix interference. Because of this dilution, the matrix spike concentrations in the sample were reduced to a level where the recovery calculation does not provide useful information. See Blank Spike (LCS).
QP	-	Hydrocarbon result partly due to individual peak(s) in quantitation range.
R3	-	The RPD exceeded the acceptance limit due to sample matrix effects.
R4	-	Due to the low levels of analyte in the sample, the duplicate RPD calculation does not provide useful information.
RL7	-	Sample required dilution due to high concentrations of target analyte.
Z3	-	The sample required a dilution due to the nature of the sample matrix. Because of this dilution, the surrogate spike concentration in the sample was reduced to a level where the recovery calculation does not provide useful information.
ZX	-	Due to sample matrix effects, the surrogate recovery was outside the acceptance limits.

Laboratory Reporting Conventions:

DET	-	Analyte DETECTED at or above the Reporting Limit. Qualitative Analyses only.
ND	-	Analyte NOT DETECTED at or above the reporting limit (MDL or MRL, as appropriate).
NR/NA	-	Not Reported / Not Available
dry	-	Sample results reported on a Dry Weight Basis. Results and Reporting Limits have been corrected for Percent Dry Weight.
wet	-	Sample results and reporting limits reported on a Wet Weight Basis (as received). Results with neither 'wet' nor 'dry' are reported on a Wet Weight Basis.
RPD	-	RELATIVE PERCENT DIFFERENCE (RPDs calculated using Results, not Percent Recoveries).
MRL	-	METHOD REPORTING LIMIT. Reporting Level at, or above, the lowest level standard of the Calibration Table.
MDL*	-	METHOD DETECTION LIMIT. Reporting Level at, or above, the statistically derived limit based on 40CFR, Part 136, Appendix B. *MDLs are listed on the report only if the data has been evaluated below the MRL. Results between the MDL and MRL are reported as Estimated Results.
Dil	-	Dilutions are calculated based on deviations from the standard dilution performed for an analysis, and may not represent the dilution found on the analytical raw data.
Reporting Limits	-	Reporting limits (MDLs and MRLs) are adjusted based on variations in sample preparation amounts, analytical dilutions and percent solids, where applicable.
Electronic Signature	-	Electronic Signature added in accordance with TestAmerica's *Electronic Reporting and Electronic Signatures Policy*. Application of electronic signature indicates that the report has been reviewed and approved for release by the laboratory. Electronic signature is intended to be the legally binding equivalent of a traditionally handwritten signature.

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

11720 Nooh Creek Pkwy N Suite 400, Bothell, WA 98011-8244 425-420-9200 FAX 420-9210
11922 E. First Ave, Spokane, WA 99206-5302 509-924-9200 FAX 924-9290
9405 SW Nimbus Ave, Beaverton, OR 97008-7145 503-906-9200 FAX 906-9210
2000 W International Airport Rd Ste A10, Anchorage, AK 99502-1119 907-563-9200 FAX 563-9210

CHAIN OF CUSTODY REPORT

Work Order #: BQE0417

CLIENT: [illegible]

REPORT TO: [illegible]
ADDRESS: [illegible]
PHONE: [illegible] FAX:

INVOICE TO:

P.O. NUMBER:

PROJECT NAME: [illegible]
PROJECT NUMBER: [illegible]
SAMPLED BY: [illegible]

TURNAROUND REQUEST
In Business Days *
Organic & Inorganic Analyses: 10 (STD.) 7 5 4 3 2 1 <1
Petroleum Hydrocarbon Analyses: 5 (STD.) 4 3 2 1 <1
OTHER Specify:
* Turnaround Requests less than standard may incur Rush Charges

PRESERVATIVE

REQUESTED ANALYSES

CLIENT SAMPLE IDENTIFICATION	SAMPLING DATE/TIME	NWTPH-Dx	NWTPH-Dx w/SILICA GEL	VOCs	PCBs	SVOCs w/ PAH-SIM	PPL METALS	Cr VI	TBT	HOLD	MATRIX (W, S, O)	# OF CONT.	LOCATION / COMMENTS	TA WO ID
1 MW-4-11.0	05/23 11:45									X	S	5		-01
2 MW-4-13.0	12:00	X	X	X	X	X	X	X	X			5		-02
3 MW-4-30.0	12:55	X	X	X	X	X	X	X	X			2		-03
4 MW-4-40.0	13:10											5		-04
5 MW-7-5.0	09:35	X	X	X	X	X	X	X	X			5		-05
6 MW-7-25.0	09:55	X	X	X	X	X	X	X	X			5		-06
7 MW-7-30.0	10:20											2		-07
8 MW-7-35.0	10:25											2		-08
9														
10														

RELEASED BY: [illegible] DATE: [illegible] RECEIVED BY: [illegible] DATE: [illegible]
PRINT NAME: [illegible] FIRM: GEI TIME: [illegible] PRINT NAME: [illegible] FIRM: TA TIME: [illegible]
RELEASED BY: DATE: RECEIVED BY: DATE:
PRINT NAME: FIRM: TIME: PRINT NAME: FIRM: TIME:

ADDITIONAL REMARKS: [illegible]

TEMP. 13 PAGE 1 OF 1

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

June 13, 2007

Sean Trimble
Geo Engineers - Seattle
600 Stewart St, Suite 1700
Seattle, WA/USA 98101

RE: Old Bremerton Gas Works

Enclosed are the results of analyses for samples received by the laboratory on 05/24/07 15:25. The following list is a summary of the Work Orders contained in this report, generated on 06/13/07 10:50.

If you have any questions concerning this report, please feel free to contact me.

Work Order	Project	ProjectNumber
BOE0442	Old Bremerton Gas Works	Old Bremerton Gas Works

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
MW-5-10.0	BQE0442-02	Soil	05/24/07 10:10	05/24/07 15:25
MW-5-20.0	BQE0442-04	Soil	05/24/07 10:25	05/24/07 15:25

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Petroleum Products by NWTPH-Gx

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-02 (MW-5-10.0)		**Soil**			**Sampled: 05/24/07 10:10**					
Gasoline Range Hydrocarbons	NWTPH-Gx	ND	----	5.62	mg/kg dry	1x	7F05014	06/05/07 09:18	06/05/07 14:53	
Surrogate(s): 4-BFB (FID)			*91.1%*		*50 - 150 %*	"			"	
BQE0442-04 (MW-5-20.0)		**Soil**			**Sampled: 05/24/07 10:25**					
Gasoline Range Hydrocarbons	NWTPH-Gx	ND	----	5.69	mg/kg dry	1x	7F05014	06/05/07 09:18	06/05/07 15:25	
Surrogate(s): 4-BFB (FID)			*91.2%*		*50 - 150 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Semivolatile Petroleum Products by NWTPH-Dx with Acid/Silica Gel Clean-up

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-02 (MW-5-10.0)		Soil			Sampled: 05/24/07 10:10					
Diesel Range Hydrocarbons	NWTPH-Dx	402	----	12.3	mg/kg dry	1x	7E29047	05/29/07 13:36	05/30/07 09:23	QP
Lube Oil Range Hydrocarbons	"	232	----	30.8	"	"	"	"	"	QP
Surrogate(s): 2-FBP			*65.7%*		*54 - 148 %*	"			"	
Octacosane			*187%*		*62 - 142 %*	"			"	*ZX*
BQE0442-04 (MW-5-20.0)		Soil			Sampled: 05/24/07 10:25					
Diesel Range Hydrocarbons	NWTPH-Dx	ND	----	11.6	mg/kg dry	1x	7E29047	05/29/07 13:36	05/30/07 09:52	
Lube Oil Range Hydrocarbons	"	ND	----	29.0	"	"	"	"	"	
Surrogate(s): 2-FBP			*74.7%*		*54 - 148 %*	"			"	
Octacosane			*91.0%*		*62 - 142 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Total Metals by EPA 6000/7000 Series Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-02 (MW-5-10.0)		**Soil**			**Sampled: 05/24/07 10:10**					
Antimony	EPA 6020	ND	-----	1.86	mg/kg dry	1x	7E29063	05/29/07 18:18	05/30/07 12:37	
Arsenic	"	3.81	-----	0.620	"	"	"	"	"	
Beryllium	"	ND	-----	0.620	"	"	"	"	"	
Cadmium	"	ND	-----	0.620	"	"	"	"	"	
Chromium	"	33.1	-----	0.620	"	"	"	"	"	
Copper	"	79.1	-----	0.620	"	"	"	"	"	
Lead	"	131	-----	0.620	"	"	"	"	"	
Mercury	EPA 7471A	1.62	-----	0.224	"	2x	7E29064	05/29/07 18:21	05/30/07 15:30	
Nickel	EPA 6020	61.1	-----	0.620	"	1x	7E29063	05/29/07 18:18	05/30/07 12:37	
Selenium	"	ND	-----	0.620	"	"	"	"	"	
Silver	"	ND	-----	0.620	"	"	"	"	"	
Thallium	"	ND	-----	0.620	"	"	"	"	"	
Zinc	"	204	-----	6.20	"	"	"	"	"	
BQE0442-04 (MW-5-20.0)		**Soil**			**Sampled: 05/24/07 10:25**					
Antimony	EPA 6020	ND	-----	1.53	mg/kg dry	1x	7E29063	05/29/07 18:18	05/30/07 12:49	
Arsenic	"	0.833	-----	0.511	"	"	"	"	"	
Beryllium	"	ND	-----	0.511	"	"	"	"	"	
Cadmium	"	ND	-----	0.511	"	"	"	"	"	
Chromium	"	26.3	-----	0.511	"	"	"	"	"	
Copper	"	11.1	-----	0.511	"	"	"	"	"	
Lead	"	1.44	-----	0.511	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.0941	"	"	7E29064	05/29/07 18:21	05/30/07 15:17	
Nickel	EPA 6020	34.6	-----	0.511	"	"	7E29063	05/29/07 18:18	05/30/07 12:49	
Selenium	"	ND	-----	0.511	"	"	"	"	"	
Silver	"	ND	-----	0.511	"	"	"	"	"	
Thallium	"	ND	-----	0.511	"	"	"	"	"	
Zinc	"	27.0	-----	5.11	"	"	"	"	"	

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seatde, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Polychlorinated Biphenyls by EPA Method 8082

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-02 (MW-5-10.0)		Soil			Sampled: 05/24/07 10:10					
Aroclor 1016	EPA 8082	ND	-----	64.2	ug/kg dry	1x	7E30046	05/30/07 14:09	06/02/07 02:16	
Aroclor 1221	"	ND	-----	128	"	"	"	"	"	
Aroclor 1232	"	ND	-----	64.2	"	"	"	"	"	
Aroclor 1242	"	ND	-----	64.2	"	"	"	"	"	
Aroclor 1248	"	ND	-----	64.2	"	"	"	"	"	
Aroclor 1254	"	ND	-----	64.2	"	"	"	"	"	
Aroclor 1260	"	ND	-----	64.2	"	"	"	"	"	
Aroclor 1262	"	ND	-----	64.2	"	"	"	"	"	
Aroclor 1268	"	ND	-----	64.2	"	"	"	"	"	
Surrogate(s): TCX			*48.7%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*54.9%*		*33 - 163 %*	"			"	
BQE0442-04 (MW-5-20.0)		Soil			Sampled: 05/24/07 10:25					
Aroclor 1016	EPA 8082	ND	-----	28.9	ug/kg dry	1x	7E30046	05/30/07 14:09	06/02/07 01:23	
Aroclor 1221	"	ND	-----	57.7	"	"	"	"	"	
Aroclor 1232	"	ND	-----	28.9	"	"	"	"	"	
Aroclor 1242	"	ND	-----	28.9	"	"	"	"	"	
Aroclor 1248	"	ND	-----	28.9	"	"	"	"	"	
Aroclor 1254	"	ND	-----	28.9	"	"	"	"	"	
Aroclor 1260	"	ND	-----	28.9	"	"	"	"	"	
Aroclor 1262	"	ND	-----	28.9	"	"	"	"	"	
Aroclor 1268	"	ND	-----	28.9	"	"	"	"	"	
Surrogate(s): TCX			*93.1%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*85.5%*		*33 - 163 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-04 (MW-5-20.0)		Soil			Sampled: 05/24/07 10:25					
Acetone	EPA 8260B	ND	-----	16.8	ug/kg dry	1x	7E30022	05/30/07 08:45	05/30/07 12:21	
Benzene	"	7.79	-----	0.840	"	"	"	"	"	
Bromobenzene	"	ND	-----	2.80	"	"	"	"	"	
Bromochloromethane	"	ND	-----	2.80	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	2.80	"	"	"	"	"	
Bromoform	"	ND	-----	2.80	"	"	"	"	"	
Bromomethane	"	ND	-----	5.60	"	"	"	"	"	
2-Butanone	"	ND	-----	8.40	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	2.80	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	2.80	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	2.80	"	"	"	"	"	
Carbon disulfide	"	ND	-----	1.68	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	2.80	"	"	"	"	"	
Chlorobenzene	"	ND	-----	1.12	"	"	"	"	"	
Chloroethane	"	ND	-----	2.80	"	"	"	"	"	
Chloroform	"	ND	-----	1.40	"	"	"	"	"	
Chloromethane	"	ND	-----	5.60	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	2.80	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	2.80	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	2.80	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	5.60	"	"	"	"	"	
1,2-Dibromoethane (EDB)	"	ND	-----	2.80	"	"	"	"	"	
Dibromomethane	"	ND	-----	2.80	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	2.80	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	2.80	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	2.80	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	2.80	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	1.12	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.700	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	1.68	"	"	"	"	"	
cis-1,2-Dichlorocthene	"	ND	-----	1.68	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	1.40	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	2.80	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	2.80	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	5.60	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	2.80	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	2.80	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.700	"	"	"	"	"	
Ethylbenzene	"	11.0	-----	2.24	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	5.60	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	0.560	"	"	"	"	"	
n-Hexane	"	ND	-----	1.12	"	"	"	"	"	
2-Hexanone	"	ND	-----	11.2	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-04 (MW-5-20.0)		Soil			Sampled: 05/24/07 10:25					
Isopropylbenzene	EPA 8260B	ND	-----	2.80	ug/kg dry	1x	7E30022	05/30/07 08:45	05/30/07 12:21	
p-Isopropyltoluene	"	ND	-----	2.80	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	11.2	"	"	"	"	"	
Methylene chloride	"	ND	-----	1.96	"	"	"	"	"	
Naphthalene	"	8.41	-----	5.60	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	2.80	"	"	"	"	"	
Styrene	"	ND	-----	0.560	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	5.60	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	5.60	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	2.80	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	2.80	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	1.12	"	"	"	"	"	
Toluene	"	ND	-----	0.840	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	1.40	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.700	"	"	"	"	"	
Trichloroethene	"	ND	-----	1.40	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	2.80	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	2.80	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	2.80	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	2.80	"	"	"	"	"	
Vinyl chloride	"	ND	-----	1.40	"	"	"	"	"	
o-Xylene	"	ND	-----	2.80	"	"	"	"	"	
m,p-Xylene	"	ND	-----	2.80	"	"	"	"	"	
Total Xylenes	"	ND	-----	5.60	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*122%*		*60 - 140 %*	"			"	
Toluene-d8			*109%*		*60 - 140 %*	"			"	
4-BFB			*102%*		*60 - 140 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Projeel Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-02 (MW-5-10.0)		Soil			Sampled: 05/24/07 10:10					
1,2-Dibromoethane (EDB)	EPA 8260B	ND	-----	0.112	mg/kg dry	1x	7F01007	06/01/07 12:15	06/01/07 12:50	
Acetone	"	ND	-----	1.12	"	"	"	"	"	
Benzene	"	0.0416	-----	0.0225	"	"	"	"	"	
Bromobenzene	"	ND	-----	0.112	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.112	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.112	"	"	"	"	"	
Bromoform	"	ND	-----	0.112	"	"	"	"	"	
Bromomethane	"	ND	-----	0.112	"	"	"	"	"	
2-Butanone	"	ND	-----	1.12	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	0.112	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	0.112	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.112	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.112	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.112	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.112	"	"	"	"	"	
Chloroethane	"	ND	-----	0.112	"	"	"	"	"	
Chloroform	"	ND	-----	0.112	"	"	"	"	"	
Chloromethane	"	ND	-----	0.562	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.112	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.112	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.112	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.562	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.112	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.112	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.112	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.112	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.112	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.112	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.112	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.112	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	0.112	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.112	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.112	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.112	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.112	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.112	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.112	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.112	"	"	"	"	"	
Ethylbenzene	"	ND	-----	0.112	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.562	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	0.562	"	"	"	"	"	
n-Hexane	"	ND	-----	1.12	"	"	"	"	"	
2-Hexanone	"	ND	-----	1.12	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-02 (MW-5-10.0)		Soil			Sampled: 05/24/07 10:10					
Isopropylbenzene	EPA 8260B	ND	----	0.112	mg/kg dry	1x	7F01007	06/01/07 12:15	06/01/07 12:50	
p-Isopropyltoluene	"	ND	----	0.112	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	----	1.12	"	"	"	"	"	
Methylene chloride	"	ND	----	1.12	"	"	"	"	"	
Naphthalene	"	ND	----	0.562	"	"	"	"	"	
n-Propylbenzene	"	ND	----	0.112	"	"	"	"	"	
Styrene	"	ND	----	0.112	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	----	0.562	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	----	0.562	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	----	0.112	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	----	0.112	"	"	"	"	"	
Tetrachloroethene	"	ND	----	0.112	"	"	"	"	"	
Toluene	"	0.143	----	0.112	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	----	0.112	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	----	0.112	"	"	"	"	"	
Trichloroethene	"	ND	----	0.112	"	"	"	"	"	
Trichlorofluoromethane	"	ND	----	0.112	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	----	0.112	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	----	0.112	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	----	0.112	"	"	"	"	"	
Vinyl chloride	"	ND	----	0.112	"	"	"	"	"	
Total Xylenes	"	ND	----	0.337	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*108%*		*75 - 125 %*	"			"	
Toluene-d8			*103%*		*75 - 125 %*	"			"	
4-BFB			*96.0%*		*75 - 125 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-02 (MW-5-10.0)		Soil			Sampled: 05/24/07 10:10					
Acenaphthene	EPA 8270C	ND	-----	4.04	mg/kg dry	10x	7E25030	05/31/07 11:12	06/08/07 00:12	
Acenaphthylene	"	4.52	-----	4.04	"	"	"	"	"	
Aniline	"	ND	-----	4.04	"	"	"	"	"	
Anthracene	"	9.42	-----	4.04	"	"	"	"	"	
Benzo (a) anthracene	"	23.4	-----	4.04	"	"	"	"	"	
Benzo (a) pyrene	"	19.7	-----	4.04	"	"	"	"	"	
Benzo (b) fluoranthene	"	13.2	-----	4.04	"	"	"	"	"	
Benzo (k) fluoranthene	"	19.7	-----	4.04	"	"	"	"	"	
Benzo (ghi) perylene	"	12.1	-----	4.04	"	"	"	"	"	
Benzoic Acid	"	ND	-----	12.2	"	"	"	"	"	C5
Benzyl alcohol	"	ND	-----	4.04	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	4.04	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	4.04	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	4.04	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	4.04	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	4.04	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	4.04	"	"	"	"	"	
Carbazole	"	ND	-----	4.04	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	6.12	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	4.04	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	4.04	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	4.04	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	4.04	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	4.04	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	4.04	"	"	"	"	"	
Chrysene	"	27.6	-----	4.04	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	4.04	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	4.04	"	"	"	"	"	
Dibenzofuran	"	ND	-----	4.04	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	4.04	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	4.04	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	4.04	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	61.2	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	4.04	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	4.04	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	4.04	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	4.04	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	6.12	"	"	"	"	"	C5
2,4-Dinitrophenol	"	ND	-----	6.12	"	"	"	"	"	C5
2,4-Dinitrotoluene	"	ND	-----	6.12	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	6.12	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	4.04	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-02 (MW-5-10.0)		Soil			Sampled: 05/24/07 10:10					
Fluoranthene	EPA 8270C	68.3	----	4.04	mg/kg dry	10x	7E25030	05/31/07 11:12	06/08/07 00:12	
Fluorene	"	4.20	----	4.04	"	"	"	"	"	
Hexachlorobenzene	"	ND	----	4.04	"	"	"	"	"	
Hexachlorobutadiene	"	ND	----	4.04	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	----	6.12	"	"	"	"	"	C5
Hexachloroethane	"	ND	----	4.04	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	10.1	----	4.04	"	"	"	"	"	
Isophorone	"	ND	----	4.04	"	"	"	"	"	
1-Methylnaphthalene	"	ND	----	4.04	"	"	"	"	"	
2-Methylnaphthalene	"	ND	----	4.04	"	"	"	"	"	
Naphthalene	"	ND	----	4.04	"	"	"	"	"	
2-Nitroaniline	"	ND	----	6.12	"	"	"	"	"	
3-Nitroaniline	"	ND	----	6.12	"	"	"	"	"	
4-Nitroaniline	"	ND	----	6.12	"	"	"	"	"	
Nitrobenzene	"	ND	----	4.04	"	"	"	"	"	
2-Nitrophenol	"	ND	----	4.04	"	"	"	"	"	
4-Nitrophenol	"	ND	----	6.12	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	----	4.04	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	----	4.04	"	"	"	"	"	
Pentachlorophenol	"	ND	----	6.12	"	"	"	"	"	
Phenanthrene	"	59.7	----	4.04	"	"	"	"	"	
Phenol	"	ND	----	4.04	"	"	"	"	"	
Pyrene	"	89.2	----	4.04	"	"	"	"	"	E
1,2,4-Trichlorobenzene	"	ND	----	4.04	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	----	4.04	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	----	4.04	"	"	"	"	"	
Surrogate(s): *2-FBP*		*69.9%*			*27 - 126 %*	"			"	
2-FP		*33.1%*			*16 - 121 %*	"			"	
Nitrobenzene-d5		*60.3%*			*26 - 125 %*	"			"	
Phenol-d6		*32.1%*			*10 - 120 %*	"			"	
p-Terphenyl-d14		*76.0%*			*26 - 150 %*	"			"	
2,4,6-TBP		*22.6%*			*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-04 (MW-5-20.0)		Soil			Sampled: 05/24/07 10:25					
Acenaphthene	EPA 8270C	ND	-----	0.376	mg/kg dry	1x	7E25030	05/31/07 11:12	06/08/07 00:45	
Acenaphthylene	"	ND	-----	0.376	"	"	"	"	"	
Aniline	"	ND	-----	0.376	"	"	"	"	"	
Anthracene	"	ND	-----	0.376	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.376	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.376	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.376	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.376	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.376	"	"	"	"	"	
Benzoic Acid	"	ND	-----	1.14	"	"	"	"	"	C5
Benzyl alcohol	"	ND	-----	0.376	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	0.376	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	0.376	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	0.376	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	0.376	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	0.376	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	0.376	"	"	"	"	"	
Carbazole	"	ND	-----	0.376	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	0.570	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	0.376	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	0.376	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	0.376	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	0.376	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	0.376	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	0.376	"	"	"	"	"	
Chrysene	"	ND	-----	0.376	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	0.376	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.376	"	"	"	"	"	
Dibenzofuran	"	ND	-----	0.376	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.376	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.376	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.376	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	5.70	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	0.376	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	0.376	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	0.376	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	0.376	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	0.570	"	"	"	"	"	C5
2,4-Dinitrophenol	"	ND	-----	0.570	"	"	"	"	"	C5
2,4-Dinitrotoluene	"	ND	-----	0.570	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	0.570	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	0.376	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.376	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-04 (MW-5-20.0)		Soil			Sampled: 05/24/07 10:25					
Fluorene	EPA 8270C	ND	-----	0.376	mg/kg dry	1x	7E25030	05/31/07 11:12	06/08/07 00:45	
Hexachlorobenzene	"	ND	-----	0.376	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.376	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	0.570	"	"	"	"	"	CS
Hexachloroethane	"	ND	-----	0.376	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.376	"	"	"	"	"	
Isophorone	"	ND	-----	0.376	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.376	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.376	"	"	"	"	"	
Naphthalene	"	ND	-----	0.376	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	0.570	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	0.570	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	0.570	"	"	"	"	"	
Nitrobenzene	"	ND	-----	0.376	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	0.376	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	0.570	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	0.376	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	0.376	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	0.570	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.376	"	"	"	"	"	
Phenol	"	ND	-----	0.376	"	"	"	"	"	
Pyrene	"	ND	-----	0.376	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.376	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	0.376	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	0.376	"	"	"	"	"	
Surrogate(s):	*2-FBP*		*65.3%*		*27 - 126 %*	"			"	
	2-FP		*70.5%*		*16 - 121 %*	"			"	
	Nitrobenzene-d5		*75.8%*		*26 - 125 %*	"			"	
	Phenol-d6		*45.8%*		*10 - 120 %*	"			"	
	p-Terphenyl-d14		*74.2%*		*26 - 150 %*	"			"	
	2,4,6-TBP		*57.6%*		*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-02 (MW-S-10.0)		Soil			Sampled: 05/24/07 10:10					
Acenaphthene	EPA 8270-SIM	ND	-----	0.612	mg/kg dry	50x	7E25030	05/31/07 11:12	06/06/07 21:55	
Acenaphthylene	"	3.02	-----	0.612	"	"	"	"	"	
Anthracene	"	11.1	-----	0.612	"	"	"	"	"	
Benzo (a) anthracene	"	21.0	-----	0.612	"	"	"	"	"	
Benzo (a) pyrene	"	16.7	-----	0.612	"	"	"	"	"	
Benzo (b) fluoranthene	"	12.5	-----	0.612	"	"	"	"	"	
Benzo (k) fluoranthene	"	14.6	-----	0.612	"	"	"	"	"	
Benzo (ghi) perylene	"	14.6	-----	0.612	"	"	"	"	"	
Chrysene	"	28.9	-----	0.612	"	"	"	"	"	
Dibenz (a,h) anthracene	"	4.37	-----	0.612	"	"	"	"	"	
Fluoranthene	"	49.9	-----	0.612	"	"	"	"	"	
Fluorene	"	4.57	-----	0.612	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	11.1	-----	0.612	"	"	"	"	"	
1-Methylnaphthalene	"	0.979	-----	0.612	"	"	"	"	"	
2-Methylnaphthalene	"	1.63	-----	0.612	"	"	"	"	"	
Naphthalene	"	2.08	-----	0.612	"	"	"	"	"	
Phenanthrene	"	50.8	-----	0.612	"	"	"	"	"	
Pyrene	"	85.5	-----	0.612	"	"	"	"	"	E
Surrogate(s): p-Terphenyl-d14			*72.1%*		*50 - 147 %*	"			"	*Z3*
BQE0442-02RE1 (MW-5-10.0)		Soil			Sampled: 05/24/07 10:10					
Pyrene	EPA 8270-SIM	95.7	-----	1.22	mg/kg dry	100x	7E25030	05/31/07 11:12	06/10/07 20:47	
Surrogate(s): p-Terphenyl-d14			*74.0%*		*50 - 147 %*	"			"	
BQE0442-04 (MW-5-20.0)		Soil			Sampled: 05/24/07 10:25					
Acenaphthene	EPA 8270-SIM	0.0205	-----	0.0114	mg/kg dry	1x	7E25030	05/31/07 11:12	06/06/07 16:16	
Acenaphthylene	"	ND	-----	0.0114	"	"	"	"	"	
Anthracene	"	0.0198	-----	0.0114	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.0114	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.0114	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.0114	"	"	"	"	"	
Benzo (k) fluoranthene	"	0.0129	-----	0.0114	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.0114	"	"	"	"	"	
Chrysene	"	ND	-----	0.0114	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.0114	"	"	"	"	"	
Fluoranthene	"	0.0122	-----	0.0114	"	"	"	"	"	
Fluorene	"	ND	-----	0.0114	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.0114	"	"	"	"	"	
1-Methylnaphthalene	"	0.0228	-----	0.0114	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-04 (MW-5-20.0)		Soil			Sampled: 05/24/07 10:25					
2-Methylnaphthalene	EPA 8270-SIM	ND	----	0.0114	mg/kg dry	1x	7E25030	05/31/07 11:12	06/06/07 16:16	
Naphthalene	"	0.0319	----	0.0114	"	"	"	"	"	
Phenanthrene	"	0.0843	----	0.0114	"	"	"	"	"	
Pyrene	"	0.0137	----	0.0114	"	"	"	"	"	
Surrogate(s): p-Terphenyl-d14			77.1%		50 - 147 %	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Conventional Chemistry Parameters by APHA/EPA Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-02 (MW-5-10.0)		Soil			Sampled: 05/24/07 10:10					
Hexavalent Chromium	EPA 7196A	ND	-----	1.1	mg/kg dry	1x	7F05026	06/05/07 11:31	06/07/07 20:30	
BQE0442-04 (MW-5-20.0)		Soil			Sampled: 05/24/07 10:25					
Hexavalent Chromium	EPA 7196A	ND	-----	1.2	mg/kg dry	1x	7F05026	06/05/07 11:31	06/07/07 20:30	

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Projeet Manager:	Sean Trimble	06/13/07 10:50

Physical Parameters by APHA/ASTM/EPA Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-02 (MW-5-10.0)		**Soil**			**Sampled: 05/24/07 10:10**					
Dry Weight	BSOPSPL003R08	80.6	-----	1.00	%	1x	7E30051	05/30/07 14:29	05/31/07 00:00	
BQE0442-04 (MW-5-20.0)		**Soil**			**Sampled: 05/24/07 10:25**					
Dry Weight	BSOPSPL003R08	86.6	-----	1.00	%	1x	7E30051	05/30/07 14:29	05/31/07 00:00	

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical repori shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Organotins

STL Seattle

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0442-02 (MW-5-10.0)		Soil			Sampled: 05/24/07 10:10					
Tributyltin	Organotins	ND	-----	1.6	ug/Kg dry	1x	19127	05/30/07 02:10	06/01/07 09:47	
Surrogate(s): Tripentyltin			*232%*		*42 - 192 %*	"			"	*X*
BQE0442-04 (MW-5-20.0)		Soil			Sampled: 05/24/07 10:25					
Tributyltin	Organotins	ND	-----	1.5	ug/Kg dry	1x	19127	05/30/07 02:10	06/01/07 10:10	
Surrogate(s): Tripentyltin			*215%*		*42 - 192 %*	"			"	*X*

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Petroleum Products by NWTPH-Gx - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F05014 **Soil Preparation Method: EPA 5030B (P/T)**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F05014-BLK1)								Extracted: 06/05/07 09:18						
Gasoline Range Hydrocarbons	NWTPH-Gx	ND	---	5.00	mg/kg wet	1x	--	--	--	--	--	--	06/05/07 12:09	
Surrogate(s): 4-BFB (FID)		*Recovery: 90.3%*			*Limits: 50-150%*	"							*06/05/07 12:09*	
LCS (7F05014-BS1)								Extracted: 06/05/07 09:18						
Gasoline Range Hydrocarbons	NWTPH-Gx	47.3	---	5.00	mg/kg wet	1x	--	50.0	94.6%	(75-125)	--	--	06/05/07 12:42	
Surrogate(s): 4-BFB (FID)		*Recovery: 96.3%*			*Limits: 50-150%*	"							*06/05/07 12:42*	
Duplicate (7F05014-DUP1)					QC Source: BQE0501-01			Extracted: 06/05/07 09:18						
Gasoline Range Hydrocarbons	NWTPH-Gx	ND	---	4.31	mg/kg dry	1x	ND	--	--	--	29.5%	(40)	06/05/07 15:58	R4
Surrogate(s): 4-BFB (FID)		*Recovery: 91.5%*			*Limits: 50-150%*	"							*06/05/07 15:58*	
Matrix Spike (7F05014-MS1)					QC Source: BQE0501-01			Extracted: 06/05/07 09:18						
Gasoline Range Hydrocarbons	NWTPH-Gx	44.8	---	4.31	mg/kg dry	1x	1.40	43.1	101%	(42-125)	--	--	06/05/07 16:31	
Surrogate(s): 4-BFB (FID)		*Recovery: 97.7%*			*Limits: 50-150%*	"							*06/05/07 16:31*	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Semivolatile Petroleum Products by NWTPH-Dx with Acid/Silica Gel Clean-up - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7E29047 **Soil Preparation Method: EPA 3550B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29047-BLK1)								Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	ND	---	10.0	mg/kg wet	1x	--	--	--	--	--	--	05/29/07 23:07	
Lube Oil Range Hydrocarbons	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Surrogate(s): 2-FBP		*Recovery:*	*69.9%*		*Limits:*	*54-148%*	"						*05/29/07 23:07*	
Octacosane			*91.8%*			*62-142%*	"						"	
LCS (7E29047-BS1)								Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	71.2	---	10.0	mg/kg wet	1x	--	66.7	107%	(78-129)	--	--	05/29/07 23:37	
Surrogate(s): 2-FBP		*Recovery:*	*80.4%*		*Limits:*	*54-148%*	"						*05/29/07 23:37*	
Octacosane			*90.8%*			*62-142%*	"						"	
Duplicate (7E29047-DUP1)					QC Source: BQE0385-08			Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	6040	---	107	mg/kg dry	10x	3770	--	--	--	46.3%	(50)	05/30/07 00:06	QP
Lube Oil Range Hydrocarbons	"	703	---	269	"	"	390	--	--	--	57.3%	"	"	QP, R3
Surrogate(s): 2-FBP		*Recovery:*	*98.2%*		*Limits:*	*54-148%*	"						*05/30/07 00:06*	
Octacosane			*277%*			*62-142%*	"						"	*ZX*
Duplicate (7E29047-DUP2)					QC Source: BQE0417-03			Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	5110	---	111	mg/kg dry	10x	4370	--	--	--	15.6%	(50)	05/30/07 00:35	
Lube Oil Range Hydrocarbons	"	ND	---	277	"	"	ND	--	--	--	12.1%	"	"	R4
Surrogate(s): 2-FBP		*Recovery:*	*112%*		*Limits:*	*54-148%*	"						*05/30/07 00:35*	
Octacosane			*140%*			*62-142%*	"						"	
Matrix Spike (7E29047-MS1)					QC Source: BQE0385-08			Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	6140	---	107	mg/kg dry	10x	3770	71.6	3310%	(46-155)	--	--	05/30/07 01:04	MI
Surrogate(s): 2-FBP		*Recovery:*	*96.8%*		*Limits:*	*54-148%*	"						*05/30/07 01:04*	
Octacosane			*305%*			*62-142%*	"						"	*ZX*

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29063 **Soil Preparation Method: EPA 3050B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29063-BLK1)								Extracted: 05/29/07 18:18						
Selenium	EPA 6020	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	05/30/07 11:07	
Zinc	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Antimony	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
Beryllium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Lead	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Chromium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Cadmium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Arsenic	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Silver	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Nickel	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Thallium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Copper	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
LCS (7E29063-BS1)								Extracted: 05/29/07 18:18						
Selenium	EPA 6020	41.0	---	0.500	mg/kg wet	1x	--	40.0	102%	(80-120)	--	--	05/30/07 11:13	
Zinc	"	41.7	---	5.00	"	"	--	"	104%	"	--	--	"	
Cadmium	"	41.9	---	0.500	"	"	--	"	105%	"	--	--	"	
Thallium	"	40.1	---	0.500	"	"	--	"	100%	"	--	--	"	
Antimony	"	31.4	---	1.50	"	"	--	30.0	105%	"	--	--	"	
Nickel	"	43.7	---	0.500	"	"	--	40.0	109%	"	--	--	"	
Copper	"	43.2	---	0.500	"	"	--	"	108%	"	--	--	"	
Beryllium	"	43.9	---	0.500	"	"	--	"	110%	"	--	--	"	
Arsenic	"	42.1	---	0.500	"	"	--	"	105%	"	--	--	"	
Lead	"	41.3	---	0.500	"	"	--	"	103%	"	--	--	"	
Silver	"	42.6	---	0.500	"	"	--	"	106%	"	--	--	"	
Chromium	"	44.3	---	0.500	"	"	--	"	111%	"	--	--	"	
Duplicate (7E29063-DUP1)					QC Source: BQE0473-01			Extracted: 05/29/07 18:18						
Arsenic	EPA 6020	6.36	---	0.532	mg/kg dry	1x	6.43	--	--	--	1.09%	(30)	05/30/07 11:31	
Nickel	"	40.8	---	0.532	"	"	34.0	--	--	--	18.2%	"	"	
Beryllium	"	ND	---	0.532	"	"	ND	--	--	--	1.79%	"	"	R4
Silver	"	ND	---	0.532	"	"	ND	--	--	--	NR	(50)	"	R4
Copper	"	44.5	---	0.532	"	"	59.9	--	--	--	29.5%	(30)	"	
Selenium	"	ND	---	0.532	"	"	ND	--	--	--	44.7%	"	"	R4
Chromium	"	25.5	---	0.532	"	"	28.3	--	--	--	10.4%	"	"	
Lead	"	8.88	---	0.532	"	"	11.0	--	--	--	21.3%	"	"	
Cadmium	"	ND	---	0.532	"	"	ND	--	--	--	6.27%	"	"	R4
Zinc	"	50.6	---	5.32	"	"	50.3	--	--	--	0.595%	"	"	
Thallium	"	ND	---	0.532	"	"	ND	--	--	--	NR	"	"	R4

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUTE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Projeel Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Projeel Manager:	Sean Trimble	06/13/07 10:50

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results
- TestAmerica - Seattle, WA

QC Batch: 7E29063 **Soil Preparation Method: EPA 3050B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Duplicate (7E29063-DUP1)				QC Source: BQE0473-01				Extracted: 05/29/07 18:18						
Antimony	EPA 6020	ND	---	1.60	mg/kg dry	1x	ND	--	--	--		(30)	05/30/07 11:31	R4
Matrix Spike (7E29063-MS1)				QC Source: BQE0473-01				Extracted: 05/29/07 18:18						
Thallium	EPA 6020	39.6	---	0.511	mg/kg dry	1x	ND	40.9	96.8%	(75-120)	--	--	05/30/07 11:25	
Antimony	"	2.26	---	1.53	"	"	ND	30.7	7.36%	(10-120)	--	--	"	
Copper	"	94.2	---	0.511	"	"	59.9	40.9	83.9%	(20-148)	--	--	"	
Nickel	"	80.5	---	0.511	"	"	34.0	"	114%	(35-150)	--	--	"	
Beryllium	"	43.7	---	0.511	"	"	0.282	"	106%	(72-122)	--	--	"	
Selenium	"	40.3	---	0.511	"	"	0.287	"	97.8%	(61-120)	--	--	"	
Zinc	"	90.6	---	5.11	"	"	50.3	"	98.5%	(20-160)	--	--	"	
Lead	"	50.2	---	0.511	"	"	11.0	"	95.8%	(29-166)	--	--	"	
Chromium	"	71.6	---	0.511	"	"	28.3	"	106%	(30-163)	--	--	"	
Cadmium	"	42.2	---	0.511	"	"	0.181	"	103%	(80-120)	--	--	"	
Arsenic	"	49.4	---	0.511	"	"	6.43	"	105%	(57-125)	--	--	"	
Silver	"	40.1	---	0.511	"	"	ND	"	98.0%	(54-126)	--	--	"	
Post Spike (7E29063-PS1)				QC Source: BQE0473-01				Extracted: 05/29/07 18:18						
Zinc	EPA 6020	0.191	---		ug/ml	1x	0.0946	0.0995	96.9%	(75-125)	--	--	05/30/07 11:19	
Thallium	"	0.0920	---		"	"	0.0000500	0.100	92.0%	"	--	--	"	
Antimony	"	0.0430	---		"	"	0.0000700	0.0500	85.9%	"	--	--	"	
Lead	"	0.114	---		"	"	0.0207	0.0995	93.8%	"	--	--	"	
Chromium	"	0.156	---		"	"	0.0532	0.100	103%	"	--	--	"	
Cadmium	"	0.0985	---		"	"	0.000340	"	98.2%	"	--	--	"	
Arsenic	"	0.112	---		"	"	0.0121	"	99.9%	"	--	--	"	
Nickel	"	0.160	---		"	"	0.0639	0.0995	96.6%	"	--	--	"	
Copper	"	0.210	---		"	"	0.113	0.101	96.0%	"	--	--	"	
Beryllium	"	0.0992	---		"	"	0.000530	0.100	98.7%	"	--	--	"	
Silver	"	0.0982	---		"	"	0.0000400	"	98.2%	"	--	--	"	
Selenium	"	0.0946	---		"	"	0.000540	"	94.1%	"	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29064 Soil Preparation Method: EPA 7471A

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29064-BLK1)								Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/30/07 13:44	
LCS (7E29064-BS1)								Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	0.694	---	0.100	mg/kg wet	1x	--	0.667	104%	(80-120)	--	--	05/30/07 13:46	
LCS Dup (7E29064-BSD1)								Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	0.649	---	0.100	mg/kg wet	1x	--	0.667	97.3%	(80-120)	6.70%	(20)	05/30/07 13:49	
Duplicate (7E29064-DUP1)				QC Source: BQE0473-01				Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	ND	---	0.106	mg/kg dry	1x	ND	--	--	--	1.32%	(30)	05/30/07 13:54	R4
Matrix Spike (7E29064-MS1)				QC Source: BQE0473-01				Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	0.810	---	0.106	mg/kg dry	1x	0.0229	0.709	111%	(70-130)	--	--	05/30/07 13:51	

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Polychlorinated Biphenyls by EPA Method 8082 - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E30046 **Soil Preparation Method: EPA 35S0B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E30046-BLK1)								Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	ND	---	25.0	ug/kg wet	1x	--	--	--	--	--	--	05/30/07 20:50	
Aroclor 1221	"	ND	---	50.0	"	"	--	--	--	--	--	--	"	
Aroclor 1232	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1242	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1248	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1254	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1260	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1262	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1268	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Surrogate(s): TCX		*Recovery: 95.1%*			*Limits: 39-139%*	"							*05/30/07 20:50*	
Decachlorobiphenyl		*97.3%*			*33-163%*	"							"	
LCS (7E30046-BS1)								Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	78.6	---	25.0	ug/kg wet	1x	--	83.3	94.4%	(54-125)	--	--	05/30/07 22:34	
Aroclor 1260	"	82.3	---	25.0	"	"	--	"	98.8%	(58-128)	--	--	"	
Surrogate(s): TCX		*Recovery: 92.8%*			*Limits: 39-139%*	"							*05/30/07 22:34*	
Decachlorobiphenyl		*101%*			*33-163%*	"							"	
Matrix Spike (7E30046-MS1)				QC Source: BQE0504-01				Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	92.1	---	27.5	ug/kg dry	1x	ND	91.6	101%	(47-134)	--	--	05/30/07 21:58	
Aroclor 1260	"	130	---	27.5	"	"	43.6	"	94.3%	(22-171)	--	--	"	
Surrogate(s): TCX		*Recovery: 92.1%*			*Limits: 39-139%*	"							*05/30/07 21:58*	
Decachlorobiphenyl		*89.2%*			*33-163%*	"							"	
Matrix Spike Dup (7E30046-MSD1)				QC Source: BQE0504-01				Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	90.2	---	27.5	ug/kg dry	1x	ND	91.6	98.5%	(47-134)	2.08%	(35)	05/30/07 22:16	
Aroclor 1260	"	128	---	27.5	"	"	43.6	"	92.1%	(22-171)	1.55%	"	"	
Surrogate(s): TCX		*Recovery: 93.0%*			*Limits: 39-139%*	"							*05/30/07 22:16*	
Decachlorobiphenyl		*98.1%*			*33-163%*	"							"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E30022 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E30022-BLK1)								Extracted: 05/30/07 08:45						
Acetone	EPA 8260B	ND	---	30.0	ug/kg wet	1x	--	--	--	--	--	--	05/30/07 11:08	
Benzene	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	15.0	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2-Dibromoethane (EDB)	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	4.00	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	**Old Bremerton Gas Works**	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E30022 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E30022-BLK1)								Extracted: 05/30/07 08:45						
Hexachlorobutadiene	EPA 8260B	ND	---	10.0	ug/kg wet	1x	--	--	--	--	--	--	05/30/07 11:08	
Methyl tert-butyl ether	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	3.50	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
o-Xylene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
m,p-Xylene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*1,2-DCA-d4*	*Recovery:*	*107%*	*Limits:*	*60-140%*	*" 05/30/07 11:08*
	Toluene-d8		*96.5%*		*60-140%*	*" "*
	4-BFB		*112%*		*60-140%*	*" "*

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	**Old Bremerton Gas Works**	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E30022 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E30022-BS1)								Extracted: 05/30/07 08:45						
Acetone	EPA 8260B	391	---	30.0	ug/kg wet	1x	--	400	97.8%	(70-130)	--	--	05/30/07 09:56	
Benzene	"	39.3	---	1.50	"	"	--	40.0	98.2%	"	--	--	"	
2-Butanone	"	377	---	15.0	"	"	--	400	94.2%	"	--	--	"	
Carbon disulfide	"	39.2	---	3.00	"	"	--	40.0	98.0%	"	--	--	"	
Chlorobenzene	"	39.4	---	2.00	"	"	--	"	98.5%	"	--	--	"	
1,1-Dichloroethane	"	37.6	---	2.00	"	"	--	"	94.0%	"	--	--	"	
1,1-Dichloroethene	"	40.0	---	3.00	"	"	--	"	100%	"	--	--	"	
cis-1,2-Dichloroethene	"	40.3	---	3.00	"	"	--	"	101%	"	--	--	"	
Ethylbenzene	"	40.8	---	4.00	"	"	--	"	102%	"	--	--	"	
Hexachlorobutadiene	"	37.5	---	10.0	"	"	--	"	93.8%	"	--	--	"	
4-Methyl-2-pentanone	"	383	---	20.0	"	"	--	400	95.8%	"	--	--	"	
Tetrachloroethene	"	40.4	---	2.00	"	"	--	40.0	101%	"	--	--	"	
Toluene	"	40.2	---	1.50	"	"	--	"	100%	"	--	--	"	
1,1,1-Trichloroethane	"	40.7	---	2.50	"	"	--	"	102%	"	--	--	"	
Trichloroethene	"	38.6	---	2.50	"	"	--	"	96.5%	"	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*110%*		*Limits:*	*60-140%*	"						05/30/07 09:56	
Toluene-d8			*105%*			*60-140%*	"						"	
4-BFB			*91.5%*			*60-140%*	"						"	
LCS Dup (7E30022-BSD1)								Extracted: 05/30/07 08:45						
Acetone	EPA 8260B	341	---	30.0	ug/kg wet	1x	--	400	85.2%	(70-130)	13.7%	(30)	05/30/07 10:21	
Benzene	"	39.6	---	1.50	"	"	--	40.0	99.0%	"	0.760%	"	"	
2-Butanone	"	348	---	15.0	"	"	--	400	87.0%	"	8.00%	"	"	
Carbon disulfide	"	39.6	---	3.00	"	"	--	40.0	99.0%	"	1.02%	"	"	
Chlorobenzene	"	43.3	---	2.00	"	"	--	"	108%	"	9.43%	"	"	
1,1-Dichloroethane	"	39.6	---	2.00	"	"	--	"	99.0%	"	5.18%	"	"	
1,1-Dichloroethene	"	41.0	---	3.00	"	"	--	"	102%	"	2.47%	"	"	
cis-1,2-Dichloroethene	"	40.9	---	3.00	"	"	--	"	102%	"	1.48%	"	"	
Ethylbenzene	"	43.1	---	4.00	"	"	--	"	108%	"	5.48%	"	"	
Hexachlorobutadiene	"	39.1	---	10.0	"	"	--	"	97.8%	"	4.18%	"	"	
4-Methyl-2-pentanone	"	347	---	20.0	"	"	--	400	86.8%	"	9.86%	"	"	
Tetrachloroethene	"	39.7	---	2.00	"	"	--	40.0	99.2%	"	1.75%	"	"	
Toluene	"	40.8	---	1.50	"	"	--	"	102%	"	1.48%	"	"	
1,1,1-Trichloroethane	"	40.8	---	2.50	"	"	--	"	102%	"	0.245%	"	"	
Trichloroethene	"	39.8	---	2.50	"	"	--	"	99.5%	"	3.06%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*106%*		*Limits:*	*60-140%*	"						*05/30/07 10:21*	
Toluene-d8			*107%*			*60-140%*	"						"	
4-BFB			*94.5%*			*60-140%*	"						"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7F01007 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F01007-BLK1)								Extracted: 06/01/07 08:15						
1,2-Dibromoethane (EDB)	EPA 8260B	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	06/01/07 12:19	
Acetone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzene	"	ND	---	0.0200	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F01007 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F01007-BLK1)								Extracted: 06/01/07 08:15						
Hexachlorobutadiene	EPA 8260B	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	06/01/07 12:19	
Methyl tert-butyl ether	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	0.300	"	"	--	--	--	--	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 105%*			*Limits: 75-125%*	"							*06/01/07 12:19*	
Toluene-d8		*104%*			*75-125%*	"							"	
4-BFB		*94.5%*			*75-125%*	"							"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F01007 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F01007-BLK2)								Extracted: 06/01/07 08:15						
1,2-Dibromoethane (EDB)	EPA 8260B	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	06/05/07 12:32	
Acetone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7F01007 **Soil Preparation Method: EPA S030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F01007-BLK2)								Extracted: 06/01/07 08:15						
Hexachlorobutadiene	EPA 8260B	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	06/05/07 12:32	
Methyl tert-butyl ether	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	0.300	"	"	--	--	--	--	--	--	"	
Surrogate(s):	*1,2-DCA-d4*	*Recovery:*	*96.5%*		*Limits:*	*75-125%*	"						06/05/07 12:32	
	Toluene-d8		*102%*			*75-125%*	"						"	
	4-BFB		*102%*			*75-125%*	"						"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Volatdc Organic Compounds (Special List) by EBA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F01007 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7F01007-BS1)								Exlracted: 06/01/07 08:15						
Benzene	EPA 8260B	2.20	---	0.0200	mg/kg wet	1x	--	2.00	110%	(75-125)	--	--	06/01/07 10:15	
Chlorobenzene	"	2.31	---	0.100	"	"	--	"	116%	"	--	--	"	
1,1-Dichloroethene	"	2.49	---	0.100	"	"	--	"	124%	(69-128)	--	--	"	
Trichloroethene	"	2.16	---	0.100	"	"	--	"	108%	(75-125)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*106%*		*Limits:*	*75-125%*	"						*06/01/07 10:15*	
Toluene-d8			*99.5%*			*75-125%*	"						"	
4-BFB			*93.0%*			*75-125%*	"						"	
LCS Dup (7F01007-BSD1)								Extracted: 06/01/07 08:15						
Benzene	EPA 8260B	2.13	---	0.0200	mg/kg wet	1x	--	2.00	106%	(75-125)	3.23%	(20)	06/01/07 10:44	
Chlorobenzene	"	2.30	---	0.100	"	"	--	"	115%	"	0.434%	"	"	
1,1-Dichloroethene	"	2.43	---	0.100	"	"	--	"	122%	(69-128)	2.44%	"	"	
Trichloroethene	"	2.09	---	0.100	"	"	--	"	104%	(75-125)	3.29%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*108%*		*Limits:*	*75-125%*	"						*06/01/07 10:44*	
Toluene-d8			*100%*			*75-125%*	"						"	
4-BFB			*93.0%*			*75-125%*	"						"	
Matrix Spike (7F01007-MS1)					QC Source: BQE0508-06			Extracted: 06/01/07 08:15						
Benzene	EPA 8260B	1.92	---	0.0166	mg/kg dry	1x	ND	1.66	116%	(75-131)	--	--	06/01/07 14:28	
Chlorobenzene	"	1.94	---	0.0829	"	"	ND	"	117%	(75-125)	--	--	"	
1,1-Dichloroethene	"	2.27	---	0.0829	"	"	ND	"	137%	(69-142)	--	--	"	
Trichloroethene	"	1.83	---	0.0829	"	"	ND	"	110%	(75-134)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*108%*		*Limits:*	*75-125%*	"						*06/01/07 14:28*	
Toluene-d8			*96.4%*			*75-125%*	"						"	
4-BFB			*108%*			*75-125%*	"						"	
Matrix Spike Dup (7F01007-MSD1)					QC Source: BQE0508-06			Extracted: 06/01/07 08:15						
Benzene	EPA 8260B	2.01	---	0.0172	mg/kg dry	1x	ND	1.72	117%	(75-131)	4.58%	(25)	06/01/07 14:58	
Chlorobenzene	"	2.08	---	0.0861	"	"	ND	"	121%	(75-125)	6.97%	"	"	
1,1-Dichloroethene	"	2.32	---	0.0861	"	"	ND	"	135%	(69-142)	2.18%	"	"	
Trichloroethene	"	1.92	---	0.0861	"	"	ND	"	112%	(75-134)	4.80%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*109%*		*Limits:*	*75-125%*	"						*06/01/07 14:58*	
Toluene-d8			*100%*			*75-125%*	"						"	
4-BFB			*91.9%*			*75-125%*	"						"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25030-BLK1)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	ND	---	0.330	mg/kg wet	1x	--	--	--	--	--	--	06/07/07 01:12	
Acenaphthylene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Aniline	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (a) anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (a) pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (b) fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (k) fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (ghi) perylene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzoic Acid	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzyl alcohol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroethoxy)methane	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroethyl)ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroisopropyl)ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-ethylhexyl)phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Bromophenyl phenyl ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Butyl benzyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Carbazole	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Chloroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
4-Chloro-3-methylphenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Chloronaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Chlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Chlorophenyl phenyl ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Methylphenol (o-Cresol)	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Chrysene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Di-n-butyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dibenz (a,h) anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dibenzofuran	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
3,3'-Dichlorobenzidine	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
2,4-Dichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Diethyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4-Dimethylphenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dimethyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4,6-Dinitro-2-methylphenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2,4-Dinitrophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E2S030-BLK1)								Extracted: 05/31/07 11:12						
2,4-Dinitrotoluene	EPA 8270C	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	06/07/07 01:12	
2,6-Dinitrotoluene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
N-Nitrosodiphenylamine	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Fluorene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorobutadiene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorocyclopentadiene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	C5
Hexachloroethane	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Indeno (1,2,3-cd) pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Isophorone	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1-Methylnaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Methylnaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
3-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
4-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Nitrobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Nitrophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Nitrophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
N-Nitrosodi-n-propylamine	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Di-n-octyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Pentachlorophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Phenanthrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Phenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4,5-Trichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4,6-Trichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*2-FBP*	*Recovery: 99.1%*	*Limits: 27-126%*	"	06/07/07 01:12
	2-FP	*95.2%*	*16-121%*	"	"
	Nitrobenzene-d5	*111%*	*26-125%*	"	"
	Phenol-d6	*61.6%*	*10-120%*	"	"
	p-Terphenyl-d14	*105%*	*26-150%*	"	"
	2,4,6-TBP	*88.9%*	*10-152%*	"	"

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody documeni. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E25030-BS1)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	2.78	---	0.330	mg/kg wet	1x	--	3.33	83.5%	(47-128)	--	--	06/07/07 01:45	
4-Chloro-3-methylphenol	"	2.86	---	0.330	"	"	--	"	85.9%	(49-130)	--	--	"	
2-Chlorophenol	"	2.89	---	0.330	"	"	--	"	86.8%	(51-120)	--	--	"	
1,4-Dichlorobenzene	"	2.79	---	0.330	"	"	--	"	83.8%	"	--	--	"	
2,4-Dinitrotoluene	"	2.97	---	0.500	"	"	--	"	89.2%	(51-135)	--	--	"	
4-Nitrophenol	"	2.78	---	0.500	"	"	--	"	83.5%	(32-155)	--	--	"	
N-Nitrosodi-n-propylamine	"	2.87	---	0.330	"	"	--	"	86.2%	(51-120)	--	--	"	
Pentachlorophenol	"	3.47	---	0.500	"	"	--	"	104%	(46-163)	--	--	"	
Phenol	"	2.86	---	0.330	"	"	--	"	85.9%	(50-122)	--	--	"	
Pyrene	"	3.09	---	0.330	"	"	--	"	92.8%	(45-138)	--	--	"	
1,2,4-Trichlorobenzene	"	2.89	---	0.330	"	"	--	"	86.8%	(47-120)	--	--	"	
Surrogate(s): 2-FBP		*Recovery:*	*97.3%*		*Limits:*	*27-126%*	"						*06/07/07 01:45*	
2-FP			*90.7%*			*16-121%*	"						"	
Nitrobenzene-d5			*91.6%*			*26-125%*	"						"	
Phenol-d6			*59.5%*			*10-120%*	"						"	
p-Terphenyl-d14			*102%*			*26-150%*	"						"	
2,4,6-TBP			*105%*			*10-152%*	"						"	
Matrix Spike (7E25030-MS1)					QC Source: BQE0385-04			Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	2.07	---	0.356	mg/kg dry	1x	ND	3.60	57.5%	(47-128)	--	--	06/07/07 02:18	
4-Chloro-3-methylphenol	"	2.19	---	0.356	"	"	ND	"	60.8%	(45-130)	--	--	"	
2-Chlorophenol	"	2.15	---	0.356	"	"	ND	"	59.7%	(48-120)	--	--	"	
1,4-Dichlorobenzene	"	2.12	---	0.356	"	"	ND	"	58.9%	(50-120)	--	--	"	
2,4-Dinitrotoluene	"	2.19	---	0.540	"	"	ND	"	60.8%	(34-154)	--	--	"	
4-Nitrophenol	"	1.97	---	0.540	"	"	ND	"	54.7%	(17-164)	--	--	"	
N-Nitrosodi-n-propylamine	"	2.22	---	0.356	"	"	ND	"	61.7%	(49-120)	--	--	"	
Pentachlorophenol	"	2.14	---	0.540	"	"	ND	"	59.4%	(22-183)	--	--	"	
Phenol	"	2.13	---	0.356	"	"	ND	"	59.2%	(32-132)	--	--	"	
Pyrene	"	2.19	---	0.356	"	"	ND	"	60.8%	(31-147)	--	--	"	
1,2,4-Trichlorobenzene	"	2.24	---	0.356	"	"	ND	"	62.2%	(47-120)	--	--	"	
Surrogate(s): 2-FBP		*Recovery:*	*60.0%*		*Limits:*	*27-126%*	"						*06/07/07 02:18*	
2-FP			*56.9%*			*16-121%*	"						"	
Nitrobenzene-d5			*60.6%*			*26-125%*	"						"	
Phenol-d6			*38.1%*			*10-120%*	"						"	
p-Terphenyl-d14			*59.7%*			*26-150%*	"						"	
2,4,6-TBP			*62.2%*			*10-152%*	"						"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Matrix Spike Dup (7E25030-MSD1)				QC Source: BQE0385-04				Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	1.87	---	0.356	mg/kg dry	1x	ND	3.60	51.9%	(47-128)	10.2%	(24)	06/07/07 02:51	
4-Chloro-3-methylphenol	"	2.00	---	0.356	"	"	ND	"	55.6%	(45-130)	9.07%	(23)	"	
2-Chlorophenol	"	1.92	---	0.356	"	"	ND	"	53.3%	(48-120)	11.3%	(27)	"	
1,4-Dichlorobenzene	"	1.88	---	0.356	"	"	ND	"	52.2%	(50-120)	12.0%	(34)	"	
2,4-Dinitrotoluene	"	1.99	---	0.540	"	"	ND	"	55.3%	(34-154)	9.57%	(24)	"	
4-Nitrophenol	"	1.75	---	0.540	"	"	ND	"	48.6%	(17-164)	11.8%	(31)	"	
N-Nitrosodi-n-propylamine	"	1.96	---	0.356	"	"	ND	"	54.4%	(49-120)	12.4%	"	"	
Pentachlorophenol	"	1.95	---	0.540	"	"	ND	"	54.2%	(22-183)	9.29%	(26)	"	
Phenol	"	1.88	---	0.356	"	"	ND	"	52.2%	(32-132)	12.5%	(31)	"	
Pyrene	"	1.99	---	0.356	"	"	ND	"	55.3%	(31-147)	9.57%	(26)	"	
1,2,4-Trichlorobenzene	"	2.04	---	0.356	"	"	ND	"	56.7%	(47-120)	9.35%	(25)	"	
Surrogate(s):	*2-FBP*	*Recovery:*	53.6%		*Limits:*	*27-126%*	"						06/07/07 02:51	
	2-FP		49.7%			*16-121%*	"						"	
	Nitrobenzene-d5		53.9%			*26-125%*	"						"	
	Phenol-d6		33.6%			*10-120%*	"						"	
	p-Terphenyl-d14		54.2%			*26-150%*	"						"	
	2,4,6-TBP		54.7%			*10-152%*	"						"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420:9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7E25030 Soil Preparation Method: EPA 3545

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25030-BLK2)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	ND	---	0.0100	mg/kg wet	1x	--	--	--	--	--	--	06/06/07 13:17	
Acenaphthylene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (a) anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (a) pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (b) fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (k) fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (ghi) perylene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Chrysene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Dibenz (a,h) anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Fluorene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Indeno (1,2,3-cd) pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
1-Methylnaphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
2-Methylnaphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Phenanthrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Surrogate(s): p-Terphenyl-d14		*Recovery: 83.8%*			*Limits: 50-147%*	"							*06/06/07 13:17*	
LCS (7E25030-BS2)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	0.613	---	0.0100	mg/kg wet	1x	--	0.667	91.9%	(70-125)	--	--	06/06/07 13:53	
Acenaphthylene	"	0.619	---	0.0100	"	"	--	"	92.8%	(70-133)	--	--	"	
Anthracene	"	0.653	---	0.0100	"	"	--	"	97.9%	(70-152)	--	--	"	
Benzo (a) anthracene	"	0.577	---	0.0100	"	"	--	"	86.5%	(60-125)	--	--	"	
Benzo (a) pyrene	"	0.600	---	0.0100	"	"	--	"	90.0%	(64-134)	--	--	"	
Benzo (b) fluoranthene	"	0.571	---	0.0100	"	"	--	"	85.6%	(62-147)	--	--	"	
Benzo (k) fluoranthene	"	0.551	---	0.0100	"	"	--	"	82.6%	(60-144)	--	--	"	
Benzo (ghi) perylene	"	0.695	---	0.0100	"	"	--	"	104%	(57-137)	--	--	"	
Chrysene	"	0.646	---	0.0100	"	"	--	"	96.9%	(70-139)	--	--	"	
Dibenz (a,h) anthracene	"	0.682	---	0.0100	"	"	--	"	102%	(56-140)	--	--	"	
Fluoranthene	"	0.609	---	0.0100	"	"	--	"	91.3%	(70-141)	--	--	"	
Fluorene	"	0.651	---	0.0100	"	"	--	"	97.6%	(76-132)	--	--	"	
Indeno (1,2,3-cd) pyrene	"	0.669	---	0.0100	"	"	--	"	100%	(55-138)	--	--	"	
1-Methylnaphthalene	"	0.615	---	0.0100	"	"	--	"	92.2%	(46-128)	--	--	"	
2-Methylnaphthalene	"	0.622	---	0.0100	"	"	--	"	93.3%	(41-125)	--	--	"	
Naphthalene	"	0.599	---	0.0100	"	"	--	"	89.8%	(43-125)	--	--	"	
Phenanthrene	"	0.576	---	0.0100	"	"	--	"	86.4%	(73-125)	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method:** EPA 3545

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E25030-BS2)								Extracted: 05/31/07 11:12						
Pyrene	EPA 8270-SIM	0.570	---	0.0100	mg/kg wet	1x	--	0.667	85.5%	(68-140)	--	--	06/06/07 13:53	
Surrogate(s): p-Terphenyl-d14		*Recovery: 83.2%*			*Limits: 50-147%*	"							06/06/07 13:53	
Matrix Spike (7E25030-MS2)					QC Source: BQE0445-05			Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	1.89	---	1.42	mg/kg dry	50x	2.37	0.758	-63.3%	(67-132)	--	--	06/07/07 15:37	M4
Acenaphthylene	"	0.947	---	1.42	"	"	0.284	"	87.5%	(65-142)	--	--	"	
Anthracene	"	2.84	---	1.42	"	"	3.50	"	-87.1%	(66-158)	--	--	"	M4
Benzo (a) anthracene	"	10.5	---	1.42	"	"	14.3	"	-501%	(41-156)	--	--	"	M4
Benzo (a) pyrene	"	15.2	---	1.42	"	"	19.8	"	-607%	(52-148)	--	--	"	M4
Benzo (b) fluoranthene	"	13.6	---	1.42	"	"	17.3	"	-488%	(53-151)	--	--	"	M4
Benzo (k) fluoranthene	"	13.4	---	1.42	"	"	15.5	"	-277%	(46-161)	--	--	"	M4
Benzo (ghi) perylene	"	9.66	---	1.42	"	"	15.1	"	-718%	(26-154)	--	--	"	M4
Chrysene	"	15.5	---	1.42	"	"	20.8	"	-699%	(55-155)	--	--	"	M4
Dibenz (a,h) anthracene	"	4.64	---	1.42	"	"	6.34	"	-224%	(27-157)	--	--	"	M4
Fluoranthene	"	15.2	---	1.42	"	"	22.0	"	-897%	(46-172)	--	--	"	M4
Fluorene	"	1.23	---	1.42	"	"	1.04	"	25.1%	(66-143)	--	--	"	M4
Indeno (1,2,3-cd) pyrene	"	8.90	---	1.42	"	"	12.6	"	-488%	(24-159)	--	--	"	M4
1-Methylnaphthalene	"	0.852	---	1.42	"	"	0.284	"	74.9%	(39-140)	--	--	"	
2-Methylnaphthalene	"	0.852	---	1.42	"	"	0.473	"	50.0%	(32-139)	--	--	"	
Naphthalene	"	1.04	---	1.42	"	"	0.568	"	62.3%	(38-134)	--	--	"	
Phenanthrene	"	6.16	---	1.42	"	"	11.0	"	-639%	(63-139)	--	--	"	M4
Pyrene	"	15.8	---	1.42	"	"	24.5	"	-1150%	(51-172)	--	--	"	M4
Surrogate(s): p-Terphenyl-d14		*Recovery: 117%*			*Limits: 50-147%*	"							06/07/07 15:37	Z3
Matrix Spike Dup (7E25030-MSD2)					QC Source: BQE0445-05			Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	1.89	---	1.42	mg/kg dry	50x	2.37	0.758	-63.3%	(67-132)	0.00%	(50)	06/07/07 16:11	M4
Acenaphthylene	"	0.852	---	1.42	"	"	0.284	"	74.9%	(65-142)	10.6%	"	"	
Anthracene	"	3.03	---	1.42	"	"	3.50	"	-62.0%	(66-158)	6.47%	"	"	M4
Benzo (a) anthracene	"	10.2	---	1.42	"	"	14.3	"	-541%	(41-156)	2.90%	"	"	M4
Benzo (a) pyrene	"	15.5	---	1.42	"	"	19.8	"	-567%	(52-148)	1.95%	"	"	M4
Benzo (b) fluoranthene	"	14.7	---	1.42	"	"	17.3	"	-343%	(53-151)	7.77%	"	"	M4
Benzo (k) fluoranthene	"	12.7	---	1.42	"	"	15.5	"	-369%	(46-161)	5.36%	"	"	M4
Benzo (ghi) perylene	"	9.56	---	1.42	"	"	15.1	"	-731%	(26-154)	1.04%	"	"	M4
Chrysene	"	15.2	---	1.42	"	"	20.8	"	-739%	(55-155)	1.95%	(44)	"	M4
Dibenz (a,h) anthracene	"	4.83	---	1.42	"	"	6.34	"	-199%	(27-157)	4.01%	(50)	"	M4
Fluoranthene	"	15.3	---	1.42	"	"	22.0	"	-884%	(46-172)	0.656%	"	"	M4
Fluorene	"	1.23	---	1.42	"	"	1.04	"	25.1%	(66-143)	0.00%	(52)	"	M4
Indeno (1,2,3-cd) pyrene	"	9.09	---	1.42	"	"	12.6	"	-463%	(24-159)	2.11%	(43)	"	M4

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Matrix Spike Dup (7E25030-MSD2)					QC Source: BQE0445-05				Extracted: 05/31/07 11:12					
1-Methylnaphthalene	EPA 8270-SIM	0.758	---	1.42	mg/kg dry	50x	0.284	0.758	62.5%	(39-140)	11.7%	(50)	06/07/07 16:11	
2-Methylnaphthalene	"	0.852	---	1.42	"	"	0.473	"	50.0%	(32-139)	0.00%	"	"	
Naphthalene	"	1.04	---	1.42	"	"	0.568	"	62.3%	(38-134)	0.00%	"	"	
Phenanthrene	"	6.06	---	1.42	"	"	11.0	"	-652%	(63-139)	1.64%	"	"	M4
Pyrene	"	15.3	---	1.42	"	"	24.5	"	-1210%	(51-172)	3.22%	"	"	M4
Surrogate(s): p-Terphenyl-d14		*Recovery: 107%*			*Limits: 50-147%*	"							*06/07/07 16:11*	*Z3*

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Projeet Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Conventional Chemistry Parameters by APHA/EPA Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F05026 **Soil Preparation Method: Special Procedure**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F05026-BLK1)								Extracted: 06/05/07 11:31						
Hexavalent Chromium	EPA 7196A	ND	---	1.0	mg/kg wet	1x	--	--	--	--	--	--	06/07/07 20:30	
LCS (7F05026-BS1)								Extracted: 06/05/07 11:31						
Hexavalent Chromium	EPA 7196A	20	---	1.0	mg/kg wet	1x	--	25.0	80.0%	(80-120)	--	--	06/07/07 20:30	
Duplicate (7F05026-DUP1)				QC Source: BQE0442-04				Extracted: 06/05/07 11:31						
Hexavalent Chromium	EPA 7196A	ND	---	1.2	mg/kg dry	1x	ND	--	--	--	NR	(30)	06/07/07 20:30	
Matrix Spike (7F05026-MS1)				QC Source: BQE0442-04				Extracted: 06/05/07 11:31						
Hexavalent Chromium	EPA 7196A	21	---	1.2	mg/kg dry	1x	ND	28.9	72.7%	(75-125)	--	--	06/07/07 20:30	M2

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Physical Parameters by APHA/ASTM/EPA Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E30051 **Soil Preparation Method: Dry Weight**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E30051-BLK1)								Extracted: 05/30/07 14:29						
Dry Weight	BSOPSPL003R08	100	---	1.00	%	1x	--	--	--	--	--	--	05/31/07 00:00	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Organotins - Laboratory Quality Control Results
STL Seattle

QC Batch: 19127 **Soil Preparation Method: Organotin Prep**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (580-19216-1)				QC Source:				Extracted: 05/30/07 02:10						
Tributyltin	Organotins	ND	---	1.3	ug/Kg dry	1x	--	--	--	--	--	--	05/31/07 08:10	
Surrogate(s): Tripentyltin		*Recovery: 156%*		*Limits: 42-192%*		"							*05/31/07 08:10*	
LCS (580-19216-2)				QC Source:				Extracted: 05/30/07 02:10						
Tributyltin	Organotins	114	---	1.3	ug/Kg dry	1x	--	119	96%	(29-110)	--	--	05/31/07 08:33	
Surrogate(s): Tripentyltin		*Recovery: 117%*		*Limits: 42-192%*		"							*05/31/07 08:33*	
LCS Dup (580-19216-3)				QC Source:				Extracted: 05/30/07 02:10						
Tributyltin	Organotins	125	---	1.3	ug/Kg dry	1x	--	119	105%	(29-110)	10%	(28)	05/31/07 08:57	
Surrogate(s): Tripentyltin		*Recovery: 126%*		*Limits: 42-192%*		"							*05/31/07 08:57*	

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/13/07 10:50

Notes and Definitions

Report Specific Notes:

C5	-	Calibration Verification recovery was below the method control limit for this analyte. An additional check standard was analyzed at the reporting limit to ensure instrument sensitivity at the reporting limit. Samples ND.
E	-	Concentration exceeds the calibration range and therefore result is semi-quantitative.
M1	-	The MS and/or MSD were above the acceptance limits due to sample matrix interference. See Blank Spike (LCS).
M2	-	The MS and/or MSD were below the acceptance limits due to sample matrix interference. See Blank Spike (LCS).
M4	-	The sample required a dilution due to matrix interference. Because of this dilution, the matrix spike concentrations in the sample were reduced to a level where the recovery calculation docs not provide useful information. See Blank Spike (LCS).
QP	-	Hydrocarbon result partly due to individual peak(s) in quantitation range.
R3	-	The RPD exceeded the acceptance limit due to sample matrix effects.
R4	-	Due to the low levels of analyte in the sample, the duplicate RPD calculation does not provide useful information.
X	-	Surrogate exceeds the control limits
Z3	-	The sample required a dilution due to the nature of the sample matrix. Because of this dilution, the surrogate spike concentration in the sample was reduced to a level where the recovery calculation does not provide useful information.
ZX	-	Due to sample matrix effects, the surrogate recovery was outside the acceptance limits.

Laboratory Reporting Conventions:

DET	-	Analyte DETECTED at or above the Reporting Limit. Qualitative Analyses only.
ND	-	Analyte NOT DETECTED at or above die reporting limit (MDL or MRL, as appropriate).
NR/NA	-	Not Reported / Not Available
dry	-	Sample results reported on a Dry Weight Basis. Results and Reporting Limits have been corrected for Percent Dry Weight.
wet	-	Sample results and reporting limits reported on a Wet Weight Basis (as received). Results with neither 'wet' nor 'dry' are reported on a Wet Weight Basis.
RPD	-	RELATIVE PERCENT DIFFERENCE (RPDs calculated using Results, not Percent Recoveries).
MRL	-	METHOD REPORTING LIMIT. Reporting Level at, or above, the lowest level standard of the Calibration Table.
MDL*	-	METHOD DETECTION LIMIT. Reporting Level at, or above, the statistically derived limit based on 40CFR, Part 136, Appendix B. *MDLs are listed on the report only if the data has been evaluated below the MRL. Results between the MDL and MRL are reported as Estimated Results.
Dil	-	Dilutions are calculated based on deviations from the standard dilution performed for an analysis, and may not represent the dilution found on the analytical raw data.
Reporting Limits	-	Reporting limits (MDLs and MRLs) are adjusted based on variations in sample preparation amounts, analytical dilutions and percent solids, where applicable.
Electronic Signature	-	Electronic Signature added in accordance with TestAmerica's *Electronic Reporting and Electronic Signatures Policy*. Application of electronic signature indicates that the report has been reviewed and approved for release by the laboratory. Electronic signature is intended to be the legally binding equivalent of a traditionally handwritten signature.

The results in this repori apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

11720 North Creek Pkwy N Suite 400, Bothell, WA 98011-8244 425-420-9200 FAX 420-9210
11922 E. First Ave, Spokane, WA 99206-5302 509-924-9200 FAX 924-9290
9405 SW Nimbus Ave, Beaverton, OR 97008-7145 503-906-9200 FAX 906-9210
2000 W International Airport Rd Ste A10, Anchorage, AK 99302-1119 907-563-9200 FAX 563-9210

CHAIN OF CUSTODY REPORT

Work Order #: BQE0442

CLIENT: GeoEngineers
REPORT TO: Sean Trimble
ADDRESS: 600 Stewart, Ste. 1700 Seattle, WA
PHONE: (206) 728-2674 FAX:
PROJECT NAME: Old Bremerton Gas Works
PROJECT NUMBER: 0892-017-00
SAMPLED BY: Missy Leone

INVOICE TO:
P.O. NUMBER:

TURNAROUND REQUEST
In Business Days *
Organic & Inorganic Analyses: 10 (STD.) | 3 | 3 | 3 | 3 | 3 | 3 | <1
Petroleum Hydrocarbon Analyses: 5 (STD.) | 3 | 3 | 3 | 3 | <1
OTHER Specify:
* Turnaround Requests less than standard may incur Rush Charges.

PRESERVATIVE

REQUESTED ANALYSES

	CLIENT SAMPLE IDENTIFICATION	SAMPLING DATE/TIME	NWTPH-Gx	NWTPH-Gx w/ SG cleanup	VOCs	PCBs	SVOCs (PAHs)	PPL metals	Chromium VI	Tributyl Tin	HOLD	MATRIX (W, S, O)	# OF CNT.	LOCATION / COMMENTS	TA WO ID
1	MW-5-5.0	05/24 09:30									X	S	5		-01
2	MW-5-10.0	10:10	X	X	X	X	X	X	X	X					-02
3	MW-5-15.0	10:15									X				-03
4	MW-5-20.0	10:25	X	X	X	X	X	X	X	X					-04
5															
6															
7															
8															
9															
10															

RELEASED BY: Melissa J. Leone DATE: 05/24/07
PRINT NAME: MELISSA LEONE FIRM: GEOENGINEERS (GEI) TIME: 1525
RECEIVED BY: Tom Blankinship DATE: 5/24/07
PRINT NAME: Blankinship FIRM: TA TIME: 1525
RELEASED BY: DATE:
PRINT NAME: FIRM: TIME:
RECEIVED BY: DATE:
PRINT NAME: FIRM: TIME:

ADDITIONAL REMARKS: Please contact Sean Trimble w/ any questions. Thanks!
TEMP: 5.2 w/o
PAGE 1 OF 1

COC REV 05/2006

Note: By relinquishing samples to TestAmerica, client agrees to pay for the services requested on this chain of custody form and for any additional analyses performed on this project.
Payment for services is due within 30 days from the date of invoice unless otherwise contracted. Sample(s) will be disposed of after 30 days unless otherwise contracted.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

June 14, 2007

Sean Trimble
Geo Engineers - Seattle
600 Stewart St, Suite 1700
Seattle, WA/USA 98101

RE: Old Bremerton Gas Works

Enclosed are the results of analyses for samples received by the laboratory on 05/22/07 17:50. The following list is a summary of the Work Orders contained in this report, generated on 06/14/07 13:22.

If you have any questions concerning this report, please feel free to contact me.

Work Order	Project	ProjectNumber
BOE0385	Old Bremerton Gas Works	Old Bremerton Gas Works

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
MW-3-5.0	BQE0385-01	Soil	05/22/07 08:55	05/22/07 17:50
MW-3-25.0	BQE0385-04	Soil	05/22/07 09:40	05/22/07 17:50
MW-6-5.0	BQE0385-07	Soil	05/22/07 11:25	05/22/07 17:50
MW-6-10.0	BQE0385-08	Soil	05/22/07 11:40	05/22/07 17:50
MW-6-35.0	BQE0385-10	Soil	05/22/07 12:20	05/22/07 17:50
MW-8-10.0	BQE0385-11	Soil	05/22/07 13:45	05/22/07 17:50
MW-8-25.0	BQE0385-12	Soil	05/22/07 14:05	05/22/07 17:50

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Petroleum Products by NWTPH-Dx with Acid/Silica Gel Clean-up

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		Soil			Sampled: 05/22/07 08:55					
Diesel Range Hydrocarbons	NWTPH-Dx	6710	-----	118	mg/kg dry	10x	7E29047	05/29/07 13:36	05/30/07 02:32	QP
Lube Oil Range Hydrocarbons	"	2250	-----	295	"	"	"	"	"	QP
Surrogate(s): 2-FBP			*137%*		*54 - 148 %*	"			"	
Octacosane			*311%*		*62 - 142 %*	"			"	*ZX*
BQE0385-04 (MW-3-25.0)		Soil			Sampled: 05/22/07 09:40					
Diesel Range Hydrocarbons	NWTPH-Dx	ND	-----	10.7	mg/kg dry	1x	7E29047	05/29/07 13:36	05/30/07 03:02	
Lube Oil Range Hydrocarbons	"	ND	-----	26.6	"	"	"	"	"	
Surrogate(s): 2-FBP			*65.1%*		*54 - 148 %*	"			"	
Octacosane			*87.5%*		*62 - 142 %*	"			"	
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
Diesel Range Hydrocarbons	NWTPH-Dx	ND	-----	11.4	mg/kg dry	1x	7E29047	05/29/07 13:36	05/30/07 03:31	
Lube Oil Range Hydrocarbons	"	ND	-----	28.5	"	"	"	"	"	
Surrogate(s): 2-FBP			*61.2%*		*54 - 148 %*	"			"	
Octacosane			*83.9%*		*62 - 142 %*	"			"	
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					
Diesel Range Hydrocarbons	NWTPH-Dx	3770	-----	52.7	mg/kg dry	5x	7E29047	05/29/07 13:36	05/30/07 05:28	QP
Lube Oil Range Hydrocarbons	"	390	-----	132	"	"	"	"	"	QP
Surrogate(s): 2-FBP			*70.6%*		*54 - 148 %*	"			"	
Octacosane			*188%*		*62 - 142 %*	"			"	*ZX*
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
Diesel Range Hydrocarbons	NWTPH-Dx	ND	-----	11.2	mg/kg dry	1x	7E29047	05/29/07 13:36	05/30/07 05:58	
Lube Oil Range Hydrocarbons	"	ND	-----	28.1	"	"	"	"	"	
Surrogate(s): 2-FBP			*72.0%*		*54 - 148 %*	"			"	
Octacosane			*89.2%*		*62 - 142 %*	"			"	
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
Diesel Range Hydrocarbons	NWTPH-Dx	ND	-----	11.6	mg/kg dry	1x	7E29047	05/29/07 13:36	05/30/07 06:27	
Lube Oil Range Hydrocarbons	"	ND	-----	29.0	"	"	"	"	"	
Surrogate(s): 2-FBP			*62.6%*		*54 - 148 %*	"			"	
Octacosane			*80.6%*		*62 - 142 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Petroleum Products by NWTPH-Dx with Acid/Silica Gel Clean-up

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-12 (MW-8-25.0)		Soil			Sampled: 05/22/07 14:05					
Diesel Range Hydrocarbons	NWTPH-Dx	336	----	11.9	mg/kg dry	1x	7E29047	05/29/07 13:36	05/30/07 06:56	QP
Lube Oil Range Hydrocarbons	"	138	----	29.8	"	"	"	"	"	QP
Surrogate(s): 2-FBP			*73.5%*		*54 - 148 %*	"			"	
Octacosane			*181%*		*62 - 142 %*	"			"	*ZX*

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Total Metals by EPA 6000/7000 Series Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		Soil			Sampled: 05/22/07 08:55					
Antimony	EPA 6020	ND	-----	1.80	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 08:56	
Arsenic	"	48.4	-----	0.600	"	"	"	"	"	
Beryllium	"	ND	-----	0.600	"	"	"	"	"	
Cadmium	"	ND	-----	0.600	"	"	"	"	"	
Chromium	"	26.3	-----	0.600	"	"	"	"	"	
Copper	"	37.8	-----	0.600	"	"	"	"	"	
Lead	"	87.0	-----	0.600	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.129	"	"	7E29055	05/29/07 15:13	05/30/07 13:34	
Nickel	EPA 6020	37.5	-----	0.600	"	"	7E25029	05/25/07 10:36	05/29/07 08:56	
Selenium	"	ND	-----	0.600	"	"	"	"	"	
Silver	"	ND	-----	0.600	"	"	"	"	"	
Thallium	"	ND	-----	0.600	"	"	"	"	"	
Zinc	"	166	-----	6.00	"	"	"	"	"	
BQE0385-04 (MW-3-25.0)		Soil			Sampled: 05/22/07 09:40					
Antimony	EPA 6020	ND	-----	1.62	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 08:26	
Arsenic	"	1.27	-----	0.540	"	"	"	"	"	
Beryllium	"	ND	-----	0.540	"	"	"	"	"	
Cadmium	"	ND	-----	0.540	"	"	"	"	"	
Chromium	"	23.9	-----	0.540	"	"	"	"	"	
Copper	"	11.0	-----	0.540	"	"	"	"	"	
Lead	"	1.54	-----	0.540	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.0976	"	"	7E29055	05/29/07 15:13	05/30/07 13:37	
Nickel	EPA 6020	36.2	-----	0.540	"	"	7E25029	05/25/07 10:36	05/29/07 08:26	
Selenium	"	ND	-----	0.540	"	"	"	"	"	
Silver	"	ND	-----	0.540	"	"	"	"	"	
Thallium	"	ND	-----	0.540	"	"	"	"	"	
Zinc	"	24.9	-----	5.40	"	"	"	"	"	
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
Antimony	EPA 6020	ND	-----	1.64	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 09:02	
Arsenic	"	1.64	-----	0.547	"	"	"	"	"	
Beryllium	"	ND	-----	0.547	"	"	"	"	"	
Cadmium	"	ND	-----	0.547	"	"	"	"	"	
Chromium	"	33.1	-----	0.547	"	"	"	"	"	
Copper	"	15.5	-----	0.547	"	"	"	"	"	
Lead	"	2.78	-----	0.547	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.113	"	"	7E29055	05/29/07 15:13	05/30/07 13:39	
Nickel	EPA 6020	38.6	-----	0.547	"	"	7E25029	05/25/07 10:36	05/29/07 09:02	
Selenium	"	ND	-----	0.547	"	"	"	"	"	
Silver	"	ND	-----	0.547	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the wrinen approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Total Metals by EPA 6000/7000 Series Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
Thallium	EPA 6020	ND	----	0.547	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 09:02	
Zinc	"	30.5	----	5.47	"	"	"	"	"	
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					
Antimony	EPA 6020	ND	-----	1.58	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 09:08	
Arsenic	"	1.26	-----	0.527	"	"	"	"	"	
Beryllium	"	ND	-----	0.527	"	"	"	"	"	
Cadmium	"	ND	-----	0.527	"	"	"	"	"	
Chromium	"	19.9	-----	0.527	"	"	"	"	"	
Copper	"	9.47	-----	0.527	"	"	"	"	"	
Lead	"	1.36	-----	0.527	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.104	"	"	7E29064	05/29/07 18:21	05/30/07 14:48	
Nickel	EPA 6020	28.8	-----	0.527	"	"	7E25029	05/25/07 10:36	05/29/07 09:08	
Selenium	"	ND	-----	0.527	"	"	"	"	"	
Silver	"	ND	-----	0.527	"	"	"	"	"	
Thallium	"	ND	-----	0.527	"	"	"	"	"	
Zinc	"	22.7	-----	5.27	"	"	"	"	"	
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
Antimony	EPA 6020	ND	-----	1.82	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 09:51	
Arsenic	"	0.841	-----	0.605	"	"	"	"	"	
Beryllium	"	ND	-----	0.605	"	"	"	"	"	
Cadmium	"	ND	-----	0.605	"	"	"	"	"	
Chromium	"	24.8	-----	0.605	"	"	"	"	"	
Copper	"	16.4	-----	0.605	"	"	"	"	"	
Lead	"	1.30	-----	0.605	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.111	"	"	7E29064	05/29/07 18:21	05/30/07 14:50	
Nickel	EPA 6020	33.3	-----	0.605	"	"	7E25029	05/25/07 10:36	05/29/07 09:51	
Selenium	"	ND	-----	0.605	"	"	"	"	"	
Silver	"	ND	-----	0.605	"	"	"	"	"	
Thallium	"	ND	-----	0.605	"	"	"	"	"	
Zinc	"	31.7	-----	6.05	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Total Metals by EPA 6000/7000 Series Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
Antimony	EPA 6020	ND	-----	1.77	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 09:57	
Arsenic	"	6.72	-----	0.589	"	"	"	"	"	
Beryllium	"	ND	-----	0.589	"	"	"	"	"	
Cadmium	"	0.966	-----	0.589	"	"	"	"	"	
Chromium	"	36.0	-----	0.589	"	"	"	"	"	
Copper	"	68.1	-----	0.589	"	"	"	"	"	
Mercury	EPA 7471A	0.392	-----	0.108	"	"	7E29064	05/29/07 18:21	05/30/07 14:59	
Nickel	EPA 6020	42.1	-----	0.589	"	"	7E25029	05/25/07 10:36	05/29/07 09:57	
Selenium	"	ND	-----	0.589	"	"	"	"	"	
Silver	"	ND	-----	0.589	"	"	"	"	"	
Thallium	"	ND	-----	0.589	"	"	"	"	"	
BQE0385-11RE1 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
Lead	EPA 6020	246	-----	1.18	mg/kg dry	2x	7E25029	05/25/07 10:36	05/29/07 11:08	
Zinc	"	291	-----	11.8	"	"	"	"	"	
BQE0385-12 (MW-8-25.0)		Soil			Sampled: 05/22/07 14:05					
Antimony	EPA 6020	ND	-----	1.69	mg/kg dry	1x	7E25029	05/25/07 10:36	05/29/07 10:03	
Arsenic	"	2.25	-----	0.562	"	"	"	"	"	
Beryllium	"	ND	-----	0.562	"	"	"	"	"	
Cadmium	"	ND	-----	0.562	"	"	"	"	"	
Chromium	"	39.4	-----	0.562	"	"	"	"	"	
Copper	"	23.3	-----	0.562	"	"	"	"	"	
Lead	"	4.75	-----	0.562	"	"	"	"	"	
Mercury	EPA 7471A	ND	-----	0.105	"	"	7E29064	05/29/07 18:21	05/30/07 15:02	
Nickel	EPA 6020	37.2	-----	0.562	"	"	7E25029	05/25/07 10:36	05/29/07 10:03	
Selenium	"	ND	-----	0.562	"	"	"	"	"	
Silver	"	ND	-----	0.562	"	"	"	"	"	
Thallium	"	ND	-----	0.562	"	"	"	"	"	
Zinc	"	48.0	-----	5.62	"	"	"	"	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody documeni. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Polychlorinated Biphenyls by EPA Method 8082

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		Soil			Sampled: 05/22/07 08:55					
Aroclor 1016	EPA 8082	ND	-----	58.8	ug/kg dry	1x	7E30046	05/30/07 14:09	06/03/07 02:31	
Aroclor 1221	"	ND	-----	118	"	"	"	"	"	
Aroclor 1232	"	ND	-----	58.8	"	"	"	"	"	
Aroclor 1242	"	ND	-----	58.8	"	"	"	"	"	
Aroclor 1248	"	ND	-----	58.8	"	"	"	"	"	
Aroclor 1254	"	ND	-----	58.8	"	"	"	"	"	
Aroclor 1260	"	ND	-----	58.8	"	"	"	"	"	
Aroclor 1262	"	ND	-----	58.8	"	"	"	"	"	
Aroclor 1268	"	ND	-----	58.8	"	"	"	"	"	
Surrogate(s): *TCX*			*68.2%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*73.2%*		*33 - 163 %*	"			"	
BQE0385-04 (MW-3-25.0)		Soil			Sampled: 05/22/07 09:40					
Aroclor 1016	EPA 8082	ND	-----	27.3	ug/kg dry	1x	7E30046	05/30/07 14:09	06/02/07 00:13	
Aroclor 1221	"	ND	-----	54.5	"	"	"	"	"	
Aroclor 1232	"	ND	-----	27.3	"	"	"	"	"	
Aroclor 1242	"	ND	-----	27.3	"	"	"	"	"	
Aroclor 1248	"	ND	-----	27.3	"	"	"	"	"	
Aroclor 1254	"	ND	-----	27.3	"	"	"	"	"	
Aroclor 1260	"	ND	-----	27.3	"	"	"	"	"	
Aroclor 1262	"	ND	-----	27.3	"	"	"	"	"	
Aroclor 1268	"	ND	-----	27.3	"	"	"	"	"	
Surrogate(s): *TCX*			*88.7%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*93.4%*		*33 - 163 %*	"			"	
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
Aroclor 1016	EPA 8082	ND	-----	28.8	ug/kg dry	1x	7E30046	05/30/07 14:09	06/02/07 00:30	
Aroclor 1221	"	ND	-----	57.7	"	"	"	"	"	
Aroclor 1232	"	ND	-----	28.8	"	"	"	"	"	
Aroclor 1242	"	ND	-----	28.8	"	"	"	"	"	
Aroclor 1248	"	ND	-----	28.8	"	"	"	"	"	
Aroclor 1254	"	ND	-----	28.8	"	"	"	"	"	
Aroclor 1260	"	ND	-----	28.8	"	"	"	"	"	
Aroclor 1262	"	ND	-----	28.8	"	"	"	"	"	
Aroclor 1268	"	ND	-----	28.8	"	"	"	"	"	
Surrogate(s): *TCX*			*89.6%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*90.4%*		*33 - 163 %*	"			"	

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Projeel Manager:	Sean Trimble	06/14/07 13:22

Polychlorinated Biphenyls by EPA Method 8082

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					
Aroclor 1016	EPA 8082	ND	-----	50.8	ug/kg dry	1x	7E30046	05/30/07 14:09	06/03/07 02:48	
Aroclor 1221	"	ND	-----	102	"	"	"	"	"	
Aroclor 1232	"	ND	-----	50.8	"	"	"	"	"	
Aroclor 1242	"	ND	-----	50.8	"	"	"	"	"	
Aroclor 1248	"	ND	-----	50.8	"	"	"	"	"	
Aroclor 1254	"	ND	-----	50.8	"	"	"	"	"	
Aroclor 1260	"	ND	-----	50.8	"	"	"	"	"	
Aroclor 1262	"	ND	-----	50.8	"	"	"	"	"	
Aroclor 1268	"	ND	-----	50.8	"	"	"	"	"	
Surrogate(s): TCX			*50.1%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*67.9%*		*33 - 163 %*	"			"	
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
Aroclor 1016	EPA 8082	ND	-----	55.4	ug/kg dry	1x	7E30046	05/30/07 14:09	06/02/07 00:48	
Aroclor 1221	"	ND	-----	111	"	"	"	"	"	
Aroclor 1232	"	ND	-----	55.4	"	"	"	"	"	
Aroclor 1242	"	ND	-----	55.4	"	"	"	"	"	
Aroclor 1248	"	ND	-----	55.4	"	"	"	"	"	
Aroclor 1254	"	ND	-----	55.4	"	"	"	"	"	
Aroclor 1260	"	ND	-----	55.4	"	"	"	"	"	
Aroclor 1262	"	ND	-----	55.4	"	"	"	"	"	
Aroclor 1268	"	ND	-----	55.4	"	"	"	"	"	
Surrogate(s): TCX			*93.9%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*99.3%*		*33 - 163 %*	"			"	
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
Aroclor 1016	EPA 8082	ND	-----	29.1	ug/kg dry	1x	7E30046	05/30/07 14:09	06/02/07 01:06	
Aroclor 1221	"	ND	-----	58.1	"	"	"	"	"	
Aroclor 1232	"	ND	-----	29.1	"	"	"	"	"	
Aroclor 1242	"	ND	-----	29.1	"	"	"	"	"	
Aroclor 1248	"	ND	-----	29.1	"	"	"	"	"	
Aroclor 1254	"	ND	-----	29.1	"	"	"	"	"	
Aroclor 1260	"	ND	-----	29.1	"	"	"	"	"	
Aroclor 1262	"	ND	-----	29.1	"	"	"	"	"	
Aroclor 1268	"	ND	-----	29.1	"	"	"	"	"	
Surrogate(s): TCX			*92.5%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*135%*		*33 - 163 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Polychlorinated Biphenyls by EPA Method 8082

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-12 (MW-8-25.0)		Soil			Sampled: 05/22/07 14:05					
Aroclor 1016	EPA 8082	ND	-----	30.1	ug/kg dry	1x	7E30046	05/30/07 14:09	06/03/07 03:06	
Aroclor 1221	"	ND	-----	60.2	"	"	"	"	"	
Aroclor 1232	"	ND	-----	30.1	"	"	"	"	"	
Aroclor 1242	"	ND	-----	30.1	"	"	"	"	"	
Aroclor 1248	"	ND	-----	30.1	"	"	"	"	"	
Aroclor 1254	"	ND	-----	30.1	"	"	"	"	"	
Aroclor 1260	"	ND	-----	30.1	"	"	"	"	"	
Aroclor 1262	"	ND	-----	30.1	"	"	"	"	"	
Aroclor 1268	"	ND	-----	30.1	"	"	"	"	"	
Surrogate(s): *TCX*			*52.4%*		*39 - 139 %*	"			"	
Decachlorobiphenyl			*61.8%*		*33 - 163 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-04 (MW-3-25.0)		Soil			Sampled: 05/22/07 09:40					
Acetone	EPA 8260B	23.3	-----	17.4	ug/kg dry	1x	7E24024	05/24/07 11:26	05/24/07 12:01	
Benzene	"	ND	-----	0.870	"	"	"	"	"	
Bromobenzene	"	ND	-----	2.90	"	"	"	"	"	
Bromochloromethane	"	ND	-----	2.90	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	2.90	"	"	"	"	"	
Bromoform	"	ND	-----	2.90	"	"	"	"	"	
Bromomethane	"	ND	-----	5.80	"	"	"	"	"	
2-Butanone	"	ND	-----	8.70	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	2.90	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	2.90	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	2.90	"	"	"	"	"	
Carbon disulfide	"	ND	-----	1.74	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	2.90	"	"	"	"	"	
Chlorobenzene	"	ND	-----	1.16	"	"	"	"	"	
Chloroethane	"	ND	-----	2.90	"	"	"	"	"	
Chloroform	"	ND	-----	1.45	"	"	"	"	"	
Chloromethane	"	ND	-----	5.80	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	2.90	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	2.90	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	2.90	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	5.80	"	"	"	"	"	
1,2-Dibromoethane (EDB)	"	ND	-----	2.90	"	"	"	"	"	
Dibromomethane	"	ND	-----	2.90	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	2.90	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	2.90	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	2.90	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	2.90	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	1.16	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.725	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	1.74	"	"	"	"	"	
cia-1,2-Dichloroethene	"	ND	-----	1.74	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	1.45	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	2.90	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	2.90	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	5.80	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	2.90	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	2.90	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.725	"	"	"	"	"	
Ethylbenzene	"	ND	-----	2.32	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	5.80	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	0.580	"	"	"	"	"	
n-Hexane	"	ND	-----	1.16	"	"	"	"	"	
2-Hexanone	"	ND	-----	11.6	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-04 (MW-3-25.0)		Soil			Sampled: 05/22/07 09:40					
Isopropylbenzene	EPA 8260B	ND	-----	2.90	ug/kg dry	1x	7E24024	05/24/07 11:26	05/24/07 12:01	
p-Isopropyltoluene	"	ND	-----	2.90	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	11.6	"	"	"	"	"	
Methylene chloride	"	ND	-----	2.03	"	"	"	"	"	
Naphthalene	"	9.14	-----	5.80	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	2.90	"	"	"	"	"	
Styrene	"	ND	-----	0.580	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	5.80	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	5.80	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	2.90	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	2.90	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	1.16	"	"	"	"	"	
Toluene	"	ND	-----	0.870	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	1.45	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.725	"	"	"	"	"	
Trichloroethene	"	ND	-----	1.45	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	2.90	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	2.90	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	2.90	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	2.90	"	"	"	"	"	
Vinyl chloride	"	ND	-----	1.45	"	"	"	"	"	
o-Xylene	"	ND	-----	2.90	"	"	"	"	"	
m,p-Xylene	"	ND	-----	2.90	"	"	"	"	"	
Total Xylenes	"	ND	-----	5.80	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*113%*		*60 - 140 %*	"			"	
Toluene-d8			*109%*		*60 - 140 %*	"			"	
4-BFB			*109%*		*60 - 140 %*	"			"	
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
Acetone	EPA 8260B	ND	-----	19.2	ug/kg dry	1x	7E24024	05/24/07 11:26	05/24/07 12:25	
Benzene	"	ND	-----	0.958	"	"	"	"	"	
Bromobenzene	"	ND	-----	3.19	"	"	"	"	"	
Bromochloromethane	"	ND	-----	3.19	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	3.19	"	"	"	"	"	
Bromoform	"	ND	-----	3.19	"	"	"	"	"	
Bromomethane	"	ND	-----	6.39	"	"	"	"	"	
2-Butanone	"	ND	-----	9.58	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	3.19	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	3.19	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	3.19	"	"	"	"	"	
Carbon disulfide	"	ND	-----	1.92	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	3.19	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Projeet Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-07 (MW-6-5.0)		**Soil**			**Sampled: 05/22/07 11:25**					
Chlorobenzene	EPA 8260B	ND	-----	1.28	ug/kg dry	1x	7E24024	05/24/07 11:26	05/24/07 12:25	
Chloroethane	"	ND	-----	3.19	"	"	"	"	"	
Chloroform	"	ND	-----	1.60	"	"	"	"	"	
Chloromethane	"	ND	-----	6.39	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	3.19	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	3.19	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	3.19	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	6.39	"	"	"	"	"	
1,2-Dibromoethane (EDB)	"	ND	-----	3.19	"	"	"	"	"	
Dibromomethane	"	ND	-----	3.19	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	3.19	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	3.19	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	3.19	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	3.19	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	1.28	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.798	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	1.92	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	1.92	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	1.60	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	3.19	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	3.19	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	6.39	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	3.19	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	3.19	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.798	"	"	"	"	"	
Ethylbenzene	"	ND	-----	2.55	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	6.39	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	0.639	"	"	"	"	"	
n-Hexane	"	ND	-----	1.28	"	"	"	"	"	
2-Hexanone	"	ND	-----	12.8	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	3.19	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	3.19	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	12.8	"	"	"	"	"	
Methylene chloride	"	ND	-----	2.23	"	"	"	"	"	
Naphthalene	"	ND	-----	6.39	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	3.19	"	"	"	"	"	
Styrene	"	ND	-----	0.639	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	6.39	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	6.39	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	3.19	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	3.19	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	1.28	"	"	"	"	"	
Toluene	"	ND	-----	0.958	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
1,1,1-Trichloroethane	EPA 8260B	ND	-----	1.60	ug/kg dry	1x	7E24024	05/24/07 11:26	05/24/07 12:25	
1,1,2-Trichloroethane	"	ND	-----	0.798	"	"	"	"	"	
Trichloroethene	"	ND	-----	1.60	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	3.19	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	3.19	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	3.19	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	3.19	"	"	"	"	"	
Vinyl chloride	"	ND	-----	1.60	"	"	"	"	"	
o-Xylene	"	ND	-----	3.19	"	"	"	"	"	
m,p-Xylene	"	ND	-----	3.19	"	"	"	"	"	
Total Xylenes	"	ND	-----	6.39	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*118%*		*60 - 140 %*	"			"	
Toluene-d8			*102%*		*60 - 140 %*	"			"	
4-BFB			*109%*		*60 - 140 %*	"			"	
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
Acetone	EPA 8260B	ND	-----	23.6	ug/kg dry	1x	7E25028	05/25/07 10:05	05/25/07 12:45	
Benzene	"	7.22	-----	1.18	"	"	"	"	"	
Bromobenzene	"	ND	-----	3.94	"	"	"	"	"	
Bromochloromethane	"	ND	-----	3.94	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	3.94	"	"	"	"	"	
Bromoform	"	ND	-----	3.94	"	"	"	"	"	
Bromomethane	"	ND	-----	7.88	"	"	"	"	"	
2-Butanone	"	ND	-----	11.8	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	3.94	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	3.94	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	3.94	"	"	"	"	"	
Carbon disulfide	"	ND	-----	2.36	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	3.94	"	"	"	"	"	
Chlorobenzene	"	ND	-----	1.58	"	"	"	"	"	
Chloroethane	"	ND	-----	3.94	"	"	"	"	"	
Chloroform	"	ND	-----	1.97	"	"	"	"	"	
Chloromethane	"	ND	-----	7.88	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	3.94	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	3.94	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	3.94	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	7.88	"	"	"	"	"	
1,2-Dibromoethane (EDB)	"	ND	-----	3.94	"	"	"	"	"	
Dibromomethane	"	ND	-----	3.94	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	3.94	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	3.94	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	3.94	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-10 (MW-6-35.0)		**Soil**			**Sampled: 05/22/07 12:20**					
Dichlorodifluoromethane	EPA 8260B	ND	-----	3.94	ug/kg dry	1x	7E25028	05/25/07 10:05	05/25/07 12:45	
1,1-Dichloroethane	"	ND	-----	1.58	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.985	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	2.36	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	2.36	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	1.97	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	3.94	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	3.94	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	7.88	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	3.94	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	3.94	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.985	"	"	"	"	"	
Ethylbenzene	"	4.75	-----	3.15	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	7.88	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	0.788	"	"	"	"	"	
n-Hexane	"	ND	-----	1.58	"	"	"	"	"	
2-Hexanone	"	ND	-----	15.8	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	3.94	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	3.94	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	15.8	"	"	"	"	"	
Methylene chloride	"	ND	-----	2.76	"	"	"	"	"	
Naphthalene	"	177	-----	7.88	"	"	"	"	"	E
n-Propylbenzene	"	ND	-----	3.94	"	"	"	"	"	
Styrene	"	ND	-----	0.788	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	7.88	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	7.88	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	3.94	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	3.94	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	1.58	"	"	"	"	"	
Toluene	"	ND	-----	1.18	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	1.97	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.985	"	"	"	"	"	
Trichloroethene	"	ND	-----	1.97	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	3.94	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	3.94	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	3.94	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	3.94	"	"	"	"	"	
Vinyl chloride	"	ND	-----	1.97	"	"	"	"	"	
o-Xylene	"	ND	-----	3.94	"	"	"	"	"	
m,p-Xylene	"	ND	-----	3.94	"	"	"	"	"	
Total Xylenes	"	ND	-----	7.88	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4		*126%*			*60 - 140 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Projeel Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
Toluene-d8			*105%*		*60 - 140 %*	*1x*			*05/25/07 12:45*	
4-BFB			*97.5%*		*60 - 140 %*	"			"	
BQE0385-12 (MW-8-25.0)		Soil			Sampled: 05/22/07 14:05					
Acetone	EPA 8260B	ND	-----	16.1	ug/kg dry	1x	7E24024	05/24/07 11:26	05/24/07 13:14	
Benzene	"	ND	-----	0.803	"	"	"	"	"	
Bromobenzene	"	ND	-----	2.68	"	"	"	"	"	
Bromochloromethane	"	ND	-----	2.68	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	2.68	"	"	"	"	"	
Bromoform	"	ND	-----	2.68	"	"	"	"	"	
Bromomethane	"	ND	-----	5.35	"	"	"	"	"	
2-Butanone	"	ND	-----	8.03	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	2.68	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	2.68	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	2.68	"	"	"	"	"	
Carbon disulfide	"	ND	-----	1.61	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	2.68	"	"	"	"	"	
Chlorobenzene	"	ND	-----	1.07	"	"	"	"	"	
Chloroethane	"	ND	-----	2.68	"	"	"	"	"	
Chloroform	"	ND	-----	1.34	"	"	"	"	"	
Chloromethane	"	ND	-----	5.35	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	2.68	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	2.68	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	2.68	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	5.35	"	"	"	"	"	
1,2-Dibromoethane (EDB)	"	ND	-----	2.68	"	"	"	"	"	
Dibromomethane	"	ND	-----	2.68	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	2.68	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	2.68	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	2.68	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	2.68	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	1.07	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.669	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	1.61	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	1.61	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	1.34	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	2.68	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	2.68	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	5.35	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	2.68	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	2.68	"	"	"	"	"	
trans-1,3-Dichioropropene	"	ND	-----	0.669	"	"	"	"	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method)

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-12 (MW-8-25.0)		Soil			Sampled: 05/22/07 14:05					
Ethylbenzene	EPA 8260B	ND	-----	2.14	ug/kg dry	1x	7E24024	05/24/07 11:26	05/24/07 13:14	
Hexachlorobutadiene	"	ND	-----	5.35	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	0.535	"	"	"	"	"	
n-Hexane	"	ND	-----	1.07	"	"	"	"	"	
2-Hexanone	"	ND	-----	10.7	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	2.68	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	2.68	"	"	"	"	"	
4-Melhyl-2-pentanone	"	ND	-----	10.7	"	"	"	"	"	
Methylene chloride	"	ND	-----	1.87	"	"	"	"	"	
Naphthalene	"	ND	-----	5.35	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	2.68	"	"	"	"	"	
8tyrene	"	0.814	-----	0.535	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	5.35	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	5.35	"	"	"	"	"	
1,1,1,2-Tetrachloroelhane	"	ND	-----	2.68	"	"	"	"	"	
1,1,2,2-Tetrachloroelhane	"	ND	-----	2.68	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	1.07	"	"	"	"	"	
Toluene	"	ND	-----	0.803	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	1.34	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.669	"	"	"	"	"	
Trichloroethene	"	ND	-----	1.34	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	2.68	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	2.68	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	2.68	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	2.68	"	"	"	"	"	
Vinyl chloride	"	ND	-----	1.34	"	"	"	"	"	
o-Xylene	"	ND	-----	2.68	"	"	"	"	"	
m,p-Xylene	"	ND	-----	2.68	"	"	"	"	"	
Total Xylenes	"	ND	-----	5.35	"	"	"	"	"	
Surrogate(s):	*1,2-DCA-d4*		*130%*		*60 - 140 %*	"			"	
	Toluene-d8		*109%*		*60 - 140 %*	"			"	
	4-BFB		*110%*		*60 - 140 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		Soil			Sampled: 05/22/07 08:55					RL7
1,2-Dibromoethane (EDB)	EPA 8260B	ND	-----	0.553	mg/kg dry	5x	7E25034	05/25/07 10:00	05/25/07 20:03	
Acetone	"	ND	-----	5.53	"	"	"	"	"	
Benzene	"	1.93	-----	0.111	"	"	"	"	"	
Bromobenzene	"	ND	-----	0.553	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.553	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.553	"	"	"	"	"	
Bromoform	"	ND	-----	0.553	"	"	"	"	"	
Bromomethane	"	ND	-----	0.553	"	"	"	"	"	
2-Butanone	"	ND	-----	5.53	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	0.553	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	0.553	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.553	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.553	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.553	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.553	"	"	"	"	"	
Chloroethane	"	ND	-----	0.553	"	"	"	"	"	
Chloroform	"	ND	-----	0.553	"	"	"	"	"	
Chloromethane	"	ND	-----	2.77	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.553	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.553	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.553	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	2.77	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.553	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.553	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.553	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.553	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.553	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.553	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.553	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.553	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	0.553	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.553	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.553	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.553	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.553	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.553	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.553	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.553	"	"	"	"	"	
Ethylbenzene	"	3.29	-----	0.553	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	2.77	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	2.77	"	"	"	"	"	
n-Hexane	"	ND	-----	5.53	"	"	"	"	"	
2-Hexanone	"	ND	-----	5.53	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		Soil			Sampled: 05/22/07 08:55					RL7
Isopropylbenzene	EPA 8260B	ND	-----	0.553	mg/kg dry	5x	7E25034	05/25/07 10:00	05/25/07 20:03	
p-Isopropyltoluene	"	0.808	-----	0.553	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	5.53	"	"	"	"	"	
Methylene chloride	"	ND	-----	5.53	"	"	"	"	"	
Naphthalene	"	465	-----	2.77	"	"	"	"	"	E
n-Propylbenzene	"	ND	-----	0.553	"	"	"	"	"	
Styrene	"	ND	-----	0.553	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	2.77	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	2.77	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.553	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.553	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.553	"	"	"	"	"	
Toluene	"	1.41	-----	0.553	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.553	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.553	"	"	"	"	"	
Trichloroethene	"	ND	-----	0.553	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.553	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.553	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	6.70	-----	0.553	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	2.41	-----	0.553	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.553	"	"	"	"	"	
Total Xylenes	"	8.71	-----	1.66	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*105%*		*75 - 125 %*	*1x*			"	
Toluene-d8			*103%*		*75 - 125 %*	"			"	
4-BFB			*100%*		*75 - 125 %*	"			"	
BQE0385-01RE1 (MW-3-5.0)		Soil			Sampled: 05/22/07 08:55					
Naphthalene	EPA 8260B	708	-----	55.3	mg/kg dry	100x	7E29028	05/25/07 10:00	05/30/07 23:47	
Surrogate(s): 1,2-DCA-d4			*106%*		*75 - 125 %*	*1x*			"	
Toluene-d8			*104%*		*75 - 125 %*	"			"	
4-BFB			*92.3%*		*75 - 125 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					RL7
1,2-Dibromoethane (EDB)	EPA 8260B	ND	-----	3.60	mg/kg dry	40x	7E25034	05/25/07 10:00	05/25/07 20:33	
Acetone	"	ND	-----	36.0	"	"	"	"	"	
Benzene	"	ND	-----	0.719	"	"	"	"	"	
Bromobenzene	"	ND	-----	3.60	"	"	"	"	"	
Bromochloromethane	"	ND	-----	3.60	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	3.60	"	"	"	"	"	
Bromoform	"	ND	-----	3.60	"	"	"	"	"	
Bromomethane	"	ND	-----	3.60	"	"	"	"	"	
2-Butanone	"	ND	-----	36.0	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	3.60	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	3.60	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	3.60	"	"	"	"	"	
Carbon disulfide	"	ND	-----	3.60	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	3.60	"	"	"	"	"	
Chlorobenzene	"	ND	-----	3.60	"	"	"	"	"	
Chloroethane	"	ND	-----	3.60	"	"	"	"	"	
Chloroform	"	ND	-----	3.60	"	"	"	"	"	
Chloromethane	"	ND	-----	18.0	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	3.60	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	3.60	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	3.60	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	18.0	"	"	"	"	"	
Dibromomethane	"	ND	-----	3.60	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	3.60	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	3.60	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	3.60	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	3.60	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	3.60	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	3.60	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	3.60	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	3.60	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	3.60	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	3.60	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	3.60	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	3.60	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	3.60	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	3.60	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	3.60	"	"	"	"	"	
Ethylbenzene	"	ND	-----	3.60	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	18.0	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	18.0	"	"	"	"	"	
n-Hexane	"	ND	-----	36.0	"	"	"	"	"	
2-Hexanone	"	ND	-----	36.0	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					RL7
Isopropylbenzene	EPA 8260B	ND	-----	3.60	mg/kg dry	40x	7E25034	05/25/07 10:00	05/25/07 20:33	
p-Isopropyltoluene	"	ND	-----	3.60	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	36.0	"	"	"	"	"	
Methylene chloride	"	ND	-----	36.0	"	"	"	"	"	
Naphthalene	"	2290	-----	18.0	"	"	"	"	"	E
n-Propylbenzene	"	ND	-----	3.60	"	"	"	"	"	
Styrene	"	ND	-----	3.60	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	18.0	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	18.0	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	3.60	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	3.60	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	3.60	"	"	"	"	"	
Toluene	"	5.00	-----	3.60	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	3.60	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	3.60	"	"	"	"	"	
Trichloroethene	"	ND	-----	3.60	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	3.60	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	3.60	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	13.2	-----	3.60	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	3.67	-----	3.60	"	"	"	"	"	
Vinyl chloride	"	ND	-----	3.60	"	"	"	"	"	
Total Xylenes	"	16.7	-----	10.8	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*107%*		*75 - 125 %*	*1x*			"	
Toluene-d8			*103%*		*75 - 125 %*	"			"	
4-BFB			*98.9%*		*75 - 125 %*	"			"	
BQE0385-08RE1 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					
Naphthalene	EPA 8260B	2000	-----	450	mg/kg dry	1000x	7E29028	05/25/07 10:00	05/31/07 00:16	
Surrogate(s): 1,2-DCA-d4			*110%*		*75 - 125 %*	*1x*			"	
Toluene-d8			*104%*		*75 - 125 %*	"			"	
4-BFB			*93.3%*		*75 - 125 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Projeet Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
Naphthalene	EPA 8260B	ND	-----	0.428	mg/kg dry	1x	7F04053	06/04/07 15:11	06/04/07 18:57	A-01
Surrogate(s): 1,2-DCA-d4			*99.4%*		*75 - 125 %*	"			"	
Toluene-d8			*102%*		*75 - 125 %*	"			"	
4-BFB			*101%*		*75 - 125 %*	"			"	
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
1,2-Dibromoethane (EDB)	EPA 8260B	ND	-----	0.125	mg/kg dry	1x	7E29028	05/25/07 10:00	05/31/07 02:13	
Acetone	"	ND	-----	1.25	"	"	"	"	"	
Benzene	"	ND	-----	0.0249	"	"	"	"	"	
Bromobenzene	"	ND	-----	0.125	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.125	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.125	"	"	"	"	"	
Bromoform	"	ND	-----	0.125	"	"	"	"	"	
Bromomethane	"	ND	-----	0.125	"	"	"	"	"	
2-Butanone	"	ND	-----	1.25	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	0.125	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	0.125	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.125	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.125	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.125	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.125	"	"	"	"	"	
Chloroethane	"	ND	-----	0.125	"	"	"	"	"	
Chloroform	"	ND	-----	0.125	"	"	"	"	"	
Chloromethane	"	ND	-----	0.623	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.125	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.125	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.125	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.623	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.125	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.125	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.125	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.125	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.125	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.125	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.125	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.125	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	0.125	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.125	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.125	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.125	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.125	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.125	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
cis-1,3-Dichloropropene	EPA 8260B	ND	-----	0.125	mg/kg dry	1x	7E29028	05/25/07 10:00	05/31/07 02:13	
trans-1,3-Dichloropropene	"	ND	-----	0.125	"	"	"	"	"	
Ethylbenzene	"	ND	-----	0.125	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.623	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	0.623	"	"	"	"	"	
n-Hexane	"	ND	-----	1.25	"	"	"	"	"	
2-Hexanone	"	ND	-----	1.25	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	0.125	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	0.125	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	1.25	"	"	"	"	"	
Methylene chloride	"	ND	-----	1.25	"	"	"	"	"	
Naphthalene	"	ND	-----	0.623	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	0.125	"	"	"	"	"	
Styrene	"	ND	-----	0.125	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	0.623	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.623	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.125	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.125	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.125	"	"	"	"	"	
Toluene	"	ND	-----	0.125	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.125	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.125	"	"	"	"	"	
Trichloroethene	"	ND	-----	0.125	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.125	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.125	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	0.125	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	0.125	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.125	"	"	"	"	"	
Total Xylenes	"	ND	-----	0.374	"	"	"	"	"	
Surrogate(s):	*1,2-DCA-d4*		*106%*		*75 - 125 %*	"			"	
	Toluene-d8		*103%*		*75 - 125 %*	"			"	
	4-BFB		*97 2%*		*75 - 125 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		**Soil**			**Sampled: 05/22/07 08:55**					
Acenaphthene	EPA 8270C	ND	-----	98.7	mg/kg dry	100x	7E25030	05/31/07 11:12	06/09/07 17:47	
Acenaphthylene	"	233	-----	98.7	"	"	"	"	"	
Aniline	"	ND	-----	98.7	"	"	"	"	"	
Anthracene	"	274	-----	98.7	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	98.7	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	98.7	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	98.7	"	"	"	"	"	
Benzo (k) fluoranlhene	"	ND	-----	98.7	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	98.7	"	"	"	"	"	
Benzoic Acid	"	ND	-----	299	"	"	"	"	"	C5
Benzyl alcohol	"	ND	-----	98.7	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	98.7	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	98.7	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	98.7	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	98.7	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	98.7	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	98.7	"	"	"	"	"	
Carbazole	"	ND	-----	98.7	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	150	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	98.7	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	98.7	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	98.7	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	98.7	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	98.7	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	98.7	"	"	"	"	"	
Chrysene	"	ND	-----	98.7	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	98.7	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	98.7	"	"	"	"	"	
Dibenzofuran	"	ND	-----	98.7	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	98.7	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	98.7	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	98.7	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	1500	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	98.7	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	98.7	"	"	"	"	"	
2,4-Dimelhylphenol	"	ND	-----	98.7	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	98.7	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	150	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	150	"	"	"	"	"	C5
2,4-Dinitrotoluene	"	ND	-----	150	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	150	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	98.7	"	"	"	"	"	
Fluoranthene	"	176	-----	98.7	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		Soil			Sampled: 05/22/07 08:55					
Fluorene	EPA 8270C	177	-----	98.7	mg/kg dry	100x	7E25030	05/31/07 11:12	06/09/07 17:47	
Hexachlorobenzene	"	ND	-----	98.7	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	98.7	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	150	"	"	"	"	"	C5
Hexachloroethane	"	ND	-----	98.7	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	98.7	"	"	"	"	"	
Isophorone	"	ND	-----	98.7	"	"	"	"	"	
1-Methylnaphthalene	"	236	-----	98.7	"	"	"	"	"	
2-Methylnaphthalene	"	404	-----	98.7	"	"	"	"	"	
Naphthalene	"	521	-----	98.7	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	150	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	150	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	150	"	"	"	"	"	
Nitrobenzene	"	ND	-----	98.7	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	98.7	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	150	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	98.7	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	98.7	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	150	"	"	"	"	"	
Phenanthrene	"	480	-----	98.7	"	"	"	"	"	
Phenol	"	ND	-----	98.7	"	"	"	"	"	
Pyrene	"	ND	-----	98.7	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	98.7	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	98.7	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	98.7	"	"	"	"	"	
Surrogate(s):	*2-FBP*	*44.9%*			*27 - 126 %*	"			"	
	2-FP	*10.0%*			*16 - 121 %*	"			"	*Z3*
	Nitrobenzene-d5	*35.1%*			*26 - 125 %*	"			"	
	Phenol-d6	*15.0%*			*10 - 120 %*	"			"	
	p-Terphenyl-d14	*49.9%*			*26 - 150 %*	"			"	
	2,4,6-TBP	*20.0%*			*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-04 (MW-3-25.0)		Soil			Sampled: 05/22/07 09:40					
Acenaphthene	EPA 8270C	ND	-----	0.356	mg/kg dry	1x	7E25030	05/31/07 11:12	06/07/07 03:24	
Acenaphthylene	"	ND	-----	0.356	"	"	"	"	"	
Aniline	"	ND	-----	0.356	"	"	"	"	"	
Anthracene	"	ND	-----	0.356	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.356	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.356	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.356	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.356	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.356	"	"	"	"	"	
Benzoic Acid	"	ND	-----	1.08	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	0.356	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	0.356	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	0.356	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	0.356	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	0.356	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	0.356	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	0.356	"	"	"	"	"	
Carbazole	"	ND	-----	0.356	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	0.540	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	0.356	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	0.356	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	0.356	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	0.356	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	0.356	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	0.356	"	"	"	"	"	
Chrysene	"	ND	-----	0.356	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	0.356	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.356	"	"	"	"	"	
Dibenzofuran	"	ND	-----	0.356	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.356	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.356	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.356	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	5.40	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	0.356	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	0.356	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	0.356	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	0.356	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	0.540	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	0.540	"	"	"	"	"	
2,4-Dinitrotoluene	"	ND	-----	0.540	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	0.540	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	0.356	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.356	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-04 (MW-3-25.0)		Soil			Sampled: 05/22/07 09:40					
Fluorene	EPA 8270C	ND	-----	0.356	mg/kg dry	1x	7E25030	05/31/07 11:12	06/07/07 03:24	
Hexachlorobenzene	"	ND	-----	0.356	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.356	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	0.540	"	"	"	"	"	C5
Hexachloroethane	"	ND	-----	0.356	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.356	"	"	"	"	"	
Isophorone	"	ND	-----	0.356	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.356	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.356	"	"	"	"	"	
Naphthalene	"	ND	-----	0.356	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	0.540	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	0.540	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	0.540	"	"	"	"	"	
Nitrobenzene	"	ND	-----	0.356	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	0.356	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	0.540	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	0.356	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	0.356	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	0.540	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.356	"	"	"	"	"	
Phenol	"	ND	-----	0.356	"	"	"	"	"	
Pyrene	"	ND	-----	0.356	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.356	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	0.356	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	0.356	"	"	"	"	"	
Surrogate(s):	*2-FBP*		*64.7%*		*27 - 126 %*	"			"	
	2-FP		*65.6%*		*16 - 121 %*	"			"	
	Nitrobenzene-d5		*73.9%*		*26 - 125 %*	"			"	
	Phenol-d6		*42.8%*		*10 - 120 %*	"			"	
	p-Terphenyl-d14		*76 1%*		*26 - 150 %*	"			"	
	2,4,6-TBP		*59.7%*		*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Projeel Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
Acenaphthene	EPA 8270C	ND	-----	0.759	mg/kg dry	1x	7E25030	05/31/07 11:12	06/07/07 03:57	
Acenaphthylene	"	ND	-----	0.759	"	"	"	"	"	
Aniline	"	ND	-----	0.759	"	"	"	"	"	
Anthracene	"	ND	-----	0.759	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.759	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.759	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.759	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.759	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.759	"	"	"	"	"	
Benzoic Acid	"	ND	-----	2.30	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	0.759	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	0.759	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	0.759	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	0.759	"	"	"	"	"	
Bis(2-elhylhexyl)phthalate	"	ND	-----	0.759	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	0.759	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	0.759	"	"	"	"	"	
Carbazole	"	ND	-----	0.759	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	1.15	"	"	"	"	"	
4-Chloro-3-melhylphenol	"	ND	-----	0.759	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	0.759	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	0.759	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	0.759	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	0.759	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	0.759	"	"	"	"	"	
Chrysene	"	ND	-----	0.759	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	0.759	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.759	"	"	"	"	"	
Dibenzofuran	"	ND	-----	0.759	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.759	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.759	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.759	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	11.5	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	0.759	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	0.759	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	0.759	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	0.759	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	1.15	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	1.15	"	"	"	"	"	
2,4-Dinilrotoluene	"	ND	-----	1.15	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	1.15	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	0.759	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.759	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, wilhoul the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
Fluorene	EPA 8270C	ND	-----	0.759	mg/kg dry	1x	7E25030	05/31/07 11:12	06/07/07 03:57	
Hexachlorobenzene	"	ND	-----	0.759	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.759	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	1.15	"	"	"	"	"	C5
Hexachloroethane	"	ND	-----	0.759	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.759	"	"	"	"	"	
Isophorone	"	ND	-----	0.759	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.759	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.759	"	"	"	"	"	
Naphthalene	"	ND	-----	0.759	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	1.15	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	1.15	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	1.15	"	"	"	"	"	
Nitrobenzene	"	ND	-----	0.759	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	0.759	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	1.15	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	0.759	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	0.759	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	1.15	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.759	"	"	"	"	"	
Phenol	"	ND	-----	0.759	"	"	"	"	"	
Pyrene	"	ND	-----	0.759	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.759	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	0.759	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	0.759	"	"	"	"	"	
Surrogate(s):	*2-FBP*		*37.2%*		*27 - 126 %*	"			"	
	2-FP		*37.2%*		*16 - 121 %*	"			"	
	Nitrobenzene-d5		*42.0%*		*26 - 125 %*	"			"	
	Phenol-d6		*23.0%*		*10 - 120 %*	"			"	
	p-Terphenyl-d14		*35.4%*		*26 - 150 %*	"			"	
	2,4,6-TBP		*26.4%*		*10 - 152 %*	"			"	

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					
Acenaphthene	EPA 8270C	ND	-----	174	mg/kg dry	100x	7E25030	05/31/07 11:12	06/09/07 18:21	
Acenaphthylene	"	460	-----	174	"	"	"	"	"	
Aniline	"	ND	-----	174	"	"	"	"	"	
Anthracene	"	285	-----	174	"	"	"	"	"	
Benzo (a) anthracene	"	186	-----	174	"	"	"	"	"	
Benzo (a) pyrene	"	186	-----	174	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	174	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	174	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	174	"	"	"	"	"	
Benzoic Acid	"	ND	-----	527	"	"	"	"	"	C5
Benzyl alcohol	"	ND	-----	174	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	174	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	174	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	174	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	174	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	174	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	174	"	"	"	"	"	
Carbazole	"	ND	-----	174	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	263	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	174	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	174	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	174	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	174	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	174	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	174	"	"	"	"	"	
Chrysene	"	201	-----	174	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	174	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	174	"	"	"	"	"	
Dibenzofuran	"	ND	-----	174	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	174	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	174	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	174	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	2630	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	174	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	174	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	174	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	174	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	263	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	263	"	"	"	"	"	C5
2,4-Dinitrotoluene	"	ND	-----	263	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	263	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	174	"	"	"	"	"	
Fluoranthene	"	572	-----	174	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Projeet Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Projecl Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					
Fluorene	"	404	-----	174	"	"	"	"	"	
Hexachlorobenzene	"	ND	-----	174	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	174	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	263	"	"	"	"	"	C5
Hexachloroethane	"	ND	-----	174	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	174	"	"	"	"	"	
Isophorone	"	ND	-----	174	"	"	"	"	"	
1-Methylnaphthalene	"	615	-----	174	"	"	"	"	"	
2-Methylnaphthalene	"	978	-----	174	"	"	"	"	"	
Naphthalene	"	953	-----	174	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	263	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	263	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	263	"	"	"	"	"	
Nitrobenzene	"	ND	-----	174	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	174	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	263	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	174	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	174	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	263	"	"	"	"	"	
Phenanthrene	"	1490	-----	174	"	"	"	"	"	
Phenol	"	ND	-----	174	"	"	"	"	"	
Pyrene	"	913	-----	174	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	174	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	174	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	174	"	"	"	"	"	
Surrogate(s): *2-FBP*		*120%*			*27 - 126 %*	"			"	
2-FP		*70.1%*			*16 - 121 %*	"			"	
Nitrobenzene-d5		*110%*			*26 - 125 %*	"			"	
Phenol-d6		*50.1%*			*10 - 120 %*	"			"	
p-Terphenyl-d14		*NR*			*26 - 150 %*	"			"	*Z3*
2,4,6-TBP		*20.0%*			*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
Acenaphthene	EPA 8270C	ND	-----	0.375	mg/kg dry	1x	7E25030	05/31/07 11:12	06/07/07 04:30	
Acenaphthylene	"	0.611	-----	0.375	"	"	"	"	"	
Aniline	"	ND	-----	0.375	"	"	"	"	"	
Anthracene	"	0.586	-----	0.375	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.375	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.375	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.375	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.375	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.375	"	"	"	"	"	
Benzoic Acid	"	ND	-----	1.14	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	0.375	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	0.375	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	0.375	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	0.375	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	0.375	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	0.375	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	0.375	"	"	"	"	"	
Carbazole	"	ND	-----	0.375	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	0.569	"	"	"	"	"	
4-Chloro-3-methylpbenol	"	ND	-----	0.375	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	0.375	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	0.375	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	0.375	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	0.375	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	0.375	"	"	"	"	"	
Chrysene	"	ND	-----	0.375	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	0.375	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.375	"	"	"	"	"	
Dibenzofuran	"	ND	-----	0.375	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.375	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.375	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.375	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	5.69	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	0.375	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	0.375	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	0.375	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	0.375	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	0.569	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	0.569	"	"	"	"	"	
2,4-Dinitrotoluene	"	ND	-----	0.569	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	0.569	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	0.375	"	"	"	"	"	
Fluoranthene	"	2.99	-----	0.375	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
Fluorene	EPA 8270C	0.798	-----	0.375	mg/kg dry	1x	7E25030	05/31/07 11:12	06/07/07 04:30	
Hexachlorobenzene	"	ND	-----	0.375	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.375	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	0.569	"	"	"	"	"	C5
Hexachloroethane	"	ND	-----	0.375	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.375	"	"	"	"	"	
Isophorone	"	ND	-----	0.375	"	"	"	"	"	
1-Methylnaphthalene	"	1.13	-----	0.375	"	"	"	"	"	
2-Methylnaphthalene	"	1.79	-----	0.375	"	"	"	"	"	
Naphthalene	"	1.49	-----	0.375	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	0.569	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	0.569	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	0.569	"	"	"	"	"	
Nitrobenzene	"	ND	-----	0.375	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	0.375	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	0.569	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	0.375	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	0.375	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	0.569	"	"	"	"	"	
Phenanthrene	"	2.99	-----	0.375	"	"	"	"	"	
Phenol	"	ND	-----	0.375	"	"	"	"	"	
Pyrene	"	1.53	-----	0.375	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.375	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	0.375	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	0.375	"	"	"	"	"	

Surrogate(s): *2-FBP*	*80.2%*	*27 - 126 %*	"	"
2-FP	*83.6%*	*16 - 121 %*	"	"
Nitrobenzene-d5	*95.5%*	*26 - 125 %*	"	"
Phenol-d6	*54.4%*	*10 - 120 %*	"	"
p-Terphenyl-d14	*87.6%*	*26 - 150 %*	"	"
2,4,6-TBP	*81.5%*	*10 - 152 %*	"	"

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Projeet Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
Acenaphthene	EPA 8270C	ND	-----	0.969	mg/kg dry	1x	7E25030	05/31/07 11:12	06/07/07 08:20	
Acenaphthylene	"	ND	-----	0.969	"	"	"	"	"	
Aniline	"	ND	-----	0.969	"	"	"	"	"	
Anthracene	"	ND	-----	0.969	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.969	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.969	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.969	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.969	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.969	"	"	"	"	"	
Benzoic Acid	"	ND	-----	2.93	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	0.969	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	0.969	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	0.969	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	0.969	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	0.969	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	0.969	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	0.969	"	"	"	"	"	
Carbazole	"	ND	-----	0.969	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	1.47	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	0.969	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	0.969	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	0.969	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	0.969	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	0.969	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	0.969	"	"	"	"	"	
Chrysene	"	ND	-----	0.969	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	0.969	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.969	"	"	"	"	"	
Dibenzofuran	"	ND	-----	0.969	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.969	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.969	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.969	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	14.7	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	0.969	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	0.969	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	0.969	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	0.969	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	1.47	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	1.47	"	"	"	"	"	
2,4-Dinitrotoluene	"	ND	-----	1.47	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	1.47	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	0.969	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.969	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
Fluorene	EPA 8270C	ND	-----	0.969	mg/kg dry	1x	7E25030	05/31/07 11:12	06/07/07 08:20	
Hexachlorobenzene	"	ND	-----	0.969	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	0.969	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	1.47	"	"	"	"	"	C5
Hexachloroethane	"	ND	-----	0.969	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.969	"	"	"	"	"	
Isophorone	"	ND	-----	0.969	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.969	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.969	"	"	"	"	"	
Naphthalene	"	ND	-----	0.969	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	1.47	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	1.47	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	1.47	"	"	"	"	"	
Nitrobenzene	"	ND	-----	0.969	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	0.969	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	1.47	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	0.969	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	0.969	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	1.47	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.969	"	"	"	"	"	
Phenol	"	ND	-----	0.969	"	"	"	"	"	
Pyrene	"	ND	-----	0.969	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	0.969	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	0.969	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	0.969	"	"	"	"	"	
Surrogate(s): *2-FBP*		*123%*			*27 - 126 %*	"			"	
2-FP		*120%*			*16 - 121 %*	"			"	
Nitrobenzene-d5		*140%*			*26 - 125 %*	"			"	ZX
Phenol-d6		*78.0%*			*10 - 120 %*	"			"	
p-Terphenyl-d14		*134%*			*26 - 150 %*	"			"	
2,4,6-TBP		*119%*			*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-12 (MW-8-25.0)		Soil			Sampled: 05/22/07 14:05					
Acenaphthene	EPA 8270C	ND	-----	9.80	mg/kg dry	10x	7E25030	05/31/07 11:12	06/07/07 22:00	
Acenaphthylene	"	10.4	-----	9.80	"	"	"	"	"	
Aniline	"	ND	-----	9.80	"	"	"	"	"	
Anthracene	"	13.5	-----	9.80	"	"	"	"	"	
Benzo (a) anthracene	"	43.3	-----	9.80	"	"	"	"	"	
Benzo (a) pyrene	"	55.5	-----	9.80	"	"	"	"	"	
Benzo (b) fluoranthene	"	31.8	-----	9.80	"	"	"	"	"	
Benzo (k) fluoranthene	"	36.1	-----	9.80	"	"	"	"	"	
Benzo (ghi) perylene	"	32.7	-----	9.80	"	"	"	"	"	
Benzoic Acid	"	ND	-----	29.7	"	"	"	"	"	C5
Benzyl alcohol	"	ND	-----	9.80	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	9.80	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	9.80	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	9.80	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	9.80	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	9.80	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	9.80	"	"	"	"	"	
Carbazole	"	ND	-----	9.80	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	14.8	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	9.80	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	9.80	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	9.80	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	9.80	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	9.80	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	9.80	"	"	"	"	"	
Chrysene	"	51.6	-----	9.80	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	9.80	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	9.80	"	"	"	"	"	
Dibenzofuran	"	ND	-----	9.80	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	9.80	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	9.80	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	9.80	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	148	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	9.80	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	9.80	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	9.80	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	9.80	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	14.8	"	"	"	"	"	C5
2,4-Dinitrophenol	"	ND	-----	14.8	"	"	"	"	"	C5
2,4-Dinitrotoluene	"	ND	-----	14.8	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	14.8	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	9.80	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-12 (MW-8-25.0)		Soil			Sampled: 05/22/07 14:05					
Fluoranthene	EPA 8270C	79.1	-----	9.80	mg/kg dry	10x	7E25030	05/31/07 11:12	06/07/07 22:00	
Fluorene	"	ND	-----	9.80	"	"	"	"	"	
Hexachlorobenzene	"	ND	-----	9.80	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	9.80	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	14.8	"	"	"	"	"	C5
Hexachloroethane	"	ND	-----	9.80	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	25.1	-----	9.80	"	"	"	"	"	
Isophorone	"	ND	-----	9.80	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	9.80	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	9.80	"	"	"	"	"	
Naphthalene	"	ND	-----	9.80	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	14.8	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	14.8	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	14.8	"	"	"	"	"	
Nitrobenzene	"	ND	-----	9.80	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	9.80	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	14.8	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	9.80	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	9.80	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	14.8	"	"	"	"	"	
Phenanthrene	"	19.6	-----	9.80	"	"	"	"	"	
Phenol	"	ND	-----	9.80	"	"	"	"	"	
Pyrene	"	159	-----	9.80	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	9.80	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	9.80	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	9.80	"	"	"	"	"	
Surrogate(s): *2-FBP*			*85.6%*		*27 - 126 %*	"			"	
2-FP			*78.0%*		*16 - 121 %*	"			"	
Nitrobenzene-d5			*85.6%*		*26 - 125 %*	"			"	
Phenol-d6			*53.0%*		*10 - 120 %*	"			"	
p-Terphenyl-d14			*88.4%*		*26 - 150 %*	"			"	
2,4,6-TBP			*52.5%*		*10 - 152 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		Soil			Sampled: 05/22/07 08:55					
Acenaphthene	EPA 8270-SIM	18.5	-----	1.50	mg/kg dry	50x	7E25030	05/31/07 11:12	06/06/07 18:32	
Acenaphthylene	"	204	-----	1.50	"	"	"	"	"	E
Anthracene	"	273	-----	1.50	"	"	"	"	"	E
Benzo (a) anthracene	"	59.7	-----	1.50	"	"	"	"	"	
Benzo (a) pyrene	"	58.9	-----	1.50	"	"	"	"	"	
Benzo (b) fluoranthene	"	26.1	-----	1.50	"	"	"	"	"	
Benzo (k) fluoranthene	"	34.9	-----	1.50	"	"	"	"	"	
Benzo (ghi) perylene	"	31.9	-----	1.50	"	"	"	"	"	
Chrysene	"	69.2	-----	1.50	"	"	"	"	"	
Dibenz (a,h) anthracene	"	8.48	-----	1.50	"	"	"	"	"	
Fluoranthene	"	137	-----	1.50	"	"	"	"	"	
Fluorene	"	182	-----	1.50	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	26.8	-----	1.50	"	"	"	"	"	
1-Methylnaphthalene	"	172	-----	1.50	"	"	"	"	"	
2-Methylnaphthalene	"	279	-----	1.50	"	"	"	"	"	E
Naphthalene	"	384	-----	1.50	"	"	"	"	"	E
Phenanthrene	"	379	-----	1.50	"	"	"	"	"	E
Pyrene	"	192	-----	1.50	"	"	"	"	"	
Surrogate(s): p-Terphenyl-d14		*37.6%*			*50 - 147 %*	"			"	*Z3*
BQE0385-04 (MW-3-25.0)		Soil			Sampled: 05/22/07 09:40					
Acenaphthene	EPA 8270-SIM	0.0108	-----	0.0108	mg/kg dry	1x	7E25030	05/31/07 11:12	06/06/07 15:08	
Acenaphthylene	"	0.0151	-----	0.0108	"	"	"	"	"	
Anthracene	"	ND	-----	0.0108	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.0108	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.0108	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.0108	"	"	"	"	"	
Benzo (k) fluoranthene	"	0.0130	-----	0.0108	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.0108	"	"	"	"	"	
Chrysene	"	ND	-----	0.0108	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.0108	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.0108	"	"	"	"	"	
Fluorene	"	0.0130	-----	0.0108	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.0108	"	"	"	"	"	
1-Methylnaphthalene	"	0.0144	-----	0.0108	"	"	"	"	"	
2-Methylnaphthalene	"	0.0158	-----	0.0108	"	"	"	"	"	
Naphthalene	"	0.0360	-----	0.0108	"	"	"	"	"	
Phenanthrene	"	0.0122	-----	0.0108	"	"	"	"	"	
Pyrene	"	ND	-----	0.0108	"	"	"	"	"	
Surrogate(s): p-Terphenyl-d14		*66.1%*			*50 - 147 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
Acenaphthene	EPA 8270-SIM	ND	-----	0.0230	mg/kg dry	1x	7E25030	05/31/07 11:12	06/06/07 15:42	
Acenaphthylene	"	0.0490	-----	0.0230	"	"	"	"	"	
Anthracene	"	0.0613	-----	0.0230	"	"	"	"	"	
Benzo (a) anthracene	"	0.0475	-----	0.0230	"	"	"	"	"	
Benzo (a) pyrene	"	0.0782	-----	0.0230	"	"	"	"	"	
Benzo (b) fluoranthene	"	0.0368	-----	0.0230	"	"	"	"	"	
Benzo (k) fluoranthene	"	0.0536	-----	0.0230	"	"	"	"	"	
Benzo (ghi) perylene	"	0.0398	-----	0.0230	"	"	"	"	"	
Chrysene	"	0.0644	-----	0.0230	"	"	"	"	"	
Dibenz (a,h) anthracene	"	0.0245	-----	0.0230	"	"	"	"	"	
Fluoranthene	"	0.123	-----	0.0230	"	"	"	"	"	
Fluorene	"	0.0659	-----	0.0230	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	0.0368	-----	0.0230	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.0230	"	"	"	"	"	
2-Methylnaphthalene	"	0.0245	-----	0.0230	"	"	"	"	"	
Naphthalene	"	ND	-----	0.0230	"	"	"	"	"	
Phenanthrene	"	0.253	-----	0.0230	"	"	"	"	"	
Pyrene	"	0.161	-----	0.0230	"	"	"	"	"	
Surrogate(s): p-Terphenyl-d14			*34.1%*		*50 - 147 %*	"			"	Z6
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					
Acenaphthene	EPA 8270-SIM	31.2	-----	2.63	mg/kg dry	50x	7E25030	05/31/07 11:12	06/06/07 19:06	
Acenaphthylene	"	303	-----	2.63	"	"	"	"	"	
Anthracene	"	233	-----	2.63	"	"	"	"	"	
Benzo (a) anthracene	"	113	-----	2.63	"	"	"	"	"	
Benzo (a) pyrene	"	116	-----	2.63	"	"	"	"	"	
Benzo (b) fluoranthene	"	57.4	-----	2.63	"	"	"	"	"	
Benzo (k) fluoranthene	"	60.6	-----	2.63	"	"	"	"	"	
Benzo (ghi) perylene	"	79.0	-----	2.63	"	"	"	"	"	
Chrysene	"	146	-----	2.63	"	"	"	"	"	
Dibenz (a,h) anthracene	"	22.8	-----	2.63	"	"	"	"	"	
Fluoranthene	"	321	-----	2.63	"	"	"	"	"	
Fluorene	"	313	-----	2.63	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	58.5	-----	2.63	"	"	"	"	"	
1-Methylnaphthalene	"	340	-----	2.63	"	"	"	"	"	
2-Methylnaphthalene	"	513	-----	2.63	"	"	"	"	"	E
Naphthalene	"	545	-----	2.63	"	"	"	"	"	E
Phenanthrene	"	856	-----	2.63	"	"	"	"	"	E
Pyrene	"	428	-----	2.63	"	"	"	"	"	E

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					
Surrogate(s): p-Terphenyl-d14			*70.1%*		*50 - 147 %*	"			"	*Z3*
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
Acenaphthene	EPA 8270-SIM	ND	-----	0.114	mg/kg dry	10x	7E25030	05/31/07 11:12	06/06/07 16:50	
Acenaphthylene	"	0.523	-----	0.114	"	"	"	"	"	
Anthracene	"	0.774	-----	0.114	"	"	"	"	"	
Benzo (a) anthracene	"	0.265	-----	0.114	"	"	"	"	"	
Benzo (a) pyrene	"	0.394	-----	0.114	"	"	"	"	"	
Benzo (b) fluoranthene	"	0.152	-----	0.114	"	"	"	"	"	
Benzo (k) fluoranthene	"	0.250	-----	0.114	"	"	"	"	"	
Benzo (ghi) perylene	"	0.159	-----	0.114	"	"	"	"	"	
Chrysene	"	0.349	-----	0.114	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.114	"	"	"	"	"	
Fluoranthene	"	0.933	-----	0.114	"	"	"	"	"	
Fluorene	"	0.781	-----	0.114	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	0.129	-----	0.114	"	"	"	"	"	
1-Methylnaphthalene	"	0.986	-----	0.114	"	"	"	"	"	
2-Methylnaphthalene	"	1.44	-----	0.114	"	"	"	"	"	
Naphthalene	"	1.27	-----	0.114	"	"	"	"	"	
Phenanthrene	"	2.66	-----	0.114	"	"	"	"	"	
Pyrene	"	1.27	-----	0.114	"	"	"	"	"	
Surrogate(s): p-Terphenyl-d14			*72.6%*		*50 - 147 %*	"			"	
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
Acenaphthene	EPA 8270-SIM	ND	-----	1.47	mg/kg dry	50x	7E25030	05/31/07 11:12	06/06/07 19:40	
Acenaphthylene	"	ND	-----	1.47	"	"	"	"	"	
Anthracene	"	1.47	-----	1.47	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	1.47	"	"	"	"	"	
Benzo (a) pyrene	"	2.84	-----	1.47	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	1.47	"	"	"	"	"	
Benzo (k) fluoranthene	"	1.76	-----	1.47	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	1.47	"	"	"	"	"	
Chrysene	"	ND	-----	1.47	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	1.47	"	"	"	"	"	
Fluoranthene	"	ND	-----	1.47	"	"	"	"	"	
Fluorene	"	ND	-----	1.47	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	1.47	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	1.47	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	1.47	"	"	"	"	"	
Naphthalene	"	ND	-----	1.47	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
Phenanthrene	EPA 8270-SIM	4.21	-----	1.47	mg/kg dry	50x	7E25030	05/31/07 11:12	06/06/07 19:40	
Pyrene	"	1.96	-----	1.47	"	"	"	"	"	
Surrogate(s): p-Terphenyl-d14			*120%*		*50 - 147 %*	"			"	*Z3*
BQE0385-12 (MW-8-25.0)		Soil			Sampled: 05/22/07 14:05					
Acenaphthene	EPA 8270-SIM	ND	-----	1.48	mg/kg dry	50x	7E25030	05/31/07 11:12	06/06/07 20:14	
Acenaphthylene	"	6.24	-----	1.48	"	"	"	"	"	
Anthracene	"	14.9	-----	1.48	"	"	"	"	"	
Benzo (a) anthracene	"	37.6	-----	1.48	"	"	"	"	"	
Benzo (a) pyrene	"	47.0	-----	1.48	"	"	"	"	"	
Benzo (b) fluoranthene	"	27.3	-----	1.48	"	"	"	"	"	
Benzo (k) fluoranthene	"	29.0	-----	1.48	"	"	"	"	"	
Benzo (ghi) perylene	"	39.5	-----	1.48	"	"	"	"	"	
Chrysene	"	53.1	-----	1.48	"	"	"	"	"	
Dibenz (a,h) anthracene	"	10.3	-----	1.48	"	"	"	"	"	
Fluoranthene	"	65.2	-----	1.48	"	"	"	"	"	
Fluorene	"	ND	-----	1.48	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	28.7	-----	1.48	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	1.48	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	1.48	"	"	"	"	"	
Naphthalene	"	ND	-----	1.48	"	"	"	"	"	
Phenanthrene	"	17.2	-----	1.48	"	"	"	"	"	
Pyrene	"	147	-----	1.48	"	"	"	"	"	
Surrogate(s): p-Terphenyl-d14			*82.6%*		*50 - 147 %*	"			"	*Z3*

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Conventional Chemistry Parameters by APHA/EPA Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		Soil			Sampled: 05/22/07 08:55					
Hexavalent Chromium	EPA 7196A	ND	-----	1.1	mg/kg dry	1x	7F04030	06/04/07 10:44	06/07/07 21:00	
BQE0385-04 (MW-3-25.0)		Soil			Sampled: 05/22/07 09:40					
Hexavalent Chromium	EPA 7196A	ND	-----	1.1	mg/kg dry	1x	7F04030	06/04/07 10:44	06/07/07 21:00	
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
Hexavalent Chromium	EPA 7196A	ND	-----	1.1	mg/kg dry	1x	7F04030	06/04/07 10:44	06/07/07 21:00	
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					
Hexavalent Chromium	EPA 7196A	ND	-----	1.1	mg/kg dry	1x	7F04030	06/04/07 10:44	06/07/07 21:00	
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
Hexavalent Chromium	EPA 7196A	ND	-----	1.0	mg/kg dry	1x	7F04030	06/04/07 10:44	06/07/07 21:00	
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
Hexavalent Chromium	EPA 7196A	ND	----	1.0	mg/kg dry	1x	7F04030	06/04/07 10:44	06/07/07 21:00	
BQE0385-12 (MW-8-25.0)		Soil			Sampled: 05/22/07 14:05					
Hexavalent Chromium	EPA 7196A	ND	----	1.1	mg/kg dry	1x	7F04030	06/04/07 10:44	06/07/07 21:00	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Physical Parameters by APHA/ASTM/EPA Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		Soil			Sampled: 05/22/07 08:55					
Dry Weight	BSOPSPL003R08	83.3	-----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	
BQE0385-04 (MW-3-25.0)		Soil			Sampled: 05/22/07 09:40					
Dry Weight	BSOPSPL003R08	92.6	-----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
Dry Weight	BSOPSPL003R08	87.0	-----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					
Dry Weight	BSOPSPL003R08	94.0	-----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
Dry Weight	BSOPSPL003R08	87.9	-----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
Dry Weight	BSOPSPL003R08	84.9	-----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	
BQE0385-12 (MW-8-25.0)		Soil			Sampled: 05/22/07 14:05					
Dry Weight	BSOPSPL003R08	83.9	-----	1.00	%	1x	7E25053	05/25/07 16:43	05/29/07 00:00	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Gasoline Hydrocarbons by NWTPH-Gx and BTEX by EPA Method 8021B

TestAmerica - Spokane, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		Soil			Sampled: 05/22/07 08:55					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	645	-----	120	mg/kg dry	10x	7060006	06/01/07 12:05	06/01/07 16:34	
Surrogate(s): 4-BFB (FID)			227%		50 - 150 %	"			"	ZX
BQE0385-04 (MW-3-25.0)		Soil			Sampled: 05/22/07 09:40					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	ND	-----	10.8	mg/kg dry	1x	7060006	06/01/07 12:05	06/01/07 16:59	
Surrogate(s): 4-BFB (FID)			90.8%		50 - 150 %	"			"	
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	ND	-----	11.5	mg/kg dry	1x	7060006	06/01/07 12:05	06/01/07 17:48	
Surrogate(s): 4-BFB (FID)			86.7%		50 - 150 %	"			"	
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	541	-----	89.9	mg/kg dry	10x	7060006	06/01/07 12:05	06/01/07 18:13	
Surrogate(s): 4-BFB (FID)			185%		50 - 150 %	"			"	ZX
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	ND	-----	9.16	mg/kg dry	2x	7060006	06/01/07 12:05	06/01/07 18:38	
Surrogate(s): 4-BFB (FID)			65.6%		50 - 150 %	"			"	
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	ND	-----	11.8	mg/kg dry	1x	7060006	06/01/07 12:05	06/01/07 19:27	
Surrogate(s): 4-BFB (FID)			99.6%		50 - 150 %	"			"	
BQE0385-12 (MW-8-25.0)		Soil			Sampled: 05/22/07 14:05					
Gasoline Range Hydrocarbons	NWTPH-Gx/802 1B	ND	-----	11.9	mg/kg dry	1x	7060006	06/01/07 12:05	06/04/07 13:16	
Surrogate(s): 4-BFB (FID)			86.0%		50 - 150 %	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Conventional Chemistry Parameters by APHA/EPA Methods

TestAmerica - Spokane, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		Soil			Sampled: 05/22/07 08:55					
% Solids	TA SOP	83.3	-----	0.0100	% by Weight	1x	7060022	05/25/07 16:43	05/29/07 00:00	
BQE0385-04 (MW-3-25.0)		Soil			Sampled: 05/22/07 09:40					
% Solids	TA SOP	92.6	----	0.0100	% by Weight	1x	7060022	05/25/07 16:43	05/29/07 00:00	
BQE0385-07 (MW-6-5.0)		Soil			Sampled: 05/22/07 11:25					
% Solids	TA SOP	87.0	---	0.0100	% by Weight	1x	7060022	05/25/07 16:43	05/29/07 00:00	
BQE0385-08 (MW-6-10.0)		Soil			Sampled: 05/22/07 11:40					
% Solids	TA SOP	94.0	---	0.0100	% by Weight	1x	7060022	05/25/07 16:43	05/29/07 00:00	
BQE0385-10 (MW-6-35.0)		Soil			Sampled: 05/22/07 12:20					
% Solids	TA SOP	87.3	---	0.0100	% by Weight	1x	7060011	06/04/07 08:28	06/04/07 08:52	
BQE0385-11 (MW-8-10.0)		Soil			Sampled: 05/22/07 13:45					
% Solids	TA SOP	84.9	---	0.0100	% by Weight	1x	7060022	05/25/07 16:43	05/29/07 00:00	
BQE0385-12 (MW-8-25.0)		Soil			Sampled: 05/22/07 14:05					
% Solids	TA SOP	83.9	---	0.0100	% by Weight	1x	7060022	05/25/07 16:43	05/29/07 00:00	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Organotins

STL Seattle

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-01 (MW-3-5.0)		**Soil**			**Sampled: 05/22/07 08:55**					
Dibutyltin	Organotins	ND	-----	0.79	ug/Kg dry	1x	19029	05/25/07 02:36	05/31/07 01:27	
Monobutyltin	"	ND	-----	0.79	"	"	"	"	"	
Tetra-n-butyltin	"	ND	-----	2.1	"	"	"	"	"	
Tributyltin	"	ND	-----	0.79	"	"	"	"	"	
Surrogate(s): Tripentyltin			*110%*		*42 - 192 %*	"			"	
BQE0385-04 (MW-3-25.0)		**Soil**			**Sampled: 05/22/07 09:40**					
Dibutyltin	Organotins	ND	-----	0.69	ug/Kg dry	1x	19029	05/25/07 02:36	05/31/07 01:50	
Monobutyltin	"	ND	-----	0.69	"	"	"	"	"	
Tetra-n-butyltin	"	ND	-----	1.9	"	"	"	"	"	
Tributyltin	"	ND	-----	0.69	"	"	"	"	"	
Surrogate(s): Tripentyltin			*175%*		*42 - 192 %*	"			"	
BQE0385-07 (MW-6-5.0)		**Soil**			**Sampled: 05/22/07 11:25**					
Dibutyltin	Organotins	ND	-----	0.74	ug/Kg dry	1x	19029	05/25/07 02:36	05/31/07 02:13	
Monobutyltin	"	ND	-----	0.74	"	"	"	"	"	
Tetra-n-butyltin	"	ND	-----	2.0	"	"	"	"	"	
Tributyltin	"	ND	-----	0.74	"	"	"	"	"	
Surrogate(s): Tripentyltin			*89%*		*42 - 192 %*	"			"	
BQE0385-08 (MW-6-10.0)		**Soil**			**Sampled: 05/22/07 11:40**					
Dibutyltin	Organotins	ND	-----	0.72	ug/Kg dry	1x	19029	05/25/07 02:36	05/31/07 02:36	
Monobutyltin	"	ND	-----	0.72	"	"	"	"	"	
Tetra-n-butyltin	"	ND	-----	2.0	"	"	"	"	"	
Tributyltin	"	ND	-----	0.72	"	"	"	"	"	
Surrogate(s): Tripentyltin			*119%*		*42 - 192 %*	"			"	
BQE0385-11 (MW-8-10.0)		**Soil**			**Sampled: 05/22/07 13:45**					
Dibutyltin	Organotins	ND	-----	0.72	ug/Kg dry	1x	19029	05/25/07 02:36	05/31/07 02:59	
Monobutyltin	"	ND	-----	0.72	"	"	"	"	"	
Tetra-n-butyltin	"	ND	-----	1.9	"	"	"	"	"	
Tributyltin	"	ND	-----	0.72	"	"	"	"	"	
Surrogate(s): Tripentyltin			*94%*		*42 - 192 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Organotins
STL Seattle

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQE0385-12 (MW-8-25.0)		**Soil**			**Sampled: 05/22/07 14:05**					
Dibutyltin	Organotins	ND	-----	0.76	ug/Kg dry	1x	19029	05/25/07 02:36	05/31/07 03:22	
Monobutyltin	"	ND	-----	0.76	"	"	"	"	"	
Tetra-n-butyltin	"	ND	-----	2.1	"	"	"	"	"	
Tributyltin	"	ND	-----	0.76	"	"	"	"	"	
Surrogate(s): Tripentyltin			*107%*		*42 - 192 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Petroleum Products by NWTPH-Dx with Acid/Silica Gel Clean-up - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29047 **Soil Preparation Method: EPA 3550B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29047-BLK1)								Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	ND	---	10.0	mg/kg wet	1x	--	--	--	--	--	--	05/29/07 23:07	
Lube Oil Range Hydrocarbons	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Surrogate(s): 2-FBP		*Recovery:*	*69.9%*		*Limits:*	*54-148%*	"						*05/29/07 23:07*	
Octacosane			*91.8%*			*62-142%*	"						"	
LCS (7E29047-BS1)								Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	71.2	---	10.0	mg/kg wet	1x	--	66.7	107%	(78-129)	--	--	05/29/07 23:37	
Surrogate(s): 2-FBP		*Recovery:*	*80.4%*		*Limits:*	*54-148%*	"						*05/29/07 23:37*	
Octacosane			*90.8%*			*62-142%*	"						"	
Duplicate (7E29047-DUP1)					QC Source: BQE0385-08			Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	6040	---	107	mg/kg dry	10x	3770	--	--	--	46.3%	(50)	05/30/07 00:06	QP
Lube Oil Range Hydrocarbons	"	703	---	269	"	"	390	--	--	--	57.3%	"	"	QP, R3
Surrogate(s): 2-FBP		*Recovery:*	*98.2%*		*Limits:*	*54-148%*	"						*05/30/07 00:06*	
Octacosane			*277%*			*62-142%*	"						"	*ZX*
Duplicate (7E29047-DUP2)					QC Source: BQE0417-03			Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	5110	---	111	mg/kg dry	10x	4370	--	--	--	15.6%	(50)	05/30/07 00:35	
Lube Oil Range Hydrocarbons	"	ND	---	277	"	"	ND	--	--	--	12.1%	"	"	R4
Surrogate(s): 2-FBP		*Recovery:*	*112%*		*Limits:*	*54-148%*	"						*05/30/07 00:35*	
Octacosane			*140%*			*62-142%*	"						"	
Matrix Spike (7E29047-MS1)					QC Source: BQE0385-08			Extracted: 05/29/07 13:36						
Diesel Range Hydrocarbons	NWTPH-Dx	6140	---	107	mg/kg dry	10x	3770	71.6	3310%	(46-155)	--	--	05/30/07 01:04	M1
Surrogate(s): 2-FBP		*Recovery:*	*96.8%*		*Limits:*	*54-148%*	"						*05/30/07 01:04*	
Octacosane			*305%*			*62-142%*	"						"	*ZX*

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Cas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25029 **Soil Preparation Method: EPA 3050B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25029-BLK1)								Extracted: 05/25/07 10:36						
Arsenic	EPA 6020	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	05/29/07 07:57	
Thallium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Selenium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Nickel	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Copper	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Lead	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Cadmium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Chromium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Antimony	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
Zinc	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Beryllium	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Silver	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
LCS (7E25029-BS1)								Extracted: 05/25/07 10:36						
Copper	EPA 6020	43.3	---	0.500	mg/kg wet	1x	--	40.0	108%	(80-120)	--	--	05/29/07 08:03	
Arsenic	"	42.3	---	0.500	"	"	--	"	106%	"	--	--	"	
Zinc	"	42.3	---	5.00	"	"	--	"	106%	"	--	--	"	
Nickel	"	42.3	---	0.500	"	"	--	"	106%	"	--	--	"	
Thallium	"	41.7	---	0.500	"	"	--	"	104%	"	--	--	"	
Antimony	"	34.1	---	1.50	"	"	--	30.0	114%	"	--	--	"	
Beryllium	"	43.0	---	0.500	"	"	--	40.0	108%	"	--	--	"	
Cadmium	"	43.0	---	0.500	"	"	--	"	108%	"	--	--	"	
Silver	"	43.3	---	0.500	"	"	--	"	108%	"	--	--	"	
Selenium	"	41.2	---	0.500	"	"	--	"	103%	"	--	--	"	
Chromium	"	42.4	---	0.500	"	"	--	"	106%	"	--	--	"	
Lead	"	42.9	---	0.500	"	"	--	"	107%	"	--	--	"	
Duplicate (7E25029-DUP1)					QC Source: BQE0385-04			Extracted: 05/25/07 10:36						
Silver	EPA 6020	ND	---	0.540	mg/kg dry	1x	ND	--	--	--	13.3%	(50)	05/29/07 08:20	R4
Nickel	"	35.5	---	0.540	"	"	36.2	--	--	--	1.95%	(30)	"	
Thallium	"	ND	---	0.540	"	"	ND	--	--	--	NR	"	"	R4
Zinc	"	24.8	---	5.40	"	"	24.9	--	--	--	0.402%	"	"	
Selenium	"	ND	---	0.540	"	"	ND	--	--	--	NR	"	"	R4
Beryllium	"	ND	---	0.540	"	"	ND	--	--	--	6.16%	"	"	R4
Antimony	"	ND	---	1.62	"	"	ND	--	--	--		"	"	R4
Copper	"	10.7	---	0.540	"	"	11.0	--	--	--	2.76%	"	"	
Arsenic	"	1.30	---	0.540	"	"	1.27	--	--	--	2.33%	"	"	
Chromium	"	23.9	---	0.540	"	"	23.9	--	--	--	0.00%	"	"	
Cadmium	"	ND	---	0.540	"	"	ND	--	--	--	19.4%	"	"	R4

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25029 **Soil Preparation Method: EPA 3050B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Duplicate (7E25029-DUP1)				QC Source: BQE0385-04				Extracted: 05/25/07 10:36						
Lead	EPA 6020	1.50	---	0.540	mg/kg dry	1x	1.54	--	--	--	2.63%	(30)	05/29/07 08:20	
Matrix Spike (7E25029-MS1)				QC Source: BQE0385-04				Extracted: 05/25/07 10:36						
Antimony	EPA 6020	4.07	---	1.62	mg/kg dry	1x	ND	32.4	12.6%	(10-120)	--	--	05/29/07 08:15	
Lead	"	45.6	---	0.540	"	"	1.54	43.2	102%	(29-166)	--	--	"	
Thallium	"	42.7	---	0.540	"	"	ND	"	98.8%	(75-120)	--	--	"	
Silver	"	44.1	---	0.540	"	"	0.0756	"	102%	(54-126)	--	--	"	
Zinc	"	67.3	---	5.40	"	"	24.9	"	98.1%	(20-160)	--	--	"	
Arsenic	"	44.6	---	0.540	"	"	1.27	"	100%	(57-125)	--	--	"	
Selenium	"	42.0	---	0.540	"	"	ND	"	97.2%	(61-120)	--	--	"	
Nickel	"	80.7	---	0.540	"	"	36.2	"	103%	(35-150)	--	--	"	
Beryllium	"	45.1	---	0.540	"	"	0.173	"	104%	(72-122)	--	--	"	
Copper	"	54.8	---	0.540	"	"	11.0	"	101%	(20-148)	--	--	"	
Cadmium	"	45.4	---	0.540	"	"	0.0756	"	105%	(80-120)	--	--	"	
Chromium	"	66.2	---	0.540	"	"	23.9	"	97.9%	(30-163)	--	--	"	
Post Spike (7E25029-PS1)				QC Source: BQE0385-04				Extracted: 05/25/07 10:36						
Beryllium	EPA 6020	0.0988	---		ug/ml	1x	0.000320	0.100	98.5%	(75-125)	--	--	05/29/07 08:09	
Nickel	"	0.164	---		"	"	0.0670	0.0995	97.5%	"	--	--	"	
Copper	"	0.120	---		"	"	0.0204	0.101	98.6%	"	--	--	"	
Cadmium	"	0.100	---		"	"	0.000140	0.100	99.9%	"	--	--	"	
Chromium	"	0.144	---		"	"	0.0442	"	99.8%	"	--	--	"	
Arsenic	"	0.105	---		"	"	0.00235	"	103%	"	--	--	"	
Lead	"	0.101	---		"	"	0.00285	0.0995	98.6%	"	--	--	"	
Antimony	"	0.0486	---		"	"	0.0000700	0.0500	97.1%	"	--	--	"	
Thallium	"	0.0957	---		"	"	0.0000500	0.100	95.6%	"	--	--	"	
Silver	"	0.0994	---		"	"	0.000140	"	99.3%	"	--	--	"	
Selenium	"	0.0959	---		"	"	0.000170	"	95.7%	"	--	--	"	
Zinc	"	0.144	---		"	"	0.0461	0.0995	98.4%	"	--	--	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7E2905S **Soil Preparation Method: EPA 7471A**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29055-BLK1)								Extracted: 05/29/07 15:13						
Mercury	EPA 7471A	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/30/07 11:55	
LCS (7E29055-BS1)								Extracted: 05/29/07 15:13						
Mercury	EPA 7471A	0.697	---	0.100	mg/kg wet	1x	--	0.667	104%	(80-120)	--	--	05/30/07 11:57	
LCS Dup (7E29055-BSD1)								Extracted: 05/29/07 15:13						
Mercury	EPA 7471A	0.690	---	0.100	mg/kg wet	1x	--	0.667	103%	(80-120)	1.01%	(20)	05/30/07 11:59	
Duplicate (7E29055-DUP1)				QC Source: BQE0338-51				Extracted: 05/29/07 15:13						
Mercury	EPA 7471A	ND	---	0.106	mg/kg dry	1x	ND	--	--	--	NR	(30)	05/30/07 12:05	R4
Matrix Spike (7E29055-MS1)				QC Source: BQE0338-51				Extracted: 05/29/07 15:13						
Mercury	EPA 7471A	0.777	---	0.106	mg/kg dry	1x	ND	0.707	110%	(70-130)	--	--	05/30/07 12:02	

QC Batch: 7E29064 **Soil Preparation Method: EPA 7471A**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29064-BLK1)								Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/30/07 13:44	
LCS (7E29064-BS1)								Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	0.694	---	0.100	mg/kg wet	1x	--	0.667	104%	(80-120)	--	--	05/30/07 13:46	
LCS Dup (7E29064-BSD1)								Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	0.649	---	0.100	mg/kg wet	1x	--	0.667	97.3%	(80-120)	6.70%	(20)	05/30/07 13:49	
Duplicate (7E29064-DUP1)				QC Source: BQE0473-01				Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	ND	---	0.106	mg/kg dry	1x	ND	--	--	--	1 32%	(30)	05/30/07 13:54	R4
Matrix Spike (7E29064-MS1)				QC Source: BQE0473-01				Extracted: 05/29/07 18:21						
Mercury	EPA 7471A	0.810	---	0.106	mg/kg dry	1x	0.0229	0.709	111%	(70-130)	--	--	05/30/07 13:51	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody documeni. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Polychlorinated Biphenyls by EPA Method 8082 - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7E30046 **Soil Preparation Method: EPA 3550B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E30046-BLK1)								Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	ND	---	25.0	ug/kg wet	1x	--	--	--	--	--	--	05/30/07 20:50	
Aroclor 1221	"	ND	---	50.0	"	"	--	--	--	--	--	--	"	
Aroclor 1232	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1242	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1248	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1254	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1260	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1262	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Aroclor 1268	"	ND	---	25.0	"	"	--	--	--	--	--	--	"	
Surrogate(s): TCX		*Recovery: 95.1%*			*Limits: 39-139%*	"							05/30/07 20:50	
Decachlorobiphenyl		*97 3%*			*33-163%*	"							"	
LCS (7E30046-BS1)								Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	78.6	---	25.0	ug/kg wet	1x	--	83.3	94.4%	(54-125)	--	--	05/30/07 22:34	
Aroclor 1260	"	82.3	---	25.0	"	"	--	"	98.8%	(58-128)	--	--	"	
Surrogate(s): TCX		*Recovery: 92.8%*			*Limits: 39-139%*	"							05/30/07 22:34	
Decachlorobiphenyl		*101%*			*33-163%*	"							"	
Matrix Spike (7E30046-MS1)				QC Source: BQE0504-01				Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	92.1	---	27.5	ug/kg dry	1x	ND	91.6	101%	(47-134)	--	--	05/30/07 21:58	
Aroclor 1260	"	130	---	27.5	"	"	43.6	"	94.3%	(22-171)	--	--	"	
Surrogate(s): TCX		*Recovery: 92.1%*			*Limits: 39-139%*	"							05/30/07 21:58	
Decachlorobiphenyl		*89.2%*			*33-163%*	"							"	
Matrix Spike Dup (7E30046-MSD1)				QC Source: BQE0504-01				Extracted: 05/30/07 14:09						
Aroclor 1016	EPA 8082	90.2	---	27.5	ug/kg dry	1x	ND	91.6	98.5%	(47-134)	2.08%	(35)	05/30/07 22:16	
Aroclor 1260	"	128	---	27.5	"	"	43.6	"	92.1%	(22-171)	1.55%	"	"	
Surrogate(s): TCX		*Recovery: 93.0%*			*Limits: 39-139%*	"							05/30/07 22:16	
Decachlorobiphenyl		*98 1%*			*33-163%*	"							"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7E24024 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E24024-BLK1)								Extracted: 05/24/07 08:26						
Acetone	EPA 8260B	ND	---	30.0	ug/kg wet	1x	--	--	--	--	--	--	05/24/07 11:36	
Benzene	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	15.0	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2-Dibromoethane (EDB)	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	4.00	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E24024 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E24024-BLK1)								Extracted: 05/24/07 08:26						
Hexachlorobutadiene	EPA 8260B	ND	---	10.0	ug/kg wet	1x	--	--	--	--	--	--	05/24/07 11:36	
Methyl tert-butyl ether	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	3.50	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
o-Xylene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
m,p-Xylene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*1,2-DCA-d4*	*Recovery:* *114%*	*Limits:* *60-140%*	"	*05/24/07 11:36*
	Toluene-d8	*98.8%*	*60-140%*	"	"
	4-BFB	*107%*	*60-140%*	"	"

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody documeni. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E24024 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E24024-BS1)								Extracted: 05/24/07 08:26						
Acetone	EPA 8260B	315	---	30.0	ug/kg wet	1x	--	400	78.8%	(70-130)	--	--	05/24/07 10:17	
Benzene	"	39.0	---	1.50	"	"	--	40.0	97.5%	"	--	--	"	
2-Butanone	"	323	---	15.0	"	"	--	400	80.8%	"	--	--	"	
Carbon disulfide	"	40.4	---	3.00	"	"	--	40.0	101%	"	--	--	"	
Chlorobenzene	"	41.9	---	2.00	"	"	--	"	105%	"	--	--	"	
1,1-Dichloroethane	"	38.4	---	2.00	"	"	--	"	96.0%	"	--	--	"	
1,1-Dichloroethene	"	39.4	---	3.00	"	"	--	"	98.5%	"	--	--	"	
cis-1,2-Dichloroethene	"	39.6	---	3.00	"	"	--	"	99.0%	"	--	--	"	
Ethylbenzene	"	44.4	---	4.00	"	"	--	"	111%	"	--	--	"	
Hexachlorobutadiene	"	43.8	---	10.0	"	"	--	"	110%	"	--	--	"	
4-Methyl-2-pentanone	"	328	---	20.0	"	"	--	400	82.0%	"	--	--	"	
Tetrachloroethene	"	41.5	---	2.00	"	"	--	40.0	104%	"	--	--	"	
Toluene	"	41.6	---	1.50	"	"	--	"	104%	"	--	--	"	
1,1,1-Trichloroethane	"	38.4	---	2.50	"	"	--	"	96.0%	"	--	--	"	
Trichloroethene	"	36.6	---	2.50	"	"	--	"	91.5%	"	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 94.5%*			*Limits: 60-140%*	"							*05/24/07 10:17*	
Toluene-d8		*104%*			*60-140%*	"							"	
4-BFB		*97.5%*			*60-140%*	"							"	
LCS Dup (7E24024-BSD1)								Extracted: 05/24/07 08:26						
Acetone	EPA 8260B	340	---	30.0	ug/kg wet	1x	--	400	85.0%	(70-130)	7.63%	(30)	05/24/07 10:41	
Benzene	"	37.4	---	1.50	"	"	--	40.0	93.5%	"	4.19%	"	"	
2-Botanone	"	363	---	15.0	"	"	--	400	90.8%	"	11.7%	"	"	
Carbon disulfide	"	38.0	---	3.00	"	"	--	40.0	95.0%	"	6.12%	"	"	
Chlorobenzene	"	40.2	---	2.00	"	"	--	"	100%	"	4.14%	"	"	
1,1-Dichloroethaae	"	38.2	---	2.00	"	"	--	"	95.5%	"	0.522%	"	"	
1,1-Dichloroethene	"	37.5	---	3.00	"	"	--	"	93.8%	"	4.94%	"	"	
cis-1,2-Dichloroethene	"	39.7	---	3.00	"	"	--	"	99.2%	"	0.252%	"	"	
Ethylbenzene	"	40.6	---	4.00	"	"	--	"	102%	"	8.94%	"	"	
Hexachlorobutadiene	"	41.8	---	10.0	"	"	--	"	104%	"	4.67%	"	"	
4-Methyl-2-pentanone	"	377	---	20.0	"	"	--	400	94.2%	"	13.9%	"	"	
Tetrachloroethene	"	40.1	---	2.00	"	"	--	40.0	100%	"	3.43%	"	"	
Toluene	"	41.0	---	1.50	"	"	--	"	102%	"	1.45%	"	"	
1,1,1-Trichloroethane	"	37.5	---	2.50	"	"	--	"	93.8%	"	2.37%	"	"	
Trichloroethene	"	36.3	---	2.50	"	"	--	"	90.8%	"	0.823%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 105%*			*Limits: 60-140%*	"							*05/24/07 10:41*	
Toluene-d8		*107%*			*60-140%*	"							"	
4-BFB		*108%*			*60-140%*	"							"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25028 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25028-BLK1)								Extracted: 05/25/07 10:05						
Acetone	EPA 8260B	ND	---	30.0	ug/kg wet	1x	--	--	--	--	--	--	05/25/07 11:57	
Benzene	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	15.0	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2-Dibromoethane (EDB)	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	3.00	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	4.00	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25028 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25028-BLK1)								Extracted: 05/25/07 10:05						
Hexachlorobutadiene	EPA 8260B	ND	---	10.0	ug/kg wet	1x	--	--	--	--	--	--	05/25/07 11:57	
Methyl tert-butyl ether	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	3.50	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	1.50	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	1.25	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
o-Xylene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
m,p-Xylene	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*1,2-DCA-d4*	*Recovery: 106%*	*Limits: 60-140%*	"	*05/25/07 11:57*
	Toluene-d8	*99.5%*	*60-140%*	"	"
	4-BFB	*101%*	*60-140%*	"	"

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) per EPA Method 8260B (Low Soil Method) - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25028 **Soil Preparation Method: EPA 5035**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E25028-BS1)								Extracted: 05/25/07 10:05						
Acetone	EPA 8260B	411	---	30.0	ug/kg wet	1x	--	400	103%	(70-130)	--	--	05/25/07 10:40	
Benzene	"	38.3	---	1.50	"	"	--	40.0	95.8%	"	--	--	"	
2-Butanone	"	429	---	15.0	"	"	--	400	107%	"	--	--	"	
Carbon disulfide	"	40.0	---	3.00	"	"	--	40.0	100%	"	--	--	"	
Chlorobenzene	"	39.7	---	2.00	"	"	--	"	99.2%	"	--	--	"	
1,1-Dichloroethane	"	39.3	---	2.00	"	"	--	"	98.2%	"	--	--	"	
1,1-Dichloroethene	"	40.0	---	3.00	"	"	--	"	100%	"	--	--	"	
cis-1,2-Dichloroethene	"	42.8	---	3.00	"	"	--	"	107%	"	--	--	"	
Ethylbenzene	"	39.9	---	4.00	"	"	--	"	99.8%	"	--	--	"	
Hexachlorobutadiene	"	40.3	---	10.0	"	"	--	"	101%	"	--	--	"	
4-Methyl-2-pentanone	"	393	---	20.0	"	"	--	400	98.2%	"	--	--	"	
Tetrachloroethene	"	36.7	---	2.00	"	"	--	40.0	91.8%	"	--	--	"	
Toluene	"	38.3	---	1.50	"	"	--	"	95.8%	"	--	--	"	
1,1,1-Trichloroethane	"	41.5	---	2.50	"	"	--	"	104%	"	--	--	"	
Trichloroethene	"	37.1	---	2.50	"	"	--	"	92.8%	"	--	--	"	
Surrogate(s): *1,2-DCA-d4*		*Recovery:* *108%*			*Limits:* *60-140%*	"							05/25/07 10:40	
Toluene-d8		*99.5%*			*60-140%*	"							"	
4-BFB		*95.8%*			*60-140%*	"							"	
LCS Dup (7E25028-BSD1)								Extracted: 05/25/07 10:05						
Acetone	EPA 8260B	310	---	30.0	ug/kg wet	1x	--	400	77.5%	(70-130)	28.0%	(30)	05/25/07 11:05	
Benzene	"	39.0	---	1.50	"	"	--	40.0	97.5%	"	1.81%	"	"	
2-Butanone	"	345	---	15.0	"	"	--	400	86.2%	"	21.7%	"	"	
Carbon disulfide	"	38.9	---	3.00	"	"	--	40.0	97.2%	"	2.79%	"	"	
Chlorobenzene	"	39.5	---	2.00	"	"	--	"	98.8%	"	0.505%	"	"	
1,1-Dichloroethane	"	40.1	---	2.00	"	"	--	"	100%	"	2.02%	"	"	
1,1-Dichloroethene	"	38.3	---	3.00	"	"	--	"	95.8%	"	4.34%	"	"	
cis-1,2-Dichloroethene	"	42.0	---	3.00	"	"	--	"	105%	"	1.89%	"	"	
Ethylbenzene	"	41.4	---	4.00	"	"	--	"	104%	"	3.69%	"	"	
Hexachlorobutadiene	"	42.5	---	10.0	"	"	--	"	106%	"	5.31%	"	"	
4-Methyl-2-pentanone	"	355	---	20.0	"	"	--	400	88.8%	"	10.2%	"	"	
Tetrachloroethene	"	39.5	---	2.00	"	"	--	40.0	98.8%	"	7.35%	"	"	
Toluene	"	40.0	---	1.50	"	"	--	"	100%	"	4.34%	"	"	
1,1,1-Trichloroethane	"	41.2	---	2.50	"	"	--	"	103%	"	0.726%	"	"	
Trichloroethene	"	39.2	---	2.50	"	"	--	"	98.0%	"	5.50%	"	"	
Surrogate(s): *1,2-DCA-d4*		*Recovery:* *101%*			*Limits:* *60-140%*	"							05/25/07 11:05	
Toluene-d8		*103%*			*60-140%*	"							"	
4-BFB		*102%*			*60-140%*	"							"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25034 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25034-BLK1)								Extracted: 05/25/07 10:00						
1,2-Dibromoethane (EDB)	EPA 8260B	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/25/07 13:57	
Acetone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzene	"	ND	---	0.0200	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25034 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25034-BLK1)								Extracted: 05/25/07 10:00						
Hexachlorobutadiene	EPA 8260B	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	05/25/07 13:57	
Methyl tert-butyl ether	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethaoe	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethaoe	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	0.300	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*1,2-DCA-d4*	*Recovery:*	*98.5%*	*Limits: 75-125%*	"	*05/25/07 13:57*
	Toluene-d8		*102%*	*75-125%*	"	"
	4-BFB		*103%*	*75-125%*	"	"

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25034 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E25034-BS1)								Extracted: 05/25/07 10:00						
Benzene	EPA 8260B	1.91	---	0.0200	mg/kg wet	1x	--	2.00	95.5%	(75-125)	--	--	05/25/07 12:23	
Chlorobenzene	"	1.95	---	0.100	"	"	--	"	97.5%	"	--	--	"	
1,1-Dichloroethene	"	1.97	---	0.100	"	"	--	"	98.5%	(69-128)	--	--	"	
Trichloroethene	"	1.98	---	0.100	"	"	--	"	99.0%	(75-125)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*100%*		*Limits:*	*75-125%*	"						*05/25/07 12:23*	
Toluene-d8			*101%*			*75-125%*	"						"	
4-BFB			*98.5%*			*75-125%*	"						"	
LCS Dup (7E25034-BSD1)								Extracted: 05/25/07 10:00						
Benzene	EPA 8260B	2.04	---	0.0200	mg/kg wet	1x	--	2.00	102%	(75-125)	6.58%	(20)	05/25/07 12:50	
Chlorobenzene	"	2.05	---	0.100	"	"	--	"	102%	"	5.00%	"	"	
1,1-Dichloroethene	"	1.98	---	0.100	"	"	--	"	99.0%	(69-128)	0.506%	"	"	
Trichloroethene	"	2.09	---	0.100	"	"	--	"	104%	(75-125)	5.41%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*102%*		*Limits:*	*75-125%*	"						*05/25/07 12:50*	
Toluene-d8			*102%*			*75-125%*	"						"	
4-BFB			*97.0%*			*75-125%*	"						"	

QC Batch: 7E29028 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29028-BLK1)								Extracted: 05/30/07 12:08						
1,2-Dibromoethane (EDB)	EPA 8260B	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/30/07 19:15	
Acetone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzene	"	ND	---	0.0200	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2-Bulanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29028 Soil Preparation Method: EPA 5030B

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29028-BLK1)								Extracted: 05/30/07 12:08						
Chloromethane	EPA 8260B	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	05/30/07 19:15	
2-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Hexachlorobutadiene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Methyl tert-butyl ether	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29028 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29028-BLK1)								Extracted: 05/30/07 12:08						
1,1,1-Trichloroethane	EPA 8260B	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/30/07 19:15	
1,1,2-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	0.300	"	"	--	--	--	--	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*100%*		*Limits:*	*75-125%*	"						*05/30/07 19:15*	
Toluene-d8			*104%*			*75-125%*	"						"	
4-BFB			*103%*			*75-125%*	"						"	
Blank (7E29028-BLK2)								Extracted: 05/30/07 12:08						
1,2-Dibromoethane (EDB)	EPA 8260B	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/31/07 11:18	
Acetone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200, FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29028 Soil Preparation Method: EPA 5030B

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29028-BLK2)								Extracted: 05/30/07 12:08						
1,4-Dichlorobenzene	EPA 8260B	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	05/31/07 11:18	
Dichlorodifluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Hexachlorobutadiene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Methyl tert-butyl ether	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Tritnble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E29028 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E29028-BLK2)								Extracted: 05/30/07 12:08						
Total Xylenes	EPA 8260B	ND	---	0.300	mg/kg wet	1x	--	--	--	--	--	--	05/31/07 11:18	
Surrogate(s): 1,2-DCA-d4		*Recovery: 104%*			*Limits: 75-125%*	"							*05/31/07 11:18*	
Toluene-dS		*103%*			*75-125%*	"							"	
4-BFB		*99.0%*			*75-125%*	"							"	
LCS (7E29028-BS1)								Extracted: 05/30/07 12:08						
Benzene	EPA 8260B	2.13	---	0.0200	mg/kg wet	1x	--	2.00	106%	(75-125)	--	--	05/30/07 18:38	
Chlorobenzene	"	2.31	---	0.100	"	"	--	"	116%	"	--	--	"	
1,1-Dichloroethene	"	2.19	---	0.100	"	"	--	"	110%	(69-128)	--	--	"	
Trichloroethene	"	2.13	---	0.100	"	"	--	"	106%	(75-125)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 103%*			*Limits: 75-125%*	"							*05/30/07 18:38*	
Toluene-d8		*101%*			*75-125%*	"							"	
4-BFB		*99.0%*			*75-125%*	"							"	
Matrix Spike (7E29028-MS1)					QC Source: BQE0445-01			Extracted: 05/30/07 12:08						
Benzene	EPA 8260B	2.14	---	0.0193	mg/kg dry	1x	ND	1.93	111%	(75-131)	--	--	05/30/07 21:13	
Chlorobenzene	"	2.23	---	0.0965	"	"	ND	"	116%	(75-125)	--	--	"	
1,1-Dichloroethene	"	2.37	---	0.0965	"	"	ND	"	123%	(69-142)	--	--	"	
Trichloroethene	"	2.06	---	0.0965	"	"	ND	"	107%	(75-134)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 103%*			*Limits: 75-125%*	"							*05/30/07 21:13*	
Toluene-d8		*99.0%*			*75-125%*	"							"	
4-BFB		*93.8%*			*75-125%*	"							"	
Matrix Spike Dup (7E29028-MSD1)					QC Source: BQE0445-01			Extracted: 05/30/07 12:08						
Benzene	EPA 8260B	2.19	---	0.0194	mg/kg dry	1x	ND	1.94	113%	(75-131)	2.31%	(25)	05/30/07 21:42	
Chlorobenzene	"	2.33	---	0.0969	"	"	ND	"	120%	(75-125)	4.39%	"	"	
1,1-Dichloroethene	"	2.40	---	0.0969	"	"	ND	"	124%	(69-142)	1.26%	"	"	
Trichloroethene	"	2.15	---	0.0969	"	"	ND	"	111%	(75-134)	4.28%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 105%*			*Limits: 75-125%*	"							*05/30/07 21:42*	
Toluene-d8		*102%*			*75-125%*	"							"	
4-BFB		*91.8%*			*75-125%*	"							"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F040S3 Soil Preparation Method: EPA 5030B

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F04053-BLK1)								Extracted: 06/04/07 15:11						
1,2-Dibromoethane (EDB)	EPA 8260B	ND	---	0.100	mg/kg wet	1x	--	--	--	--	--	--	06/04/07 18:28	
Acetone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzene	"	ND	---	0.0200	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F04053 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F040S3-BLK1)								Extracted: 06/04/07 15:11						
Hexachlorobutadiene	EPA 8260B	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	06/04/07 18:28	
Methyl tert-butyl ether	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	0.300	"	"	--	--	--	--	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 97.0%*			*Limits: 75-125%*	"							*06/04/07 18:28*	
Toluene-d8		*102%*			*75-125%*	"							"	
4-BFB		*99.5%*			*75-125%*	"							"	

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Volatile Organic Compounds (Special List) by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F04053 **Soil Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7F04053-BS1)								Extracted: 06/04/07 15:11						
Benzene	EPA 8260B	2.03	---	0.0200	mg/kg wet	1x	--	2.00	102%	(75-125)	--	--	06/04/07 16:24	
Chlorobenzene	"	2.14	---	0.100	"	"	--	"	107%	"	--	--	"	
1,1-Dichloroethene	"	2.08	---	0.100	"	"	--	"	104%	(69-128)	--	--	"	
Trichloroethene	"	2.06	---	0.100	"	"	--	"	103%	(75-125)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:* 98.0%			*Limits:* 75-125%	"							06/04/07 16:24	
Toluene-d8		99.0%			75-125%	"							"	
4-BFB		101%			75-125%	"							"	
LCS Dup (7F04053-BSD1)								Extracted: 06/04/07 15:11						
Benzene	EPA 8260B	2.07	---	0.0200	mg/kg wet	1x	--	2.00	104%	(75-125)	1.95%	(20)	06/04/07 16:53	
Chlorobenzene	"	2.17	---	0.100	"	"	--	"	108%	"	1.39%	"	"	
1,1-Dichloroethene	"	2.14	---	0.100	"	"	--	"	107%	(69-128)	2.84%	"	"	
Trichloroethene	"	2.06	---	0.100	"	"	--	"	103%	(75-125)	0.00%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:* 99.0%			*Limits:* 75-125%	"							06/04/07 16:53	
Toluene-d8		99.5%			75-125%	"							"	
4-BFB		100%			75-125%	"							"	
Matrix Spike (7F04053-MS1)					QC Source: BQE0385-10			Extracted: 06/04/07 15:11						
Benzene	EPA 8260B	2.46	---	0.0228	mg/kg dry	1x	ND	2.28	108%	(75-131)	--	--	06/04/07 17:22	
Chlorobenzene	"	2.54	---	0.114	"	"	ND	"	111%	(75-125)	--	--	"	
1,1-Dichloroethene	"	2.60	---	0.114	"	"	ND	"	114%	(69-142)	--	--	"	
Trichloroethene	"	2.44	---	0.114	"	"	ND	"	107%	(75-134)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:* 98.7%			*Limits:* 75-125%	"							06/04/07 17:22	
Toluene-d8		98.7%			75-125%	"							"	
4-BFB		98.7%			75-125%	"							"	
Matrix Spike Dup (7F04053-MSD1)					QC Source: BQE0385-10			Extracted: 06/04/07 15:11						
Benzene	EPA 8260B	2.54	---	0.0228	mg/kg dry	1x	ND	2.28	111%	(75-131)	3.20%	(25)	06/04/07 17:51	
Chlorobenzene	"	2.59	---	0.114	"	"	ND	"	114%	(75-125)	1.95%	"	"	
1,1-Dichloroethene	"	2.67	---	0.114	"	"	ND	"	117%	(69-142)	2.66%	"	"	
Trichloroethene	"	2.50	---	0.114	"	"	ND	"	110%	(75-134)	2.43%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:* 99.1%			*Limits:* 75-125%	"							06/04/07 17:51	
Toluene-d8		98.7%			75-125%	"							"	
4-BFB		98.2%			75-125%	"							"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the wrinen approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method: EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25030-BLK1)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	ND	---	0.330	mg/kg wet	1x	--	--	--	--	--	--	06/07/07 01:12	
Acenaphthylene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Aniline	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (a) anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (a) pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (b) fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (k) fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzo (ghi) perylene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Benzoic Acid	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Benzyl alcohol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroethoxy)methane	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroethyl)ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-chloroisopropyl)ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Bis(2-ethylhexyl)phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Bromophenyl phenyl ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Butyl benzyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Carbazole	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Chloroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
4-Chloro-3-methylphenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Chloronaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Chlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Chlorophenyl phenyl ether	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
3 & 4-Methylpheool (m,p-Cresols)	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Methylphenol (o-Cresol)	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Chrysene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Di-n-butyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dibenz (a,h) anthracene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dibenzofuran	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
3,3'-Dichlorobenzidine	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
2,4-Dichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Diethyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4-Dimethylphenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Dimethyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4,6-Dinitro-2-methylphenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
2,4-Dinitrophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUTE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7E25030 Soil Preparation Method: EPA 3545

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25030-BLK1)								Extracted: 05/31/07 11:12						
2,4-Dinitrotoluene	EPA 8270C	ND	---	0.500	mg/kg wet	1x	--	--	--	--	--	--	06/07/07 01:12	
2,6-Dinitrotoluene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
N-Nitrosodiphenylamine	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Fluoranthene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Fluorene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorobutadiene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Hexachlorocyclopentadiene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	C5
Hexachloroethane	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Indeno (1,2,3-cd) pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Isophorone	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1-Methylnaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Methylnaphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
3-Nitroaniline	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
4-Nitroaoilinc	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Nitrobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2-Nitrophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
4-Nitrophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
N-Nitrosodi-n-propylamine	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Di-n-octyl phthalate	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Pentachlorophenol	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Phenanthrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Phenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
Pyrene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4,5-Trichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	
2,4,6-Trichlorophenol	"	ND	---	0.330	"	"	--	--	--	--	--	--	"	

Surrogate(s):	*2-FBP*	*Recovery: 99.1%*	*Limits: 27-126%*	"	06/07/07 01:12
	2-FP	*95.2%*	*16-121%*	"	"
	Nitrobenzene-d5	*111%*	*26-125%*	"	"
	Phenol-d6	*61.6%*	*10-120%*	"	"
	p-Terphenyl-d14	*105%*	*26-150%*	"	"
	2,4,6-TBP	*88.9%*	*10-152%*	"	"

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 **Soil Preparation Method:—EPA 3545**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E25030-BS1)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	2.78	---	0.330	mg/kg wet	1x	--	3.33	83.5%	(47-128)	--	--	06/07/07 01:45	
4-Chloro-3-methylphenol	"	2.86	---	0.330	"	"	--	"	85.9%	(49-130)	--	--	"	
2-Chlorophenol	"	2.89	---	0.330	"	"	--	"	86.8%	(51-120)	--	--	"	
1,4-Dichlorobenzene	"	2.79	---	0.330	"	"	--	"	83.8%	"	--	--	"	
2,4-Dinitrotoluene	"	2.97	---	0.500	"	"	--	"	89.2%	(51-135)	--	--	"	
4-Nitrophenol	"	2.78	---	0.500	"	"	--	"	83.5%	(32-155)	--	--	"	
N-Nitrosodi-n-propylamine	"	2.87	---	0.330	"	"	--	"	86.2%	(51-120)	--	--	"	
Pentachlorophenol	"	3.47	---	0.500	"	"	--	"	104%	(46-163)	--	--	"	
Phenol	"	2.86	---	0.330	"	"	--	"	85.9%	(50-122)	--	--	"	
Pyrene	"	3.09	---	0.330	"	"	--	"	92.8%	(45-138)	--	--	"	
1,2,4-Trichlorobenzene	"	2.89	---	0.330	"	"	--	"	86.8%	(47-120)	--	--	"	
Surrogate(s):	*2-FBP*	*Recovery:*	*97.3%*		*Limits:*	*27-126%*	"						06/07/07 01:45	
	2-FP		*90.7%*			*16-121%*	"						"	
	Nitrobenzene-d5		*91.6%*			*26-125%*	"						"	
	Phenol-d6		*59.5%*			*10-120%*	"						"	
	p-Terphenyl-d14		*102%*			*26-150%*	"						"	
	2,4,6-TBP		*105%*			*10-152%*	"						"	
Matrix Spike (7E2S030-MS1)					QC Source: BQE0385-04			Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270C	2.07	---	0.356	mg/kg dry	1x	ND	3.60	57.5%	(47-128)	--	--	06/07/07 02:18	
4-Chloro-3-methylphenol	"	2.19	---	0.356	"	"	ND	"	60.8%	(45-130)	--	--	"	
2-Chlorophenol	"	2.15	---	0.356	"	"	ND	"	59.7%	(48-120)	--	--	"	
1,4-Dichlorobenzene	"	2.12	---	0.356	"	"	ND	"	58.9%	(50-120)	--	--	"	
2,4-Dinitrotoluene	"	2.19	---	0.540	"	"	ND	"	60.8%	(34-154)	--	--	"	
4-Nitrophenol	"	1.97	---	0.540	"	"	ND	"	54.7%	(17-164)	--	--	"	
N-Nitrosodi-n-propylamine	"	2.22	---	0.356	"	"	ND	"	61.7%	(49-120)	--	--	"	
Pentachlorophenol	"	2.14	---	0.540	"	"	ND	"	59.4%	(22-183)	--	--	"	
Phenol	"	2.13	---	0.356	"	"	ND	"	59.2%	(32-132)	--	--	"	
Pyrene	"	2.19	---	0.356	"	"	ND	"	60.8%	(31-147)	--	--	"	
1,2,4-Trichlorobenzene	"	2.24	---	0.356	"	"	ND	"	62.2%	(47-120)	--	--	"	
Surrogate(s):	*2-FBP*	*Recovery:*	*60.0%*		*Limits:*	*27-126%*	"						06/07/07 02:18	
	2-FP		*56.9%*			*16-121%*	"						"	
	Nitrobenzene-d5		*60.6%*			*26-125%*	"						"	
	Phenol-d6		*38.1%*			*10-120%*	"						"	
	p-Terphenyl-d14		*59.7%*			*26-150%*	"						"	
	2,4,6-TBP		*62.2%*			*10-152%*	"						"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 Soil Preparation Method: EPA 3545

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Matrix Spike Dup (7E25030-MSD1)					QC Source: BQE0385-04				Extracted: 05/31/07 11:12					
Acenaphthene	EPA 8270C	1.87	---	0.356	mg/kg dry	1x	ND	3.60	51.9%	(47-128)	10.2%	(24)	06/07/07 02:51	
4-Chloro-3-methylphenol	"	2.00	---	0.356	"	"	ND	"	55.6%	(45-130)	9.07%	(23)	"	
2-Chlorophenol	"	1.92	---	0.356	"	"	ND	"	53.3%	(48-120)	11.3%	(27)	"	
1,4-Dichlorobenzene	"	1.88	---	0.356	"	"	ND	"	52.2%	(50-120)	12.0%	(34)	"	
2,4-Dinitrotoluene	"	1.99	---	0.540	"	"	ND	"	55.3%	(34-154)	9.57%	(24)	"	
4-Nitrophenol	"	1.75	---	0.540	"	"	ND	"	48.6%	(17-164)	11.8%	(31)	"	
N-Nitrosodi-n-propylamine	"	1.96	---	0.356	"	"	ND	"	54.4%	(49-120)	12.4%	"	"	
Pentachlorophenol	"	1.95	---	0.540	"	"	ND	"	54.2%	(22-183)	9.29%	(26)	"	
Phenol	"	1.88	---	0.356	"	"	ND	"	52.2%	(32-132)	12.5%	(31)	"	
Pyrene	"	1.99	---	0.356	"	"	ND	"	55.3%	(31-147)	9.57%	(26)	"	
1,2,4-Trichlorobenzene	"	2.04	---	0.356	"	"	ND	"	56.7%	(47-120)	9.35%	(25)	"	

Surrogate(s):		*Recovery:*		*Limits:*		
	2-FBP	53.6%	27-126%	"	06/07/07 02:51
	2-FP	49.7%	16-121%	"	"
	Nitrobenzene-d5	53.9%	26-125%	"	"
	Phenol-d6	33.6%	10-120%	"	"
	p-Terphenyl-d14	54.2%	26-150%	"	"
	2,4,6-TBP	54.7%	10-152%	"	"

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 Soil Preparation Method: EPA 3545

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25030-BLK2)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	ND	---	0.0100	mg/kg wet	1x	--	--	--	--	--	--	06/06/07 13:17	
Acenaphthylene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (a) anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (a) pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (b) fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (k) fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (ghi) perylene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Chrysene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Dibenz (a,h) anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Fluorene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Indeno (1,2,3-cd) pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
1-Methylnaphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
2-Methylnaphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Phenanthrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Surrogate(s): p-Terphenyl-d14		*Recovery: 83.8%*		*Limits: 50-147%*	"								*06/06/07 13:17*	
LCS (7E25030-BS2)								Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	0.613	---	0.0100	mg/kg wet	1x	--	0.667	91.9%	(70-125)	--	--	06/06/07 13:53	
Acenaphthylene	"	0.619	---	0.0100	"	"	--	"	92.8%	(70-133)	--	--	"	
Anthracene	"	0.653	---	0.0100	"	"	--	"	97.9%	(70-152)	--	--	"	
Benzo (a) anthracene	"	0.577	---	0.0100	"	"	--	"	86.5%	(60-125)	--	--	"	
Benzo (a) pyrene	"	0.600	---	0.0100	"	"	--	"	90.0%	(64-134)	--	--	"	
Benzo (b) fluoranthene	"	0.571	---	0.0100	"	"	--	"	85.6%	(62-147)	--	--	"	
Benzo (k) fluoranthene	"	0.551	---	0.0100	"	"	--	"	82.6%	(60-144)	--	--	"	
Benzo (ghi) perylene	"	0.695	---	0.0100	"	"	--	"	104%	(57-137)	--	--	"	
Chrysene	"	0.646	---	0.0100	"	"	--	"	96.9%	(70-139)	--	--	"	
Dibenz (a,h) anthracene	"	0.682	---	0.0100	"	"	--	"	102%	(56-140)	--	--	"	
Fluoranthene	"	0.609	---	0.0100	"	"	--	"	91.3%	(70-141)	--	--	"	
Fluorene	"	0.651	---	0.0100	"	"	--	"	97.6%	(76-132)	--	--	"	
Indeno (1,2,3-cd) pyrene	"	0.669	---	0.0100	"	"	--	"	100%	(55-138)	--	--	"	
1-Methylnaphthalene	"	0.615	---	0.0100	"	"	--	"	92.2%	(46-128)	--	--	"	
2-Methylnaphthalene	"	0.622	---	0.0100	"	"	--	"	93.3%	(41-125)	--	--	"	
Naphthalene	"	0.599	---	0.0100	"	"	--	"	89.8%	(43-125)	--	--	"	
Phenanthrene	"	0.576	---	0.0100	"	"	--	"	86.4%	(73-125)	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 Soil Preparation Method: EPA 3S4S

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7E25030-BS2)								Extracted: 05/31/07 11:12						
Pyrene	EPA 8270-SIM	0.570	---	0.0100	mg/kg wet	1x	--	0.667	85.5%	(68-140)	--	--	06/06/07 13:53	
Surrogate(s): p-Terphenyl-d14		*Recovery:*	*83.2%*		*Limits: 50-147%*	"							06/06/07 13:53	
Matrix Spike (7E25030-MS2)				QC Source: BQE0445-0S				Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	1.89	---	1.42	mg/kg dry	50x	2.37	0.758	-63.3%	(67-132)	--	--	06/07/07 15:37	M4
Acenaphthylene	"	0.947	---	1.42	"	"	0.284	"	87.5%	(65-142)	--	--	"	
Anthracene	"	2.84	---	1.42	"	"	3.50	"	-87.1%	(66-158)	--	--	"	M4
Benzo (a) anthracene	"	10.5	---	1.42	"	"	14.3	"	-501%	(41-156)	--	--	"	M4
Benzo (a) pyrene	"	15.2	---	1.42	"	"	19.8	"	-607%	(52-148)	--	--	"	M4
Benzo (b) fluoranthene	"	13.6	---	1.42	"	"	17.3	"	-488%	(53-151)	--	--	"	M4
Benzo (k) fluoranthene	"	13.4	---	1.42	"	"	15.5	"	-277%	(46-161)	--	--	"	M4
Benzo (ghi) perylene	"	9.66	---	1.42	"	"	15.1	"	-718%	(26-154)	--	--	"	M4
Chrysene	"	15.5	---	1.42	"	"	20.8	"	-699%	(55-155)	--	--	"	M4
Dibenz (a,h) anthracene	"	4.64	---	1.42	"	"	6.34	"	-224%	(27-157)	--	--	"	M4
Fluoranthene	"	15.2	---	1.42	"	"	22.0	"	-897%	(46-172)	--	--	"	M4
Fluorene	"	1.23	---	1.42	"	"	1.04	"	25.1%	(66-143)	--	--	"	M4
Indeno (1,2,3-cd) pyrene	"	8.90	---	1.42	"	"	12.6	"	-488%	(24-159)	--	--	"	M4
1-Methylnaphthalene	"	0.852	---	1.42	"	"	0.284	"	74.9%	(39-140)	--	--	"	
2-Methylnaphthalene	"	0.852	---	1.42	"	"	0.473	"	50.0%	(32-139)	--	--	"	
Naphthalene	"	1.04	---	1.42	"	"	0.568	"	62.3%	(38-134)	--	--	"	
Phenanthrene	"	6.16	---	1.42	"	"	11.0	"	-639%	(63-139)	--	--	"	M4
Pyrene	"	15.8	---	1.42	"	"	24.5	"	-1150%	(51-172)	--	--	"	M4
Surrogate(s): p-Terphenyl-d14		*Recovery:*	*117%*		*Limits: 50-147%*	"							06/07/07 15:37	Z3
Matrix Spike Dup (7E25030-MSD2)				QC Source: BQE044S-05				Extracted: 05/31/07 11:12						
Acenaphthene	EPA 8270-SIM	1.89	---	1.42	mg/kg dry	50x	2.37	0.758	-63.3%	(67-132)	0.00%	(50)	06/07/07 16:11	M4
Acenaphthylene	"	0.852	---	1.42	"	"	0.284	"	74.9%	(65-142)	10.6%	"	"	
Anthracene	"	3.03	---	1.42	"	"	3.50	"	-62.0%	(66-158)	6.47%	"	"	M4
Benzo (a) anthracene	"	10.2	---	1.42	"	"	14.3	"	-541%	(41-156)	2.90%	"	"	M4
Benzo (a) pyrene	"	15.5	---	1.42	"	"	19.8	"	-567%	(52-148)	1.95%	"	"	M4
Benzo (b) fluoranthene	"	14.7	---	1.42	"	"	17.3	"	-343%	(53-151)	7.77%	"	"	M4
Benzo (k) fluoranthene	"	12.7	---	1.42	"	"	15.5	"	-369%	(46-161)	5.36%	"	"	M4
Benzo (ghi) perylene	"	9.56	---	1.42	"	"	15.1	"	-731%	(26-154)	1.04%	"	"	M4
Chrysene	"	15.2	---	1.42	"	"	20.8	"	-739%	(55-155)	1.95%	(44)	"	M4
Dibenz (a,h) anthracene	"	4.83	---	1.42	"	"	6.34	"	-199%	(27-157)	4.01%	(50)	"	M4
Fluoranthene	"	15.3	---	1.42	"	"	22.0	"	-884%	(46-172)	0.656%	"	"	M4
Fluorene	"	1.23	---	1.42	"	"	1.04	"	25.1%	(66-143)	0.00%	(52)	"	M4
Indeno (1,2,3-cd) pyrene	"	9.09	---	1.42	"	"	12.6	"	-463%	(24-159)	2.11%	(43)	"	M4

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Polynuclear Aromatic Hydrocarbons by GC/MS-SIM - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25030 Soil Preparation Method: EPA 354S

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Matrix Spike Dup (7E25030-MSD2)				QC Source: BQE044S-05				Extracted: 05/31/07 11:12						
1-Methylnaphthalene	EPA 8270-SIM	0.758	---	1.42	mg/kg dry	50x	0.284	0.758	62.5%	(39-140)	11.7%	(50)	06/07/07 16:11	
2-Methylnaphthalene	"	0.852	---	1.42	"	"	0.473	"	50.0%	(32-139)	0.00%	"	"	
Naphthalene	"	1.04	---	1.42	"	"	0.568	"	62.3%	(38-134)	0.00%	"	"	
Phenanthrene	"	6.06	---	1.42	"	"	11.0	"	-652%	(63-139)	1.64%	"	"	M4
Pyrene	"	15.3	---	1.42	"	"	24.5	"	-1210%	(51-172)	3.22%	"	"	M4
Surrogate(s): p-Terphenyl-d14		*Recovery: 107%*		*Limits: 50-147%*	"								*06/07/07 16:11*	*Z3*

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Conventional Chemistry Parameters by APHA/EPA Methods - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7F04030 **Soil Preparation Method: Special Procedure**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F04030-BLK1)								Extracted: 06/04/07 10:44						
Hexavalent Chromium	EPA 7196A	ND	---	0.2	mg/kg wet	1x	--	--	--	--	--	--	06/07/07 21:00	
LCS (7F04030-BS1)								Extracted: 06/04/07 10:44						
Hexavalent Chromium	EPA 7196A	5.1	---	0.2	mg/kg wet	1x	--	6.25	81.6%	(80-120)	--	--	06/07/07 21:00	
Duplicate (7F04030-DUP1)					QC Source: BQE0385-04			Extracted: 06/04/07 10:44						
Hexavalent Chromium	EPA 7196A	ND	---	0.3	mg/kg dry	1x	ND	--	--	--	NR	(30)	06/07/07 21:00	
Matrix Spike (7F04030-MS1)					QC Source: BQE0385-04			Extracted: 06/04/07 10:44						
Hexavalent Chromium	EPA 7196A	4.9	---	0.3	mg/kg dry	1x	ND	6.75	72.6%	(75-125)	--	--	06/07/07 21:00	M2

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	**Old Bremerton Gas Works**	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Physical Parameters by APHA/ASTM/EPA Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7E25053 **Soil Preparation Method: Dry Weight**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7E25053-BLK1)								Extracted: 05/25/07 16:40						
Dry Weight	BSOPSPL00 3R08	100	---	1.00	%	1x	--	--	--	--	--	--	05/29/07 00:00	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Gasoline Hydrocarbons by NWTPH-Gx and BTEX by EPA Method 8021B - Laboratory Quality Control Results

TestAmerica - Spokane, WA

QC Batch: 7060006 **Soil Preparation Method: GC Volatiles**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blanlt (7060006-BLK1)								Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	ND	---	10.0	mg/kg wet	1x	--	--	--	--	--	--	06/01/07 12:26	
Surrogate(s): 4-BFB (FID)		*Recovery:*	*92.0%*		*Limits: 50-150%*	"							*06/01/07 12:26*	
LCS (7060006-BS1)								Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	44.0	---	10.0	mg/kg wet	1x	--	50.0	88.0%	(80-120)	--	--	06/01/07 12:50	
Surrogate(s): 4-BFB (FID)		*Recovery:*	*132%*		*Limits: 50-150%*	"							*06/01/07 12:50*	
Duplicate (7060006-DUP1)					QC Source: SQF0003-02			Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	ND	---	20.8	mg/kg dry	1x	ND	--	--	--	1.55%	(20)	06/01/07 15:44	
Surrogate(s): 4-BFB (FID)		*Recovery:*	*17.0%*		*Limits: 50-150%*	"							*06/01/07 15:44*	ZX
Duplicate (7060006-DUP2)					QC Source: BQE0385-10			Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	ND	---	9.16	mg/kg dry	2x	ND	--	--	--	94.3%	(20)	06/01/07 19:03	R4
Surrogate(s): 4-BFB (FID)		*Recovery:*	*65.1%*		*Limits: 50-150%*	"							*06/01/07 19:03*	
Matrix Spike (7060006-MS1)					QC Source: SQF0003-02			Extracted: 06/01/07 12:05						
Gasoline Range Hydrocarbons	NWTPH-Gx/ 8021B	11.1	---	20.8	mg/kg dry	1x	1.92	104	8.83%	(70-130)	--	--	06/01/07 16:09	M2
Surrogate(s): 4-BFB (FID)		*Recovery:*	*18.0%*		*Limits: 50-150%*	"							*06/01/07 16:09*	ZX

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Organotins - Laboratory Quality Control Results
STL Seattle

QC Batch: 19029 **Soil Preparation Method: Organotin Prep**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (580-19160-1)				QC Source:				Extracted: 05/25/07 02:36						
Dibutyltin	Organotins	ND	---	0.67	ug/Kg dry	1x	--	--	--	--	--	--	05/30/07 09:36	
Monobutyltin	"	ND	---	0.67	"	"	--	--	--	--	--	--	"	
Tetra-n-butyltin	"	ND	---	1.8	"	"	--	--	--	--	--	--	"	
Tributyltin	"	ND	---	0.67	"	"	--	--	--	--	--	--	"	
Surrogate(s): Tripentyltin		*Recovery: 81%*		*Limits: 42-192%*		"							05/30/07 09:36	
LCS (580-19160-2)				QC Source:				Extracted: 05/25/07 02:36						
Dibutyltin	Organotins	83.1	---	0.67	ug/Kg dry	1x	--	102	81%	(32-114)	--	--	05/30/07 09:59	
Monobutyltin	"	64.6	---	0.67	"	"	--	83.1	78%	(21-99)	--	--	"	
Tetra-n-butyltin	"	101	---	1.8	"	"	--	133	75%	(42-124)	--	--	"	
Tributyltin	"	98.1	---	0.67	"	"	--	119	83%	(29-110)	--	--	"	
Surrogate(s): Tripentyltin		*Recovery: 100%*		*Limits: 42-192%*		"							05/30/07 09:59	
LCS Dup (580-19160-3)				QC Source:				Extracted: 05/25/07 02:36						
Dibutyltin	Organotins	81.4	---	0.67	ug/Kg dry	1x	--	102	80%	(32-114)	2%	(30)	05/30/07 10:22	
Monobutyltin	"	62.2	---	0.67	"	"	--	83.1	75%	(21-99)	4%	(36)	"	
Tetra-n-butyltin	"	107	---	1.8	"	"	--	133	80%	(42-124)	6%	(25)	"	
Tributyltin	"	95.3	---	0.67	"	"	--	119	80%	(29-110)	3%	(28)	"	
Surrogate(s): Tripentyltin		*Recovery: 101%*		*Limits: 42-192%*		"							05/30/07 10:22	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Notes and Definitions

Report Specific Notes:

A-01	-	Analyte not within calibration range for this analysis. Please see 8270 results.
C5	-	Calibration Verification recovery was below the method control limit for this analyte. An additional check standard was analyzed at the reporting limit to ensure instrument sensitivity at the reporting limit. Samples ND.
E	-	Concentration exceeds the calibration range and therefore result is semi-quantitative.
M1	-	The MS and/or MSD were above the acceptance limits due to sample matrix interference. See Blank Spike (LCS).
M2	-	The MS and/or MSD were below the acceptance limits due to sample matrix interference. See Blank Spike (LCS).
M4	-	The sample required a dilution due to matrix interference. Because of this dilution, the matrix spike concentrations in the sample were reduced to a level where the recovery calculation does not provide useful information. See Blank Spike (LCS).
QP	-	Hydrocarbon result partly due to individual peak(s) in quantitation range.
R3	-	The RPD exceeded the acceptance limit due to sample matrix effects.
R4	-	Due to the low levels of analyte in the sample, the duplicate RPD calculation does not provide useful information.
RL7	-	Sample required dilution due to high concentrations of target analyte.
Z3	-	The sample required a dilution due to the nature of the sample matrix. Because of this dilution, the surrogate spike concentration in the sample was reduced to a level where the recovery calculation does not provide useful information.
Z6	-	Surrogate recovery was below acceptance limits.
ZX	-	Due to sample matrix effects, the surrogate recovery was outside the acceptance limits.

Laboratory Reporting Conventions:

DET	-	Analyte DETECTED at or above the Reporting Limit. Qualitative Analyses only.
ND	-	Analyte NOT DETECTED at or above the reporting limit (MDL or MRL, as appropriate).
NR/NA	-	Not Reported / Not Available
dry	-	Sample results reported on a Dry Weight Basis. Results and Reporting Limits have been corrected for Percent Dry Weight.
wet	-	Sample results and reporting limits reported on a Wet Weight Basis (as received). Results with neither 'wet' nor 'dry' are reported on a Wet Weight Basis.
RPD	-	RELATIVE PERCENT DIFFERENCE (RPDs calculated using Results, not Percent Recoveries).
MRL	-	METHOD REPORTING LIMIT. Reporting Level at, or above, the lowest level standard of the Calibration Table.
MDL*	-	METHOD DETECTION LIMIT. Reporting Level at, or above, the statistically derived limit based on 40CFR, Part 136, Appendix B. *MDLs are listed on the report only if the data has been evaluated below the MRL. Results between the MDL and MRL are reported as Estimated Results.
Dil	-	Dilutions are calculated based on deviations from the standard dilution performed for an analysis, and may not represent the dilution found on the analytical raw data.
Reporting Limits	-	Reporting limits (MDLs and MRLs) are adjusted based on variations in sample preparation amounts, analytical dilutions and percent solids, where applicable.

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTINO CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Projeet Number:	Old Bremerton Gas Works	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 13:22

Electronic Signature - Electronic Signature added in accordance with TestAmerica's *Electronic Reporting and Electronic Signatures Policy.* Application of electronic signature indicates that the report has been reviewed and approved for release by the laboratory. Electronic signamre is intended to be the legally binding equivalent of a traditionally handwritten signature.

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical repori shall not be reproduced except in full, withoul the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

11720 North Creek Pkwy N Suite 400, Bothell, WA 98011-8244 425-420-9200 FAX 420-9210
11922 E. First Ave, Spokane, WA 99206-5302 509-924-9200 FAX 924-9290
9405 SW Nimbus Ave, Beaverton, OR 97008-7145 503-906-9200 FAX 906-9210
2000 W International Airport Rd Ste A10, Anchorage, AK 99502-1119 907-563-9200 FAX 563-9210

CHAIN OF CUSTODY REPORT

Work Order #: BQE0385

CLIENT: GeoEngineers

REPORT TO: Sean Trimble
ADDRESS: 600 Stewart, Ste. 1700
Seattle, WA
PHONE: (206) 728-2674 FAX:

INVOICE TO:

P.O. NUMBER:

PROJECT NAME: Old Bremerton Gas Works
PROJECT NUMBER: 0892-017-01
SAMPLED BY:

PRESERVATIVE

REQUESTED ANALYSES

TURNAROUND REQUEST
in Business Days *
Organic & Inorganic Analyses: 10 (STD.) 7 5 4 3 2 1 <1
Petroleum Hydrocarbon Analyses: 5 (STD.) 5 3 5 5 <1
OTHER Specify:
* Turnaround Requests less than standard may incur Rush Charges.

	CLIENT SAMPLE IDENTIFICATION	SAMPLING DATE/TIME	HOLD	MATRIX (W, S, O)	# OF CONT.	LOCATION / COMMENTS	TA WO ID
1	MW-3-5.0	05/22 0855		S	5		
2	MW-3-10.0	0910			5		
3	MW-3-20.0	0930			5		
4	MW-3-25.0	0940			5		
5	MW-3-30.0	1000			2		
6	MW-3-40.0	1035			5		
7	MW-6-5.0	1125			5		
8	MW-6-10.0	1140			5		
9	MW-6-15.0	1215			5		
10	MW-6-35.0	1220			2		

RELEASED BY: Melissa J. Leone DATE: 05/22/07
PRINT NAME: MELISSA LEONE FIRM: GEI TIME: 17:50

RECEIVED BY: [signature] DATE: 5/22
PRINT NAME: Shannae [signature] FIRM: TA TIME: 1750

RELEASED BY: DATE:
PRINT NAME: FIRM: TIME:

RECEIVED BY: DATE:
PRINT NAME: FIRM: TIME:

ADDITIONAL REMARKS: Please contact Sean Trimble to determine analyses for Samples.

TEMP: 10.2

Note: By retinquishing samples to TestAmerica, client agrees to pay for the services requested on this chain of custody form and for any additional analyses performed on this project.
Payment for services is due within 30 days from the date of invoice unless otherwise contracted. Sample(s) will be disposed of after 30 days unless otherwise contracted.

TestAmerica
ANALYTICAL TESTING CORPORATION

11720 North Creek Pkwy N Suite 400, Bothell, WA 98011-8244 425-420-9200 FAX 420-9210 ✓
11922 E. Pint Ave, Spokane, WA 99206-5302 509-924-9200 FAX 924-9290
9405 SW Nimbus Ave, Beaverton, OR 97008-7145 503-906-9200 FAX 906-9210
2000 W intomationul Airport Rd Ste A10, Anchorage, AK 99502-1119 907-563-9200 FAX 563-9210

CHAIN OF CUSTODY REPORT

Work Order #: BQE0385

CLIENT: GeoEngineers

REPORT TO: Sean Trimble
ADDRESS: 600 Stewart, Ste. 1700
Seattle, WA
PHONE: (206) 728-2674 FAX:

INVOICE TO:

P.O. NUMBER:

PROJECT NAME: Old Bremerton Gas Works
PROJECT NUMBER: 0892-017-01
SAMPLED BY:

TURNAROUND REQUEST
In Business Days *
Organic A Inorgmic Analysea: 10 (STD.) 7 5 4 3 2 1 <1
Petroleum Hydrocrbon Analysea: 5 (STD.) 4 3 2 1 <1
OTHER specify:
* Turnaround Requests less than stoudard may incur Rush Okvges.

PRESERVATIVE

REQUESTED ANALYSES

	CLIENT SAMPLE IDENTIFICATION	SAMPLING DATE/TIME	HOLD	MATRIX (W, S, O)	# OF CONT.	LOCATION / COMMENTS	TA WO ID
1	MW-8-10.0	05/22 1345	X	S	5		
2	MW-8-25.0	↓ 1405	↓	↓	5		
3	MW-8-40.0	↓ 1425	↓	↓	5		
4							
5							
6							
7							
8							
9							
10							

RELEASED BY: Melissa S. Leone DATE: 05/22/07
PRINT NAME: MELISSA LEONE FIRM: GEI TIME: 17:50

RECEIVED BY: [signature] DATE: 5/22
PRINT NAME: Shanhae Boop FIRM: FA TIME: 17:50

RELEASED BY: DATE:
PRINT NAME: FIRM: TIME:

RECEIVED BY: DATE:
PRINT NAME: FIRM: TIME:

ADDITIONAL REMARKS: Please contact Sean Trimble to determine analyses for samples.

TEMP: 10.2

COC REV 05/2006

Note: By relinquishing samples to TestAmerica, client agrees to pay for the services requested on this chain of custody form and for any additional analyses performed on this project.
Payment for services is due within 30 days from the date of invoice unless otherwise contracted. Sample(s) will be disposed of after 30 days unless otherwise contracted.

TestAmerica
ANALYTICAL TESTING CORPORATION

11720 North Creek Pkwy N Suite 400, Bothell, WA 98011-8244 425-420-9200 FAX 420-9210
11922 E. First Ave, Spokane, WA 99206-5302 509-924-9200 FAX 924-9290
9405 SW Nimbus Ave, Beaverton, OR 97008-7145 503-904-9200 FAX 904-9210
2000 W International Airport Rd Ste A10, Anchorage, AK 99502-1119 907-563-9200 FAX 563-9210

CHAIN OF CUSTODY REPORT

Work Order #: DDE0385

CLIENT: GeoEngineers

REPORT TO: Sean Trimble
ADDRESS: 600 Stewart St. 1700
Seattle WA
PHONE: (206) 728-2649 FAX:

INVOICE TO:

P.O. NUMBER:

PROJECT NAME: 21 Interurban Gas
PROJECT NUMBER: 0965
0992-017-01
SAMPLED BY:

TURNAROUND REQUEST
In Business Days *
Organic & Inorganic Analyses: 10 (STD.) 7 5 4 3 2 1 <1
Petroleum Hydrocarbon Analyses: 5 (STD.) 4 3 2 1 <1
OTHER Specify:
* Turnaround Requests less than standard may incur Rush Charges.

PRESERVATIVE

REQUESTED ANALYSES

CLIENT SAMPLE IDENTIFICATION	SAMPLING DATE/TIME	NW-TPH GX	NWTPH-Dx w/Silica cl	VOCs	PCBs	SVOCs w/PAH (SIM)	PPL METALS	Cr VI	TBT					HOLD	MATRIX (W, S, O)	# OF CONT.	LOCATION/ COMMENTS	TA WO ID
1 MW-3-5.0	05/22 0955	X	X	X	X	X	X	X	X						S	5		01
2 MW-3-10.0	0910															5		02
3 MW-3-20.0	0930															5		03
4 MW-3-25.0	0940	X	X	X	X	X	X	X	X							5		04
5 MW-3-30.0	1000															2		05
6 MW-3-40.0	1015															5		06
7 MW-6-5.0	1125	X	X	X	X	X	X	X	X							5		07
8 MW-6-10.0	1190	X	X	X	X	X	X	X	X							5		08
9 MW-6-15.0	1215															5		09
10 MW-6-35.0	1220	X	X	X	X	X	X	X	X							2		10

RELINQUISHED BY: Melissa Johnson	DATE: 05/22/07	RECEIVED BY: [illegible]	DATE:
PRINT NAME: Melissa Johnson FIRM: GeoE	TIME: 17:50	PRINT NAME: [illegible] FIRM: [illegible]	TIME: 1750
RELEASED BY:	DATE:	RECEIVED BY:	DATE:
PRINT NAME: FIRM:	TIME:	PRINT NAME: FIRM:	TIME:

ADDITIONAL REMARKS: Please contact Sean Trimble with to determine analysis for Samples.
TEMP:
PAGE 1 OF 2

Note: By relinquishing samples to TestAmerica, client agrees to pay for the services requested on this chain of custody form and for any additional analyses performed on this project.
Payment for services is due within 30 days from the date of invoice unless otherwise contracted. Sample(s) will be disposed of after 30 days unless otherwise contracted.

TestAmerica
ANALYTICAL TESTING CORPORATION

11720 North Creek Pkwy N Suite 400, Bothell, WA 98011-8244 425-420-9200 FAX 420-9210
11911 E. First Ave, Spokane, WA 99206-5302 509-924-9200 FAX 924-9290
9405 SW Nimbus Ave, Beaverton, OR 97008-7145 503-906-9200 FAX 906-9210
2000 W International Airport Rd Ste A10, Anchorage, AK 99502-1119 907-563-9200 FAX 563-9210

CHAIN OF CUSTODY REPORT

Work Order #:

CLIENT: Geoengineers

REPORT TO: Sean Trimble
ADDRESS: 600 Stewart Ste. 1700 Seattle WA
PHONE: (206) 728-2614 FAX:

INVOICE TO:

P.O. NUMBER:

PROJECT NAME: [illegible]
PROJECT NUMBER: [illegible]-017-01
SAMPLED BY:

TURNAROUND REQUEST
In Business Days *
Organic & Inorganic Analyses: 10 (STD.) 7 5 4 3 2 1 <1
Petroleum Hydrocarbon Analyses: 5 (STD.) 4 3 2 1 <1
OTHER Specify:
* Turnaround Requests less than standard may incur Rush Charges

PRESERVATIVE

REQUESTED ANALYSES

CLIENT SAMPLE IDENTIFICATION	SAMPLING DATE/TIME	TPH-Gx	NWTPH-Dx w/SILICA	VOCs	PCBs	SVOCs w/ PAHs (SIM)	PPL METALS	CrVI	TBT					HOLD	MATRIX (W, S, O)	# OF CONT.	LOCATION / COMMENTS	TA WO ID
1 MW-8-10.0	05/22 1345	X	X	X	X	X	X	X	X					X	S	5		11
2 MW-8-25.0	↓ 1405	X	X	X	X	X	X	X	X					↓	↓	5		12
3 MW-8-40.0	↓ 1425													↓	↓	5		13
4																		
5																		
6																		
7																		
8																		
9																		
10																		

RELEASED BY: [illegible] DATE: 05/22/07
PRINT NAME: Melissa Keone FIRM: GEI TIME: 17:50
RECEIVED BY: [illegible] DATE: [illegible]
PRINT NAME: [illegible] FIRM: FPI TIME: 5/22
RELEASED BY: DATE:
PRINT NAME: FIRM: TIME:
RECEIVED BY: DATE:
PRINT NAME: FIRM: TIME:

ADDITIONAL REMARKS: Please contact Sean Trimble to determine analyses for samples.
TEMP:
PAGE 2 OF 2

Note: By relinquishing samples to TestAmerica, client agrees to pay for the services requested on this chain of custody form and for any additional analyses performed on this project.
Payment for services is due within 30 days from the date of invoice unless otherwise contracted. Sample(s) will be disposed of after 30 days unless otherwise contracted.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

June 14, 2007

Sean Trimble
Geo Engineers - Seattle
600 Stewart St, Suite 1700
Seattle, WA/USA 98101

RE: Old Bremerton Gas Works

Enclosed are the results of analyses for samples received by the laboratory on 06/01/07 19:50. The following list is a summary of the Work Orders contained in this report, generated on 06/14/07 15:15.

If you have any questions concerning this report, please feel free to contact me.

Work Order	Project	ProjectNumber
BQF0037	Old Bremerton Gas Works	0892-017-00

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	**Old Bremerton Gas Works**	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
MW-1	BQF0037-01	Water	06/01/07 08:30	06/01/07 19:50
MW-2	BQF0037-02	Water	06/01/07 10:20	06/01/07 19:50
MW-3	BQF0037-03	Water	06/01/07 11:00	06/01/07 19:50
MW-6	BQF0037-04	Water	06/01/07 12:40	06/01/07 19:50
MW-8	BQF0037-05	Water	06/01/07 13:10	06/01/07 19:50
MW-7	BQF0037-06	Water	06/01/07 14:30	06/01/07 19:50
MW-4	BQF0037-07	Water	06/01/07 15:10	06/01/07 19:50
MW-5	BQF0037-08	Water	06/01/07 15:50	06/01/07 19:50
MW-6-dup	BQF0037-09	Water	06/01/07 12:45	06/01/07 19:50

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Petroleum Products by NWTPH-Gx

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-01 (MW-1)			Water			Sampled: 06/01/07 08:30				
Gasoline Range Hydrocarbons	NWTPH-Gx	ND	-----	50.0	ug/l	1x	7F06024	06/06/07 10:20	06/07/07 02:14	
Surrogate(s): 4-BFB (FID)			90.7%		58 - 144 %	"			"	
BQF0037-02 (MW-2)			Water			Sampled: 06/01/07 10:20				
Gasoline Range Hydrocarbons	NWTPH-Gx	63.5	-----	50.0	ug/l	1x	7F06024	06/06/07 10:20	06/07/07 02:47	
Surrogate(s): 4-BFB (FID)			90.2%		58 - 144 %	"			"	
BQF0037-03 (MW-3)			Water			Sampled: 06/01/07 11:00				
Gasoline Range Hydrocarbons	NWTPH-Gx	2800	-----	50.0	ug/l	1x	7F06024	06/06/07 10:20	06/07/07 03:20	
Surrogate(s): 4-BFB (FID)			90.2%		58 - 144 %	"			"	
BQF0037-04 (MW-6)			Water			Sampled: 06/01/07 12:40				
Gasoline Range Hydrocarbons	NWTPH-Gx	3450	-----	50.0	ug/l	1x	7F06024	06/06/07 10:20	06/07/07 03:52	
Surrogate(s): 4-BFB (FID)			90.3%		58 - 144 %	"			"	
BQF0037-05 (MW-8)			Water			Sampled: 06/01/07 13:10				
Gasoline Range Hydrocarbons	NWTPH-Gx	4850	-----	500	ug/l	10x	7F06024	06/06/07 10:20	06/07/07 09:50	
Surrogate(s): 4-BFB (FID)			90.7%		58 - 144 %	1x			"	
BQF0037-06 (MW-7)			Water			Sampled: 06/01/07 14:30				
Gasoline Range Hydrocarbons	NWTPH-Gx	174	-----	50.0	ug/l	1x	7F06024	06/06/07 10:20	06/07/07 04:25	
Surrogate(s): 4-BFB (FID)			91.7%		58 - 144 %	"			"	
BQF0037-07 (MW-4)			Water			Sampled: 06/01/07 15:10				
Gasoline Range Hydrocarbons	NWTPH-Gx	10600	-----	500	ug/l	10x	7F06024	06/06/07 10:20	06/07/07 08:45	
Surrogate(s): 4-BFB (FID)			91.0%		58 - 144 %	1x			"	
BQF0037-08 (MW-5)			Water			Sampled: 06/01/07 15:50				
Gasoline Range Hydrocarbons	NWTPH-Gx	481	-----	50.0	ug/l	1x	7F06024	06/06/07 10:20	06/07/07 04:57	
Surrogate(s): 4-BFB (FID)			90.7%		58 - 144 %	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Projeel Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Petroleum Products by NWTPH-Gx

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-09 (MW-6-dup)			Water		Sampled: 06/01/07 12:45					
Gasoline Range Hydrocarbons	NWTPH-Gx	3400	-----	50.0	ug/l	1x	7F06024	06/06/07 10:20	06/07/07 06:35	
Surrogate(s): 4-BFB (FID)			*89.0%*		*58 - 144 %*	"			"	

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinett, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Petroleum Products by NWTPH-Dx with Acid/Silica Gel Clean-up

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-01 (MW-1)			Water		Sampled: 06/01/07 08:30					
Diesel Range Hydrocarbons	NWTPH-Dx	ND	-----	0.236	mg/l	1x	7F06018	06/06/07 09:34	06/08/07 02:04	
Lube Oil Range Hydrocarbons	"	ND	-----	0.472	"	"	"	"	"	
Surrogate(s): 2-FBP			*78.4%*		*53 - 125 %*	"			"	
Octacosane			*98.3%*		*68 - 125 %*	"			"	
BQF0037-02 (MW-2)			Water		Sampled: 06/01/07 10:20					
Diesel Range Hydrocarbons	NWTPH-Dx	ND	-----	0.236	mg/l	1x	7F06018	06/06/07 09:34	06/08/07 02:34	
Lube Oil Range Hydrocarbons	"	ND	-----	0.472	"	"	"	"	"	
Surrogate(s): 2-FBP			*83.9%*		*53 - 125 %*	"			"	
Octacosane			*101%*		*68 - 125 %*	"			"	
BQF0037-03 (MW-3)			Water		Sampled: 06/01/07 11:00					
Diesel Range Hydrocarbons	NWTPH-Dx	ND	-----	0.236	mg/l	1x	7F06018	06/06/07 09:34	06/08/07 04:33	
Lube Oil Range Hydrocarbons	"	ND	-----	0.472	"	"	"	"	"	
Surrogate(s): 2-FBP			*82.6%*		*53 - 125 %*	"			"	
Octacosane			*99.2%*		*68 - 125 %*	"			"	
BQF0037-04 (MW-6)			Water		Sampled: 06/01/07 12:40					
Diesel Range Hydrocarbons	NWTPH-Dx	0.540	-----	0.236	mg/l	1x	7F06018	06/06/07 09:34	06/08/07 05:02	Q5, QP
Lube Oil Range Hydrocarbons	"	ND	-----	0.472	"	"	"	"	"	
Surrogate(s): 2-FBP			*66.9%*		*53 - 125 %*	"			"	
Octacosane			*97.5%*		*68 - 125 %*	"			"	
BQF0037-05 (MW-8)			Water		Sampled: 06/01/07 13:10					
Diesel Range Hydrocarbons	NWTPH-Dx	1.86	-----	0.236	mg/l	1x	7F06018	06/06/07 09:34	06/08/07 05:32	Q5
Lube Oil Range Hydrocarbons	"	ND	-----	0.472	"	"	"	"	"	
Surrogate(s): 2-FBP			*87.7%*		*53 - 125 %*	"			"	
Octacosane			*99.2%*		*68 - 125 %*	"			"	
BQF0037-06 (MW-7)			Water		Sampled: 06/01/07 14:30					
Diesel Range Hydrocarbons	NWTPH-Dx	0.447	-----	0.236	mg/l	1x	7F06018	06/06/07 09:34	06/08/07 06:01	
Lube Oil Range Hydrocarbons	"	ND	-----	0.472	"	"	"	"	"	
Surrogate(s): 2-FBP			*81.8%*		*53 - 125 %*	"			"	
Octacosane			*100%*		*68 - 125 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Petroleum Products by NWTPH-Dx with Acid/Silica Gel Clean-up

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-07 (MW-4)			Water		Sampled: 06/01/07 15:10					
Diesel Range Hydrocarbons	NWTPH-Dx	18.5	-----	1.18	mg/l	5x	7F06018	06/06/07 09:34	06/08/07 06:31	Q5
Lube Oil Range Hydrocarbons	"	ND	-----	2.36	"	"	"	"	"	
Surrogate(s): 2-FBP			*108%*		*53 - 125 %*	"			"	
Octacosane			*106%*		*68 - 125 %*	"			"	
BQF0037-08 (MW-5)			Water		Sampled: 06/01/07 15:50					
Diesel Range Hydrocarbons	NWTPH-Dx	ND	-----	0.236	mg/l	1x	7F06018	06/06/07 09:34	06/08/07 07:00	
Lube Oil Range Hydrocarbons	"	ND	-----	0.472	"	"	"	"	"	
Surrogate(s): 2-FBP			*85.6%*		*53 - 125 %*	"			"	
Octacosane			*102%*		*68 - 125 %*	"			"	
BQF0037-09 (MW-6-dup)			Water		Sampled: 06/01/07 12:45					
Diesel Range Hydrocarbons	NWTPH-Dx	0.646	-----	0.236	mg/l	1x	7F06018	06/06/07 09:34	06/08/07 07:30	Q5, QP
Lube Oil Range Hydrocarbons	"	ND	-----	0.472	"	"	"	"	"	
Surrogate(s): 2-FBP			*78.8%*		*53 - 125 %*	"			"	
Octacosane			*94.9%*		*68 - 125 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Total Metals by EPA 6000/7000 Series Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-01 (MW-1)		**Water**			**Sampled: 06/01/07 08:30**					
Antimony	EPA 6020	ND	-----	0.00300	mg/l	1x	7F05020	06/05/07 10:37	06/12/07 07:27	
Arsenic	"	0.00154	-----	0.00100	"	"	"	"	06/07/07 15:08	
Beryllium	"	ND	-----	0.00100	"	"	"	"	"	
Cadmium	"	ND	-----	0.00100	"	"	"	"	"	
Chromium	"	0.0118	-----	0.00100	"	"	"	"	"	
Copper	"	0.0101	-----	0.00100	"	"	"	"	"	
Lead	"	0.00155	-----	0.00100	"	"	"	"	"	
Mercury	EPA 7470A	ND	-----	0.000200	"	"	7F06043	06/06/07 13:20	06/07/07 13:54	
Nickel	EPA 6020	0.0187	-----	0.00100	"	"	7F05020	06/05/07 10:37	06/07/07 15:08	
Selenium	"	ND	-----	0.00100	"	"	"	"	"	
Silver	"	ND	-----	0.00100	"	"	"	"	"	
Thallium	"	ND	-----	0.00100	"	"	"	"	"	
Zinc	"	0.0134	-----	0.0100	"	"	"	"	"	
BQF0037-02 (MW-2)		**Water**			**Sampled: 06/01/07 10:20**					
Antimony	EPA 6020	ND	-----	0.00300	mg/l	1x	7F05020	06/05/07 10:37	06/12/07 07:41	
Arsenic	"	0.00108	-----	0.00100	"	"	"	"	06/07/07 15:13	
Beryllium	"	ND	-----	0.00100	"	"	"	"	"	
Cadmium	"	ND	-----	0.00100	"	"	"	"	"	
Chromium	"	0.00515	-----	0.00100	"	"	"	"	"	
Copper	"	0.00340	-----	0.00100	"	"	"	"	"	
Lead	"	ND	-----	0.00100	"	"	"	"	"	
Mercury	EPA 7470A	ND	-----	0.000200	"	"	7F06043	06/06/07 13:20	06/07/07 13:56	
Nickel	EPA 6020	0.00724	-----	0.00100	"	"	7F05020	06/05/07 10:37	06/07/07 15:13	
Selenium	"	ND	-----	0.00100	"	"	"	"	"	
Silver	"	ND	-----	0.00100	"	"	"	"	"	
Thallium	"	ND	-----	0.00100	"	"	"	"	"	
Zinc	"	ND	-----	0.0100	"	"	"	"	"	
BQF0037-03 (MW-3)		**Water**			**Sampled: 06/01/07 11:00**					
Antimony	EPA 6020	ND	-----	0.00300	mg/l	1x	7F05020	06/05/07 10:37	06/12/07 07:45	
Arsenic	"	0.0142	-----	0.00100	"	"	"	"	06/07/07 15:19	
Beryllium	"	0.00107	-----	0.00100	"	"	"	"	"	
Cadmium	"	ND	-----	0.00100	"	"	"	"	"	
Chromium	"	0.228	-----	0.00100	"	"	"	"	"	
Copper	"	0.130	-----	0.00100	"	"	"	"	"	
Lead	"	0.0183	-----	0.00100	"	"	"	"	"	
Mercury	EPA 7470A	0.000246	-----	0.000200	"	"	7F06043	06/06/07 13:20	06/07/07 13:59	
Nickel	EPA 6020	0.232	-----	0.00100	"	"	7F05020	06/05/07 10:37	06/07/07 15:19	
Selenium	"	ND	-----	0.00100	"	"	"	"	"	
Silver	"	ND	-----	0.00100	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Projeel Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Projeel Manager:	Sean Trimble	06/14/07 15:15

Total Metals by EPA 6000/7000 Series Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-03 (MW-3)		Water			Sampled: 06/01/07 11:00					
Thallium	EPA 6020	ND	-----	0.00100	mg/l	1x	7F05020	06/05/07 10:37	06/07/07 15:19	
Zinc	"	0.185	-----	0.0100	"	"	"	"	"	
BQF0037-04 (MW-6)		Water			Sampled: 06/01/07 12:40					
Antimony	EPA 6020	ND	-----	0.00300	mg/l	1x	7F05020	06/05/07 10:37	06/12/07 07:50	
Arsenic	"	0.00480	-----	0.00100	"	"	"	"	06/07/07 15:25	
Beryllium	"	ND	-----	0.00100	"	"	"	"	"	
Cadmium	"	ND	-----	0.00100	"	"	"	"	"	
Chromium	"	0.00134	-----	0.00100	"	"	"	"	"	
Copper	"	0.00105	-----	0.00100	"	"	"	"	"	
Lead	"	ND	-----	0.00100	"	"	"	"	"	
Mercury	EPA 7470A	ND	-----	0.000200	"	"	7F06043	06/06/07 13:20	06/07/07 14:01	
Nickel	EPA 6020	0.00165	-----	0.00100	"	"	7F05020	06/05/07 10:37	06/07/07 15:25	
Selenium	"	ND	-----	0.00100	"	"	"	"	"	
Silver	"	ND	-----	0.00100	"	"	"	"	"	
Thallium	"	ND	-----	0.00100	"	"	"	"	"	
Zinc	"	ND	-----	0.0100	"	"	"	"	"	
BQF0037-05 (MW-8)		Water			Sampled: 06/01/07 13:10					
Antimony	EPA 6020	ND	-----	0.00300	mg/l	1x	7F05020	06/05/07 10:37	06/12/07 07:54	
Arsenic	"	0.00469	-----	0.00100	"	"	"	"	06/07/07 15:31	
Beryllium	"	ND	-----	0.00100	"	"	"	"	"	
Cadmium	"	ND	-----	0.00100	"	"	"	"	"	
Chromium	"	0.00928	-----	0.00100	"	"	"	"	"	
Copper	"	0.00894	-----	0.00100	"	"	"	"	"	
Lead	"	0.00447	-----	0.00100	"	"	"	"	"	
Mercury	EPA 7470A	ND	-----	0.000200	"	"	7F06043	06/06/07 13:20	06/07/07 14:04	
Nickel	EPA 6020	0.0144	-----	0.00100	"	"	7F05020	06/05/07 10:37	06/07/07 15:31	
Selenium	"	ND	-----	0.00100	"	"	"	"	"	
Silver	"	ND	-----	0.00100	"	"	"	"	"	
Thallium	"	ND	-----	0.00100	"	"	"	"	"	
Zinc	"	0.0127	-----	0.0100	"	"	"	"	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Projeel Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Total Metals by EPA 6000/7000 Series Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-06 (MW-7)		Water			Sampled: 06/01/07 14:30					
Antimony	EPA 6020	ND	-----	0.00300	mg/l	1x	7F05020	06/05/07 10:37	06/12/07 07:59	
Arsenic	"	0.00143	-----	0.00100	"	"	"	"	06/07/07 15:37	
Beryllium	"	ND	-----	0.00100	"	"	"	"	"	
Cadmium	"	ND	-----	0.00100	"	"	"	"	"	
Chromium	"	0.0156	-----	0.00100	"	"	"	"	"	
Copper	"	0.0131	-----	0.00100	"	"	"	"	"	
Lead	"	0.00223	-----	0.00100	"	"	"	"	"	
Mercury	EPA 7470A	ND	-----	0.000200	"	"	7F06043	06/06/07 13:20	06/07/07 14:06	
Nickel	EPA 6020	0.0202	-----	0.00100	"	"	7F05020	06/05/07 10:37	06/07/07 15:37	
Selenium	"	ND	-----	0.00100	"	"	"	"	"	
Silver	"	ND	-----	0.00100	"	"	"	"	"	
Thallium	"	ND	-----	0.00100	"	"	"	"	"	
Zinc	"	0.0180	-----	0.0100	"	"	"	"	"	
BQF0037-07 (MW-4)		Water			Sampled: 06/01/07 15:10					
Antimony	EPA 6020	ND	-----	0.00300	mg/l	1x	7F05020	06/05/07 10:37	06/12/07 08:04	
Arsenic	"	0.0260	-----	0.00100	"	"	"	"	06/07/07 15:55	
Beryllium	"	0.00108	-----	0.00100	"	"	"	"	"	
Cadmium	"	ND	-----	0.00100	"	"	"	"	"	
Chromium	"	0.177	-----	0.00100	"	"	"	"	"	
Copper	"	0.143	-----	0.00100	"	"	"	"	"	
Lead	"	0.0216	-----	0.00100	"	"	"	"	"	
Mercury	EPA 7470A	ND	-----	0.000200	"	"	7F06043	06/06/07 13:20	06/07/07 14:09	
Nickel	EPA 6020	0.180	-----	0.00100	"	"	7F05020	06/05/07 10:37	06/07/07 15:55	
Selenium	"	ND	-----	0.00100	"	"	"	"	"	
Silver	"	ND	-----	0.00100	"	"	"	"	"	
Thallium	"	ND	-----	0.00100	"	"	"	"	"	
Zinc	"	0.155	-----	0.0100	"	"	"	"	"	
BQF0037-08 (MW-5)		Water			Sampled: 06/01/07 15:50					
Antimony	EPA 6020	ND	-----	0.00300	mg/l	1x	7F05020	06/05/07 10:37	06/12/07 08:08	
Arsenic	"	0.00283	-----	0.00100	"	"	"	"	06/07/07 16:07	
Beryllium	"	ND	-----	0.00100	"	"	"	"	"	
Cadmium	"	ND	-----	0.00100	"	"	"	"	"	
Chromium	"	0.00607	-----	0.00100	"	"	"	"	"	
Copper	"	0.00900	-----	0.00100	"	"	"	"	"	
Lead	"	0.00512	-----	0.00100	"	"	"	"	"	
Mercury	EPA 7470A	ND	-----	0.000200	"	"	7F06043	06/06/07 13:20	06/07/07 14:11	
Nickel	EPA 6020	0.0897	-----	0.00100	"	"	7F05020	06/05/07 10:37	06/07/07 16:07	
Selenium	"	0.00364	-----	0.00100	"	"	"	"	"	
Silver	"	ND	-----	0.00100	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Total Metals by EPA 6000/7000 Series Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-08 (MW-5)		Water			Sampled: 06/01/07 15:50					
Thallium	EPA 6020	ND	-----	0.00100	mg/l	1x	7F05020	06/05/07 10:37	06/07/07 16:07	
Zinc	"	0.0321	-----	0.0100	"	"	"	"	"	
BQF0037-09 (MW-6-dup)		Water			Sampled: 06/01/07 12:45					
Antimony	EPA 6020	ND	-----	0.00300	mg/l	1x	7F05020	06/05/07 10:37	06/12/07 08:13	
Arsenic	"	0.00443	-----	0.00100	"	"	"	"	06/07/07 16:12	
Beryllium	"	ND	-----	0.00100	"	"	"	"	"	
Cadmium	"	ND	-----	0.00100	"	"	"	"	"	
Chromium	"	0.00106	-----	0.00100	"	"	"	"	"	
Copper	"	ND	-----	0.00100	"	"	"	"	"	
Lead	"	ND	-----	0.00100	"	"	"	"	"	
Mercury	EPA 7470A	ND	-----	0.000200	"	"	7F06043	06/06/07 13:20	06/07/07 14:36	
Nickel	EPA 6020	0.00132	-----	0.00100	"	"	7F05020	06/05/07 10:37	06/07/07 16:12	
Selenium	"	ND	-----	0.00100	"	"	"	"	"	
Silver	"	ND	-----	0.00100	"	"	"	"	"	
Thallium	"	ND	-----	0.00100	"	"	"	"	"	
Zinc	"	ND	-----	0.0100	"	"	"	"	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Projeel Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polychlorinated Biphenyls by EPA 8082 Modified with Micro-Extraction

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-01 (MW-1)		Water			Sampled: 06/01/07 08:30					
Aroclor 1016	EPA 8082 Mod.	ND	-----	0.100	ug/l	1x	7F06012	06/06/07 16:42	06/08/07 01:56	
Aroclor 1221	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1232	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1242	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1248	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1254	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1260	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1262	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1268	"	ND	-----	0.100	"	"	"	"	"	
Surrogate(s): *TCX*			*103%*		*58 - 132 %*	"			"	
Decachlorobiphenyl			*79.0%*		*19 - 152 %*	"			"	
BQF0037-02 (MW-2)		Water			Sampled: 06/01/07 10:20					
Aroclor 1016	EPA 8082 Mod.	ND	-----	0.100	ug/l	1x	7F06012	06/06/07 16:42	06/08/07 02:14	
Aroclor 1221	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1232	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1242	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1248	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1254	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1260	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1262	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1268	"	ND	-----	0.100	"	"	"	"	"	
Surrogate(s): *TCX*			*164%*		*58 - 132 %*	"			"	Z2
Decachlorobiphenyl			*91.8%*		*19 - 152 %*	"			"	
BQF0037-03 (MW-3)		Water			Sampled: 06/01/07 11:00					
Aroclor 1016	EPA 8082 Mod.	ND	-----	0.100	ug/l	1x	7F06012	06/06/07 16:42	06/08/07 02:31	
Aroclor 1221	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1232	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1242	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1248	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1254	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1260	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1262	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1268	"	ND	-----	0.100	"	"	"	"	"	
Surrogate(s): *TCX*			*106%*		*58 - 132 %*	"			"	
Decachlorobiphenyl			*77.2%*		*19 - 152 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polychlorinated Biphenyls by EPA 8082 Modified with Micro-Extraction

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-04 (MW-6)		Water			Sampled: 06/01/07 12:40					
Aroclor 1016	EPA 8082 Mod.	ND	-----	0.100	ug/l	1x	7F06012	06/06/07 16:42	06/08/07 02:49	
Aroclor 1221	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1232	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1242	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1248	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1254	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1260	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1262	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1268	"	ND	-----	0.100	"	"	"	"	"	
Surrogate(s): *TCX*			*106%*		*58 - 132 %*	"			"	
Decachlorobiphenyl			*51.8%*		*19 - 152 %*	"			"	
BQF0037-05 (MW-8)		Water			Sampled: 06/01/07 13:10					
Aroclor 1016	EPA 8082 Mod.	ND	-----	0.100	ug/l	1x	7F06012	06/06/07 16:42	06/08/07 03:07	
Aroclor 1221	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1232	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1242	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1248	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1254	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1260	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1262	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1268	"	ND	-----	0.100	"	"	"	"	"	
Surrogate(s): *TCX*			*104%*		*58 - 132 %*	"			"	
Decachlorobiphenyl			*76.0%*		*19 - 152 %*	"			"	
BQF0037-06 (MW-7)		Water			Sampled: 06/01/07 14:30					
Aroclor 1016	EPA 8082 Mod.	ND	-----	0.100	ug/l	1x	7F06012	06/06/07 16:42	06/08/07 03:24	
Aroclor 1221	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1232	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1242	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1248	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1254	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1260	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1262	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1268	"	ND	-----	0.100	"	"	"	"	"	
Surrogate(s): *TCX*			*99.2%*		*58 - 132 %*	"			"	
Decachlorobiphenyl			*84.2%*		*19 - 152 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Projeel Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polychlorinated Biphenyls by EPA 8082 Modified with Micro-Extraction

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-07 (MW-4)		Water			Sampled: 06/01/07 15:10					
Aroclor 1016	EPA 8082 Mod.	ND	-----	0.100	ug/l	1x	7F06012	06/06/07 16:42	06/08/07 03:42	
Aroclor 1221	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1232	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1242	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1248	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1254	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1260	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1262	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1268	"	ND	-----	0.100	"	"	"	"	"	
Surrogate(s): *TCX*			*99.0%*		*58 - 132 %*	"			"	
Decachlorobiphenyl			*42.6%*		*19 - 152 %*	"			"	
BQF0037-08 (MW-5)		Water			Sampled: 06/01/07 15:50					
Aroclor 1016	EPA 8082 Mod.	ND	-----	0.100	ug/l	1x	7F06012	06/06/07 16:42	06/08/07 04:00	
Aroclor 1221	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1232	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1242	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1248	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1254	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1260	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1262	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1268	"	ND	-----	0.100	"	"	"	"	"	
Surrogate(s): *TCX*			*113%*		*58 - 132 %*	"			"	
Decachlorobiphenyl			*78.6%*		*19 - 152 %*	"			"	
BQF0037-09 (MW-6-dup)		Water			Sampled: 06/01/07 12:45					
Aroclor 1016	EPA 8082 Mod.	ND	-----	0.100	ug/l	1x	7F06012	06/06/07 16:42	06/08/07 04:17	
Aroclor 1221	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1232	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1242	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1248	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1254	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1260	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1262	"	ND	-----	0.100	"	"	"	"	"	
Aroclor 1268	"	ND	-----	0.100	"	"	"	"	"	
Surrogate(s): *TCX*			*106%*		*58 - 132 %*	"			"	
Decachlorobiphenyl			*66.2%*		*19 - 152 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-01 (MW-1)		Water			Sampled: 06/01/07 08:30					
Acetone	EPA 8260B	ND	-----	10.0	ug/l	1x	7F04061	06/04/07 16:31	06/04/07 21:09	
Benzene	"	ND	-----	0.200	"	"	"	"	"	
Bromobenzene	"	ND	-----	0.500	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromoform	"	ND	-----	0.200	"	"	"	"	"	
Bromomethane	"	ND	-----	2.00	"	"	"	"	"	
2-Butanone	"	ND	-----	2.00	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	0.200	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	0.200	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.500	"	"	"	"	"	
Carbon tetrachloride	"	0.660	-----	0.200	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Chloroethane	"	ND	-----	1.00	"	"	"	"	"	
Chloroform	"	2.84	-----	0.200	"	"	"	"	"	
Chloromethane	"	ND	-----	1.00	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	0.200	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
Ethylbenzene	"	ND	-----	0.200	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	2.50	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	1.00	"	"	"	"	"	
n-Hexane	"	ND	-----	1.00	"	"	"	"	"	
2-Hexanone	"	ND	-----	2.00	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 96011-6244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-01 (MW-1)		Water			Sampled: 06/01/07 08:30					
Isopropylbenzene	EPA 8260B	ND	-----	0.500	ug/l	1x	7F04061	06/04/07 16:31	06/04/07 21:09	
p-Isopropyltoluene	"	ND	-----	0.200	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	2.00	"	"	"	"	"	
Methylene chloride	"	ND	-----	5.00	"	"	"	"	"	
Naphthalene	"	ND	-----	2.50	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Styrene	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.500	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.200	"	"	"	"	"	
Toluene	"	ND	-----	0.200	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
Trichloroethene	"	4.79	-----	0.200	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	0.200	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.200	"	"	"	"	"	
o-Xylene	"	ND	-----	0.250	"	"	"	"	"	
m,p-Xylene	"	ND	-----	0.500	"	"	"	"	"	
Total Xylenes	"	ND	-----	0.750	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*107%*		*70 - 130 %*	"			"	
Toluene-d8			*99.0%*		*70 - 130 %*	"			"	
4-BFB			*100%*		*70 - 130 %*	"			"	
BQF0037-02 (MW-2)		Water			Sampled: 06/01/07 10:20					
Acetone	EPA 8260B	ND	-----	10.0	ug/l	1x	7F04061	06/04/07 16:31	06/04/07 21:42	
Benzene	"	18.4	-----	0.200	"	"	"	"	"	
Bromobenzene	"	ND	-----	0.500	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromoform	"	ND	-----	0.200	"	"	"	"	"	
Bromomethane	"	ND	-----	2.00	"	"	"	"	"	
2-Butanone	"	ND	-----	2.00	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	0.200	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	0.200	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.500	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.200	"	"	"	"	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-02 (MW-2)		Water			Sampled: 06/01/07 10:20					
Chlorobenzene	EPA 8260B	ND	-----	0.200	ug/l	1x	7F04061	06/04/07 16:31	06/04/07 21:42	
Chloroethane	"	ND	-----	1.00	"	"	"	"	"	
Chloroform	"	1.42	-----	0.200	"	"	"	"	"	
Chloromethane	"	ND	-----	1.00	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	0.200	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloroethane	"	4.72	-----	0.200	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
Ethylbenzene	"	ND	-----	0.200	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	2.50	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	1.00	"	"	"	"	"	
n-Hexane	"	ND	-----	1.00	"	"	"	"	"	
2-Hexanone	"	ND	-----	2.00	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	0.500	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	0.200	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	2.00	"	"	"	"	"	
Methylene chloride	"	ND	-----	5.00	"	"	"	"	"	
Naphthalene	"	ND	-----	2.50	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Styrene	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.500	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.200	"	"	"	"	"	
Toluene	"	ND	-----	0.200	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-02 (MW-2)		Water			Sampled: 06/01/07 10:20					
1,1,1-Trichloroethane	EPA 8260B	ND	-----	0.200	ug/l	1x	7F04061	06/04/07 16:31	06/04/07 21:42	
1,1,2-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
Trichloroethene	"	0.610	-----	0.200	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	0.200	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.200	"	"	"	"	"	
o-Xylene	"	ND	-----	0.250	"	"	"	"	"	
m,p-Xylene	"	ND	-----	0.500	"	"	"	"	"	
Total Xylenes	"	ND	-----	0.750	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*108%*		*70 - 130 %*	"			"	
Toluene-d8			*100%*		*70 - 130 %*	"			"	
4-BFB			*102%*		*70 - 130 %*	"			"	
BQF0037-03 (MW-3)		Water			Sampled: 06/01/07 11:00					
Acetone	EPA 8260B	ND	-----	10.0	ug/l	1x	7F04061	06/04/07 16:31	06/04/07 22:11	
Benzene	"	814	-----	0.200	"	"	"	"	"	E
Bromobenzene	"	ND	-----	0.500	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromoform	"	ND	-----	0.200	"	"	"	"	"	
Bromomethane	"	ND	-----	2.00	"	"	"	"	"	
2-Butanone	"	ND	-----	2.00	"	"	"	"	"	
n-Butylbenzene	"	0.480	-----	0.200	"	"	"	"	"	
sec-Butylbenzene	"	0.370	-----	0.200	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.500	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.200	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Chloroethane	"	ND	-----	1.00	"	"	"	"	"	
Chloroform	"	0.200	-----	0.200	"	"	"	"	"	
Chloromethane	"	ND	-----	1.00	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	0.200	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-03 (MW-3)		Water			Sampled: 06/01/07 11:00					
Dichlorodifluoromethane	EPA 8260B	ND	----	0.500	ug/l	1x	7F04061	06/04/07 16:31	06/04/07 22:11	
1,1-Dichloroethane	"	ND	----	0.200	"	"	"	"	"	
1,2-Dichloroethane	"	3.06	----	0.200	"	"	"	"	"	
1,1-Dichloroethene	"	ND	----	0.200	"	"	"	"	"	
cis-1,2-Dichloroethene	"	0.370	----	0.200	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	----	0.200	"	"	"	"	"	
1,2-Dichloropropane	"	ND	----	0.200	"	"	"	"	"	
1,3-Dichloropropane	"	ND	----	0.200	"	"	"	"	"	
2,2-Dichloropropane	"	ND	----	0.500	"	"	"	"	"	
1,1-Dichloropropene	"	ND	----	0.200	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	----	0.200	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	----	0.200	"	"	"	"	"	
Ethylbenzene	"	140	----	0.200	"	"	"	"	"	E
Hexachlorobutadiene	"	ND	----	2.50	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	----	1.00	"	"	"	"	"	
n-Hexane	"	ND	----	1.00	"	"	"	"	"	
2-Hexanone	"	ND	----	2.00	"	"	"	"	"	
Isopropylbenzene	"	5.29	----	0.500	"	"	"	"	"	
p-Isopropyltoluene	"	0.900	----	0.200	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	----	2.00	"	"	"	"	"	
Methylene chloride	"	ND	----	5.00	"	"	"	"	"	
Naphthalene	"	375	----	2.50	"	"	"	"	"	E
n-Propylbenzene	"	6.41	----	0.500	"	"	"	"	"	
Styrene	"	ND	----	0.500	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	----	1.00	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	----	1.00	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	----	0.200	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	----	0.500	"	"	"	"	"	
Tetrachloroethene	"	ND	----	0.200	"	"	"	"	"	
Toluene	"	4.21	----	0.200	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	----	0.200	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	----	0.200	"	"	"	"	"	
Trichloroethene	"	0.330	----	0.200	"	"	"	"	"	
Trichlorofluoromethane	"	ND	----	0.500	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	----	0.500	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	9.36	----	0.200	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	1.87	----	0.500	"	"	"	"	"	
Vinyl chloride	"	ND	----	0.200	"	"	"	"	"	
o-Xylene	"	17.2	----	0.250	"	"	"	"	"	
m,p-Xylene	"	22.4	----	0.500	"	"	"	"	"	
Total Xylenes	"	39.6	----	0.750	"	"	"	"	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-03 (MW-3)		Water			Sampled: 06/01/07 11:00					
Surrogate(s): 1,2-DCA-d4			*106%*		*70 - 130 %*	*1x*			*06/04/07 22:11*	
Toluene-d8			*97.5%*		*70 - 130 %*	"			"	
4-BFB			*100%*		*70 - 130 %*	"			"	
BQF0037-03RE1 (MW-3)		Water			Sampled: 06/01/07 11:00					
Acetone	EPA 8260B	ND	-----	1000	ug/l	100x	7F05028	06/05/07 11:46	06/05/07 14:04	
Benzene	"	826	-----	20.0	"	"	"	"	"	
Bromobenzene	"	ND	-----	50.0	"	"	"	"	"	
Bromochloromethane	"	ND	-----	20.0	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	20.0	"	"	"	"	"	
Bromoform	"	ND	-----	20.0	"	"	"	"	"	
Bromomethane	"	ND	-----	200	"	"	"	"	"	
2-Butanone	"	ND	-----	200	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	20.0	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	20.0	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	50.0	"	"	"	"	"	
Carbon disulfide	"	ND	-----	50.0	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	20.0	"	"	"	"	"	
Chlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
Chloroethane	"	ND	-----	100	"	"	"	"	"	
Chloroform	"	ND	-----	20.0	"	"	"	"	"	
Chloromethane	"	ND	-----	100	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	50.0	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	50.0	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	50.0	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	20.0	"	"	"	"	"	
Dibromomethane	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	50.0	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	20.0	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	20.0	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	20.0	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	20.0	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	50.0	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	20.0	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	20.0	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-03RE1 (MW-3)		Water			Sampled: 06/01/07 11:00					
trans-1,3-Dichloropropene	EPA 8260B	ND	-----	20.0	ug/l	100x	7F05028	06/05/07 11:46	06/05/07 14:04	
Ethylbenzene	"	151	-----	20.0	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	250	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	100	"	"	"	"	"	
n-Hexane	"	ND	-----	100	"	"	"	"	"	
2-Hexanone	"	ND	-----	200	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	50.0	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	20.0	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	200	"	"	"	"	"	
Methylene chloride	"	ND	-----	500	"	"	"	"	"	
Naphthalene	"	345	-----	250	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	50.0	"	"	"	"	"	
Styrene	"	ND	-----	50.0	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	100	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	100	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	50.0	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	20.0	"	"	"	"	"	
Toluene	"	ND	-----	20.0	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	20.0	"	"	"	"	"	
Trichloroethene	"	ND	-----	20.0	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	50.0	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	50.0	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	20.0	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	50.0	"	"	"	"	"	
Vinyl chloride	"	ND	-----	20.0	"	"	"	"	"	
o-Xylene	"	ND	-----	25.0	"	"	"	"	"	
m,p-Xylene	"	ND	-----	50.0	"	"	"	"	"	
Total Xylenes	"	ND	-----	75.0	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*106%*		*70 - 130 %*	*1x*			"	
Toluene-d8			*99.5%*		*70 - 130 %*	"			"	
4-BFB			*100%*		*70 - 130 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Projeel Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-04 (MW-6)		Water			Sampled: 06/01/07 12:40					
Acetone	EPA 8260B	ND	-----	10.0	ug/l	1x	7F04061	06/04/07 16:31	06/04/07 22:41	
Benzene	"	874	-----	0.200	"	"	"	"	"	E
Bromobenzene	"	ND	-----	0.500	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromoform	"	ND	-----	0.200	"	"	"	"	"	
Bromomethane	"	ND	-----	2.00	"	"	"	"	"	
2-Butanone	"	ND	-----	2.00	"	"	"	"	"	
n-Butylbenzene	"	0.590	-----	0.200	"	"	"	"	"	
sec-Butylbenzene	"	0.360	-----	0.200	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.500	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.200	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Chloroethane	"	ND	-----	1.00	"	"	"	"	"	
Chloroform	"	ND	-----	0.200	"	"	"	"	"	
Chloromethane	"	ND	-----	1.00	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	0.200	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloroethane	"	0.930	-----	0.200	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,2-Dichloroethene	"	0.740	-----	0.200	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
Ethylbenzene	"	181	-----	0.200	"	"	"	"	"	E
Hexachlorobutadiene	"	ND	-----	2.50	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	1.00	"	"	"	"	"	
n-Hexane	"	1.17	-----	1.00	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Projeel Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-04 (MW-6)		Water			Sampled: 06/01/07 12:40					
2-Hexanone	EPA 8260B	ND	-----	2.00	ug/l	1x	7F04061	06/04/07 16:31	06/04/07 22:41	
Isopropylbenzene	"	8.93	-----	0.500	"	"	"	"	"	
p-Isopropyltoluene	"	0.270	-----	0.200	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	2.00	"	"	"	"	"	
Methylene chloride	"	ND	-----	5.00	"	"	"	"	"	
Naphthalene	"	54.9	-----	2.50	"	"	"	"	"	
n-Propylbenzene	"	3.14	-----	0.500	"	"	"	"	"	
Styrene	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.500	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.200	"	"	"	"	"	
Toluene	"	3.07	-----	0.200	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
Trichloroethene	"	ND	-----	0.200	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	10.3	-----	0.200	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	1.26	-----	0.500	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.200	"	"	"	"	"	
o-Xylene	"	12.6	-----	0.250	"	"	"	"	"	
m,p-Xylene	"	6.54	-----	0.500	"	"	"	"	"	
Total Xylenes	"	19.2	-----	0.750	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*105%*		*70 - 130 %*	"			"	
Toluene-d8			*99.5%*		*70 - 130 %*	"			"	
4-BFB			*99.0%*		*70 - 130 %*	"			"	
BQF0037-04RE1 (MW-6)		Water			Sampled: 06/01/07 12:40					
Acetone	EPA 8260B	ND	-----	1000	ug/l	100x	7F05028	06/05/07 11:46	06/05/07 14:31	
Benzene	"	950	-----	20.0	"	"	"	"	"	
Bromobenzene	"	ND	-----	50.0	"	"	"	"	"	
Bromochloromethane	"	ND	-----	20.0	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	20.0	"	"	"	"	"	
Bromoform	"	ND	-----	20.0	"	"	"	"	"	
Bromomethane	"	ND	-----	200	"	"	"	"	"	
2-Butanone	"	ND	-----	200	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	20.0	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	20.0	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	50.0	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Tritnble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-04RE1 (MW-6)		Water			Sampled: 06/01/07 12:40					
Carbon disulfide	EPA 8260B	ND	-----	50.0	ug/l	100x	7F05028	06/05/07 11:46	06/05/07 14:31	
Carbon tetrachloride	"	ND	-----	20.0	"	"	"	"	"	
Chlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
Chloroethane	"	ND	-----	100	"	"	"	"	"	
Chloroform	"	ND	-----	20.0	"	"	"	"	"	
Chloromethane	"	ND	-----	100	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	50.0	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	50.0	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	50.0	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	20.0	"	"	"	"	"	
Dibromomethane	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dichiorobenzene	"	ND	-----	20.0	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	50.0	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	20.0	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	20.0	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	20.0	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	20.0	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	50.0	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	20.0	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	20.0	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	20.0	"	"	"	"	"	
Ethylbenzene	"	187	-----	20.0	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	250	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	100	"	"	"	"	"	
n-Hexane	"	ND	-----	100	"	"	"	"	"	
2-Hexanonc	"	ND	-----	200	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	50.0	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	20.0	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	200	"	"	"	"	"	
Methylene chloride	"	ND	-----	500	"	"	"	"	"	
Naphthalene	"	ND	-----	250	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	50.0	"	"	"	"	"	
Styrene	"	ND	-----	50.0	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	100	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	100	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	50.0	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical repori shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-04RE1 (MW-6)		Water			Sampled: 06/01/07 12:40					
Tetrachloroethene	EPA 8260B	ND	-----	20.0	ug/l	100x	7F05028	06/05/07 11:46	06/05/07 14:31	
Toluene	"	ND	-----	20.0	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	20.0	"	"	"	"	"	
Trichloroethene	"	ND	-----	20.0	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	50.0	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	50.0	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	20.0	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	50.0	"	"	"	"	"	
Vinyl chloride	"	ND	-----	20.0	"	"	"	"	"	
o-Xylene	"	ND	-----	25.0	"	"	"	"	"	
m,p-Xylene	"	ND	-----	50.0	"	"	"	"	"	
Total Xylenes	"	ND	-----	75.0	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*104%*		*70 - 130 %*	*1x*			"	
Toluene-d8			*100%*		*70 - 130 %*	"			"	
4-BFB			*102%*		*70 - 130 %*	"			"	
BQF0037-05 (MW-8)		Water			Sampled: 06/01/07 13:10					
Acetone	EPA 8260B	ND	-----	10.0	ug/l	1x	7F04061	06/04/07 16:31	06/04/07 23:08	
Benzene	"	**605**	-----	0.200	"	"	"	"	"	E
Bromobenzene	"	ND	-----	0.500	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromoform	"	ND	-----	0.200	"	"	"	"	"	
Bromomethane	"	ND	-----	2.00	"	"	"	"	"	
2-Butanone	"	ND	-----	2.00	"	"	"	"	"	
n-Butylbenzene	"	**0.580**	-----	0.200	"	"	"	"	"	
sec-Butylbenzene	"	**0.570**	-----	0.200	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.500	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.200	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Chloroethane	"	ND	-----	1.00	"	"	"	"	"	
Chloroform	"	ND	-----	0.200	"	"	"	"	"	
Chloromethane	"	ND	-----	1.00	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	0.200	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-05 (MW-8)		Water			Sampled: 06/01/07 13:10					
1,3-Dichlorobenzene	EPA 8260B	ND	-----	0.200	ug/l	1x	7F04061	06/04/07 16:31	06/04/07 23:08	
1,4-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
Ethylbenzene	"	217	-----	0.200	"	"	"	"	"	E
Hexachlorobutadiene	"	ND	-----	2.50	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	1.00	"	"	"	"	"	
n-Hexane	"	ND	-----	1.00	"	"	"	"	"	
2-Hexanone	"	ND	-----	2.00	"	"	"	"	"	
Isopropylbenzene	"	8.15	-----	0.500	"	"	"	"	"	
p-Isopropyltoluene	"	1.17	-----	0.200	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	2.00	"	"	"	"	"	
Methylene chloride	"	ND	-----	5.00	"	"	"	"	"	
Naphthalene	"	1020	-----	2.50	"	"	"	"	"	E
n-Propylbenzene	"	2.38	-----	0.500	"	"	"	"	"	
Styrene	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.500	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.200	"	"	"	"	"	
Toluene	"	1.49	-----	0.200	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
Trichloroethene	"	ND	-----	0.200	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	40.4	-----	0.200	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	5.60	-----	0.500	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.200	"	"	"	"	"	
o-Xylene	"	103	-----	0.250	"	"	"	"	"	E
m,p-Xylene	"	88.4	-----	0.500	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-05 (MW-8)		Water			Sampled: 06/01/07 13:10					
Total Xylenes	EPA 8260B	191	-----	0.750	ug/l	1x	7F04061	06/04/07 16:31	06/04/07 23:08	
Surrogate(s): *1,2-DCA-d4*			*104%*		*70 - 130 %*	"			"	
Toluene-d8			*97.5%*		*70 - 130 %*	"			"	
4-BFB			*97.5%*		*70 - 130 %*	"			"	
BQF0037-05RE1 (MW-8)		Water			Sampled: 06/01/07 13:10					
Acetone	EPA 8260B	ND	-----	1000	ug/l	100x	7F05028	06/05/07 11:46	06/05/07 14:56	
Benzene	"	650	-----	20.0	"	"	"	"	"	
Bromobenzene	"	ND	-----	50.0	"	"	"	"	"	
Bromochloromethane	"	ND	-----	20.0	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	20.0	"	"	"	"	"	
Bromoform	"	ND	-----	20.0	"	"	"	"	"	
Bromomethane	"	ND	-----	200	"	"	"	"	"	
2-Butanone	"	ND	-----	200	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	20.0	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	20.0	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	50.0	"	"	"	"	"	
Carbon disulfide	"	ND	-----	50.0	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	20.0	"	"	"	"	"	
Chlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
Chloroethane	"	ND	-----	100	"	"	"	"	"	
Chloroform	"	ND	-----	20.0	"	"	"	"	"	
Chloromethane	"	ND	-----	100	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	50.0	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	50.0	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	50.0	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	20.0	"	"	"	"	"	
Dibromomethane	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	50.0	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	20.0	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	20.0	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	20.0	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	20.0	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	50.0	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	20.0	"	"	"	"	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Projeet Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-05RE1 (MW-8)		Water			Sampled: 06/01/07 13:10					
cis-1,3-Dichloropropene	EPA 8260B	ND	-----	20.0	ug/l	100x	7F05028	06/05/07 11:46	06/05/07 14:56	
trans-1,3-Dichloropropene	"	ND	-----	20.0	"	"	"	"	"	
Ethylbenzene	"	244	-----	20.0	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	250	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	100	"	"	"	"	"	
n-Hexane	"	ND	-----	100	"	"	"	"	"	
2-Hexanone	"	ND	-----	200	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	50.0	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	20.0	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	200	"	"	"	"	"	
Methylene chloride	"	ND	-----	500	"	"	"	"	"	
Naphthalene	"	1070	-----	250	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	50.0	"	"	"	"	"	
Styrene	"	ND	-----	50.0	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	100	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	100	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	50.0	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	20.0	"	"	"	"	"	
Toluene	"	ND	-----	20.0	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	20.0	"	"	"	"	"	
Trichloroethene	"	ND	-----	20.0	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	50.0	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	50.0	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	49.0	-----	20.0	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	50.0	"	"	"	"	"	
Vinyl chloride	"	ND	-----	20.0	"	"	"	"	"	
o-Xylene	"	111	-----	25.0	"	"	"	"	"	
m,p-Xylene	"	100	-----	50.0	"	"	"	"	"	
Total Xylenes	"	211	-----	75.0	"	"	"	"	"	
Surrogate(s): *1,2-DCA-d4*			*104%*		*70 - 130 %*	*1x*			"	
Toluene-d8			*100%*		*70 - 130 %*	"			"	
4-BFB			*101%*		*70 - 130 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-06 (MW-7)		Water			Sampled: 06/01/07 14:30					
Acetone	EPA 8260B	ND	-----	10.0	ug/l	1x	7F05028	06/05/07 11:46	06/05/07 13:00	
Benzene	"	2.23	-----	0.200	"	"	"	"	"	
Bromobenzene	"	ND	-----	0.500	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromoform	"	ND	-----	0.200	"	"	"	"	"	
Bromomethane	"	ND	-----	2.00	"	"	"	"	"	
2-Butanone	"	ND	-----	2.00	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	0.200	"	"	"	"	"	
sec-Butylbenzene	"	0.320	-----	0.200	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.500	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.200	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Chloroethane	"	ND	-----	1.00	"	"	"	"	"	
Chloroform	"	ND	-----	0.200	"	"	"	"	"	
Chloromethane	"	ND	-----	1.00	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	0.200	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichioropropane	"	ND	-----	0.200	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
Ethylbenzene	"	0.530	-----	0.200	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	2.50	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	1.00	"	"	"	"	"	
n-Hexane	"	ND	-----	1.00	"	"	"	"	"	
2-Hexanone	"	ND	-----	2.00	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analysed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 · FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Projeel Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-06 (MW-7)		Water			Sampled: 06/01/07 14:30					
Isopropylbenzene	EPA 8260B	ND	-----	0.500	ug/l	1x	7F05028	06/05/07 11:46	06/05/07 13:00	
p-Isopropyltoluene	"	ND	-----	0.200	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	2.00	"	"	"	"	"	
Methylene chloride	"	ND	-----	5.00	"	"	"	"	"	
Naphthalene	"	3.19	-----	2.50	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Styrene	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.500	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.200	"	"	"	"	"	
Toluene	"	ND	-----	0.200	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
Trichloroethene	"	0.400	-----	0.200	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	0.200	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.200	"	"	"	"	"	
o-Xylene	"	ND	-----	0.250	"	"	"	"	"	
m,p-Xylene	"	ND	-----	0.500	"	"	"	"	"	
Total Xylenes	"	ND	-----	0.750	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*106%*		*70 - 130 %*	"			"	
Toluene-d8			*96.5%*		*70 - 130 %*	"			"	
4-BFB			*99.5%*		*70 - 130 %*	"			"	
BQF0037-07 (MW-4)		Water			Sampled: 06/01/07 15:10					
Acetone	EPA 8260B	ND	-----	10.0	ug/l	1x	7F04061	06/04/07 16:31	06/05/07 00:03	
Benzene	"	25.2	-----	0.200	"	"	"	"	"	
Bromobenzene	"	ND	-----	0.500	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromoform	"	ND	-----	0.200	"	"	"	"	"	
Bromomethane	"	ND	-----	2.00	"	"	"	"	"	
2-Butanone	"	ND	-----	2.00	"	"	"	"	"	
n-Butylbenzene	"	5.30	-----	0.200	"	"	"	"	"	
sec-Butylbenzene	"	4.43	-----	0.200	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.500	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.200	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-07 (MW-4)		Water			Sampled: 06/01/07 15:10					
Chlorobenzene	EPA 8260B	ND	-----	0.200	ug/l	1x	7F04061	06/04/07 16:31	06/05/07 00:03	
Chloroethane	"	ND	-----	1.00	"	"	"	"	"	
Chloroform	"	ND	-----	0.200	"	"	"	"	"	
Chloromethane	"	ND	-----	1.00	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	0.200	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,2-Dichloroethene	"	1.29	-----	0.200	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
Ethylbenzene	"	282	-----	0.200	"	"	"	"	"	E
Hexachlorobutadiene	"	ND	-----	2.50	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	1.00	"	"	"	"	"	
n-Hexane	"	ND	-----	1.00	"	"	"	"	"	
2-Hexanone	"	ND	-----	2.00	"	"	"	"	"	
Isopropylbenzene	"	37.4	-----	0.500	"	"	"	"	"	
p-Isopropyltoluene	"	8.44	-----	0.200	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	2.00	"	"	"	"	"	
Methylene chloride	"	ND	-----	5.00	"	"	"	"	"	
Naphthalene	"	1670	-----	2.50	"	"	"	"	"	E
n-Propylbenzene	"	9.20	-----	0.500	"	"	"	"	"	
Styrene	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.500	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.200	"	"	"	"	"	
Toluene	"	41.9	-----	0.200	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-07 (MW-4)		Water			Sampled: 06/01/07 15:10					
1,1,1-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
Trichloroethene	"	0.630	-----	0.200	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	154	-----	0.200	"	"	"	"	"	E
1,3,5-Trimethylbenzene	"	30.0	-----	0.500	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.200	"	"	"	"	"	
o-Xylene	"	180	-----	0.250	"	"	"	"	"	E
m,p-Xylene	"	321	-----	0.500	"	"	"	"	"	E
Total Xylenes	"	501	-----	0.750	"	"	"	"	"	E
Surrogate(s): 1,2-DCA-d4			*103%*		*70 - 130 %*	"			"	
Toluene-d8			*95.5%*		*70 - 130 %*	"			"	
4-BFB			*99.5%*		*70 - 130 %*	"			"	
BQF0037-07RE1 (MW-4)		Water			Sampled: 06/01/07 15:10					
Acetone	EPA 8260B	ND	-----	100	ug/l	10x	7F05028	06/05/07 11:46	06/05/07 15:23	
Benzene	"	25.9	-----	2.00	"	"	"	"	"	
Bromobenzene	"	ND	-----	5.00	"	"	"	"	"	
Bromochloromethane	"	ND	-----	2.00	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	2.00	"	"	"	"	"	
Bromoform	"	ND	-----	2.00	"	"	"	"	"	
Bromomethane	"	ND	-----	20.0	"	"	"	"	"	
2-Butanone	"	ND	-----	20.0	"	"	"	"	"	
n-Butylbenzene	"	6.10	-----	2.00	"	"	"	"	"	
sec-Butylbenzene	"	4.80	-----	2.00	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	5.00	"	"	"	"	"	
Carbon disulfide	"	ND	-----	5.00	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	2.00	"	"	"	"	"	
Chlorobenzene	"	ND	-----	2.00	"	"	"	"	"	
Chloroethane	"	ND	-----	10.0	"	"	"	"	"	
Chloroform	"	ND	-----	2.00	"	"	"	"	"	
Chloromethane	"	ND	-----	10.0	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	5.00	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	5.00	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	2.00	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	5.00	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	2.00	"	"	"	"	"	
Dibromomethane	"	ND	-----	2.00	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	2.00	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	2.00	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-07RE1 (MW-4)		Water			Sampled: 06/01/07 15:10					
1,4-Dichlorobenzene	EPA 8260B	ND	-----	2.00	ug/l	10x	7F05028	06/05/07 11:46	06/05/07 15:23	
Dichlorodifluoromethane	"	ND	-----	5.00	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	2.00	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	2.00	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	2.00	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	2.00	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	2.00	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	2.00	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	2.00	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	5.00	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	2.00	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	2.00	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	2.00	"	"	"	"	"	
Ethylbenzene	"	322	-----	2.00	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	25.0	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	10.0	"	"	"	"	"	
n-Hexane	"	ND	-----	10.0	"	"	"	"	"	
2-Hexanone	"	ND	-----	20.0	"	"	"	"	"	
Isopropylbenzene	"	40.0	-----	5.00	"	"	"	"	"	
p-Isopropyltoluene	"	8.90	-----	2.00	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	20.0	"	"	"	"	"	
Methylene chloride	"	ND	-----	50.0	"	"	"	"	"	
Naphthalene	"	5710	-----	25.0	"	"	"	"	"	E
n-Propylbenzene	"	9.70	-----	5.00	"	"	"	"	"	
Styrene	"	ND	-----	5.00	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	10.0	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	10.0	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	2.00	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	5.00	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	2.00	"	"	"	"	"	
Toluene	"	45.4	-----	2.00	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	2.00	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	2.00	"	"	"	"	"	
Trichloroethene	"	ND	-----	2.00	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	5.00	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	5.00	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	179	-----	2.00	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	33.5	-----	5.00	"	"	"	"	"	
Vinyl chloride	"	ND	-----	2.00	"	"	"	"	"	
o-Xylene	"	211	-----	2.50	"	"	"	"	"	
m,p-Xylene	"	383	-----	5.00	"	"	"	"	"	
Total Xylenes	"	593	-----	7.50	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-07RE1 (MW-4)		Water			Sampled: 06/01/07 15:10					
Surrogate(s): 1,2-DCA-d4			*106%*		*70 - 130 %*	*1x*			*06/05/07 15:23*	
Toluene-d8			*100%*		*70 - 130 %*	"			"	
4-BFB			*96.5%*		*70 - 130 %*	"			"	
BQF0037-07RE2 (MW-4)		Water			Sampled: 06/01/07 15:10					
Acetone	EPA 8260B	ND	-----	4000	ug/l	400x	7F05028	06/05/07 11:46	06/05/07 17:33	
Benzene	"	ND	-----	80.0	"	"	"	"	"	
Bromobenzene	"	ND	-----	200	"	"	"	"	"	
Bromochloromethane	"	ND	-----	80.0	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	80.0	"	"	"	"	"	
Bromoform	"	ND	-----	80.0	"	"	"	"	"	
Bromomethane	"	ND	-----	800	"	"	"	"	"	
2-Butanone	"	ND	-----	800	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	80.0	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	80.0	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	200	"	"	"	"	"	
Carbon disulfide	"	ND	-----	200	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	80.0	"	"	"	"	"	
Chlorobenzene	"	ND	-----	80.0	"	"	"	"	"	
Chloroethane	"	ND	-----	400	"	"	"	"	"	
Chloroform	"	ND	-----	80.0	"	"	"	"	"	
Chloromethane	"	ND	-----	400	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	200	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	200	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	80.0	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	200	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	80.0	"	"	"	"	"	
Dibromomethane	"	ND	-----	80.0	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	80.0	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	80.0	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	80.0	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	200	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	80.0	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	80.0	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	80.0	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	80.0	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	80.0	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	80.0	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	80.0	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	200	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	80.0	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	80.0	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-07RE2 (MW-4)		Water			Sampled: 06/01/07 15:10					
trans-1,3-Dichloropropene	EPA 8260B	ND	-----	80.0	ug/l	400x	7F05028	06/05/07 11:46	06/05/07 17:33	
Ethylbenzene	"	308	-----	80.0	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	1000	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	400	"	"	"	"	"	
n-Hexane	"	ND	-----	400	"	"	"	"	"	
2-Hexanone	"	ND	-----	800	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	200	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	80.0	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	800	"	"	"	"	"	
Methylene chloride	"	ND	-----	2000	"	"	"	"	"	
Naphthalene	"	5270	-----	1000	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	200	"	"	"	"	"	
Styrene	"	ND	-----	200	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	400	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	400	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	80.0	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	200	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	80.0	"	"	"	"	"	
Toluene	"	ND	-----	80.0	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	80.0	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	80.0	"	"	"	"	"	
Trichloroethene	"	ND	-----	80.0	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	200	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	200	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	176	-----	80.0	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	200	"	"	"	"	"	
Vinyl chloride	"	ND	-----	80.0	"	"	"	"	"	
o-Xylene	"	196	-----	100	"	"	"	"	"	
m,p-Xylene	"	340	-----	200	"	"	"	"	"	
Total Xylenes	"	536	-----	300	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*106%*		*70 - 130 %*	*1x*			"	
Toluene-d8			*100%*		*70 - 130 %*	"			"	
4-BFB			*100%*		*70 - 130 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-08 (MW-5)		Water			Sampled: 06/01/07 15:50					
Acetone	EPA 8260B	ND	-----	10.0	ug/l	1x	7F05028	06/05/07 11:46	06/05/07 13:27	
Benzene	"	85.1	-----	0.200	"	"	"	"	"	
Bromobenzene	"	ND	-----	0.500	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromoform	"	ND	-----	0.200	"	"	"	"	"	
Bromomethane	"	ND	-----	2.00	"	"	"	"	"	
2-Butanone	"	ND	-----	2.00	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	0.200	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	0.200	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.500	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	0.200	"	"	"	"	"	
Chlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Chloroethane	"	ND	-----	1.00	"	"	"	"	"	
Chloroform	"	ND	-----	0.200	"	"	"	"	"	
Chloromethane	"	ND	-----	1.00	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	0.200	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
Ethylbenzene	"	10.1	-----	0.200	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	2.50	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	1.00	"	"	"	"	"	
n-Hexane	"	ND	-----	1.00	"	"	"	"	"	
2-Hexanone	"	ND	-----	2.00	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-08 (MW-5)		Water			Sampled: 06/01/07 15:50					
Isopropylbenzene	EPA 8260B	5.25	-----	0.500	ug/l	1x	7F05028	06/05/07 11:46	06/05/07 13:27	
p-Isopropyltoluene	"	ND	-----	0.200	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	2.00	"	"	"	"	"	
Methylene chloride	"	ND	-----	5.00	"	"	"	"	"	
Naphthalene	"	25.5	-----	2.50	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	0.500	"	"	"	"	"	
Styrene	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.500	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	0.200	"	"	"	"	"	
Toluene	"	0.450	-----	0.200	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
Trichloroethene	"	ND	-----	0.200	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	3.52	-----	0.200	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	0.530	-----	0.500	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.200	"	"	"	"	"	
o-Xylene	"	4.91	-----	0.250	"	"	"	"	"	
m,p-Xylene	"	3.38	-----	0.500	"	"	"	"	"	
Total Xylenes	"	8.29	-----	0.750	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*105%*		70 - 130 %	"			"	
Toluene-d8			*100%*		70 - 130 %	"			"	
4-BFB			*100%*		70 - 130 %	"			"	
BQF0037-09 (MW-6-dup)		Water			Sampled: 06/01/07 12:45					
Acetone	EPA 8260B	ND	-----	10.0	ug/l	1x	7F04061	06/04/07 16:31	06/05/07 00:59	
Benzene	"	846	-----	0.200	"	"	"	"	"	E
Bromobenzene	"	ND	-----	0.500	"	"	"	"	"	
Bromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	0.200	"	"	"	"	"	
Bromoform	"	ND	-----	0.200	"	"	"	"	"	
Bromomethane	"	ND	-----	2.00	"	"	"	"	"	
2-Butanone	"	ND	-----	2.00	"	"	"	"	"	
n-Butylbenzene	"	0.520	-----	0.200	"	"	"	"	"	
sec-Butylbenzene	"	0.400	-----	0.200	"	"	"	"	"	
tert-Butyibenzene	"	ND	-----	0.500	"	"	"	"	"	
Carbon disulfide	"	ND	-----	0.500	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-09 (MW-6-dup)		Water			Sampled: 06/01/07 12:45					
Carbon tetrachloride	EPA 8260B	ND	-----	0.200	ug/l	1x	7F04061	06/04/07 16:31	06/05/07 00:59	
Chlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Chloroethane	"	ND	-----	1.00	"	"	"	"	"	
Chloroform	"	ND	-----	0.200	"	"	"	"	"	
Chloromethane	"	ND	-----	1.00	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	0.500	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	0.200	"	"	"	"	"	
Dibromomethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	0.200	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloroethane	"	0.850	-----	0.200	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,2-Dichloroethene	"	0.770	-----	0.200	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	0.200	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	0.200	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	0.200	"	"	"	"	"	
Ethylbenzene	"	180	-----	0.200	"	"	"	"	"	E
Hexachlorobutadiene	"	ND	-----	2.50	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	1.00	"	"	"	"	"	
n-Hexane	"	ND	-----	1.00	"	"	"	"	"	
2-Hexanone	"	ND	-----	2.00	"	"	"	"	"	
Isopropylbenzene	"	8.90	-----	0.500	"	"	"	"	"	
p-Isopropyltoluene	"	0.250	-----	0.200	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	2.00	"	"	"	"	"	
Methylene chloride	"	ND	-----	5.00	"	"	"	"	"	
Naphthalene	"	64.6	-----	2.50	"	"	"	"	"	
n-Propylbenzene	"	3.29	-----	0.500	"	"	"	"	"	
Styrene	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	1.00	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	0.500	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-09 (MW-6-dup)		Water			Sampled: 06/01/07 12:45					
Tetrachloroethene	EPA 8260B	ND	-----	0.200	ug/l	1x	7F04061	06/04/07 16:31	06/05/07 00:59	
Toluene	"	3.17	-----	0.200	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	0.200	"	"	"	"	"	
Trichloroethene	"	ND	-----	0.200	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	0.500	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	0.500	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	10.6	-----	0.200	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	1.22	-----	0.500	"	"	"	"	"	
Vinyl chloride	"	ND	-----	0.200	"	"	"	"	"	
o-Xylene	"	12.7	-----	0.250	"	"	"	"	"	
m,p-Xylene	"	7.55	-----	0.500	"	"	"	"	"	
Total Xylenes	"	20.3	-----	0.750	"	"	"	"	"	
Surrogate(s): 1,2-DCA-d4			*97.0%*		*70 - 130 %*	"			"	
Toluene-d8			*98.5%*		*70 - 130 %*	"			"	
4-BFB			*102%*		*70 - 130 %*	"			"	
BQF0037-09RE1 (MW-6-dup)		Water			Sampled: 06/01/07 12:45					
Acetone	EPA 8260B	ND	-----	1000	ug/l	100x	7F05028	06/05/07 11:46	06/05/07 17:59	
Benzene	"	826	-----	20.0	"	"	"	"	"	
Bromobenzene	"	ND	-----	50.0	"	"	"	"	"	
Bromochloromethane	"	ND	-----	20.0	"	"	"	"	"	
Bromodichloromethane	"	ND	-----	20.0	"	"	"	"	"	
Bromoform	"	ND	-----	20.0	"	"	"	"	"	
Bromomethane	"	ND	-----	200	"	"	"	"	"	
2-Butanone	"	ND	-----	200	"	"	"	"	"	
n-Butylbenzene	"	ND	-----	20.0	"	"	"	"	"	
sec-Butylbenzene	"	ND	-----	20.0	"	"	"	"	"	
tert-Butylbenzene	"	ND	-----	50.0	"	"	"	"	"	
Carbon disulfide	"	ND	-----	50.0	"	"	"	"	"	
Carbon tetrachloride	"	ND	-----	20.0	"	"	"	"	"	
Chlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
Chloroethane	"	ND	-----	100	"	"	"	"	"	
Chloroform	"	ND	-----	20.0	"	"	"	"	"	
Chloromethane	"	ND	-----	100	"	"	"	"	"	
2-Chlorotoluene	"	ND	-----	50.0	"	"	"	"	"	
4-Chlorotoluene	"	ND	-----	50.0	"	"	"	"	"	
Dibromochloromethane	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dibromo-3-chloropropane	"	ND	-----	50.0	"	"	"	"	"	
1,2-Dibromoethane	"	ND	-----	20.0	"	"	"	"	"	
Dibromomethane	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	20.0	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-09RE1 (MW-6-dup)		Water			Sampled: 06/01/07 12:45					
1,3-Dichlorobenzene	EPA 8260B	ND	-----	20.0	ug/l	100x	7F05028	06/05/07 11:46	06/05/07 17:59	
1,4-Dichlorobenzene	"	ND	-----	20.0	"	"	"	"	"	
Dichlorodifluoromethane	"	ND	-----	50.0	"	"	"	"	"	
1,1-Dichloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dichloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,1-Dichloroethene	"	ND	-----	20.0	"	"	"	"	"	
cis-1,2-Dichloroethene	"	ND	-----	20.0	"	"	"	"	"	
trans-1,2-Dichloroethene	"	ND	-----	20.0	"	"	"	"	"	
1,2-Dichloropropane	"	ND	-----	20.0	"	"	"	"	"	
1,3-Dichloropropane	"	ND	-----	20.0	"	"	"	"	"	
2,2-Dichloropropane	"	ND	-----	50.0	"	"	"	"	"	
1,1-Dichloropropene	"	ND	-----	20.0	"	"	"	"	"	
cis-1,3-Dichloropropene	"	ND	-----	20.0	"	"	"	"	"	
trans-1,3-Dichloropropene	"	ND	-----	20.0	"	"	"	"	"	
Ethylbenzene	"	160	-----	20.0	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	250	"	"	"	"	"	
Methyl tert-butyl ether	"	ND	-----	100	"	"	"	"	"	
n-Hexane	"	ND	-----	100	"	"	"	"	"	
2-Hexanone	"	ND	-----	200	"	"	"	"	"	
Isopropylbenzene	"	ND	-----	50.0	"	"	"	"	"	
p-Isopropyltoluene	"	ND	-----	20.0	"	"	"	"	"	
4-Methyl-2-pentanone	"	ND	-----	200	"	"	"	"	"	
Methylene chloride	"	ND	-----	500	"	"	"	"	"	
Naphthalene	"	ND	-----	250	"	"	"	"	"	
n-Propylbenzene	"	ND	-----	50.0	"	"	"	"	"	
Styrene	"	ND	-----	50.0	"	"	"	"	"	
1,2,3-Trichlorobenzene	"	ND	-----	100	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	100	"	"	"	"	"	
1,1,1,2-Tetrachloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,1,2,2-Tetrachloroethane	"	ND	-----	50.0	"	"	"	"	"	
Tetrachloroethene	"	ND	-----	20.0	"	"	"	"	"	
Toluene	"	ND	-----	20.0	"	"	"	"	"	
1,1,1-Trichloroethane	"	ND	-----	20.0	"	"	"	"	"	
1,1,2-Trichloroethane	"	ND	-----	20.0	"	"	"	"	"	
Trichloroethene	"	ND	-----	20.0	"	"	"	"	"	
Trichlorofluoromethane	"	ND	-----	50.0	"	"	"	"	"	
1,2,3-Trichloropropane	"	ND	-----	50.0	"	"	"	"	"	
1,2,4-Trimethylbenzene	"	ND	-----	20.0	"	"	"	"	"	
1,3,5-Trimethylbenzene	"	ND	-----	50.0	"	"	"	"	"	
Vinyl chloride	"	ND	-----	20.0	"	"	"	"	"	
o-Xylene	"	ND	-----	25.0	"	"	"	"	"	
m,p-Xylene	"	ND	-----	50.0	"	"	"	"	"	
Total Xylenes	"	ND	-----	75.0	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-09RE1 (MW-6-dup)		Water			Sampled: 06/01/07 12:45					
Surrogate(s): *1,2-DCA-d4*		*106%*			*70 - 130 %*	*1x*			*06/05/07 17:59*	
Toluene-d8		*99.5%*			*70 - 130 %*	*"*			*"*	
4-BFB		*100%*			*70 - 130 %*	*"*			*"*	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-01 (MW-1)		Water			Sampled: 06/01/07 08:30					
Acenaphthene	EPA 8270C	ND	-----	10.2	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 19:10	
Acenaphthylene	"	ND	-----	10.2	"	"	"	"	"	
Aniline	"	ND	-----	10.2	"	"	"	"	"	
Anthracene	"	ND	-----	10.2	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	10.2	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	10.2	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	10.2	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	10.2	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	10.2	"	"	"	"	"	
Benzoic Acid	"	ND	-----	20.4	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	10.2	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	10.2	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	10.2	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	10.2	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	51.0	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	10.2	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	10.2	"	"	"	"	"	
Carbazole	"	ND	-----	10.2	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	10.2	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	10.2	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	10.2	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	10.2	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	10.2	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	10.2	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	10.2	"	"	"	"	"	
Chrysene	"	ND	-----	10.2	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	10.2	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	10.2	"	"	"	"	"	
Dibenzofuran	"	ND	-----	10.2	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	10.2	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	10.2	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	10.2	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	10.2	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	10.2	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	10.2	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	10.2	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	10.2	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	10.2	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	20.4	"	"	"	"	"	C
2,4-Dinitrotoluene	"	ND	-----	10.2	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	10.2	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	10.2	"	"	"	"	"	
Fluoranthene	"	ND	-----	10.2	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-01 (MW-1)		Water			Sampled: 06/01/07 08:30					
Fluorene	EPA 8270C	ND	----	10.2	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 19:10	
Hexachlorobenzene	"	ND	----	10.2	"	"	"	"	"	
Hexachlorobutadiene	"	ND	----	10.2	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	----	10.2	"	"	"	"	"	
Hexachloroethane	"	ND	----	10.2	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	----	10.2	"	"	"	"	"	
Isophorone	"	ND	----	10.2	"	"	"	"	"	
1-Methylnaphthalene	"	ND	----	10.2	"	"	"	"	"	
2-Methylnaphthalene	"	ND	----	10.2	"	"	"	"	"	
Naphthalene	"	ND	----	10.2	"	"	"	"	"	
2-Nitroaniline	"	ND	----	10.2	"	"	"	"	"	
3-Nitroaniline	"	ND	----	10.2	"	"	"	"	"	
4-Nitroaniline	"	ND	----	10.2	"	"	"	"	"	
Nitrobenzene	"	ND	----	10.2	"	"	"	"	"	
2-Nitrophenol	"	ND	----	10.2	"	"	"	"	"	
4-Nitrophenol	"	ND	----	10.2	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	----	10.2	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	----	10.2	"	"	"	"	"	
Pentachlorophenol	"	ND	----	10.2	"	"	"	"	"	
Phenanthrene	"	ND	----	10.2	"	"	"	"	"	
Phenol	"	ND	----	10.2	"	"	"	"	"	
Pyrene	"	ND	----	10.2	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	----	10.2	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	----	10.2	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	----	10.2	"	"	"	"	"	
Surrogate(s):	*2-FBP*	*106%*			*44 - 120 %*	"			"	
	2-FP	*88.8%*			*16 - 120 %*	"			"	
	Nitrobenzene-d5	*104%*			*38 - 120 %*	"			"	
	Phenol-d6	*58.9%*			*16 - 120 %*	"			"	
	p-Terphenyl-d14	*117%*			*24 - 146 %*	"			"	
	2,4,6-TBP	*84.4%*			*32 - 135 %*	"			"	

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-02 (MW-2)		Water			Sampled: 06/01/07 10:20					
Acenaphthene	EPA 8270C	ND	-----	9.71	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 19:34	
Acenaphthylene	"	ND	-----	9.71	"	"	"	"	"	
Aniline	"	ND	-----	9.71	"	"	"	"	"	
Anthracene	"	ND	-----	9.71	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	9.71	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	9.71	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	9.71	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	9.71	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	9.71	"	"	"	"	"	
Benzoic Acid	"	ND	-----	19.4	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	9.71	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	9.71	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	9.71	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	9.71	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	48.5	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	9.71	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	9.71	"	"	"	"	"	
Carbazole	"	ND	-----	9.71	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	9.71	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	9.71	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	9.71	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	9.71	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	9.71	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	9.71	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	9.71	"	"	"	"	"	
Chrysene	"	ND	-----	9.71	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	9.71	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	9.71	"	"	"	"	"	
Dibenzofuran	"	ND	-----	9.71	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	9.71	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	9.71	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	9.71	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	9.71	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	9.71	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	9.71	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	9.71	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	9.71	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	9.71	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	19.4	"	"	"	"	"	C
2,4-Dinitrotoluene	"	ND	-----	9.71	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	9.71	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	9.71	"	"	"	"	"	
Fluoranthene	"	ND	-----	9.71	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-02 (MW-2)		Water			Sampled: 06/01/07 10:20					
Fluorene	EPA 8270C	ND	-----	9.71	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 19:34	
Hexachlorobenzene	"	ND	-----	9.71	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	9.71	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	9.71	"	"	"	"	"	
Hexachloroethane	"	ND	-----	9.71	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	9.71	"	"	"	"	"	
Isophorone	"	ND	-----	9.71	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	9.71	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	9.71	"	"	"	"	"	
Naphthalene	"	ND	-----	9.71	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	9.71	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	9.71	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	9.71	"	"	"	"	"	
Nitrobenzene	"	ND	-----	9.71	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	9.71	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	9.71	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	9.71	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	9.71	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	9.71	"	"	"	"	"	
Phenanthrene	"	ND	-----	9.71	"	"	"	"	"	
Phenol	"	ND	-----	9.71	"	"	"	"	"	
Pyrene	"	ND	-----	9.71	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	9.71	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	9.71	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	9.71	"	"	"	"	"	
Surrogate(s): *2-FBP*			*109%*		*44 - 120 %*	"			"	
2-FP			*78.1%*		*16 - 120 %*	"			"	
Nitrobenzene-d5			*105%*		*38 - 120 %*	"			"	
Phenol-d6			*55.1%*		*16 - 120 %*	"			"	
p-Terphenyl-d14			*111%*		*24 - 146 %*	"			"	
2,4,6-TBP			*86 1%*		*32 - 135 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Projeet Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-03 (MW-3)		**Water**			**Sampled: 06/01/07 11:00**					
Acenaphthene	EPA 8270C	ND	-----	9.71	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 19:58	
Acenaphthylene	"	ND	-----	9.71	"	"	"	"	"	
Aniline	"	ND	-----	9.71	"	"	"	"	"	
Anthracene	"	ND	-----	9.71	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	9.71	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	9.71	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	9.71	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	9.71	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	9.71	"	"	"	"	"	
Benzoic Acid	"	ND	-----	19.4	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	9.71	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	9.71	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	9.71	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	9.71	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	48.5	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	9.71	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	9.71	"	"	"	"	"	
Carbazole	"	ND	-----	9.71	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	9.71	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	9.71	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	9.71	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	9.71	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	9.71	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	9.71	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	9.71	"	"	"	"	"	
Chrysene	"	ND	-----	9.71	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	9.71	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	9.71	"	"	"	"	"	
Dibenzofuran	"	ND	-----	9.71	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	9.71	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	9.71	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	9.71	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	9.71	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	9.71	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	9.71	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	9.71	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	9.71	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	9.71	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	19.4	"	"	"	"	"	C
2,4-Dinitrotoluene	"	ND	-----	9.71	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	9.71	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	9.71	"	"	"	"	"	
Fluoranthene	"	ND	-----	9.71	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-03 (MW-3)		**Water**			**Sampled:** 06/01/07 11:00					
Fluorene	EPA 8270C	ND	-----	9.71	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 19:58	
Hexachlorobenzene	"	ND	-----	9.71	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	9.71	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	9.71	"	"	"	"	"	
Hexachloroethane	"	ND	-----	9.71	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	9.71	"	"	"	"	"	
Isophorone	"	ND	-----	9.71	"	"	"	"	"	
1-Methylnaphthalene	"	16.8	-----	9.71	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	9.71	"	"	"	"	"	
Naphthalene	"	ND	-----	9.71	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	9.71	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	9.71	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	9.71	"	"	"	"	"	
Nitrobenzene	"	ND	-----	9.71	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	9.71	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	9.71	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	9.71	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	9.71	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	9.71	"	"	"	"	"	
Phenanthrene	"	ND	-----	9.71	"	"	"	"	"	
Phenol	"	75.5	-----	9.71	"	"	"	"	"	
Pyrene	"	ND	-----	9.71	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	9.71	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	9.71	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	9.71	"	"	"	"	"	
Surrogate(s): *2-FBP*		*117%*			*44 - 120 %*	"			"	
2-FP		*94.0%*			*16 - 120 %*	"			"	
Nitrobenzene-d5		*107%*			*38 - 120 %*	"			"	
Phenol-d6		*66.4%*			*16 - 120 %*	"			"	
p-Terphenyl-d14		*120%*			*24 - 146 %*	"			"	
2,4,6-TBP		*103%*			*32 - 135 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-04 (MW-6)		Water			Sampled: 06/01/07 12:40					
Acenaphthene	EPA 8270C	20.1	-----	9.43	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 20:22	
Acenaphthylene	"	34.9	-----	9.43	"	"	"	"	"	
Aniline	"	ND	-----	9.43	"	"	"	"	"	
Anthracene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	9.43	"	"	"	"	"	
Benzoic Acid	"	ND	-----	18.9	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	47.2	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	9.43	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Carbazole	"	ND	-----	9.43	"	"	"	"	"	
4-Chloroanilinc	"	ND	-----	9.43	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	9.43	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	9.43	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	9.43	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	9.43	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	9.43	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	9.43	"	"	"	"	"	
Chrysene	"	ND	-----	9.43	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	9.43	"	"	"	"	"	
Dibenzofuran	"	ND	-----	9.43	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	9.43	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	18.9	"	"	"	"	"	C
2,4-Dinitrotoluene	"	ND	-----	9.43	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	9.43	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	9.43	"	"	"	"	"	
Fluoranthene	"	11.2	-----	9.43	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-04 (MW-6)		Water			Sampled: 06/01/07 12:40					
Fluorene	EPA 8270C	15.3	-----	9.43	ug/l	tx	7F04014	06/04/07 09:04	06/12/07 20:22	
Hexachlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	9.43	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	9.43	"	"	"	"	"	
Hexachloroethane	"	ND	-----	9.43	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	9.43	"	"	"	"	"	
Isophorone	"	ND	-----	9.43	"	"	"	"	"	
1-Methylnaphthalene	"	59.4	-----	9.43	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	9.43	"	"	"	"	"	
Naphthalene	"	ND	-----	9.43	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
Nitrobenzene	"	ND	-----	9.43	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	9.43	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	9.43	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	9.43	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Phenanthrene	"	ND	-----	9.43	"	"	"	"	"	
Phenol	"	77.5	-----	9.43	"	"	"	"	"	
Pyrene	"	13.6	-----	9.43	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Surrogate(s):	*2-FBP*		*120%*		*44 - 120 %*	"			"	
	2-FP		*98.5%*		*16 - 120 %*	"			"	
	Nitrobenzene-d5		*110%*		*38 - 120 %*	"			"	
	Phenol-d6		*67.6%*		*16 - 120 %*	"			"	
	p-Terphenyl-d14		*119%*		*24 - 146 %*	"			"	
	2,4,6-TBP		*104%*		*32 - 135 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-05 (MW-8)		Water			Sampled: 06/01/07 13:10					
Acenaphthene	EPA 8270C	12.3	----	9.90	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 20:46	
Acenaphthylene	"	9.41	----	9.41	"	"	"	"	"	
Aniline	"	ND	----	9.90	"	"	"	"	"	
Anthracene	"	ND	----	9.90	"	"	"	"	"	
Benzo (a) anthracene	"	ND	----	9.90	"	"	"	"	"	
Benzo (a) pyrene	"	ND	----	9.90	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	----	9.90	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	----	9.90	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	----	9.90	"	"	"	"	"	
Benzoic Acid	"	ND	----	19.8	"	"	"	"	"	
Benzyl alcohol	"	ND	----	9.90	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	----	9.90	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	----	9.90	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	----	9.90	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	----	49.5	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	----	9.90	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	----	9.90	"	"	"	"	"	
Carbazole	"	ND	----	9.90	"	"	"	"	"	
4-Chloroaniline	"	ND	----	9.90	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	----	9.90	"	"	"	"	"	
2-Chloronaphthalene	"	ND	----	9.90	"	"	"	"	"	
2-Chlorophenol	"	ND	----	9.90	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	----	9.90	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	----	9.90	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	----	9.90	"	"	"	"	"	
Chrysene	"	ND	----	9.90	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	----	9.90	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	----	9.90	"	"	"	"	"	
Dibenzofuran	"	ND	----	9.90	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	----	9.90	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	----	9.90	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	----	9.90	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	----	9.90	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	----	9.90	"	"	"	"	"	
Diethyl phthalate	"	ND	----	9.90	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	----	9.90	"	"	"	"	"	
Dimethyl phthalate	"	ND	----	9.90	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	----	9.90	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	----	19.8	"	"	"	"	"	C
2,4-Dinitrotoluene	"	ND	----	9.90	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	----	9.90	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	----	9.90	"	"	"	"	"	
Fluoranthene	"	ND	----	9.90	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-05 (MW-8)		Water			Sampled: 06/01/07 13:10					
Fluorene	EPA 8270C	ND	-----	9.90	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 20:46	
Hexachlorobenzene	"	ND	-----	9.90	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	9.90	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	9.90	"	"	"	"	"	
Hexachloroethane	"	ND	-----	9.90	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	9.90	"	"	"	"	"	
Isophorone	"	ND	-----	9.90	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	9.90	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	9.90	"	"	"	"	"	
Naphthalene	"	ND	-----	9.90	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	9.90	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	9.90	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	9.90	"	"	"	"	"	
Nitrobenzene	"	ND	-----	9.90	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	9.90	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	9.90	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	9.90	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	9.90	"	"	"	"	"	
Pentachlorophenol	"	11.4	-----	9.90	"	"	"	"	"	
Phenanthrene	"	ND	-----	9.90	"	"	"	"	"	
Phenol	"	81.6	-----	9.90	"	"	"	"	"	
Pyrene	"	ND	-----	9.90	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	9.90	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	9.90	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	9.90	"	"	"	"	"	
Surrogate(s):	*2-FBP*		*117%*		*44 - 120 %*	"			"	
	2-FP		*98.0%*		*16 - 120 %*	"			"	
	Nitrobenzene-d5		*107%*		*38 - 120 %*	"			"	
	Phenol-d6		*66.2%*		*16 - 120 %*	"			"	
	p-Terphenyl-d14		*103%*		*24 - 146 %*	"			"	
	2,4,6-TBP		*99.7%*		*32 - 135 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-06 (MW-7)		Water			Sampled: 06/01/07 14:30					
Acenaphthene	EPA 8270C	ND	-----	9.43	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 21:10	
Acenaphthylene	"	ND	-----	9.43	"	"	"	"	"	
Aniline	"	ND	-----	9.43	"	"	"	"	"	
Anthracene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	9.43	"	"	"	"	"	
Benzoic Acid	"	ND	-----	18.9	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroethyl)e/her	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	47.2	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	9.43	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Carbazole	"	ND	-----	9.43	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	9.43	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	9.43	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	9.43	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	9.43	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	9.43	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	9.43	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	9.43	"	"	"	"	"	
Chrysene	"	ND	-----	9.43	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	9.43	"	"	"	"	"	
Dibenzofuran	"	ND	-----	9.43	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	9.43	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	18.9	"	"	"	"	"	C
2,4-Dinitrotoluene	"	ND	-----	9.43	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	9.43	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	9.43	"	"	"	"	"	
Fluoranthene	"	ND	-----	9.43	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-06 (MW-7)		Water			Sampled: 06/01/07 14:30					
Fluorene	EPA 8270C	ND	-----	9.43	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 21:10	
Hexachlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	9.43	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	9.43	"	"	"	"	"	
Hexachloroethane	"	ND	-----	9.43	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	9.43	"	"	"	"	"	
Isophorone	"	ND	-----	9.43	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	9.43	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	9.43	"	"	"	"	"	
Naphthalene	"	ND	-----	9.43	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
Nitrobenzene	"	ND	-----	9.43	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	9.43	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	9.43	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	9.43	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Phenanthrene	"	ND	-----	9.43	"	"	"	"	"	
Phenol	"	ND	-----	9.43	"	"	"	"	"	
Pyrene	"	ND	-----	9.43	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Surrogate(s):	*2-FBP*		*105%*		*44 - 120 %*	"			"	
	2-FP		*87.2%*		*16 - 120 %*	"			"	
	Nitrobenzene-d5		*95.4%*		*38 - 120 %*	"			"	
	Phenol-d6		*57.1%*		*16 - 120 %*	"			"	
	p-Terphenyl-d14		*104%*		*24 - 146 %*	"			"	
	2,4,6-TBP		*95.9%*		*32 - 135 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-07 (MW-4)		**Water**			**Sampled: 06/01/07 15:10**					
Acenaphthene	EPA 8270C	220	-----	9.43	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 21:34	E
Acenaphthylene	"	25.1	-----	9.43	"	"	"	"	"	
Aniline	"	ND	-----	9.43	"	"	"	"	"	
Anthracene	"	120	-----	9.43	"	"	"	"	"	
Benzo (a) anthracene	"	48.7	-----	9.43	"	"	"	"	"	
Benzo (a) pyrene	"	40.2	-----	9.43	"	"	"	"	"	
Benzo (b) fluoranthene	"	20.3	-----	9.43	"	"	"	"	"	
Benzo (k) fluoranthene	"	18.6	-----	9.43	"	"	"	"	"	
Benzo (ghi) perylene	"	25.6	-----	9.43	"	"	"	"	"	
Benzoic Acid	"	ND	-----	18.9	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	47.2	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	9.43	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Carbazole	"	ND	-----	9.43	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	9.43	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	9.43	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	9.43	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	9.43	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	9.43	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	9.43	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	9.43	"	"	"	"	"	
Chrysene	"	49.6	-----	9.43	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	9.43	"	"	"	"	"	
Dibenzofuran	"	31.8	-----	9.43	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	9.43	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	18.9	"	"	"	"	"	C
2,4-Dinitrotoluene	"	ND	-----	9.43	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	9.43	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	9.43	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-07 (MW-4)		Water			Sampled: 06/01/07 15:10					
Fluoranthene	EPA 8270C	37.1	-----	9.43	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 21:34	
Fluorene	"	184	-----	9.43	"	"	"	"	"	
Hexachlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	9.43	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	9.43	"	"	"	"	"	
Hexachloroethane	"	ND	-----	9.43	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	18.0	-----	9.43	"	"	"	"	"	
Isophorone	"	ND	-----	9.43	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	9.43	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	9.43	"	"	"	"	"	
Naphthalene	"	647	-----	9.43	"	"	"	"	"	E
2-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
Nitrobenzene	"	ND	-----	9.43	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	9.43	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	9.43	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	9.43	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Phenanthrene	"	ND	-----	9.43	"	"	"	"	"	
Phenol	"	ND	-----	9.43	"	"	"	"	"	
Pyrene	"	34.5	-----	9.43	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Surrogate(s): *2-FBP*		*93.0%*			*44 - 120 %*	"			"	
2-FP		*101%*			*16 - 120 %*	"			"	
Nitrobenzene-d5		*190%*			*38 - 120 %*	"			"	*ZX*
Phenol-d6		*70.1%*			*16 - 120 %*	"			"	
p-Terphenyl-d14		*96.3%*			*24 - 146 %*	"			"	
2,4,6-TBP		*98.1%*			*32 - 135 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-08 (MW-5)		Water			Sampled: 06/01/07 15:50					
Acenaphthene	EPA 8270C	14.5	-----	9.43	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 21:58	
Acenaphthylene	"	ND	-----	9.43	"	"	"	"	"	
Aniline	"	ND	-----	9.43	"	"	"	"	"	
Anthracene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	9.43	"	"	"	"	"	
Benzoic Acid	"	ND	-----	18.9	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	47.2	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	9.43	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Carbazole	"	ND	-----	9.43	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	9.43	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	9.43	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	9.43	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	9.43	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	9.43	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	9.43	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	9.43	"	"	"	"	"	
Chrysene	"	ND	-----	9.43	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	9.43	"	"	"	"	"	
Dibenzofuran	"	ND	-----	9.43	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	9.43	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	18.9	"	"	"	"	"	C
2,4-Dinitrotoluene	"	ND	-----	9.43	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	9.43	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	9.43	"	"	"	"	"	
Fluoranthene	"	ND	-----	9.43	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Frepared	Analyzed	Notes
BQF0037-08 (MW-5)		Water			Sampled: 06/01/07 15:50					
Fluorene	EPA 8270C	ND	-----	9.43	ug/l	1x	7F0401t4	06/04/07 09:04	06/12/07 21:58	
Hexachlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	9.43	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	9.43	"	"	"	"	"	
Hexachloroethane	"	ND	-----	9.43	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	9.43	"	"	"	"	"	
Isophorone	"	ND	-----	9.43	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	9.43	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	9.43	"	"	"	"	"	
Naphthalene	"	ND	-----	9.43	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
Nitrobenzene	"	ND	-----	9.43	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	9.43	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	9.43	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	9.43	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Phenanthrene	"	ND	-----	9.43	"	"	"	"	"	
Phenol	"	ND	-----	9.43	"	"	"	"	"	
Pyrene	"	ND	-----	9.43	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Surrogate(s):	*2-FBP*		*91.9%*		*44 - 120 %*	"			"	
	2-FP		*77.5%*		*16 - 120 %*	"			"	
	Nitrobenzene-d5		*85.9%*		*38 - 120 %*	"			"	
	Phenol-d6		*52.3%*		*16 - 120 %*	"			"	
	p-Terphenyl-d14		*103%*		*24 - 146 %*	"			"	
	2,4,6-TBP		*95.8%*		*32 - 135 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody documeni. This analylical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-09 (MW-6-dup)		Water			Sampled: 06/01/07 12:45					
Acenaphthene	EPA 8270C	16.3	-----	9.43	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 22:22	
Acenaphthylene	"	27.8	-----	9.43	"	"	"	"	"	
Aniline	"	ND	-----	9.43	"	"	"	"	"	
Anthracene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	9.43	"	"	"	"	"	
Benzoic Acid	"	ND	-----	18.9	"	"	"	"	"	
Benzyl alcohol	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroethoxy)methane	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroethyl)ether	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-chloroisopropyl)ether	"	ND	-----	9.43	"	"	"	"	"	
Bis(2-ethylhexyl)phthalate	"	ND	-----	47.2	"	"	"	"	"	
4-Bromophenyl phenyl ether	"	ND	-----	9.43	"	"	"	"	"	
Butyl benzyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Carbazole	"	ND	-----	9.43	"	"	"	"	"	
4-Chloroaniline	"	ND	-----	9.43	"	"	"	"	"	
4-Chloro-3-methylphenol	"	ND	-----	9.43	"	"	"	"	"	
2-Chloronaphthalene	"	ND	-----	9.43	"	"	"	"	"	
2-Chlorophenol	"	ND	-----	9.43	"	"	"	"	"	
4-Chlorophenyl phenyl ether	"	ND	-----	9.43	"	"	"	"	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	-----	9.43	"	"	"	"	"	
2-Methylphenol (o-Cresol)	"	ND	-----	9.43	"	"	"	"	"	
Chrysene	"	ND	-----	9.43	"	"	"	"	"	
Di-n-butyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	9.43	"	"	"	"	"	
Dibenzofuran	"	ND	-----	9.43	"	"	"	"	"	
1,2-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
1,3-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
1,4-Dichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
3,3'-Dichlorobenzidine	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Diethyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dimethylphenol	"	ND	-----	9.43	"	"	"	"	"	
Dimethyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
4,6-Dinitro-2-methylphenol	"	ND	-----	9.43	"	"	"	"	"	
2,4-Dinitrophenol	"	ND	-----	18.9	"	"	"	"	"	C
2,4-Dinitrotoluene	"	ND	-----	9.43	"	"	"	"	"	
2,6-Dinitrotoluene	"	ND	-----	9.43	"	"	"	"	"	
N-Nitrosodiphenylamine	"	ND	-----	9.43	"	"	"	"	"	
Fluoranthene	"	9.68	-----	9.43	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-09 (MW-6-dup)		Water			Sampled: 06/01/07 12:45					
Fluorene	EPA 8270C	ND	-----	9.43	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 22:22	
Hexachlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
Hexachlorobutadiene	"	ND	-----	9.43	"	"	"	"	"	
Hexachlorocyclopentadiene	"	ND	-----	9.43	"	"	"	"	"	
Hexachloroethane	"	ND	-----	9.43	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	9.43	"	"	"	"	"	
Isophorone	"	ND	-----	9.43	"	"	"	"	"	
1-Methylnaphthalene	"	9.47	-----	9.43	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	9.43	"	"	"	"	"	
Naphthalene	"	ND	-----	9.43	"	"	"	"	"	
2-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
3-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
4-Nitroaniline	"	ND	-----	9.43	"	"	"	"	"	
Nitrobenzene	"	ND	-----	9.43	"	"	"	"	"	
2-Nitrophenol	"	ND	-----	9.43	"	"	"	"	"	
4-Nitrophenol	"	ND	-----	9.43	"	"	"	"	"	
N-Nitrosodi-n-propylamine	"	ND	-----	9.43	"	"	"	"	"	
Di-n-octyl phthalate	"	ND	-----	9.43	"	"	"	"	"	
Pentachlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Phenanthrene	"	ND	-----	9.43	"	"	"	"	"	
Phenol	"	62.6	-----	9.43	"	"	"	"	"	
Pyrene	"	11.1	-----	9.43	"	"	"	"	"	
1,2,4-Trichlorobenzene	"	ND	-----	9.43	"	"	"	"	"	
2,4,5-Trichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
2,4,6-Trichlorophenol	"	ND	-----	9.43	"	"	"	"	"	
Surrogate(s):	*2-FBP*		*103%*		*44 - 120 %*	"			"	
	2-FP		*84.1%*		*16 - 120 %*	"			"	
	Nitrobenzene-d5		*94.2%*		*38 - 120 %*	"			"	
	Phenol-d6		*58.4%*		*16 - 120 %*	"			"	
	p-Terphenyl-d14		*107%*		*24 - 146 %*	"			"	
	2,4,6-TBP		*96.3%*		*32 - 135 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polynuclear Aromatic Compounds by GC/MS with High Volume Injection

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-01 (MW-1)		Water			Sampled: 06/01/07 08:30					
Acenaphthene	EPA 8270C-HVI	ND	-----	0.102	ug/l	1x	7F04014	06/04/07 09:04	06/11/07 19:53	
Acenaphthylene	"	ND	-----	0.102	"	"	"	"	"	
Anthracene	"	ND	-----	0.102	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.0102	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.0102	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.0102	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.0102	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.102	"	"	"	"	"	
Chrysene	"	ND	-----	0.0102	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.0102	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.102	"	"	"	"	"	
Fluorene	"	ND	-----	0.102	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.0102	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.102	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.102	"	"	"	"	"	
Naphthalene	"	ND	-----	0.102	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.102	"	"	"	"	"	
Pyrene	"	ND	-----	0.102	"	"	"	"	"	
Surrogate(s): Benzo (a) pyrene-d12			*24.8%*		*20 - 125 %*	"			"	
1-Methylnaphthalene-d10			*68.7%*		*39 - 125 %*	"			"	
BQF0037-02 (MW-2)		Water			Sampled: 06/01/07 10:20					
Acenaphthene	EPA 8270C-HVI	ND	-----	0.0971	ug/l	1x	7F04014	06/04/07 09:04	06/11/07 20:24	
Acenaphthylene	"	ND	-----	0.0971	"	"	"	"	"	
Anthracene	"	ND	-----	0.0971	"	"	"	"	"	
Benzo (a) anthracene	"	ND	-----	0.00971	"	"	"	"	"	
Benzo (a) pyrene	"	ND	-----	0.00971	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.00971	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	0.00971	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.0971	"	"	"	"	"	
Chrysene	"	ND	-----	0.00971	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.00971	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.0971	"	"	"	"	"	
Fluorene	"	ND	-----	0.0971	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.00971	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.0971	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.0971	"	"	"	"	"	
Naphthalene	"	ND	-----	0.0971	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.0971	"	"	"	"	"	
Pyrene	"	ND	-----	0.0971	"	"	"	"	"	
Surrogate(s): Benzo (a) pyrene-d12			*NR*		*20 - 125 %*	"			"	*Z6*

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polynuclear Aromatic Compounds by GC/MS with High Volume Injection

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-02 (MW-2)			Water		Sampled: 06/01/07 10:20					
1-Methylnaphthalene-d10			*71.4%*		*39 - 125 %*	*1x*			*06/11/07 20:24*	
BQF0037-03 (MW-3)			Water		Sampled: 06/01/07 11:00					
Acenaphthene	EPA 8270C-HVi	1.10	----	0.0971	ug/l	1x	7F04014	06/04/07 09:04	06/11/07 20:55	
Acenaphthylene	"	4.66	----	0.0971	"	"	"	"	"	E
Anthracene	"	5.57	----	0.0971	"	"	"	"	"	E
Benzo (a) anthracene	"	0.389	----	0.00971	"	"	"	"	"	
Benzo (a) pyrene	"	0.217	----	0.00971	"	"	"	"	"	
Benzo (b) fluoranthene	"	0.0968	----	0.00971	"	"	"	"	"	
Benzo (k) fluoranthene	"	0.227	----	0.00971	"	"	"	"	"	
Benzo (ghi) perylene	"	0.0979	----	0.0971	"	"	"	"	"	
Chrysene	"	0.432	----	0.00971	"	"	"	"	"	
Dibenz (a,h) anthracene	"	0.0437	----	0.00971	"	"	"	"	"	
Fluoranthene	"	1.95	----	0.0971	"	"	"	"	"	
Fluorene	"	3.31	----	0.0971	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	0.0874	----	0.00971	"	"	"	"	"	
2-Methylnaphthalene	"	0.415	----	0.0971	"	"	"	"	"	
Naphthalene	"	1.77	----	0.0971	"	"	"	"	"	
Phenanthrene	"	7.31	----	0.0971	"	"	"	"	"	E
Pyrene	"	2.36	----	0.0971	"	"	"	"	"	
Surrogate(s): *Benzo (a) pyrene-d12*			*43.8%*		*20 - 125 %*	"			"	
1-Methylnaphthalene-d10			*68.3%*		*39 - 125 %*	"			"	
BQF0037-03RE1 (MW-3)			Water		Sampled: 06/01/07 11:00					
Acenaphthylene	EPA 8270C-HVI	3.26	----	0.971	ug/l	10x	7F04014	06/04/07 09:04	06/14/07 09:26	
Anthracene	"	4.72	----	0.971	"	"	"	"	"	
Phenanthrene	"	5.78	----	0.971	"	"	"	"	"	
Surrogate(s): *Benzo (a) pyrene-d12*			*54.9%*		*20 - 125 %*	"			"	
1-Methylnaphthalene-d10			*41.8%*		*39 - 125 %*	"			"	

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polynuclear Aromatic Compounds by GC/MS with High Volume Injection

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-04 (MW-6)		Water			Sampled: 06/01/07 12:40					
Acenaphthene	EPA 8270C-HVI	13.5	-----	0.0943	ug/l	1x	7F04014	06/04/07 09:04	06/11/07 21:27	E
Acenaphthylene	"	23.5	-----	0.0943	"	"	"	"	"	E
Anthracene	"	4.47	-----	0.0943	"	"	"	"	"	E
Benzo (a) anthracene	"	0.727	-----	0.00943	"	"	"	"	"	
Benzo (a) pyrene	"	0.345	-----	0.00943	"	"	"	"	"	
Benzo (b) fluoranthene	"	0.272	-----	0.00943	"	"	"	"	"	
Benzo (k) fluoranthene	"	0.281	-----	0.00943	"	"	"	"	"	
Benzo (ghi) perylene	"	0.221	-----	0.0943	"	"	"	"	"	
Chrysene	"	0.772	-----	0.00943	"	"	"	"	"	
Dibenz (a,h) anthracene	"	0.0678	-----	0.00943	"	"	"	"	"	
Fluoranthene	"	8.33	-----	0.0943	"	"	"	"	"	E
Fluorene	"	9.43	-----	0.0943	"	"	"	"	"	E
Indeno (1,2,3-cd) pyrene	"	0.167	-----	0.00943	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.0943	"	"	"	"	"	
Naphthalene	"	ND	-----	0.0943	"	"	"	"	"	
Phenanthrene	"	5.84	-----	0.0943	"	"	"	"	"	E
Pyrene	"	9.39	-----	0.0943	"	"	"	"	"	E
Surrogate(s): Benzo *(a) pyrene-d12*			*47.6%*		*20 - 125 %*	"			"	
1-Methylnaphthalene-d10			*68.7%*		*39 - 125 %*	"			"	
BQF0037-04RE1 (MW-6)		Water			Sampled: 06/01/07 12:40					
Anthracene	EPA 8270C-HVI	4.23	-----	1.89	ug/l	20x	7F04014	06/04/07 09:04	06/14/07 09:55	
1-Methylnaphthalene	"	67.0	-----	1.89	"	"	"	"	"	
Phenanthrene	"	5.73	-----	1.89	"	"	"	"	"	
Surrogate(s): *Benzo (a) pyrene-d12*			*50.7%*		*20 - 125 %*	"			"	
1-Methylnaphthalene-d10			*82.5%*		*39 - 125 %*	"			"	
BQF0037-05 (MW-8)		Water			Sampled: 06/01/07 13:10					
Acenaphthene	EPA 8270C-HVI	7.10	-----	0.0990	ug/l	1x	7F04014	06/04/07 09:04	06/11/07 21:58	E
Acenaphthylene	"	14.0	-----	0.0990	"	"	"	"	"	E
Anthracene	"	0.891	-----	0.0990	"	"	"	"	"	
Benzo (a) anthracene	"	0.694	-----	0.00990	"	"	"	"	"	
Benzo (a) pyrene	"	0.878	-----	0.00990	"	"	"	"	"	
Benzo (b) fluoranthene	"	0.657	-----	0.00990	"	"	"	"	"	
Benzo (k) fluoranthene	"	0.494	-----	0.00990	"	"	"	"	"	
Benzo (ghi) perylene	"	0.500	-----	0.0990	"	"	"	"	"	
Chrysene	"	0.836	-----	0.00990	"	"	"	"	"	
Dibenz (a,h) anthracene	"	0.170	-----	0.00990	"	"	"	"	"	
Fluoranthene	"	1.72	-----	0.0990	"	"	"	"	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polynuclear Aromatic Compounds by GC/MS with High Volume Injection

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-05 (MW-8)		Water			Sampled: 06/01/07 13:10					
Fluorene	EPA 8270C-HVI	0.873	-----	0.0990	ug/l	1x	7F04014	06/04/07 09:04	06/11/07 21:58	
Indeno (1,2,3-cd) pyrene	"	0.433	-----	0.00990	"	"	"	"	"	
1-Methylnaphthalene	"	0.813	-----	0.0990	"	"	"	"	"	
2-Methylnaphthalene	"	0.367	-----	0.0990	"	"	"	"	"	
Naphthalene	"	1.90	-----	0.0990	"	"	"	"	"	
Phenanthrene	"	1.04	-----	0.0990	"	"	"	"	"	
Pyrene	"	2.92	-----	0.0990	"	"	"	"	"	
Surrogate(s): Benzo (a) pyrene-d12			*23.7%*		*20 - 125 %*	"			"	
1-Methylnaphthalene-d10			*60.4%*		*39 - 125 %*	"			"	
BQF0037-06 (MW-7)		Water			Sampled: 06/01/07 14:30					
Acenaphthene	EPA 8270C-HVI	ND	-----	0.0943	ug/l	1x	7F04014	06/04/07 09:04	06/11/07 22:29	
Acenaphthylene	"	0.222	-----	0.0943	"	"	"	"	"	
Anthracene	"	ND	-----	0.0943	"	"	"	"	"	
Benzo (a) anthracene	"	0.0168	-----	0.00943	"	"	"	"	"	
Benzo (a) pyrene	"	0.0247	-----	0.00943	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	0.00943	"	"	"	"	"	
Benzo (k) fluoranthene	"	0.0602	-----	0.00943	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	0.0943	"	"	"	"	"	
Chrysene	"	0.0372	-----	0.00943	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	0.00943	"	"	"	"	"	
Fluoranthene	"	ND	-----	0.0943	"	"	"	"	"	
Fluorene	"	0.102	-----	0.0943	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	0.00943	"	"	"	"	"	
1-Methylnaphthalene	"	ND	-----	0.0943	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.0943	"	"	"	"	"	
Naphthalene	"	0.184	-----	0.0943	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.0943	"	"	"	"	"	
Pyrene	"	0.174	-----	0.0943	"	"	"	"	"	
Surrogate(s): Benzo (a) pyrene-d12			*31.2%*		*20 - 125 %*	"			"	
1-Methylnaphthalene-d10			*84.1%*		*39 - 125 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polynuclear Aromatic Compounds by GC/MS with High Volume Injection

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch.	Prepared	Analyzed	Notes
BQF0037-07 (MW-4)		Water			Sampled: 06/01/07 15:10					
Acenaphthene	EPA 8270C-HV1	361	-----	94.3	ug/l	1000x	7F04014	06/04/07 09:04	06/14/07 11:26	
Acenaphthylene	"	ND	-----	94.3	"	"	"	"	"	
Anthracene	"	120	-----	94.3	"	"	"	"	"	
Benzo (a) anthracene	"	39.3	-----	9.43	"	"	"	"	"	
Benzo (a) pyrene	"	37.6	-----	9.43	"	"	"	"	"	
Benzo (b) fluoranthene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (k) fluoranthene	"	ND	-----	9.43	"	"	"	"	"	
Benzo (ghi) perylene	"	ND	-----	94.3	"	"	"	"	"	
Chrysene	"	40.8	-----	9.43	"	"	"	"	"	
Dibenz (a,h) anthracene	"	ND	-----	9.43	"	"	"	"	"	
Fluoranthene	"	122	-----	94.3	"	"	"	"	"	
Fluorene	"	188	-----	94.3	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	ND	-----	9.43	"	"	"	"	"	
1-Methylnaphthalene	"	762	-----	94.3	"	"	"	"	"	
2-Methylnaphthalene	"	1150	-----	94.3	"	"	"	"	"	
Naphthalene	"	3700	-----	94.3	"	"	"	"	"	
Phenanthrene	"	377	-----	94.3	"	"	"	"	"	
Pyrene	"	158	-----	94.3	"	"	"	"	"	
Surrogate(s):	*Benzo (a) pyrene-d12*		*NR*		*20 - 125 %*	"			"	Z3
	1-Methylnaphthalene-d10		*NR*		*39 - 125 %*	"			"	Z3
BQF0037-08 (MW-5)		Water			Sampled: 06/01/07 15:50					
Acenaphthene	EPA 8270C-HV1	11.7	-----	0.0943	ug/l	1x	7F04014	06/04/07 09:04	06/11/07 23:32	E
Acenaphthylene	"	3.93	-----	0.0943	"	"	"	"	"	E
Anthracene	"	0.726	-----	0.0943	"	"	"	"	"	
Benzo (a) anthracene	"	0.884	-----	0.00943	"	"	"	"	"	
Benzo (a) pyrene	"	0.905	-----	0.00943	"	"	"	"	"	
Benzo (b) fluoranthene	"	0.637	-----	0.00943	"	"	"	"	"	
Benzo (k) fluoranthene	"	0.615	-----	0.00943	"	"	"	"	"	
Benzo (ghi) perylene	"	0.639	-----	0.0943	"	"	"	"	"	
Chrysene	"	1.16	-----	0.00943	"	"	"	"	"	
Dibenz (a,h) anthracene	"	0.189	-----	0.00943	"	"	"	"	"	
Fluoranthene	"	3.29	-----	0.0943	"	"	"	"	"	
Fluorene	"	1.36	-----	0.0943	"	"	"	"	"	
Indeno (1,2,3-cd) pyrene	"	0.467	-----	0.00943	"	"	"	"	"	
2-Methylnaphthalene	"	1.20	-----	0.0943	"	"	"	"	"	
Naphthalene	"	ND	-----	0.0943	"	"	"	"	"	
Phenanthrene	"	1.46	-----	0.0943	"	"	"	"	"	
Pyrene	"	3.87	-----	0.0943	"	"	"	"	"	E

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polynuclear Aromatic Compounds by GC/MS with High Volume Injection

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-08 (MW-5)			Water		Sampled: 06/01/07 15:50					
Surrogate(s): Benzo (a) pyrene-d12			*45.4%*		*20 - 125 %*	*1x*			*06/11/07 23:32*	
1-Methylnaphthalene-d10			*62.5%*		*39 - 125 %*	"			"	
BQF0037-08RE1 (MW-5)			Water		Sampled: 06/01/07 15:50					
Acenaphthylene	EPA 8270C-HV1	3.10	-----	0.943	ug/l	10x	7F04014	06/04/07 09:04	06/14/07 10:26	
Pyrene	"	3.90	-----	0.943	"	"	"	"	"	
Surrogate(s): Benzo (a) pyrene-d12			*52.5%*		*20 - 125 %*	"			"	
1-Methylnaphthalene-d10			*51.7%*		*39 - 125 %*	"			"	
BQF0037-09 (MW-6-dup)			Water		Sampled: 06/01/07 12:45					
Acenaphthene	EPA 8270C-HVI	11.0	-----	0.0943	ug/l	1x	7F04014	06/04/07 09:04	06/12/07 00:03	E
Acenaphthylene	"	18.9	-----	0.0943	"	"	"	"	"	E
Anthracene	"	1.32	-----	0.0943	"	"	"	"	"	
Benzo (a) anthracene	"	0.430	-----	0.00943	"	"	"	"	"	
Benzo (a) pyrene	"	0.158	-----	0.00943	"	"	"	"	"	
Benzo (b) fluoranthene	"	0.115	-----	0.00943	"	"	"	"	"	
Benzo (k) fluoranthene	"	0.189	-----	0.00943	"	"	"	"	"	
Benzo (ghi) perylene	"	0.104	-----	0.0943	"	"	"	"	"	
Chrysene	"	0.392	-----	0.00943	"	"	"	"	"	
Dibenz (a,h) anthracene	"	0.0723	-----	0.00943	"	"	"	"	"	
Fluoranthene	"	7.38	-----	0.0943	"	"	"	"	"	E
Fluorene	"	5.10	-----	0.0943	"	"	"	"	"	E
Indeno (1,2,3-cd) pyrene	"	0.0985	-----	0.00943	"	"	"	"	"	
2-Methylnaphthalene	"	ND	-----	0.0943	"	"	"	"	"	
Naphthalene	"	0.445	-----	0.0943	"	"	"	"	"	
Phenanthrene	"	ND	-----	0.0943	"	"	"	"	"	
Pyrene	"	8.13	-----	0.0943	"	"	"	"	"	E
Surrogate(s): Benzo (a) pyrene-d12			*63.2%*		*20 - 125 %*	"			"	
1-Methylnaphthalene-d10			*60.4%*		*39 - 125 %*	"			"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polynuclear Aromatic Compounds by GC/MS with High Volume Injection

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-09RE1 (MW-6-dup)			Water		Sampled: 06/01/07 12:45					
Fluorene	EPA 8270C-HVI	5.34	----	1.89	ug/l	20x	7F04014	06/04/07 09:04	06/14/07 10:56	
Surrogate(s): Benzo (a) pyrene-d12			*60.9%*		*20 - 125 %*	"			"	
1-Methylnaphthalene-d10			*39.4%*		*39 - 125 %*	"			"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Conventional Chemistry Parameters by APHA/EPA Methods

TestAmerica - Seattle, WA

Analyte	Method	Result	MDL*	MRL	Units	Dil	Batch	Prepared	Analyzed	Notes
BQF0037-01 (MW-1)		Water			Sampled: 06/01/07 08:30					
Hexavalent Chromium	EPA 7196A	0.00600	-----	0.00500	mg/l	1x	7F04075	06/01/07 22:00	06/01/07 22:00	
BQF0037-02 (MW-2)		Water			Sampled: 06/01/07 10:20					
Hexavalent Chromium	EPA 7196A	ND	-----	0.00500	mg/l	1x	7F04075	06/01/07 22:00	06/01/07 22:00	
BQF0037-03 (MW-3)		Water			Sampled: 06/01/07 11:00					
Hexavalent Chromium	EPA 7196A	0.0480	-----	0.00500	mg/l	1x	7F04075	06/01/07 22:00	06/01/07 22:00	
BQF0037-04 (MW-6)		Water			Sampled: 06/01/07 12:40					
Hexavalent Chromium	EPA 7196A	0.0230	-----	0.00500	mg/l	1x	7F04075	06/01/07 22:00	06/01/07 22:00	
BQF0037-05 (MW-8)		Water			Sampled: 06/01/07 13:10					
Hexavalent Chromium	EPA 7196A	0.0900	-----	0.00500	mg/l	1x	7F04075	06/01/07 22:00	06/01/07 22:00	
BQF0037-06 (MW-7)		Water			Sampled: 06/01/07 14:30					
Hexavalent Chromium	EPA 7196A	0.0110	-----	0.00500	mg/l	1x	7F04075	06/01/07 22:00	06/01/07 22:00	
BQF0037-07 (MW-4)		Water			Sampled: 06/01/07 15:10					
Hexavalent Chromium	EPA 7196A	0.0330	-----	0.00500	mg/l	1x	7F04075	06/01/07 22:00	06/01/07 22:00	
BQF0037-08 (MW-5)		Water			Sampled: 06/01/07 15:50					
Hexavalent Chromium	EPA 7196A	0.0610	-----	0.00500	mg/l	1x	7F04075	06/01/07 22:00	06/01/07 22:00	
BQF0037-09 (MW-6-dup)		Water			Sampled: 06/01/07 12:45					
Hexavalent Chromium	EPA 7196A	0.0330	-----	0.00500	mg/l	1x	7F04075	06/01/07 22:00	06/01/07 22:00	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Petroleum Products by NWTPH-Gx - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F06024 **Water Preparation Method: EPA 5030B (P/T)**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F06024-BLK1)								Extracted: 06/06/07 10:20						
Gasoline Range Hydrocarbons	NWTPH-Gx	ND	---	50.0	ug/l	1x	--	--	--	--	--	--	06/06/07 18:38	
Surrogate(s): 4-BFB (FID)		*Recovery: 92.3%*			*Limits: 58-144%*	"							*06/06/07 18:38*	
LCS (7F06024-BS1)								Extracted: 06/06/07 10:20						
Gasoline Range Hydrocarbons	NWTPH-Gx	913	---	50.0	ug/l	1x	--	1000	91.3%	(80-120)	--	--	06/06/07 19:11	
Surrogate(s): 4-BFB (FID)		*Recovery: 94.7%*			*Limits: 58-144%*	"							*06/06/07 19:11*	
Duplicate (7F06024-DUP1)					QC Source: BQE0503-01			Extracted: 06/06/07 10:20						
Gasoline Range Hydrocarbons	NWTPH-Gx	ND	---	50.0	ug/l	1x	ND	--	--	--	21.2%	(25)	06/06/07 20:16	R4
Surrogate(s): 4-BFB (FID)		*Recovery: 90.0%*			*Limits: 58-144%*	"							*06/06/07 20:16*	
Duplicate (7F06024-DUP2)					QC Source: BQE0503-02			Extracted: 06/06/07 10:20						
Gasoline Range Hydrocarbons	NWTPH-Gx	ND	---	50.0	ug/l	1x	ND	--	--	--		(25)	06/06/07 21:21	R4
Surrogate(s): 4-BFB (FID)		*Recovery: 89.7%*			*Limits: 58-144%*	"							*06/06/07 21:21*	
Matrix Spike (7F06024-MS1)					QC Source: BQE0503-01			Extracted: 06/06/07 10:20						
Gasoline Range Hydrocarbons	NWTPH-Gx	993	---	50.0	ug/l	1x	26.6	1000	96.6%	(75-131)	--	--	06/06/07 21:54	
Surrogate(s): 4-BFB (FID)		*Recovery: 92.3%*			*Limits: 58-144%*	"							*06/06/07 21:54*	
Matrix Spike Dup (7F06024-MSD1)					QC Source: BQE0503-01			Extracted: 06/06/07 10:20						
Gasoline Range Hydrocarbons	NWTPH-Gx	969	---	50.0	ug/l	tx	26.6	1000	94.2%	(75-131)	2.45%	(25)	06/06/07 22:26	
Surrogate(s): 4-BFB (FID)		*Recovery: 92.7%*			*Limits: 58-144%*	"							*06/06/07 22:26*	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Petroleum Products by NWTPH-Dx with Acid/Silica Gel Clean-up - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F06018 **Water Preparation Method: EPA 3520C**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F06018-BLK1)								Extracted: 06/06/07 09:34						
Diesel Range Hydrocarbons	NWTPH-Dx	ND	---	0.250	mg/l	1x	--	--	--	--	--	--	06/07/07 22:09	
Lube Oil Range Hydrocarbons	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Surrogate(s): 2-FBP		*Recovery: 77.2%*			*Limits: 53-125%*	"							*06/07/07 22:09*	
Octacosane		*95.2%*			*68-125%*	"							"	
LCS (7F06018-BS1)								Extracted: 06/06/07 09:34						
Diesel Range Hydrocarbons	NWTPH-Dx	1.91	---	0.250	mg/l	1x	--	2.00	95.5%	(61-132)	--	--	06/07/07 22:38	
Surrogate(s): 2-FBP		*Recovery: 81.6%*			*Limits: 53-125%*	"							*06/07/07 22:38*	
Octacosane		*97.6%*			*68-125%*	"							"	
LCS Dup (7F06018-BSD1)								Extracted: 06/06/07 09:34						
Diesel Range Hydrocarbons	NWTPH-Dx	1.98	---	0.250	mg/l	1x	--	2.00	99.0%	(61-132)	3.60%	(35)	06/07/07 23:08	
Surrogate(s): 2-FBP		*Recovery: 86.0%*			*Limits: 53-125%*	"							*06/07/07 23:08*	
Octacosane		*100%*			*68-125%*	"							"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F05020 Water Preparation Method: EPA 3020A

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F05020-BLK1)								Extracted: 06/05/07 10:37						
Cadmium	EPA 6020	ND	---	0.00100	mg/l	1x	--	--	--	--	--	--	06/07/07 14:26	
Selenium	"	ND	---	0.00100	"	"	--	--	--	--	--	--	"	
Beryllium	"	ND	---	0.00100	"	"	--	--	--	--	--	--	"	
Arsenic	"	ND	---	0.00100	"	"	--	--	--	--	--	--	"	
Lead	"	ND	---	0.00100	"	"	--	--	--	--	--	--	"	
Chromium	"	ND	---	0.00100	"	"	--	--	--	--	--	--	"	
Copper	"	ND	---	0.00100	"	"	--	--	--	--	--	--	"	
Nickel	"	ND	---	0.00100	"	"	--	--	--	--	--	--	"	
Zinc	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Thallium	"	ND	---	0.00100	"	"	--	--	--	--	--	--	"	
Silver	"	ND	---	0.00100	"	"	--	--	--	--	--	--	"	
Antimony	"	ND	---	0.00300	"	"	--	--	--	--	--	--	06/12/07 07:04	
LCS (7F05020-BS1)								Extracted: 06/05/07 10:37						
Arsenic	EPA 6020	0.0706	---	0.00100	mg/l	1x	--	0.0800	88.3%	(80-120)	--	--	06/07/07 14:44	
Lead	"	0.0712	---	0.00100	"	"	--	"	89.0%	"	--	--	"	
Antimony	"	0.0640	---	0.00300	"	"	--	0.0600	107%	"	--	--	06/12/07 07:09	
Silver	"	0.0836	---	0.00100	"	"	--	0.0800	104%	"	--	--	06/07/07 14:44	
Beryllium	"	0.0774	---	0.00100	"	"	--	"	96.8%	"	--	--	"	
Cadmium	"	0.0751	---	0.00100	"	"	--	"	93.9%	"	--	--	"	
Thallium	"	0.0695	---	0.00100	"	"	--	"	86.9%	"	--	--	"	
Selenium	"	0.0666	---	0.00100	"	"	--	"	83.2%	"	--	--	06/11/07 14:25	
Chromium	"	0.0902	---	0.00100	"	"	--	"	113%	"	--	--	06/07/07 14:44	
Copper	"	0.0832	---	0.00100	"	"	--	"	104%	"	--	--	"	
Nickel	"	0.0846	---	0.00100	"	"	--	"	106%	"	--	--	"	
Zinc	"	0.0694	---	0.0100	"	"	--	"	86.8%	"	--	--	"	
Duplicate (7F05020-DUP1)				QC Source: BQF0037-01				Extracted: 06/05/07 10:37						
Cadmium	EPA 6020	ND	---	0.00100	mg/l	1x	ND	--	--	--	NR	(20)	06/07/07 15:02	
Antimony	"	ND	---	0.00300	"	"	ND	--	--	--		"	06/12/07 07:23	
Thallium	"	ND	---	0.00100	"	"	ND	--	--	--	NR	"	06/07/07 15:02	
Zinc	"	0.0132	---	0.0100	"	"	0.0134	--	--	--	1.50%	"	"	
Arsenic	"	0.00150	---	0.00100	"	"	0.00154	--	--	--	2.63%	"	"	
Lead	"	0.00161	---	0.00100	"	"	0.00155	--	--	--	3.80%	"	"	
Nickel	"	0.0189	---	0.00100	"	"	0.0187	--	--	--	1.06%	"	"	
Copper	"	0.0102	---	0.00100	"	"	0.0101	--	--	--	0.985%	"	"	
Chromium	"	0.0121	---	0.00100	"	"	0.0118	--	--	--	2.51%	"	"	
Selenium	"	ND	---	0.00100	"	"	ND	--	--	--	NR	"	"	
Silver	"	ND	---	0.00100	"	"	ND	--	--	--	NR	(50)	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F05020 Water Preparation Method: EPA 3020A

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Duplicate (7F05020-DUP1)				QC Source:	BQF0037-01			Extracted:	06/05/07 10:37					
Beryllium	EPA 6020	ND	---	0.00100	mg/l	1x	ND	--	--	--	NR	(20)	06/07/07 15:02	
Matrix Spike (7F05020-MS1)				QC Source:	BQF0037-01			Extracted:	06/05/07 10:37					
Thallium	EPA 6020	0.0724	---	0.00100	mg/l	1x	ND	0.0800	90.5%	(80-120)	--	--	06/07/07 14:56	
Cadmium	"	0.0738	---	0.00100	"	"	ND	"	92.2%	"	--	--	"	
Beryllium	"	0.0767	---	0.00100	"	"	ND	"	95.9%	"	--	--	"	
Arsenic	"	0.0728	---	0.00100	"	"	0.00154	"	89.1%	(75-125)	--	--	"	
Silver	"	0.0664	---	0.00100	"	"	ND	"	83.0%	(21-142)	--	--	"	
Copper	"	0.0901	---	0.00100	"	"	0.0101	"	100%	(70-125)	--	--	"	
Nickel	"	0.0998	---	0.00100	"	"	0.0187	"	101%	(77-120)	--	--	"	
Zinc	"	0.0796	---	0.0100	"	"	0.0134	"	82.8%	(68-128)	--	--	"	
Selenium	"	0.0651	---	0.00100	"	"	0.000250	"	81.1%	(78-120)	--	--	06/11/07 14:37	
Antimony	"	0.0533	---	0.00300	"	"	ND	0.0600	88.8%	(74-126)	--	--	06/12/07 07:18	
Lead	"	0.0756	---	0.00100	"	"	0.00155	0.0800	92.6%	(80-120)	--	--	06/07/07 14:56	
Chromium	"	0.0982	---	0.00100	"	"	0.0118	"	108%	"	--	--	"	
Post Spike (7F05020-PS1)				QC Source:	BQF0037-01			Extracted:	06/05/07 10:37					
Lead	EPA 6020	0.0918	---		ug/ml	1x	0.00155	0.100	90.2%	(75-125)	--	--	06/07/07 14:50	
Chromium	"	0.120	---		"	"	0.0118	"	108%	"	--	--	"	
Copper	"	0.111	---		"	"	0.0101	"	101%	"	--	--	"	
Nickel	"	0.119	---		"	"	0.0187	0.0995	101%	"	--	--	"	
Zinc	"	0.0982	---		"	"	0.0134	0.100	84.8%	"	--	--	"	
Thallium	"	0.0884	---		"	"	-0.0000400	"	88.4%	"	--	--	"	
Silver	"	0.0986	---		"	"	-0.0000400	"	98.6%	"	--	--	"	
Antimony	"	0.0519	---		"	"	0.000180	0.0510	101%	"	--	--	06/12/07 07:13	
Arsenic	"	0.0926	---		"	"	0.00154	0.0995	91.5%	"	--	--	06/07/07 14:50	
Cadmium	"	0.0917	---		"	"	0.0000300	0.100	91.7%	"	--	--	"	
Beryllium	"	0.0928	---		"	"	0.0000200	0.0995	93.2%	"	--	--	"	
Selenium	"	0.0821	---		"	"	0.000250	0.100	81.8%	"	--	--	06/11/07 14:31	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Total Metals by EPA 6000/7000 Series Methods - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F06043 **Wafer Preparation Method: EPA 7470A**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F06043-BLK1)								Extracted: 06/06/07 13:20						
Mercury	EPA 7470A	ND	---	0.000200	mg/l	1x	--	--	--	--	--	--	06/07/07 13:10	
LCS (7F06043-BS1)								Extracted: 06/06/07 13:20						
Mercury	EPA 7470A	0.00496	---	0.000200	mg/l	1x	--	0.00500	99.2%	(80-120)	--	--	06/07/07 13:13	
LCS Dup (7F06043-BSD1)								Extracted: 06/06/07 13:20						
Mercury	EPA 7470A	0.00509	---	0.000200	mg/l	1x	--	0.00500	102%	(80-120)	2.59%	(20)	06/07/07 13:15	
Duplicate (7F06043-DUP1)				QC Source: BQF0050-01				Extracted: 06/06/07 13:20						
Mercury	EPA 7470A	ND	---	0.000200	mg/l	1x	ND	--	--	--	49.4%	(20)	06/07/07 13:20	R4
Matrix Spike (7F06043-MS1)				QC Source: BQF0050-01				Extracted: 06/06/07 13:20						
Mercury	EPA 7470A	0.00501	---	0.000200	mg/l	1x	0.0000244	0.00500	99.7%	(75-125)	--	--	06/07/07 13:17	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody documeni. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polychlorinated Biphenyls by EPA 8082 Modified with Micro-Extraction - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F06012 **Water Preparation Method: Solvent Extraction**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F06012-BLK1)								Extracted: 06/06/07 16:42						
Aroclor 1016	EPA 8082 Mod.	ND	---	0.100	ug/l	1x	--	--	--	--	--	--	06/07/07 11:44	
Aroclor 1221	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Aroclor 1232	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Aroclor 1242	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Aroclor 1248	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Aroclor 1254	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Aroclor 1260	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Aroclor 1262	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Aroclor 1268	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Surrogate(s): TCX		*Recovery: 100%*			*Limits: 58-132%*	"							06/07/07 11:44	
Decachlorobiphenyl		*94.2%*			*19-152%*	"							"	
LCS (7F06012-BS1)								Extracted: 06/06/07 16:42						
Aroclor 1016	EPA 8082 Mod.	5.32	---	0.100	ug/l	1x	--	5.00	106%	(53-141)	--	--	06/07/07 12:01	
Aroclor 1260	"	5.08	---	0.100	"	"	--	"	102%	(34-161)	--	--	"	
Surrogate(s): TCX		*Recovery: 102%*			*Limits: 58-132%*	"							06/07/07 12:01	
Decachlorobiphenyl		*96 0%*			*19-152%*	"							"	
Matrix Spike (7F06012-MS1)					QC Source: BQF0037-06			Extracted: 06/06/07 16:42						
Aroclor 1016	EPA 8082 Mod.	4.90	---	0.100	ug/l	1x	ND	5.00	98.0%	(33-155)	--	--	06/07/07 12:19	
Aroclor 1260	"	4.93	---	0.100	"	"	ND	"	98.6%	(27-165)	--	--	"	
Surrogate(s): TCX		*Recovery: 97 8%*			*Limits: 58-132%*	"							06/07/07 12:19	
Decachlorobiphenyl		*91.4%*			*19-152%*	"							"	
Matrix Spike Dup (7F06012-MSD1)					QC Source: BQF0037-06			Extracted: 06/06/07 16:42						
Aroclor 1016	EPA 8082 Mod.	4.91	---	0.100	ug/l	1x	ND	5.00	98.2%	(33-155)	0.204%	(35)	06/07/07 12:37	
Aroclor 1260	"	4.96	---	0.100	"	"	ND	"	99.2%	(27-165)	0.607%	"	"	
Surrogate(s): TCX		*Recovery: 96.6%*			*Limits: 58-132%*	"							06/07/07 12:37	
Decachlorobiphenyl		*96.6%*			*19-152%*	"							"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F04061 **Water Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F04061-BLK1)								Extracted: 06/04/07 16:31						
Acetone	EPA 8260B	ND	---	10.0	ug/l	1x	--	--	--	--	--	--	06/04/07 19:36	
Benzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2-Dibromoethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroetheoe	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F04061 **Water Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F04061-BLK1)								Extracted: 06/04/07 16:31						
Hexachlorobutadiene	EPA 8260B	ND	---	2.50	ug/l	1x	--	--	--	--	--	--	06/04/07 19:36	
Methyl tert-butyl ether	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
o-Xylene	"	ND	---	0.250	"	"	--	--	--	--	--	--	"	
m,p-Xylene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	0.750	"	"	--	--	--	--	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 104%*			*Limits: 70-130%*	"							*06/04/07 19:36*	
Toluene-d8		*100%*			*70-130%*	"							"	
4-BFB		*102%*			*70-130%*	"							"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7F04061 **Water Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7F04061-BS1)								Extracted: 06/04/07 16:31						
Benzene	EPA 8260B	19.4	---	0.200	ug/l	1x	--	20.0	97.0%	(80-120)	--	--	06/04/07 17:48	
Chlorobenzene	"	19.9	---	0.200	"	"	--	"	99.5%	(79-120)	--	--	"	
1,1-Dichloroethene	"	20.2	---	0.200	"	"	--	"	101%	(80-120)	--	--	"	
Methyl tert-butyl ether	"	21.5	---	1.00	"	"	--	"	108%	(79-120)	--	--	"	
Toluene	"	20 1	---	0.200	"	"	--	"	100%	(78-120)	--	--	"	
Trichloroethene	"	20.9	---	0.200	"	"	--	"	104%	(80-120)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 102%*			*Limits: 70-130%*	"							*06/04/07 17:48*	
Toluene-d8		*100%*			*70-130%*	"							"	
4-BFB		*100%*			*70-130%*	"							"	
Matrix Spike (7F04061-MS1)					QC Source: BQF0002-05			Extracted: 06/04/07 16:31						
Benzene	EPA 8260B	18.7	---	0.200	ug/l	1x	ND	20.0	93.5%	(75-126)	--	--	06/04/07 18:20	
Chlorobenzene	"	18.6	---	0.200	"	"	ND	"	93.0%	(75-125)	--	--	"	
1,1-Dichloroethene	"	18.9	---	0.200	"	"	ND	"	94.5%	"	--	--	"	
Methyl tert-butyl ether	"	20.0	---	1.00	"	"	ND	"	100%	(70-128)	--	--	"	
Toluene	"	16.3	---	0.200	"	"	ND	"	81.5%	(75-125)	--	--	"	
Trichloroethene	"	19.1	---	0.200	"	"	ND	"	95.5%	"	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 104%*			*Limits: 70-130%*	"							*06/04/07 18:20*	
Toluene-d8		96.0%			*70-130%*	"							"	
4-BFB		99.0%			*70-130%*	"							"	
Matrix Spike Dup (7F04061-MSD1)					QC Source: BQF0002-05			Extracted: 06/04/07 16:31						
Benzene	EPA 8260B	17.8	---	0.200	ug/l	1x	ND	20.0	89.0%	(75-126)	4.93%	(20)	06/04/07 18:51	
Chlorobenzene	"	18.1	---	0.200	"	"	ND	"	90.5%	(75-125)	2.72%	"	"	
1,1-Dichloroethene	"	18.0	---	0.200	"	"	ND	"	90.0%	"	4.88%	(30)	"	
Methyl tert-butyl ether	"	19.1	---	1.00	"	"	ND	"	95.5%	(70-128)	4.60%	"	"	
Toluene	"	16.2	---	0.200	"	"	ND	"	81.0%	(75-125)	0.615%	(20)	"	
Trichloroethene	"	17.9	---	0.200	"	"	ND	"	89.5%	"	6.49%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 102%*			*Limits: 70-130%*	"							*06/04/07 18:51*	
Toluene-d8		*97.5%*			*70-130%*	"							"	
4-BFB		99.5%			*70-130%*	"							"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F05028 Water Preparation Method: EPA 5030B

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F05028-BLK1)								Extracted: 06/05/07 09:46						
Acetone	EPA 8260B	ND	---	10.0	ug/l	1x	--	--	--	--	--	--	06/05/07 12:05	
Benzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Bromobenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Bromochloromethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Bromodichloromethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Bromoform	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Bromomethane	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
2-Butanone	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
n-Butylbenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
sec-Butylbenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
tert-Butylbenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Carbon disulfide	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Carbon tetrachloride	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Chlorobenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Chloroethane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
Chloroform	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Chloromethane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Chlorotoluene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
4-Chlorotoluene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Dibromochloromethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,2-Dibromo-3-chloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2-Dibromoethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Dibromomethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Dichlorodifluoromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,2-Dichloroethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,1-Dichloroethene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
cis-1,2-Dichloroethene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
trans-1,2-Dichloroethene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,2-Dichloropropane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,3-Dichloropropane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
2,2-Dichloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,1-Dichloropropene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
cis-1,3-Dichloropropene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
trans-1,3-Dichloropropene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Ethylbenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F05028 **Water Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F05028-BLK1)								Extracted: 06/05/07 09:46						
Hexachlorobutadiene	EPA 8260B	ND	---	2.50	ug/l	1x	--	--	--	--	--	--	06/05/07 12:05	
Methyl tert-butyl ether	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
n-Hexane	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
2-Hexanone	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Isopropylbenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
p-Isopropyltoluene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
4-Methyl-2-pentanone	"	ND	---	2.00	"	"	--	--	--	--	--	--	"	
Methylene chloride	"	ND	---	5.00	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	2.50	"	"	--	--	--	--	--	--	"	
n-Propylbenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Styrene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,3-Trichlorobenzene	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	1.00	"	"	--	--	--	--	--	--	"	
1,1,1,2-Tetrachloroethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,1,2,2-Tetrachloroethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Tetrachloroethene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Toluene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,1,1-Trichloroethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,1,2-Trichloroethane	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Trichloroethene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
Trichlorofluoromethane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,3-Trichloropropane	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
1,2,4-Trimethylbenzene	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
1,3,5-Trimethylbenzene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Vinyl chloride	"	ND	---	0.200	"	"	--	--	--	--	--	--	"	
o-Xylene	"	ND	---	0.250	"	"	--	--	--	--	--	--	"	
m,p-Xylene	"	ND	---	0.500	"	"	--	--	--	--	--	--	"	
Total Xylenes	"	ND	---	0.750	"	"	--	--	--	--	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery: 104%*			*Limits: 70-130%*	"							06/05/07 12:05	
Toluene-d8		*100%*			*70-130%*	"							"	
4-BFB		*102%*			*70-130%*	"							"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Volatile Organic Compounds by EPA Method 8260B - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F05028 **Water Preparation Method: EPA 5030B**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7F0S028-BS1)								Extracted: 06/05/07 09:46						
Benzene	EPA 8260B	19.7	---	0.200	ug/l	1x	--	20.0	98.5%	(80-120)	--	--	06/05/07 10:48	
Chlorobenzene	"	20.2	---	0.200	"	"	--	"	101%	(79-120)	--	--	"	
1,1-Dichloroethene	"	21.5	---	0.200	"	"	--	"	108%	(80-120)	--	--	"	
Methyl tert-butyl ether	"	21.0	---	1.00	"	"	--	"	105%	(79-120)	--	--	"	
Toluene	"	20.6	---	0.200	"	"	--	"	103%	(78-120)	--	--	"	
Trichloroethene	"	20.8	---	0.200	"	"	--	"	104%	(80-120)	--	--	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*102%*		*Limits:*	*70-130%*	"						*06/05/07 10:48*	
Toluene-d8			*102%*			*70-130%*	"						"	
4-BFB			*100%*			*70-130%*	"						"	
LCS Dup (7F05028-BSD1)								Extracted: 06/05/07 09:46						
Benzene	EPA 8260B	18.5	---	0.200	ug/l	1x	--	20.0	92.5%	(80-120)	6.28%	(20)	06/05/07 11:20	
Chlorobenzene	"	19.0	---	0.200	"	"	--	"	95.0%	(79-120)	6.12%	"	"	
1,1-Dichloroethene	"	19.8	---	0.200	"	"	--	"	99.0%	(80-120)	8.23%	"	"	
Methyl tert-butyl ether	"	20.6	---	1.00	"	"	--	"	103%	(79-120)	1.92%	"	"	
Toluene	"	19.2	---	0.200	"	"	--	"	96.0%	(78-120)	7.04%	"	"	
Trichloroethene	"	19.4	---	0.200	"	"	--	"	97.0%	(80-120)	6.97%	"	"	
Surrogate(s): 1,2-DCA-d4		*Recovery:*	*102%*		*Limits:*	*70-130%*	"						*06/05/07 11:20*	
Toluene-d8			*101%*			*70-130%*	"						"	
4-BFB			*100%*			*70-130%*	"						"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY H, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270G - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F04014 **Water Preparation Method: EPA 3520C**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F04014-BLK1)								Extracted: 06/04/07 09:04						
Acenaphthene	EPA 8270C	ND	---	10.0	ug/l	1x	--	--	--	--	--	--	06/12/07 17:59	
Acenaphthylene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Aniline	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Anthracene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Benzo (a) anthracene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Benzo (a) pyrene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Benzo (b) fluoranthene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Benzo (k) fluoranthene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Benzo (ghi) perylene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Benzoic Acid	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	
Benzyl alcohol	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Bis(2-chloroethoxy)methane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Bis(2-chloroethyl)ether	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Bis(2-chloroisopropyl)ether	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Bis(2-ethylhexyl)phthalate	"	ND	---	50.0	"	"	--	--	--	--	--	--	"	
4-Bromophenyl phenyl ether	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Butyl benzyl phthalate	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Carbazole	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
4-Chloroaniline	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
4-Chloro-3-methylphenol	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Chloronaphthalene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Chlorophenol	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
4-Chlorophenyl phenyl ether	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
3 & 4-Methylphenol (m,p-Cresols)	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Methylphenol (o-Cresol)	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Chrysene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Di-n-butyl phthalate	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Dibenz (a,h) anthracene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Dibenzofuran	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2-Dichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,3-Dichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,4-Dichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
3,3'-Dichlorobenzidine	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2,4-Dichlorophenol	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Diethyl phthalate	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2,4-Dimethylphenol	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Dimethyl phthalate	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
4,6-Dinitro-2-methylpheool	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2,4-Dinitrophenol	"	ND	---	20.0	"	"	--	--	--	--	--	--	"	C

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7F04014 **Water Preparation Method: EPA 3520C**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F04014-BLK1)								Extracted: 06/04/07 09:04						
2,4-Dinitrotoluene	EPA 8270C	ND	---	10.0	ug/l	1x	--	--	--	--	--	--	06/12/07 17:59	
2,6-Dinitrotoluene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
N-Nitrosodiphenylamine	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Fluoranthene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Fluorene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Hexachlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Hexachlorobutadiene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Hexachlorocyclopentadiene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Hexachloroethane	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Indeno (1,2,3-cd) pyrene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Isophorone	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1-Methylnaphthalene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Methylnaphthalene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Nitroaniline	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
3-Nitroaniline	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
4-Nitroaniline	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Nitrobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2-Nitrophenol	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
4-Nitrophenol	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
N-Niuosodi-n-propylamine	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Di-n-octyl phthalate	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Pentachlorophenol	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Phenanthrene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Phenol	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
Pyrene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
1,2,4-Trichlorobenzene	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2,4,5-Trichlorophenol	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	
2,4,6-Trichlorophenol	"	ND	---	10.0	"	"	--	--	--	--	--	--	"	

Surrogate(s):		*Recovery:*	*Limits:*		
	2-FBP	*84.1%*	*44-120%*	"	*06/12/07 17:59*
	2-FP	*75.3%*	*16-120%*	"	"
	Nitrobenzene-d5	*84.9%*	*38-120%*	"	"
	Phenol-d6	*49.3%*	*16-120%*	"	"
	p-Terphenyl-d14	*117%*	*24-146%*	"	"
	2,4,6-TBP	*77.6%*	*32-135%*	"	"

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Semivolatile Organic Compounds by EPA Method 8270C - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F04014 Water Preparation Method: EPA 3520C

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7F04014-BS1)								Extracted: 06/04/07 09:04						
Acenaphthene	EPA 8270C	19.3	---	10.0	ug/l	1x	--	20.0	96.5%	(57-120)	--	--	06/12/07 18:22	
4-Chloro-3-methylphenol	"	18.4	---	10.0	"	"	--	"	92.0%	(51-124)	--	--	"	
2-Chlorophenol	"	17.4	---	10.0	"	"	--	"	87.0%	(40-120)	--	--	"	
1,4-Dichlorobenzene	"	13.2	---	10.0	"	"	--	"	66.0%	(50-120)	--	--	"	
2,4-Dinitrotoluene	"	20.2	---	10.0	"	"	--	"	101%	(66-130)	--	--	"	
4-Nitrophenol	"	22.1	---	10.0	"	"	--	"	110%	(42-148)	--	--	"	
N-Nitrosodi-n-propylamine	"	16.3	---	10.0	"	"	--	"	81.5%	(49-120)	--	--	"	
Pentachlorophenol	"	25.8	---	10.0	"	"	--	"	129%	(67-151)	--	--	"	
Phenol	"	17.7	---	10.0	"	"	--	"	88.5%	(28-120)	--	--	"	
Pyrene	"	19.0	---	10.0	"	"	--	"	95.0%	(54-134)	--	--	"	
1,2,4-Trichlorobenzene	"	14.5	---	10.0	"	"	--	"	72.5%	(52-120)	--	--	"	
Surrogate(s):	*2-FBP*	*Recovery:*	*109%*		*Limits:*	*44-120%*	"						*06/12/07 18:22*	
	2-FP		*91.5%*			*16-120%*	"						"	
	Nitrobenzene-d5		*101%*			*38-120%*	"						"	
	Phenol-d6		*60.8%*			*16-120%*	"						"	
	p-Terphenyl-d14		*111%*			*24-146%*	"						"	
	2,4,6-TBP		*95.7%*			*32-135%*	"						"	
LCS Dup (7F04014-BSD1)								Extracted: 06/04/07 09:04						
Acenaphthene	EPA 8270C	20.2	---	10.0	ug/l	1x	--	20.0	101%	(57-120)	4.56%	(25)	06/12/07 18:46	
4-Chloro-3-methylphenol	"	19.4	---	10.0	"	"	--	"	97.0%	(51-124)	5.29%	"	"	
2-Chlorophenol	"	18.2	---	10.0	"	"	--	"	91.0%	(40-120)	4.49%	(37)	"	
1,4-Dichlorobenzene	"	13.3	---	10.0	"	"	--	"	66.5%	(50-120)	0.755%	(32)	"	
2,4-Dinitrotoluene	"	21.4	---	10.0	"	"	--	"	107%	(66-130)	5.77%	(25)	"	
4-Nitrophenol	"	22.2	---	10.0	"	"	--	"	111%	(42-148)	0.451%	"	"	
N-Nitrosodi-n-propylamine	"	17.2	---	10.0	"	"	--	"	86.0%	(49-120)	5.37%	"	"	
Pentachlorophenol	"	26.8	---	10.0	"	"	--	"	134%	(67-151)	3.80%	"	"	
Phenol	"	18.8	---	10.0	"	"	--	"	94.0%	(28-120)	6.03%	(48)	"	
Pyrene	"	19.8	---	10.0	"	"	--	"	99.0%	(54-134)	4.12%	(25)	"	
1,2,4-Trichlorobenzene	"	15.1	---	10.0	"	"	--	"	75.5%	(52-120)	4.05%	"	"	
Surrogate(s):	*2-FBP*	*Recovery:*	*117%*		*Limits:*	*44-120%*	"						*06/12/07 18:46*	
	2-FP		*95.4%*			*16-120%*	"						"	
	Nitrobenzene-d5		*106%*			*38-120%*	"						"	
	Phenol-d6		*64.8%*			*16-120%*	"						"	
	p-Terphenyl-d14		*116%*			*24-146%*	"						"	
	2,4,6-TBP		*101%*			*32-135%*	"						"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polynuclear Aromatic Compounds by GC/MS with High Volume Injection - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F04014 **Water Preparation Method: EPA 3520C**

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F04014-BLK2)								Extracted: 06/04/07 09:04						
Acenaphthene	EPA 8270C-HV1	ND	---	0.100	ug/l	1x	--	--	--	--	--	--	06/11/07 18:19	
Acenaphthylene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Anthracene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Benzo (a) anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (a) pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (b) fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (k) fluoranthene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Benzo (ghi) perylene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Chrysene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Dibenz (a,h) anthracene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
Fluoranthene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Fluorene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Indeno (1,2,3-cd) pyrene	"	ND	---	0.0100	"	"	--	--	--	--	--	--	"	
1-Methylnaphthalene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
2-Methyloaphthalene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Naphthalene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Phenanthrene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Pyrene	"	ND	---	0.100	"	"	--	--	--	--	--	--	"	
Surrogate(s): Benzo (a) pyrene-d12		*Recovery:*	*65.1%*		*Limits:*	*20-125%*	*"*						*06/11/07 18:19*	
1-Methylnaphthalene-d10			*59.9%*			*39-125%*	*"*						*"*	
LCS (7F04014-BS2)								Extracted: 06/04/07 09:04						
Acenaphthene	EPA 8270C-HV1	13.5	---	1.00	ug/l	10x	--	20.0	67.5%	(44-125)	--	--	06/11/07 18:50	
Acenaphthylene	"	15.3	---	1.00	"	"	--	"	76.5%	(51-125)	--	--	"	
Anthracene	"	15.1	---	1.00	"	"	--	"	75.5%	(50-125)	--	--	"	
Benzo (a) anthracene	"	15.2	---	0.100	"	"	--	"	76.0%	"	--	--	"	
Benzo (a) pyrene	"	14.4	---	0.100	"	"	--	"	72.0%	(47-125)	--	--	"	
Benzo (b) fluoranthene	"	13.6	---	0.100	"	"	--	"	68.0%	(50-125)	--	--	"	
Benzo (k) fluoranthene	"	14.5	---	0.100	"	"	--	"	72.5%	(46-125)	--	--	"	
Benzo (ghi) perylene	"	13.7	---	1.00	"	"	--	"	68.5%	(49-125)	--	--	"	
Chrysene	"	15.5	---	0.100	"	"	--	"	77.5%	(53-125)	--	--	"	
Dibenz (a,h) anthracene	"	13.6	---	0.100	"	"	--	"	68.0%	(47-125)	--	--	"	
Fluoranthene	"	15.1	---	1.00	"	"	--	"	75.5%	(55-125)	--	--	"	
Fluorene	"	14.5	---	1.00	"	"	--	"	72.5%	(52-125)	--	--	"	
Indeno (1,2,3-cd) pyrene	"	13.7	---	0.100	"	"	--	"	68.5%	(49-125)	--	--	"	
1-Methylnaphthalene	"	10.6	---	1.00	"	"	--	"	53.0%	(37-125)	--	--	"	
2-Methylnaphthalene	"	11.8	---	1.00	"	"	--	"	59.0%	(40-125)	--	--	"	
Naphthalene	"	13.9	---	1.00	"	"	--	"	69.5%	(42-125)	--	--	"	

TestAmerica - Seattle, WA

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Polynuclear Aromatic Compounds by GC/MS with High Volume Injection - Laboratory Quality Control Results

TestAmerica - Seattle, WA

QC Batch: 7F04014 **Water Preparation Method:** EPA 3520C

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
LCS (7F04014-BS2)								Extracted: 06/04/07 09:04						
Phenanthrene	EPA 8270C-HVI	14.1	---	1.00	ug/l	10x	--	20.0	70.5%	(47-125)	--	--	06/11/07 18:50	
Pyrene	"	14.3	---	1.00	"	"	--	"	71.5%	"	--	--	"	
Surrogate(s): Benzo (a) pyrene-d12		*Recovery:*	86.9%		*Limits:*	20-125%	"						06/11/07 18:50	
1-Methylnaphthalene-d10			40.4%			39-125%	"						"	
LCS Dup (7F04014-BSD2)								Extracted: 06/04/07 09:04						
Acenaphthene	EPA 8270C-HVI	14.5	---	1.00	ug/l	10x	--	20.0	72.5%	(44-125)	7.14%	(35)	06/11/07 19:22	
Acenaphthylene	"	16.5	---	1.00	"	"	--	"	82.5%	(51-125)	7.55%	"	"	
Anthracene	"	16.1	---	1.00	"	"	--	"	80.5%	(50-125)	6.41%	"	"	
Benzo (a) anthracene	"	15.3	---	0.100	"	"	--	"	76.5%	"	0.656%	"	"	
Benzo (a) pyrene	"	14.7	---	0.100	"	"	--	"	73.5%	(47-125)	2.06%	"	"	
Benzo (b) fluoranthene	"	13.9	---	0.100	"	"	--	"	69.5%	(50-125)	2.18%	"	"	
Benzo (k) fluoranthene	"	15.8	---	0.100	"	"	--	"	79.0%	(46-125)	8.58%	"	"	
Benzo (ghi) perylene	"	14.7	---	1.00	"	"	--	"	73.5%	(49-125)	7.04%	"	"	
Chrysene	"	15.6	---	0.100	"	"	--	"	78.0%	(53-125)	0.643%	"	"	
Dibenz (a,h) anthracene	"	14.2	---	0.100	"	"	--	"	71.0%	(47-125)	4.32%	"	"	
Fluoranthene	"	16.2	---	1.00	"	"	--	"	81.0%	(55-125)	7.03%	"	"	
Fluorene	"	15.5	---	1.00	"	"	--	"	77.5%	(52-125)	6.67%	"	"	
Indeno (1,2,3-cd) pyrene	"	14.5	---	0.100	"	"	--	"	72.5%	(49-125)	5.67%	"	"	
1-Methylnaphthalene	"	13.2	---	1.00	"	"	--	"	66.0%	(37-125)	21.8%	"	"	
2-Methylnaphthalene	"	14.7	---	1.00	"	"	--	"	73.5%	(40-125)	21.9%	"	"	
Naphthalene	"	18.1	---	1.00	"	"	--	"	90.5%	(42-125)	26.2%	"	"	
Phenanthrene	"	15.2	---	1.00	"	"	--	"	76.0%	(47-125)	7.51%	"	"	
Pyrene	"	14.7	---	1.00	"	"	--	"	73.5%	"	2.76%	"	"	
Surrogate(s): Benzo (a) pyrene-d12		*Recovery:*	82.2%		*Limits:*	20-125%	"						06/11/07 19:22	
1-Methylnaphthalene-d10			53.2%			39-125%	"						"	

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Conventional Chemistry Parameters by APHA/EPA Methods - Laboratory Quality Control Results
TestAmerica - Seattle, WA

QC Batch: 7F0407S Water Preparation Method: General Preparation

Analyte	Method	Result	MDL*	MRL	Units	Dil	Source Result	Spike Amt	% REC	(Limits)	% RPD	(Limits)	Analyzed	Notes
Blank (7F0407S-BLK1)								Extracted: 06/01/07 22:00						
Hexavalent Chromium	EPA 7196A	ND	---	0.00500	mg/l	1x	--	--	--	--	--	--	06/01/07 22:00	
LCS (7F04075-BS1)								Extracted: 06/01/07 22:00						
Hexavalent Chromium	EPA 7196A	0.0550	---	0.00500	mg/l	1x	--	0.0500	110%	(90-110)	--	--	06/01/07 22:00	
Duplicate (7F04075-DUP1)				QC Source:	BQF0037-04			Extracted: 06/01/07 22:00						
Hexavalent Chromium	EPA 7196A	0.0200	---	0.00500	mg/l	1x	0.0230	--	--	--	14.0%	(25)	06/01/07 22:00	
Matrix Spike (7F04075-MS1)				QC Source:	BQF0037-04			Extracted: 06/01/07 22:00						
Hexavalent Chromium	EPA 7196A	0.0890	---	0.00500	mg/l	1x	0.0230	0.0500	132%	(85-115)	--	--	06/01/07 22:00	M7

TestAmerica - Seattle, WA

Kortland Orr For Blake T. Meinert, Project Manager

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

TestAmerica
ANALYTICAL TESTING CORPORATION

SEATTLE, WA 11720 NORTH CREEK PKWY N, SUITE 400
BOTHELL, WA 98011-8244
PH: (425) 420.9200 FAX: (425) 420.9210

Geo Engineers - Seattle	Project Name:	Old Bremerton Gas Works	
600 Stewart St, Suite 1700	Project Number:	0892-017-00	Report Created:
Seattle, WA/USA 98101	Project Manager:	Sean Trimble	06/14/07 15:15

Notes and Definitions

Report Specific Notes:

C	-	Calibration Verification recovery was above the method control limit for this analyte. Analyte not detected, data not impacted.
E	-	Concentration exceeds the calibration range and therefore result is semi-quantitative.
M7	-	The MS and/or MSD were above the acceptance limits. See Blank Spike (LCS).
Q5	-	Results in the diesel organics range are primarily due to overlap from a gasoline range product.
QP	-	Hydrocarbon result partly due to individual peak(s) in quantitation range.
R4	-	Due to the low levels of analyte in the sample, the duplicate RPD calculation does not provide useful information.
Z2	-	Surrogate recovery was above the acceptance limits. Data not impacted.
Z3	-	The sample required a dilution due to the nature of the sample matrix. Because of this dilution, the surrogate spike concentration in the sample was reduced to a level where the recovery calculation does not provide useful information.
Z6	-	Surrogate recovery was below acceptance limits.
ZX	-	Due to sample matrix effects, the surrogate recovery was outside the acceptance limits.

Laboratory Reporting Conventions:

DET	-	Analyte DETECTED at or above the Reporting Limit. Qualitative Analyses only.
ND	-	Analyte NOT DETECTED at or above the reporting limit (MDL or MRL, as appropriate).
NR/NA	-	Not Reported / Not Available
dry	-	Sample results reported on a Dry Weight Basis. Results and Reporting Limits have been corrected for Percent Dry Weight.
wet	-	Sample results and reporting limits reported on a Wet Weight Basis (as received). Results with neither 'wet' nor 'dry' are reported on a Wet Weight Basis.
RPD	-	RELATIVE PERCENT DIFFERENCE (RPDs calculated using Results, not Percent Recoveries).
MRL	-	METHOD REPORTING LIMIT. Reporting Level at, or above, the lowest level standard of the Calibration Table.
MDL*	-	METHOD DETECTION LIMIT. Reporting Level at, or above, the statistically derived limit based on 40CFR, Part 136, Appendix B. *MDLs are listed on the report only if the data has been evaluated below the MRL. Results between the MDL and MRL are reported as Estimated Results.
Dil	-	Dilutions are calculated based on deviations from the standard dilution performed for an analysis, and may not represent the dilution found on the analytical raw data.
Reporting Limits	-	Reporting limits (MDLs and MRLs) are adjusted based on variations in sample preparation amounts, analytical dilutions and percent solids, where applicable.
Electronic Signature	-	Electronic Signature added in accordance with TestAmerica's *Electronic Reporting and Electronic Signatures Policy*. Application of electronic signature indicates that the report has been reviewed and approved for release by the laboratory. Electronic signature is intended to be the legally binding equivalent of a traditionally handwritten signature.

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report shall not be reproduced except in full, without the written approval of the laboratory.

Kortland Orr For Blake T. Meinert, Project Manager

TestAmerica
ANALYTICAL TESTING CORPORATION

11720 North Creek Pkwy N Suite 400, Bothell, WA 98011-8244 425-420-9200 FAX 420-9210 ✓
11922 E. First Ave, Spokane, WA 99206-5302 509-924-9200 FAX 924-9290
9405 SW Nimbus Ave, Beaverton, OR 97008-7145 503-906-9200 FAX 906-9210
2000 W International Airport Rd Ste A10, Anchorage, AK 99502-1119 907-563-9200 FAX 563-9210

CHAIN OF CUSTODY REPORT

Work Order #: 8QF0032

CLIENT: GeoEngineers

REPORT TO: Sean Trimble
ADDRESS: Plaza 600 Bldg, 600 Stewart St
Seattle WA 98101
PHONE: 206.239.3230 FAX: 206.728.2732

INVOICE TO: ← Same

P.O. NUMBER:

PROJECT NAME: Old Bremerton Gas Works
PROJECT NUMBER: 0892-017-00
SAMPLED BY: SHL + HS

TURNAROUND REQUEST
In Business Days *
Organic & Inorganic Analyses: 10 (STD.) | 7 | 5 | 2 | 3 | 1 | 1 | <1
Petroleum Hydrocarbon Analyses: ☒ (STD.) | 4 | 3 | 2 | 1 | <1
OTHER Specify:
* Turnaround Requests less than standard may incur Rush Charges.

PRESERVATIVE

REQUESTED ANALYSES: TPH-Dx | TPH-Gx | VOCs | PCB | SVOCs (PAHs) | PPL metals | Chromium VI | TBT

	CLIENT SAMPLE IDENTIFICATION	SAMPLING DATE/TIME	MATRIX (W, S, O)	# OF CONT.	LOCATION / COMMENTS	TA WO ID
1	MW-1	06/01/07 0830			Chromium	
2	MW-2	06/01/07 1020			VI extraction within 24 hr	
3	MW-3	06/01/07 1100				
4	MW-6	06/01/07 12:40				
5	MW-8	06/01/07 13:10				
6	MW-7	06/01/07 14:30				
7	MW-4	06/01/07 15:10				
8	MW-5	06/01/07 15:50				
9	MW-6-dup	06/01/07 12:45				
10	Trip Blank	6/1/07 19:50				

RELEASED BY:		DATE: 06/01/07	RECEIVED BY:		DATE:
PRINT NAME: SHARINI	FIRM: Geo	TIME: 0710	PRINT NAME:	FIRM: TA	TIME: 1950
RELEASED BY:		DATE: 6/1/07	RECEIVED BY:		DATE:
PRINT NAME:	FIRM: EWA	TIME: 8710	PRINT NAME:	FIRM:	TIME:

ADDITIONAL REMARKS:

TEMP: 23.6

COC REV 09/2004

PAGE OF

GeoEngineers

Appendix C
Report Limitations and Guidelines for Use

APPENDIX C
REPORT LIMITATIONS AND GUIDELINES FOR USE[1]

This Appendix provides information to help you manage your risks with respect to the use of this report.

ENVIRONMENTAL SERVICES ARE PERFORMED FOR SPECIFIC PURPOSES, PERSONS AND PROJECTS

This report has been prepared for the exclusive use of the City of Bremerton, their authorized agents and regulatory agencies. This report is not intended for use by others, and the information contained herein is not applicable to other sites.

GeoEngineers structures our services to meet the specific needs of our clients. For example, an environmental site assessment study conducted for a property owner may not fulfill the needs of a prospective purchaser of the same property. Because each environmental study is unique, each environmental report is unique, prepared solely for the specific client and project site. No one except the City of Bremerton should rely on this environmental report without first conferring with GeoEngineers. This report should not be applied for any purpose or project except the one originally contemplated.

THIS ENVIRONMENTAL REPORT IS BASED ON A UNIQUE SET OF PROJECT-SPECIFIC FACTORS

This report has been prepared for the City of Bremerton. GeoEngineers considered a number of unique, project-specific factors when establishing the scope of services for this project and report. Unless GeoEngineers specifically indicates otherwise, do not rely on this report if it was:

- not prepared for you,
- not prepared for your project,
- not prepared for the specific site explored, or
- completed before important project changes were made.

If important changes are made after the date of this report, GeoEngineers should be given the opportunity to review our interpretations and recommendations and provide written modifications or confirmation, as appropriate.

RELIANCE CONDITIONS FOR THIRD PARTIES

Our report was prepared for the exclusive use of our Client. No other party may rely on the product of our services unless we agree in advance to such reliance in writing. This is to provide our firm with reasonable protection against open-ended liability claims by third parties with whom there would otherwise be no contractual limits to their actions. Within the limitations of scope, schedule and budget, our services have been executed in accordance with our Agreement with the Client and generally accepted environmental practices in this area at the time this report was prepared.

ENVIRONMENTAL REGULATIONS ARE ALWAYS EVOLVING

Some substances may be present in the site vicinity in quantities or under conditions that may have led, or may lead, to contamination of the subject site, but are not included in current local, state or federal

[1] Developed based on material provided by ASFE, Professional Firms Practicing in the Geosciences; www.asfe.org.

regulatory definitions of hazardous substances or do not otherwise present current potential liability. GeoEngineers cannot be responsible if the standards for appropriate inquiry, or regulatory definitions of hazardous substance, change or if more stringent environmental standards are developed in the future.

UNCERTAINTY MAY REMAIN EVEN AFTER THIS PHASE II ESA IS COMPLETED

No ESA can wholly eliminate uncertainty regarding the potential for contamination in connection with a property. Our interpretation of subsurface conditions in this study is based on field observations and chemical analytical data from widely-spaced sampling locations. It is always possible that contamination exists in areas that were not explored, sampled or analyzed.

SUBSURFACE CONDITIONS CAN CHANGE

This environmental report is based on conditions that existed at the time the study was performed. The findings and conclusions of this report may be affected by the passage of time, by manmade events such as construction on or adjacent to the site, by new releases of hazardous substances, or by natural events such as floods, earthquakes, slope instability or groundwater fluctuations. Always contact GeoEngineers before applying this report to determine if it is still applicable.

SOIL AND GROUNDWATER END USE

The cleanup levels referenced in this report are site- and situation-specific. The cleanup levels may not be applicable for other sites or for other on-site uses of the affected media (soil and/or groundwater). Note that hazardous substances may be present in some of the site soil and/or groundwater at detectable concentrations that are less than the referenced cleanup levels. GeoEngineers should be contacted prior to the export of soil or groundwater from the subject site or reuse of the affected media on site to evaluate the potential for associated environmental liabilities. We cannot be responsible for potential environmental liability arising out of the transfer of soil and/or groundwater from the subject site to another location or its reuse on site in instances that we were not aware of or could not control.

MOST ENVIRONMENTAL FINDINGS ARE PROFESSIONAL OPINIONS

Our interpretations of subsurface conditions are based on field observations and chemical analytical data from widely spaced sampling locations at the site. Site exploration identifies subsurface conditions only at those points where subsurface tests are conducted or samples are taken. GeoEngineers reviewed field and laboratory data and then applied our professional judgment to render an opinion about subsurface conditions throughout the site. Actual subsurface conditions may differ – sometimes significantly – from those indicated in this report. Our report, conclusions and interpretations should not be construed as a warranty of the subsurface conditions.

DO NOT REDRAW THE EXPLORATION LOGS

Environmental scientists prepare final boring and testing logs based upon their interpretation of field logs and laboratory data. To prevent errors or omissions, the logs included in an environmental report should never be redrawn for inclusion in other design drawings. Only photographic or electronic reproduction is acceptable, but recognize that separating logs from the report can elevate risk.

READ THESE PROVISIONS CLOSELY

Some clients, design professionals and contractors may not recognize that the geoscience practices (geotechnical engineering, geology and environmental science) are far less exact than other engineering and natural science disciplines. This lack of understanding can create unrealistic expectations that could lead to disappointments, claims and disputes. GeoEngineers includes these explanatory "limitations" provisions in our reports to help reduce such risks. Please confer with GeoEngineers if you are unclear how these "Report Limitations and Guidelines for Use" apply to your project or site.

GEOTECHNICAL, GEOLOGIC AND GEOENVIRONMENTAL REPORTS SHOULD NOT BE INTERCHANGED

The equipment, techniques and personnel used to perform an environmental study differ significantly from those used to perform a geotechnical or geologic study and vice versa. For that reason, a geotechnical engineering or geologic report does not usually relate any environmental findings, conclusions or recommendations; e.g., about the likelihood of encountering underground storage tanks or regulated contaminants. Similarly, environmental reports are not used to address geotechnical or geologic concerns regarding a specific project.

BIOLOGICAL POLLUTANTS

GeoEngineers' Scope of Work specifically excludes the investigation, detection, prevention or assessment of the presence of Biological Pollutants. Accordingly, this report does not include any interpretations, recommendations, findings, or conclusions regarding the detecting, assessing, preventing or abating of Biological Pollutants and no conclusions or inferences should be drawn regarding Biological Pollutants, as they may relate to this project. The term "Biological Pollutants" includes, but is not limited to, molds, fimgi, spores, bacteria, and viruses, and/or any of their byproducts.

GeoEngineers

www.geoengineers.com