



GCPT Boring	Date Completed	Maximum Depth	Maximum Gamma Count	Depth of Maximum Gamma Count
		(feet)	(Counts per Second)	(feet)
GCPT - 1.1	11/25/2013	39.7	124.0	32.5
GCPT - 1.2	11/25/2013	40.2	1,131.3	24.4
GCPT - 2.1	11/24/2013	50.8	93.5	3.3
GCPT - 2.2	11/24/2013	43.1	1,600.0	34.0
GCPT - 2.3	11/24/2013	39.4	578.7	35.6
GCPT - 3.1	11/24/2013	41.2	1,313.5	27.7
GCPT - 3.2	11/24/2013	48.4	103.1	1.0
GCPT - 4.1	11/14/2013	53.1	8,136.6	28.9
GCPT - 4.2	11/14/2013	52.8	677.4	34.0
GCPT - 5.1	11/19/2013	38.0	2,112.3	25.1
GCPT - 5.2	11/18/2013	51.2	1,911.4	26.2
GCPT - 5.3	11/19/2013	44.3	10,527.7	29.4
GCPT - 5.4	11/19/2013	43.6	147.0	11.8
GCPT - 6.2	11/19/2013	48.7	104.3	13.3
GCPT - 6.3	11/19/2013	45.1	1,720.3	27.9
GCPT - 6.4	11/16/2013	25.6	73.9	3.1
GCPT - 6.5	11/16/2013	60.0	101.8	3.3
GCPT - 7.1	11/15/2013	52.0	103.4	7.9
GCPT - 7.2	11/19/2013	50.0	100.2	4.9
GCPT - 7.3	11/16/2013	54.5	209.3	40.0
GCPT - 8.1	11/15/2013	57.1	330.9	29.0
GCPT - 9.1	11/15/2013	47.6	138.0	6.2
GCPT - 9.2	11/19/2013	54.0	97.1	16.9
GCPT - 9.3	11/15/2013	55.9	103.8	15.3
GCPT - 10.1	11/19/2013	47.6	113.8	1.6
GCPT - 10.2	11/20/2013	53.1	108.1	7.7
GCPT - 10.3	11/18/2013	7.2	81.5	3.4
GCPT - 10.4	11/18/2013	54.1	110.7	14.9
GCPT - 11.1	11/21/2013	50.9	153.5	0.2
GCPT - 11.2	11/20/2013	52.2	126.9	15.4
GCPT - 11.3	11/20/2013	53.5	114.3	6.1
GCPT - 11.4	11/18/2013	50.7	163.2	45.9
GCPT - 12.1	11/20/2013	34.1	5,135.0	24.1
GCPT - 12.2	11/20/2013	54.1	109.1	1.3
GCPT - 12.3	11/21/2013	55.4	124.6	4.1
GCPT - 12.4	11/21/2013	57.4	122.9	38.5
GCPT - 12.5	11/21/2013	42.2	107.2	7.5
GCPT - 12.6	11/18/2013	62.7	106.3	23.1
GCPT - 13.1	11/21/2013	22.1	471.7	15.4
GCPT - 13.2	11/21/2013	No boring refusal less than 5'		
GCPT - 13.3	11/21/2013	No boring refusal less than 5'		
GCPT - 13.4	11/21/2013	No boring refusal less than 5'		0.0
GCPT - 13.5	11/22/2013	No boring refusal less than 5'		0.0
GCPT - 13.6	11/22/2013	8.3	96.7	3.4
GCPT - 13.7	11/22/2013	14.3	98.8	8.9
GCPT - 14.1	11/22/2013	47.5	494.0	18.9
GCPT - 14.2	11/22/2013	No boring refusal less than 5'		
GCPT - 14.3	11/22/2013	No boring refusal less than 5'		
GCPT - 14.4	11/22/2013	No boring refusal less than 5'		
GCPT - 14.5	11/22/2013	11.4	96.2	1.6
GCPT - 14.6	11/22/2013	10.8	110.9	7.4
GCPT - 14.7	11/22/2013	No boring refusal less than 5'		
GCPT - 15.1	11/23/2013	35.6	199.0	20.3
GCPT - 15.2	11/23/2013	No boring refusal less than 5'		
GCPT - 15.3	11/23/2013	36.1	163.8	30.5
GCPT - 15.4	11/22/2013	40.2	140.0	29.4
GCPT - 15.5	11/22/2013	60.4	117.4	57.4
GCPT - 15.6	11/22/2013	42.3	118.3	2.6
GCPT - 15.7	11/22/2013	46.8	107.4	2.5
GCPT - 15.8	11/22/2013	29.7	145.4	2.3
GCPT - 16.1	11/23/2013	31.8	153.8	7.2
GCPT - 16.2	11/23/2013	24.9	115.8	1.8
GCPT - 16.3	11/23/2013	30.8	112.4	2.3
GCPT - 16.4	11/23/2013	43.8	124.1	3.0
GCPT - 16.5	11/23/2013	21.9	114.4	4.8
GCPT - 16.6	11/23/2013	25.4	110.0	13.6
GCPT - 16.7	11/23/2013	30.0	106.9	2.6
GCPT - 16.8	11/23/2013	26.9	110.8	20.7
PVC-25	11/14/2013	30.8	1,248.0	8.4
PVC-28	11/14/2013	38.5	1,375.2	24.9
PVC-36 (GCPT - 6.1)	11/14/2013	18.0	324.5	8.5
WL-108	11/15/2013	16.7	106.8	2.0
WL-111	11/13/2013	52.3	159.0	25.9
WL-119	11/15/2013	49.9	243.6	45.6

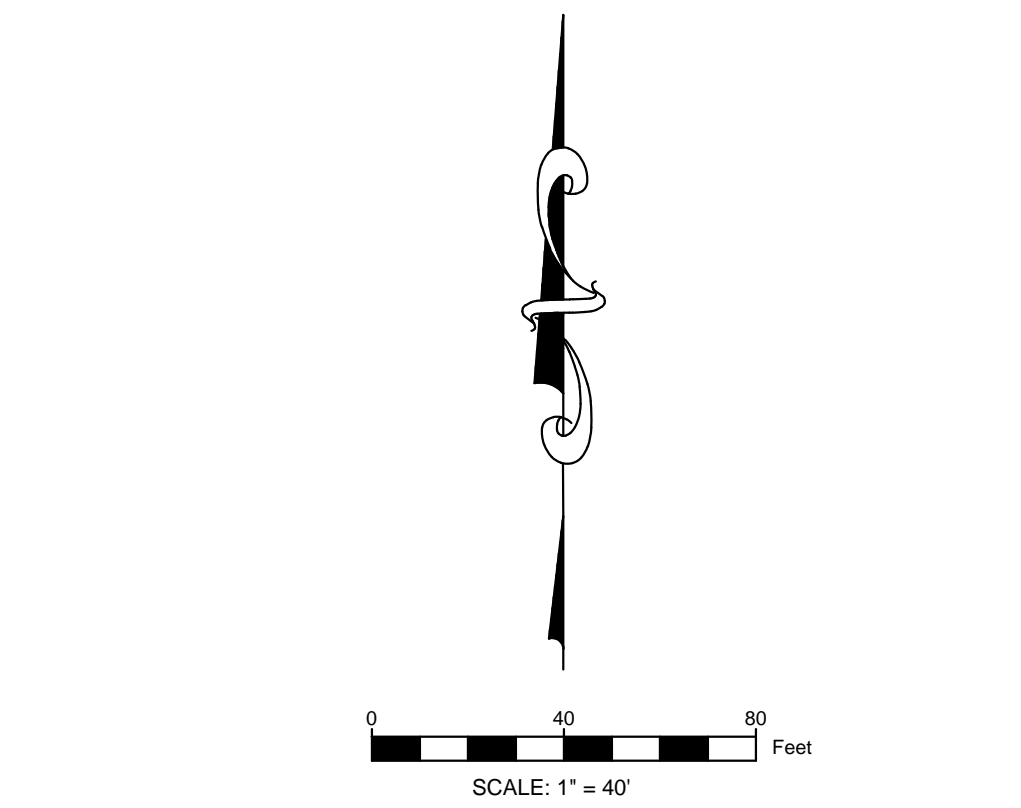

LEGEND	
	GCPT LOCATION
	ELEVATED DOWNHOLE GAMMA READING
	BOUNDARY OF ELEVATED DOWNHOLE READINGS
	NON-ELEVATED DOWNHOLE GAMMA READING
	BOUNDARY OF NON-ELEVATED DOWNHOLE READINGS
	INTERPOLATED RIM LIMITS
	FENCE
	ROCK

DRAFT

WEST LAKE LANDFILL 13570 ST. CHARLES ROCK ROAD BRIDGETON, MISSOURI 63044		WEST LAKE LANDFILL OU-1 AREA 1 RIM INVESTIGATION		 Engineering for a Better World <b>FEEZOR</b> ENGINEERING, INC.	DATE: NOVEMBER 2013	FIGURE <b>001</b>	
GCPT STATUS through 11-29-13					DESIGNED BY: PMA		
				APPROVED BY:			
PROJECT NUMBER: BT-012   FILE PATH:					REV #	DATE	BY