PACIFIC SURVEYS

SONIC VELOCITY VARIABLE DENSITY

Job No.	23354
File No.	
Company	CASCADE DRILLING
Well	PW-17
Field	COLTON
County	SAN BERNARDINO
State	CA

Location:
COLTON COMMUNITY CHURCH
1301 N. RANHO AVE
GPS: 34.0818 -117.3660

Other Services:
ELOG/GR

Sec. Twp. Rge.

Permanent Datum	G.L.	Elevation	Elevation
Log Measured From	G.L. 0'	above perm. datum	K.B.
Drilling Measured From	G.L.		D.F.
			G.L.

Date	10/03/2017		
Run Number	ONE		
Depth Driller	511.5'		
Depth Logger	511'		
Bottom Logged Interval	511'		
Top Log Interval	20'		
Casing Driller	15.5" ID TO 40'		
Casing Logger	40'		
Bit Size	10"		
Type Fluid in Hole	BENTONITE		
Density / Viscosity	9.3 / 35		
pH / Fluid Loss	8.0 / NA		
Source of Sample	TROFT		
Rm @ Meas. Temp	15.6 @ 77.0°F		
Rmf @ Meas. Temp	16.0 @ 77.0°F		
Rmc @ Meas. Temp	N/A		
Source of Rmf / Rmc	MEASURE		
Rm @ BHT	N/A		
Time Circulation Stopped	10:00		
Time Logger on Bottom	12:30		
Max. Recorded Temperature	N/A		
Equipment Number	PS-3		
Location	LA		
Recorded By	HOFFMAN		
Witnessed By	VALENZUELA		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Database File	23354.db
Dataset Pathname	SNC
Presentation Format	slt
Dataset Creation	Tue Oct 03 13:35:51 2017
Charted by	Depth in Feet scaled 1:240

240 Delta Time (usec/ft) 40	ITT	500 Variable Density 5 ft 1600	500 Variable Density 5 ft 1600
60 Gamma-Ray (GAPI) 160	(msec)	130 Single Point (Ohm-m) 400	
	5 0		

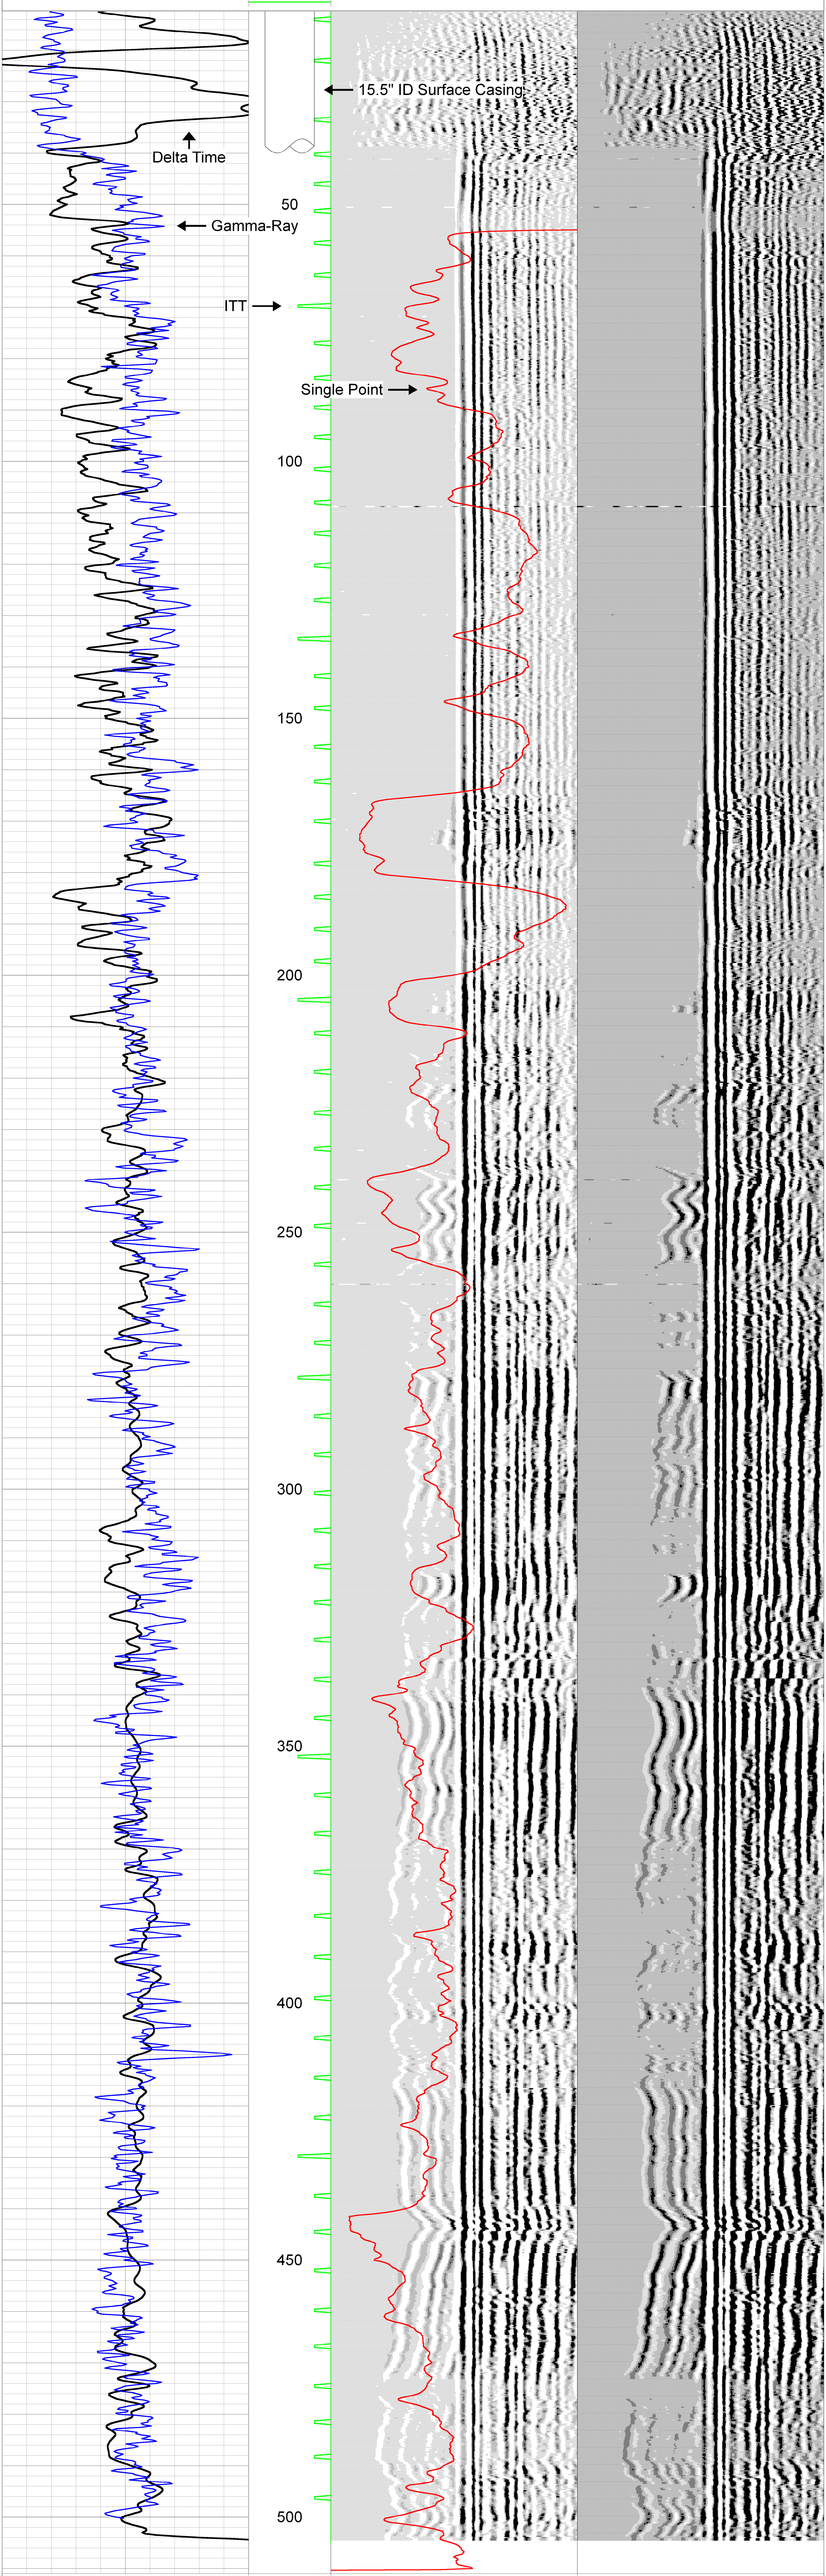

240 Delta Time (usec/ft) 40	ITT	500 Variable Density 5 ft 1600	500 Variable Density 5 ft 1600
60 Gamma-Ray (GAPI) 160	(msec)	130 Single Point (Ohm-m) 400	
	5 0		

Log Variables

DatabaseC:\ProgramData\Warrior\Data\23354.db
Dataset field/well/run1/SNC/_vars_

Top - Bottom

BOREID in	BOTTEMP degF	CASEOD in	CASETHCK in	COMPACT	FloatGate	PERFS
10	71	0	0	1	0	0

RM_MEAS_R Ohm-m	RM_MEAS_T degF	RMF Ohm-m	RSH Ohm-m	SPSHIFT mV	SRFTEMP degF	SVFLUID usec/ft
15.6	77	16	20	0	65.9	189

SVMATRIX usec/ft	TDEPTH ft
47.6	511.5