

Kingdon  
Registered Engineer

Joseph E. Naven  
Registered Engineer  
and Land Surveyor

# KINGDON AND NAVEN, INC.

ENGINEERING AND SURVEYING

23 OLT AVENUE

PHONE 309/347-5506

PEKIN, ILLINOIS - 61554

September 25, 1980

Investigations, Reports, Designs,  
Appraisals, Supervision

Water and Sewer Systems  
Sewage Treatment  
Streets and Highways  
Storm Water Drainage  
Subdivision Planning  
Land Surveying

EPA Region 5 Records Ctr.



303257

RECEIVED  
LPC/NPC

SEP 29 1980

ENVIRONMENTAL PROTECTION AGENCY  
STATE OF ILLINOIS

Mr. Monte M. Nienkerk  
Illinois Environmental Protection Agency  
4500 South 6th Street  
Springfield, Illinois

RE: TAZEWELL COUNTY/LPC #17980101  
PEKIN/MUNICIPAL #1

Dear Mr. Nienkerk:

We certify that two (2) feet of final cover material has been applied to the landfill portion of the twenty-five (25) acre site.

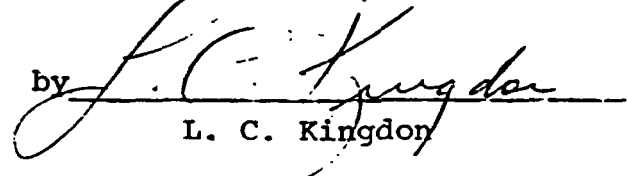
We are in the process of planting a cover material on the site which has been recommended by David Myatt, adviser to the Tazewell County Co-Operative Extension Service. A copy of our letter to the Mayor and City Commissioners concerning the planting is included.

Under a separate cover we will be sending a plat and description of the landfill site.

Yours very truly,

KINGDON and NAVEN, INC.

by

  
L. C. Kingdon

LCK:em  
Enc.

RECEIVED

OCT 01 1980

E.P.A. — D.L.P.C.  
STATE OF ILLINOIS



Kingdon  
Registered Engineer

Alph E. Naven  
Registered Engineer  
and Land Surveyor

**KINGDON AND NAVEN, INC.**  
ENGINEERING AND SURVEYING  
23 OLT AVENUE  
PHONE 309/347-5506

PEKIN, ILLINOIS - 61554

September 19, 1980

Investigations, Reports, Designs,  
Appraisals, Supervision

Water and Sewer Systems  
Sewage Treatment  
Streets and Highways  
Storm Water Drainage  
Subdivision Planning  
Land Surveying

RECEIVED  
"LPC/NPC"

SEP 29 1980

Hon. Mayor and City Commissioners  
City of Pekin  
Pekin, Illinois

ENVIRONMENTAL PROTECTION AGENCY  
STATE OF ILLINOIS

Gentlemen:

I have consulted with David Myatt, adviser to the Tazewell County Co-Operative Extension Service on the seeding of the Pekin Landfill site. His recommendations, which he will put in writing to be sent to our good friends at the E.P.A. are as follows:

To be done as soon as possible -

1. Fill washes,
2. Disc area for application of fertilizer,
3. Apply fertilizer using a 27-70-120 mixture,
4. Disc area again to incorporate the fertilizer,
5. Drill rye at the rate of one (1) bushel per acre, and
6. Spread straw on the steep slope in the northeast corner.

To be done next spring -

1. Repair eroded areas as needed,
2. Apply Actual N at the rate of forty (40) to fifty (50) pounds per acre, and
3. Broadcast a waterway mixture at the rate of twenty-five (25) pounds per acre.

To be done next summer -

1. Mow rye.

My estimate of costs are as follows:

FALL - 1980

1. Fill washes, (using City forces) - no estimate,

RECEIVED

OCT 01 1980

E.P.A. - D.L.P.C.  
STATE OF ILLINOIS

