


STATION	LEFT	RIGHT
0+00	25*	30 *
0+30	30 *	60 *
3+00	50	50
5+00	20	25
6+90	115	15 **
12+28	30	30
E0+85.50	20	40
E7+22.65	50	10
29+00	15	45
33+54.90	35	55
40+25.23	30	30
44+69.14	50	10
45+38	50	30
48+26.80	10	50
54+02.35	30	70
58+19.66	7.5	50
60+03.77	60	20
68+75.5		

- * Except that area within the ice rink or tennis courts.
- * * Except that area within the shelter house.

Note: Right-of-way width shown includes the permanent right-of-way width.

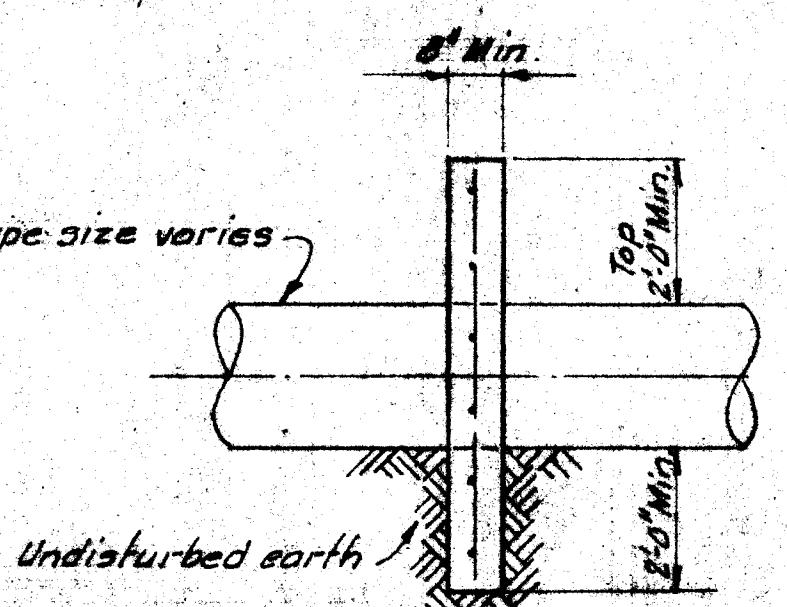

Note: Extend collar 2'-0" min. into undisturbed soil of both sides of trench. All pipe collars are to be a subsidiary obligation of the contractor and are to be included in the unit cost for pipe installation.

Note: Repudding shall be required on all existing paded areas disturbed during construction between Sta. 0400 to 29+00, Sta. 30+50 to 57+00 and Sta. 63+00 to 64+40, except that area in driveways, streets and other areas

Resodding shall also be required on all existing sodded areas disturbed, except those areas in driveways, streets and other areas surfaced with concrete or asphalt.

Resounding areas also be required areas existing roads areas disturbed during construction under this contract, to include those areas between existing M.H. 34 to M.H. 48.

The contractor shall remove and relocate all existing water and gas lines that interfere with the new sewer in place, and all cost involved with said lines shall be a subsidiary obligation of the contractor. Said relocations to be made or directed by the engineer.