

COMMONWEALTH OF PENNSYLVANIA DEPARTMENT OF ENVIRONMENTAL PROTECTION AIR QUALITY PROGRAM

PLAN APPROVAL

Issue Date: February 26, 2015 Effective Date: February 26, 2015

Expiration Date: February 26, 2018

In accordance with the provisions of the Air Pollution Control Act, the Act of January 8, 1960, P.L. 2119, as amended, and 25 Pa. Code Chapter 127, the Owner, [and Operator if noted] (hereinafter referred to as permittee) identified below is authorized by the Department of Environmental Protection (Department) to construct, install, modify or reactivate the air emission source(s) more fully described in the site inventory list. This Facility is subject to all terms and conditions specified in this plan approval. Nothing in this plan approval relieves the permittee from its obligations to comply with all applicable Federal, State and Local laws and regulations.

The regulatory or statutory authority for each plan approval condition is set forth in brackets. All terms and conditions in this permit are federally enforceable unless otherwise designated as "State-Only" requirements.

Plan Approval No. 23-0119D

Federal Tax Id - Plant Code: 23-3102655-3

Owner Information

Name: SUNOCO PARTNERS MKT & TERM LP

Mailing Address: 100 GREEN ST

MARCUS HOOK, PA 19061-4800

Plant Information

Plant: SPMT / MARCUS HOOK IND COMPLEX

Location: 23 Delaware County 23825 Marcus Hook Borough

SIC Code: 4226 Trans. & Utilities - Special Warehousing And Storage, Nec

Operator

Name: DOROTHY RURAK
Mailing Address: 100 GREEN ST

MARCUS HOOK, PA 19061-4800

[If different from owner]

Responsible Official

Name: JONATHAN A HUNT

Title: SENIOR DIRECTOR MHIC

Phone: (610) 859 - 1043

Plan Approval Contact Person

Name: DOROTHY RURAK
Title: SENIOR ENV SPECIALIST

Phone: (610) 859 - 1279

[Signature] _____

JAMES D. REBARCHAK, SOUTHEAST REGION AIR PROGRAM MANAGER



23-0119D



Plan Approval Description

Plan approval to install four (4) new cryogenic storage tanks for the storage of liquid ethane, butane, and propane. Additional installations include: the necessary piping components, a cold flare for depressurization events, a 50,000 gpm cooling tower, and a new pipeline dehydration system for the processing of liquid propane and butane. A previously permitted cold flare (Source C01) will be modified to handle the additional tankage in the event of an emergency situation with these additional storage tanks.





SECTION A. Table of Contents

Section A. Facility/Source Identification

Table of Contents
Plan Approval Inventory List

Section B. General Plan Approval Requirements

#001	1) otin	itions
#UU I	Delli	แแบบเอ

- #002 Future Adoption of Requirements
- #003 Plan Approval Temporary Operation
- #004 Content of Applications
- #005 Public Records and Confidential Information
- #006 Plan Approval terms and conditions.
- #007 Transfer of Plan Approvals
- #008 Inspection and Entry
- #009 Plan Approval Changes for Cause
- #010 Circumvention
- #011 Submissions
- #012 Risk Management
- #013 Compliance Requirement

Section C. Site Level Plan Approval Requirements

- C-I: Restrictions
- C-II: Testing Requirements
- C-III: Monitoring Requirements
- C-IV: Recordkeeping Requirements
- C-V: Reporting Requirements
- C-VI: Work Practice Standards
- C-VII: Additional Requirements
- C-VIII: Compliance Certification
- C-IX: Compliance Schedule

Section D. Source Level Plan Approval Requirements

- D-I: Restrictions
- D-II: Testing Requirements
- D-III: Monitoring Requirements
- D-IV: Recordkeeping Requirements
- D-V: Reporting Requirements
- D-VI: Work Practice Standards
- D-VII: Additional Requirements

Note: These same sub-sections are repeated for each source!

Section E. Alternative Operating Scenario(s)

- E-I: Restrictions
- E-II: Testing Requirements
- E-III: Monitoring Requirements
- E-IV: Recordkeeping Requirements
- E-V: Reporting Requirements
- E-VI: Work Practice Standards
- E-VII: Additional Requirements

Section F. Emission Restriction Summary






SECTION A. Table of Contents

Section G. Miscellaneous




SECTION A. Plan Approval Inventory List

Source	ID Source Name	Capacity/Throughput	Fuel/Material
103	FUGITIVE EQUIPMENT LEAKS	N/A	ETHANE, BUTANE, PROPA
112	COOLING TOWER	50,000.000 Gal/HR	WATER
117	CRYOGENIC ETHANE TANK (300K BBL)	N/A	ETHANE
118	CRYOGENIC BUTANE TANK (600K BBL)	N/A	BUTANE
119	CRYOGENIC PROPANE TANK (900K BBL)	N/A	PROPANE
120	CRYOGENIC PROPANE TANK (600K BBL)	N/A	PROPANE
C01	COLD FLARE (MODIFIED)	240.000 CF/HR	NATURAL GAS (PILOT AND
C02	COLD FLARE (NEW TANKS PROJECT)	117.000 CF/HR	NATURAL GAS (PILOT AND
Z01	FUGITIVES		
Z112	COOLING TOWER FUGITIVES		

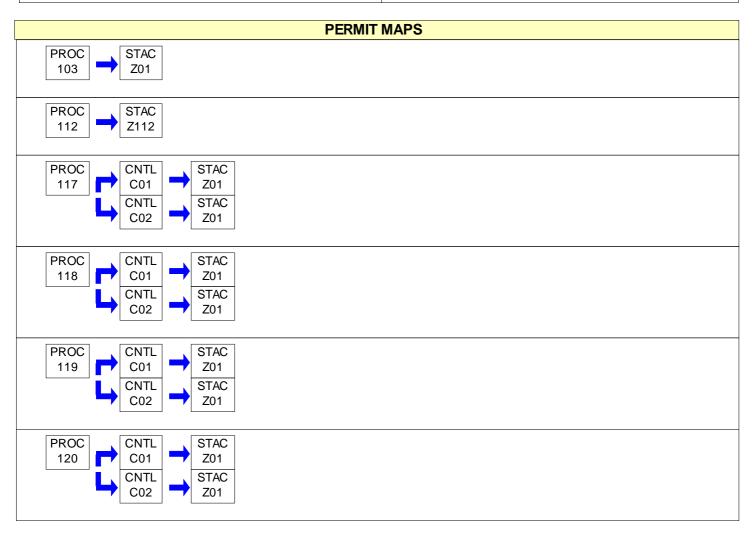







#001 [25 Pa. Code § 121.1]

Definitions

Words and terms that are not otherwise defined in this plan approval shall have the meanings set forth in Section 3 of the Air Pollution Control Act (35 P.S. § 4003) and 25 Pa. Code § 121.1.

#002 [25 Pa. Code § 127.12b (a) (b)]

Future Adoption of Requirements

The issuance of this plan approval does not prevent the future adoption by the Department of any rules, regulations or standards, or the issuance of orders necessary to comply with the requirements of the Federal Clean Air Act or the Pennsylvania Air Pollution Control Act, or to achieve or maintain ambient air quality standards. The issuance of this plan approval shall not be construed to limit the Department's enforcement authority.

#003 [25 Pa. Code § 127.12b]

Plan Approval Temporary Operation

This plan approval authorizes temporary operation of the source(s) covered by this plan approval provided the following conditions are met.

- (a) When construction, installation, modification, or reactivation is being conducted, the permittee shall provide written notice to the Department of the completion of the activity approved by this plan approval and the permittee's intent to commence operation at least five (5) working days prior to the completion of said activity. The notice shall state when the activity will be completed and when the permittee expects to commence operation. When the activity involves multiple sources on different time schedules, notice is required for the commencement of operation of each source.
- (b) Pursuant to 25 Pa. Code § 127.12b (d), temporary operation of the source(s) is authorized to facilitate the shakedown of sources and air cleaning devices, to permit operations pending the issuance of a permit under 25 Pa. Code Chapter 127, Subchapter F (relating to operating permits) or Subchapter G (relating to Title V operating permits) or to permit the evaluation of the air contaminant aspects of the source.
- (c) This plan approval authorizes a temporary operation period not to exceed 180 days from the date of commencement of operation, provided the Department receives notice from the permittee pursuant to paragraph (a), above.
- (d) The permittee may request an extension of the 180-day shakedown period if further evaluation of the air contamination aspects of the source(s) is necessary. The request for an extension shall be submitted, in writing, to the Department at least 15 days prior to the end of the initial 180-day shakedown period and shall provide a description of the compliance status of the source, a detailed schedule for establishing compliance, and the reasons compliance has not been established. This temporary operation period will be valid for a limited time and may be extended for additional limited periods, each not to exceed 180 days.
- (e) The notice submitted by the permittee pursuant to subpart (a) above, prior to the expiration of the plan approval, shall modify the plan approval expiration date on Page 1 of this plan approval. The new plan approval expiration date shall be 180 days from the date of commencement of operation.

#004 [25 Pa. Code § 127.12(a) (10)]

Content of Applications

The permittee shall maintain and operate the sources and associated air cleaning devices in accordance with good engineering practice as described in the plan approval application submitted to the Department.

#005 [25 Pa. Code §§ 127.12(c) and (d) & 35 P.S. § 4013.2]

Public Records and Confidential Information

- (a) The records, reports or information obtained by the Department or referred to at public hearings shall be available to the public, except as provided in paragraph (b) of this condition.
- (b) Upon cause shown by the permittee that the records, reports or information, or a particular portion thereof, but not emission data, to which the Department has access under the act, if made public, would divulge production or sales figures or methods, processes or production unique to that person or would otherwise tend to affect adversely the







competitive position of that person by revealing trade secrets, including intellectual property rights, the Department will consider the record, report or information, or particular portion thereof confidential in the administration of the act. The Department will implement this section consistent with sections 112(d) and 114(c) of the Clean Air Act (42 U.S.C.A. § § 7412(d) and 7414(c)). Nothing in this section prevents disclosure of the report, record or information to Federal, State or local representatives as necessary for purposes of administration of Federal, State or local air pollution control laws, or when relevant in a proceeding under the act.

#006 [25 Pa. Code § 127.12b]

Plan Approval terms and conditions.

[Additional authority for this condition is derived from 25 Pa. Code Section 127.13]

- (a) This plan approval will be valid for a limited time, as specified by the expiration date contained on Page 1 of this plan approval. Except as provided in § § 127.11a and 127.215 (relating to reactivation of sources; and reactivation), at the end of the time, if the construction, modification, reactivation or installation has not been completed, a new plan approval application or an extension of the previous approval will be required.
- (b) If construction has commenced, but cannot be completed before the expiration of this plan approval, an extension of the plan approval must be obtained to continue construction. To allow adequate time for departmental action, a request for the extension shall be postmarked at least thirty (30) days prior to the expiration date. The request for an extension shall include the following:
 - (i) A justification for the extension,
 - (ii) A schedule for the completion of the construction

If construction has not commenced before the expiration of this plan approval, then a new plan approval application must be submitted and approval obtained before construction can commence.

(c) If the construction, modification or installation is not commenced within 18 months of the issuance of this plan approval or if there is more than an 18-month lapse in construction, modification or installation, a new plan approval application that meets the requirements of 25 Pa. Code Chapter 127, Subchapter B (related to plan approval requirements), Subchapter D (related to prevention of significant deterioration of air quality), and Subchapter E (related to new source review) shall be submitted. The Department may extend the 18-month period upon a satisfactory showing that an extension is justified.

#007 [25 Pa. Code § 127.32]

Transfer of Plan Approvals

- (a) This plan approval may not be transferred from one person to another except when a change of ownership is demonstrated to the satisfaction of the Department and the Department approves the transfer of the plan approval in writing.
- (b) Section 127.12a (relating to compliance review) applies to a request for transfer of a plan approval. A compliance review form shall accompany the request.
- (c) This plan approval is valid only for the specific source and the specific location of the source as described in the application.

#008 [25 Pa. Code § 127.12(4) & 35 P.S. § 4008 & § 114 of the CAA]

Inspection and Entry

- (a) Pursuant to 35 P.S. § 4008, no person shall hinder, obstruct, prevent or interfere with the Department or its personnel in the performance of any duty authorized under the Air Pollution Control Act.
- (b) The permittee shall also allow the Department to have access at reasonable times to said sources and associated air cleaning devices with such measuring and recording equipment, including equipment recording visual observations, as the Department deems necessary and proper for performing its duties and for the effective enforcement of the Air Pollution Control Act and regulations adopted under the act.







(c) Nothing in this plan approval condition shall limit the ability of the Environmental Protection Agency to inspect or enter the premises of the permittee in accordance with Section 114 or other applicable provisions of the Clean Air Act.

#009 [25 Pa. Code 127.13a]

Plan Approval Changes for Cause

This plan approval may be terminated, modified, suspended or revoked and reissued if one or more of the following applies:

- (a) The permittee constructs or operates the source subject to the plan approval in violation of the act, the Clean Air Act, the regulations promulgated under the act or the Clean Air Act, a plan approval or permit or in a manner that causes air pollution.
- (b) The permittee fails to properly or adequately maintain or repair an air pollution control device or equipment attached to or otherwise made a part of the source.
- (c) The permittee fails to submit a report required by this plan approval.
- (d) The Environmental Protection Agency determines that this plan approval is not in compliance with the Clean Air Act or the regulations thereunder.

#010 [25 Pa. Code §§ 121.9 & 127.216]

Circumvention

- (a) The permittee, or any other person, may not circumvent the new source review requirements of 25 Pa. Code Chapter 127, Subchapter E by causing or allowing a pattern of ownership or development, including the phasing, staging, delaying or engaging in incremental construction, over a geographic area of a facility which, except for the pattern of ownership or development, would otherwise require a permit or submission of a plan approval application.
- (b) No person may permit the use of a device, stack height which exceeds good engineering practice stack height, dispersion technique or other technique which, without resulting in reduction of the total amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise be in violation of this plan approval, the Air Pollution Control Act or the regulations promulgated thereunder, except that with prior approval of the Department, the device or technique may be used for control of malodors.

#011 [25 Pa. Code § 127.12c]

Submissions

Reports, test data, monitoring data, notifications shall be submitted to the:

Regional Air Program Manager
PA Department of Environmental Protection
(At the address given on the plan approval transmittal letter or otherwise notified)

#012 [25 Pa. Code § 127.12(9) & 40 CFR Part 68]

Risk Management

- (a) If required by Section 112(r) of the Clean Air Act, the permittee shall develop and implement an accidental release program consistent with requirements of the Clean Air Act, 40 CFR Part 68 (relating to chemical accident prevention provisions) and the Federal Chemical Safety Information, Site Security and Fuels Regulatory Relief Act (P.L. 106-40).
- (b) The permittee shall prepare and implement a Risk Management Plan (RMP) which meets the requirements of Section 112(r) of the Clean Air Act, 40 CFR Part 68 and the Federal Chemical Safety Information, Site Security and Fuels Regulatory Relief Act when a regulated substance listed in 40 CFR § 68.130 is present in a process in more than the listed threshold quantity at the facility. The permittee shall submit the RMP to the Environmental Protection Agency according to the following schedule and requirements:
- (1) The permittee shall submit the first RMP to a central point specified by the Environmental Protection Agency no later than the latest of the following:







- (i) Three years after the date on which a regulated substance is first listed under § 68.130; or,
- (ii) The date on which a regulated substance is first present above a threshold quantity in a process.
- (2) The permittee shall submit any additional relevant information requested by the Department or the Environmental Protection Agency concerning the RMP and shall make subsequent submissions of RMPs in accordance with 40 CFR § 68.190.
- (3) The permittee shall certify that the RMP is accurate and complete in accordance with the requirements of 40 CFR Part 68, including a checklist addressing the required elements of a complete RMP.
- (c) As used in this plan approval condition, the term "process" shall be as defined in 40 CFR § 68.3. The term "process" means any activity involving a regulated substance including any use, storage, manufacturing, handling, or on-site movement of such substances or any combination of these activities. For purposes of this definition, any group of vessels that are interconnected, or separate vessels that are located such that a regulated substance could be involved in a potential release, shall be considered a single process.

#013 [25 Pa. Code § 127.25]

Compliance Requirement

A person may not cause or permit the operation of a source subject to § 127.11 (relating to plan approval requirements), unless the source and air cleaning devices identified in the application for the plan approval and the plan approval issued to the source, are operated and maintained in accordance with specifications in the application and conditions in the plan approval issued by the Department. A person may not cause or permit the operation of an air contamination source subject to this chapter in a manner inconsistent with good operating practices.







I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

V REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

[25 Pa. Code §127.12b]

Plan approval terms and conditions.

The permittee shall comply with all of the existing requirements of its current plan approvals and operating permit, unless specifically revised in this plan approval. The provisions in this plan approval shall be construed to supersede any contrary provisions in any previous plan approval or operating permit.

ADDITIONAL REQUIREMENTS.

002 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The air contaminant sources located in SPMT's Marcus Hook facility, which are permitted under several plan approvals and Title V operating permit No. 23-00001 and the air contaminant sources located at the SPMT's facility in the state of Delaware, which are permitted under Title V operating Permit No. AQM-003/00021 shall be considered as a single facility for New Source Review (NSR), Prevention of Significant Deterioration (PSD) and Title V applicability purposes.

COMPLIANCE CERTIFICATION.

No additional compliance certifications exist except as provided in other sections of this plan approval including Section B (relating to Plan Approval General Requirements).

IX. COMPLIANCE SCHEDULE.


No compliance milestones exist.





Source ID: 103 Source Name: FUGITIVE EQUIPMENT LEAKS

> Source Capacity/Throughput: N/A ETHANE, BUTANE, PROPANE



RESTRICTIONS.

No additional requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

III. MONITORING REQUIREMENTS.

001 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

All accessible valves (including relief valves) shall be monitored at least once a calendar quarter by leak-checking for fugitive emissions using an approved gas analyzer. Seal less/leak less valves (including, but not limited to, welded bonnet bellows and diaphragm valves) and relief valves equipped with a rupture disc upstream or venting to a control device are not required to be monitored. For valves equipped with rupture discs, a pressure-sensing device shall be installed between the relief valve and rupture disc to monitor disc integrity. All leaking discs shall be replaced at the earliest opportunity but no later than the next process shutdown.

Monitoring shall be performed with an approved gas analyzer and shall conform to the requirements listed in EPA Method 21 of 40 CFR part 60, appendix A. The gas analyzer shall be calibrated with methane. If a mixture of compounds is being monitored, the response factor shall be calculated for the average composition of the process fluid. If a response factor less than ten (10) cannot be achieved using methane, then the instrument may be calibrated with one of the compounds being measured so long as the instrument has a response factor of less than ten (10) for each compound to be measured.

Replacements for leaking components shall be re-monitored within fifteen (15) days of being placed back into service.

002 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

All pump and compressor seals shall be monitored with an approved gas analyzer at least once a calendar quarter or shall be equipped with a shaft sealing system that prevents or detects emissions from the seal. Seal systems designed and operated to prevent emissions, or seals equipped with automatic seal failure detection and alarm system need, not be monitored. These seal systems may include, but are not limited to: dual pump seals with barrier fluid at higher pressure than process pressure, seals degassing to vent control systems kept in good working order, or seals equipped with an automatic seal failure detection and alarm system. Submerged pumps or seal less pumps, including, but not limited to: diaphragm, canned, or magnetic-driven pumps may be used to satisfy the requirements of this condition and need not be monitored.

003 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The permittee shall use dataloggers and/or other electronic data collection devices for all data collection during all LDAR monitoring. The permittee shall ensure that the responsible personnel transfer, on a daily basis, electronic data from electronic datalogging devices to the electronic database. For each monitoring event in which an electronic data collection device is used, the collected monitoring data shall include an accurate time and date stamp, the monitoring reading, and identifying information on the operator and the instrument used to perform the monitoring.

The permittee may use paper logs where necessary or more feasible (e.g., small rounds, remonitoring, or when





dataloggers are not available or broken), and shall record, at a minimum, the identification of the technician undertaking the monitoring, the date, daily start and end times for the monitoring conducted, each monitoring reading, and the identification of the monitoring equipment. The permittee shall transfer any manually recorded monitoring data to the electronic database within seven (7) days of monitoring.

[40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.482-11a] Subpart VVa - Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006 Standards: Connectors in gas/vapor service and in light liquid service.

- (a) The permittee shall initially monitor all connectors in the process unit for leaks for 12 months after initial startup. If all connectors in the process unit have been monitored for leaks prior to the compliance date, no initial monitoring is required provided either no process changes have been made since the monitoring or the permittee can determine that the results of the monitoring, with or without adjustments, reliably demonstrate compliance despite process changes. If required to monitor because of a process change, the permittee is required to monitor only those connectors involved in the process change.
- (b) Except as allowed in 40 CFR §§ 60.482-1a(c), 60.482-10a, or as specified in (e), below, the permittee shall monitor all connectors in gas and vapor and light liquid service as specified in (a) and (b)(3) of this condition.
- (1) The connectors shall be monitored to detect leaks by the method specified in 40 CFR § 60.485a(b) and, as applicable, 40 CFR § 60.485a(c).
- (2) If an instrument reading greater than or equal to 500 ppm is measured, a leak is detected.
- (3) The permittee shall perform monitoring, subsequent to the initial monitoring required in (a), above, as specified in (b)(3)(i) - (iii) of this condition, and shall comply with the requirements of (b)(3)(iv) and (v), below. The required period in which monitoring must be conducted shall be determined from (b)(3)(i) - (iii), below using the monitoring results from the preceding monitoring period. The percent leaking connectors shall be calculated as specified in (c), below.
- (i) If the percent leaking connectors in the process unit was greater than or equal to 0.5 percent, then monitor within 12 months (1 year).
- (ii) If the percent leaking connectors in the process unit was greater than or equal to 0.25 percent but less than 0.5 percent, then monitor within 4 years. The permittee may comply with the requirements of (b)(3) by monitoring at least 40 percent of the connectors within 2 years of the start of the monitoring period, provided all connectors have been monitored by the end of the 4-year monitoring period.
- (iii) If the percent leaking connectors in the process unit was less than 0.25 percent, then monitor as provided in (b)(3)(iii)(A), below and either (b)(3)(iii)(B) or (b)(3)(iii)(C), below, as appropriate.
 - (A) The permittee shall monitor at least 50 percent of the connectors within 4 years of the start of the monitoring period.
- (B) If the percent of leaking connectors calculated from the monitoring results in (b)(3)(iii)(A), above is greater than or equal to 0.35 percent of the monitored connectors, the permittee shall monitor as soon as practical, but within the next 6 months, all connectors that have not yet been monitored during the monitoring period. At the conclusion of monitoring, a new monitoring period shall be started pursuant to (b)(3), above, based on the percent of leaking connectors within the total monitored connectors.
- (C) If the percent of leaking connectors calculated from the monitoring results in (b)(3)(iii)(A), above, is less than 0.35 percent of the monitored connectors, the permittee shall monitor all connectors that have not yet been monitored within 8 years of the start of the monitoring period.
- (iv) If during the monitoring conducted pursuant to (b)(3)(i) through (iii), above, a connector is found to be leaking, it shall be re-monitored once within 90 days after repair to confirm that it is not leaking.
- (v) The permittee shall keep a record of the start date and end date of each monitoring period under this section for each process unit.
- (c) For use in determining the monitoring frequency, as specified in (a) and (b)(3), above, the percent leaking connectors as used in (a) and (b)(3), above shall be calculated by using the following equation:

%CL = CL/Ct* 100

Where:

%CL = Percent of leaking connectors as determined through periodic monitoring required in (a) and (b)(3)(i) through (iii), above.

CL = Number of connectors measured at 500 ppm or greater, by the method specified in 40 CFR § 60.485a(b).



Ct = Total number of monitored connectors in the process unit or affected facility.

- (d) When a leak is detected pursuant to (a) and (b), above, it shall be repaired as soon as practicable, but not later than fifteen (15) calendar days after it is detected, except as provided in 40 CFR § 60.482-9a. A first attempt at repair as defined in this subpart shall be made no later than five (5) calendar days after the leak is detected.
- (e) Any connector that is designated, as described in 40 CFR § 60.486a(e)(1), and below, as an unsafe-to-monitor connector is exempt from the requirements of (a) and (b), above if:
- (1) the permittee demonstrates that the connector is unsafe-to-monitor because monitoring personnel would be exposed to an immediate danger as a consequence of complying with (a) and (b), above; and
- (2) the permittee has a written plan that requires monitoring of the connector as frequently as practicable during safe-tomonitor times but not more frequently than the periodic monitoring schedule otherwise applicable, and repair of the equipment according to the procedures in (d), above, if a leak is detected.
- (f) Inaccessible, ceramic, or ceramic-lined connectors .
- (1) Any connector that is inaccessible or that is ceramic or ceramic-lined (e.g., porcelain, glass, or glass-lined), is exempt from the monitoring requirements of (a) and (b), above, from the leak repair requirements of (d), above, and from the recordkeeping and reporting requirements of 40 CFR §§ 63.1038 and 63.1039. An inaccessible connector is one that meets any of the provisions specified in (f)(1)(i) -(vi), below, as applicable:
 - (i) buried;
 - (ii) insulated in a manner that prevents access to the connector by a monitor probe;
 - (iii) obstructed by equipment or piping that prevents access to the connector by a monitor probe;
- (iv) unable to be reached from a wheeled scissor-lift or hydraulic-type scaffold that would allow access to connectors up to 7.6 meters (25 feet) above the ground;
- (v) inaccessible because it would require elevating the monitoring personnel more than 2 meters (7 feet) above a permanent support surface or would require the erection of scaffold; or
- (vi) not able to be accessed at any time in a safe manner to perform monitoring. Unsafe access includes, but is not limited to, the use of a wheeled scissor-lift on unstable or uneven terrain, the use of a motorized man-lift basket in areas where an ignition potential exists, or access would require near proximity to hazards such as electrical lines, or would risk damage to equipment.
- (2) If any inaccessible, ceramic, or ceramic-lined connector is observed by visual, audible, olfactory, or other means to be leaking, the visual, audible, olfactory, or other indications of a leak to the atmosphere shall be eliminated as soon as practical.
- (g) Except for instrumentation systems and inaccessible, ceramic, or ceramic-lined connectors meeting the provisions of (f), above, identify the connectors subject to the requirements of this subpart. Connectors need not be individually identified if all connectors in a designated area or length of pipe subject to the provisions of this subpart are identified as a group, and the number of connectors subject is indicated.
- # 005 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.482-8a]
 Subpart VVa Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals
 Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006
 Standards: Pumps, valves, and connectors in heavy liquid service and pressure relief devices in light liquid or heavy liquid service.
- (a) If evidence of a potential leak is found by visual, audible, olfactory, or any other detection method at valves in heavy liquid service, the permittee shall follow either of the following procedures:
- (1) the permittee shall monitor the equipment within five (5) days by the method specified in 40 CFR § 60.485a(b) and shall comply with the requirements of (b) through (d), below.
- (2) the permittee shall eliminate the visual, audible, olfactory, or other indication of a potential leak within five (5) calendar days of detection.
- (b) If an instrument reading of 10,000 ppm or greater is measured, a leak is detected.
- (c) When a leak is detected, it shall be repaired as soon as practicable, but not later than fifteen (15) calendar days after it is detected, except as provided in 40 CFR § 60.482-9a, with the first attempt at repair made no later than five (5) calendar days after each leak is detected.
- (d) First attempts at repair include, but are not limited to, the best practices described under 40 CFR §§ 60.482-2a(c)(2) and



60	.482-	7a(e)	١.

IV. RECORDKEEPING REQUIREMENTS.

006 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

Records of this first attempt of repair shall be maintained on site.

007 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.486a]
Subpart VVa - Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals
Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006
Recordkeeping requirements.

- (a) The permittee shall record the following information for each monitoring event required by 40 CFR §§ 60.482-2a, 60.482-3a, 60.482-7a, 60.482-8a, 60.482-11a, and 60.483-2a:
- (1) monitoring instrument identification;
- (2) operator identification;
- (3) equipment identification;
- (4) date of monitoring; and
- (5) instrument reading.
- (b) When each leak is detected as specified in 40 CFR $\S\S$ 60.482-2a, 60.482-3a, 60.482-7a, 60.482-8a, 60.482-11a, and 60.483-2a, the following requirements apply:
- (1) a weatherproof and readily visible identification, marked with the equipment identification number, shall be attached to the leaking equipment;
- (2) the identification on a valve may be removed after it has been monitored for 2 successive months as specified in 40 CFR § 60.482-7a(c) and no leak has been detected during those 2 months;
- (3) the identification on a connector may be removed after it has been monitored as specified in 40 CFR § 60.482-11a(b)(3)(iv) and no leak has been detected during that monitoring; and
- (4) the identification on equipment, except on a valve or connector, may be removed after it has been repaired.
- (c) When each leak is detected as specified in 40 CFR §§ 60.482-2a, 60.482-3a, 60.482-7a, 60.482-8a, 60.482-11a, and 60.483-2a, the following information shall be recorded in a log and shall be kept for a minimum of five (5) years in a readily accessible location:
- (1) the instrument and operator identification numbers and the equipment identification number, except when indications of liquids dripping from a pump are designated as a leak;
- (2) the date the leak was detected and the dates of each attempt to repair the leak;
- (3) repair methods applied in each attempt to repair the leak;
- (4) maximum instrument reading measured by Method 21 of appendix A-7 of 40 CFR 60 at the time the leak is successfully repaired or determined to be nonrepairable, except when a pump is repaired by eliminating indications of liquids dripping;
- (5) "repair delayed" and the reason for the delay if a leak is not repaired within fifteen (15) calendar days after discovery of the leak;
- (6) the signature of the owner or operator (or designate) whose decision it was that repair could not be effected without a process shutdown:
- (7) the expected date of successful repair of the leak if a leak is not repaired within fifteen (15) days;
- (8) dates of process unit shutdowns that occur while the equipment is unrepaired; and
- (9) the date of successful repair of the leak.
- (d) The following information pertaining to the design requirements for closed vent systems and control devices described in 40 CFR § 60.482-10a shall be recorded and kept in a readily accessible location:
- (1) detailed schematics, design specifications, and piping and instrumentation diagrams;
- (2) the dates and descriptions of any changes in the design specifications;
- (3) a description of the parameter or parameters monitored, as required in 40 CFR § 60.482-10a(e), to ensure that control devices are operated and maintained in conformance with their design and an explanation of why that parameter (or





parameters) was selected for the monitoring;

- (4) periods when the closed vent systems and control devices required in 40 CFR §§ 60.482-2a, 60.482-3a, 60.482-4a, and 60.482-5a are not operated as designed, including periods when a flare pilot light does not have a flame; and
- (5) dates of startups and shutdowns of the closed vent systems and control devices required in 40 CFR §§ 60.482-2a, 60.482-3a, 60.482-4a, and 60.482-5a.
- (e) The following information pertaining to all equipment subject to the requirements in 40 CFR §§ 60.482-1a to 60.482-11a shall be recorded in a log that is kept in a readily accessible location:
- (1) a list of identification numbers for equipment subject to the requirements of this subpart;
- (2) a list of identification numbers for equipment that are designated for no detectable emissions under the provisions of 40 CFR §§ 60.482-2a(e), 60.482-3a(i), and 60.482-7a(f). The designation of equipment as subject to these requirements shall be signed by the permittee. Alternatively, the permittee may establish a mechanism with PADEP that satisfies this requirement;
- (3) a list of equipment identification numbers for pressure relief devices required to comply with 40 CFR § 60.482-4a;
- (4) the dates of each compliance test as required in 40 CFR §§ 60.482-2a(e), 60.482-3a(i), 60.482-4a, and 60.482-7a(f);
- (i) the background level measured during each compliance test.
- (ii) the maximum instrument reading measured at the equipment during each compliance test.
- (5) a list of identification numbers for equipment that the permittee designates as operating in VOC service less than 300 hr/yr in accordance with 40 CFR § 60.482-1a(e), a description of the conditions under which the equipment is in VOC service, and rationale supporting the designation that it is in VOC service less than 300 hr/yr;
- (6) the date and results of the weekly visual inspection for indications of liquids dripping from pumps in light liquid service;
- (7) records of the information specified in (i) through (vi), below, for monitoring instrument calibrations conducted according to sections 8.1.2 and 10 of Method 21 of appendix A-7 of 40 CFR § 60.485a(b);
 - (i) Date of calibration and initials of operator performing the calibration.
 - (ii) Calibration gas cylinder identification, certification date, and certified concentration.
 - (iii) Instrument scale(s) used.
- (iv) A description of any corrective action taken if the meter readout could not be adjusted to correspond to the calibration gas value in accordance with section 10.1 of Method 21 of appendix A-7 of 40 CFR 60.
- (v) Results of each calibration drift assessment required by 40 CFR § 60.485a(b)(2) (i.e., instrument reading for calibration at end of monitoring day and the calculated percent difference from the initial calibration value).
 - (vi) If the permittee makes their own calibration gas, a description of the procedure used.
- (8) the connector monitoring schedule for each process unit as specified in 40 CFR § 60.482-11a(b)(3)(v); and
- (9) records of each release from a pressure relief device subject to 40 CFR § 60.482-4a.
- (f) The following information pertaining to all valves subject to the requirements of 40 CFR § 60.482-7a(g) and (h), all pumps subject to the requirements of 40 CFR § 60.482-2a(g), and all connectors subject to the requirements of 40 CFR § 60.482-11a(e) shall be recorded in a log that is kept in a readily accessible location:
- (1) a list of identification numbers for valves, pumps, and connectors that are designated as unsafe-to-monitor, an explanation for each valve, pump, or connector stating why the valve, pump, or connector is unsafe-to-monitor, and the plan for monitoring each valve, pump, or connector; and
- (2) a list of identification numbers for valves that are designated as difficult-to-monitor, an explanation for each valve stating why the valve is difficult-to-monitor, and the schedule for monitoring each valve.
- (g) The following information shall be recorded for valves complying with 40 CFR § 60.483-2a:
- (1) a schedule of monitoring; and
- (2) the percent of valves found leaking during each monitoring period.
- (h) The following information shall be recorded in a log that is kept in a readily accessible location:
- (1) design criterion required in 40 CFR §§ 60.482-2a(d)(5) and 60.482-3a(e)(2) and explanation of the design criterion; and
- (2) any changes to this criterion and the reasons for the changes.
- (i) The following information shall be recorded in a log that is kept in a readily accessible location for use in determining exemptions as provided in 40 CFR § 60.480a(d):
- (1) an analysis demonstrating the design capacity of the affected facility;





- (2) a statement listing the feed or raw materials and products from the affected facilities and an analysis demonstrating whether these chemicals are heavy liquids or beverage alcohol; and
- (3) an analysis demonstrating that equipment is not in VOC service.
- (j) Information and data used to demonstrate that a piece of equipment is not in VOC service shall be recorded in a log that is kept in a readily accessible location.
- (k) The provisions of 40 CFR § 60.7(b) and (d) do not apply to affected facilities subject to 40 CFR 60, Subpart VVa.

V. REPORTING REQUIREMENTS.

008 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.487a]
Subpart VVa - Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals
Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006
Reporting requirements.

- (a) The permittee shall submit semiannual reports to the Administrator beginning 6 months after the initial startup date.
- (b) The initial semiannual report to the Administrator shall include the following information:
- (1) process unit identification;
- (2) number of valves subject to the requirements of 40 CFR § 60.482-7a, excluding those valves designated for no detectable emissions under the provisions of 40 CFR § 60.482-7a(f);
- (3) number of connectors subject to the requirements of 40 CFR § 60.482-11a;
- (c) All semiannual reports to the Administrator shall include the following information, summarized from the information in 40 CFR § 60.486a:
- (1) process unit identification;
- (2) for each month during the semiannual reporting period;
- (i) Number of valves for which leaks were detected as described in 40 CFR § 60.482-7a(b) or §60.483-2a;
- (ii) Number of valves for which leaks were not repaired as required in 40 CFR § 60.482-7a(d)(1);
- (iii) Number of pumps for which leaks were detected as described in 40 CFR § 60.482-2a(b), (d)(4)(ii)(A) or (B), or (d)(5)(iii);
 - (iv) Number of pumps for which leaks were not repaired as required in 40 CFR § 60.482-2a(c)(1) and (d)(6);
 - (v) Number of compressors for which leaks were detected as described in 40 CFR § 60.482-3a(f);
 - (vi) Number of compressors for which leaks were not repaired as required in 40 CFR § 60.482-3a(g)(1);
 - (vii) Number of connectors for which leaks were detected as described in 40 CFR § 60.482-11a(b);
 - (viii) Number of connectors for which leaks were not repaired as required in 40 CFR § 60.482-11a(d); and
- (ix) The facts that explain each delay of repair and, where appropriate, why a process unit shutdown was technically infeasible.
- (3) dates of process unit shutdowns which occurred within the semiannual reporting period; and
- (4) revisions to items reported according to (b), above, if changes have occurred since the initial report or subsequent revisions to the initial report.
- (d) The permittee electing to comply with the provisions of 40 CFR §§60.483-1a or 60.483-2a shall notify the Administrator of the alternative standard selected 90 days before implementing either of the provisions.
- (e) The permittee shall report the results of all performance tests in accordance with 40 CFR § 60.8 of the General Provisions. The provisions of 40 CFR § 60.8(d) do not apply to affected facilities subject to the provisions of 40 CFR 60, Subpart Wa, except that the permittee must notify the Administrator of the schedule for the initial performance tests at least thirty (30) days before the initial performance tests.
- (f) The requirements of (a) through (c), above remain in force until and unless EPA, in delegating enforcement authority to a state under section 111(c) of the CAA, approves reporting requirements or an alternative means of compliance surveillance adopted by such state. In that event, affected sources within the state will be relieved of the obligation to comply with the requirements of (a) through (c), above, provided that they comply with the requirements established by the state.

VI. WORK PRACTICE REQUIREMENTS.

009 [25 Pa. Code §127.12b]





Plan approval terms and conditions.

All piping, valves, relief valves, pump systems, and compressor systems shall conform to applicable American National Standards Institute (ANSI), American Petroleum Institute (API), American Society of Mechanical Engineers (ASME), or equivalent codes.

010 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

All underground piping shall contain no buried valves and all buried connectors shall be welded.

011 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

To the extent that good engineering practice will permit, valves and piping connections shall be so located to be accessible for leak-checking. Non-accessible valves, as approved by the Department, shall be identified, with the approved list maintained on site.

012 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

All piping connections shall be welded or flanged, except that threaded connections are permissible on piping smaller than two-inch diameter. Gas or hydraulic testing of the piping connections at no less than operating pressure shall be performed prior to installation or returning the components to service, or they shall be monitored for leaks using an approved gas analyzer within eight (8) hours of the components being returned to service. Adjustments shall be made as necessary to obtain leak-free performance. Connectors shall be inspected by visual, audible, and/or olfactory means at least weekly by operating personnel walk-through.

Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve. Except during sampling, the second valve shall be closed. If the removal of a component for repair or replacement results in an open-ended line or valve, it is exempt from the requirement to install a cap, blind flange, plug, or second valve for twenty-four (24) hours. If the repair or replacement is not completed within twenty-four (24) hours, a cap, blind flange, plug, or second valve must be installed.

013 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

Damaged or leaking valves or connectors found to be emitting compounds in excess of 500 ppmv or found by visual inspection to be leaking (e.g., dripping process fluids) shall be date tagged with a weatherproof and readily visible identification number and date the leak was found. The tag shall remain in place until the component is replaced or repaired.

Damaged or leaking pump, compressor, and agitator seals found to be emitting compounds in excess of 2,000 ppmv or found by visual inspection to be leaking (e.g., dripping process fluids) shall be date tagged with a weatherproof and readily visible identification number and date the leak was found. The tag shall remain in place until the component is replaced or repaired.

014 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

When a leak is detected, it shall be repaired as soon as practical, but no later than fifteen (15) days after it is detected. A first attempt of repair shall be made no later than five (5) calendar days after the leak is detected. Following the repair or replacement, the part shall be monitored for leakage and the results recorded.

If the repair of a component would require a unit shutdown that would create more emissions than the repair would eliminate, the repair may be delayed until the next scheduled shutdown. All leaking components which cannot be repaired until a scheduled shutdown shall be identified for such repair by tagging. A listing of all components that qualify for delay of repair shall be maintained on a "delay of repair" list. The cumulative daily emissions from all components on the delay of repair list shall be estimated using EPA's Protocol for Equipment Leak Emission Estimates, EPA-453/R-95-107 and using the emission factors in Table 2-1, or other Department and EPA approved equivalent. When the cumulative daily emission rate of all components on the delay of repair list times the number of days until the next scheduled unit shutdown is equal to or exceeds the total emissions from a unit shutdown, the Department shall be notified and may require early unit shutdown,





or other appropriate action based on the number and severity of tagged leaks awaiting shutdown.

015 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.482-10a]
Subpart VVa - Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals
Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006
Standards: Closed vent systems and control devices.

WORK PRACTICE STANDARD

(a) The vapor recovery system shall be designed and operated to recover the VOC emissions vented to them with an efficiency of 95 percent or greater.

MONITOR

- (b) The permittee shall monitor the control devices to ensure that they are operated and maintained in conformance with their designs.
- (c) Except as provided in (f h) below, the permittee shall inspect the vapor collection system or closed vent system as follows:
- (1) conduct an initial inspection according to the procedures in 40 CFR § 60.485a(b); and
- (2) conduct annual visual inspections for visible, audible, or olfactory indications of leaks.

WORK PRACTICE STANDARD

- (d) Leaks, as indicated by an instrument reading greater than 500 ppmv above background or by visual inspections, shall be repaired as soon as practicable except as provided in (e), below.
- (1) a first attempt at repair shall be made no later than five (5) calendar days after the leak is detected.
- (2) repairs shall be completed no later than fifteen (15) calendar days after the leak is detected.
- (e) Delay of repair of a closed vent system for which leaks have been detected is allowed if the repair is technically infeasible without a process unit shutdown or if the permittee determines that emissions resulting from immediate repair would be greater than the fugitive emissions likely to result from delay of repair. Repair of such equipment shall be complete by the end of the next process unit shutdown.
- (f) Any parts of the closed vent system that are designated, as described in (g)(1), below, as unsafe to inspect are exempt from the inspection requirements of (c)(1) and (c)(2), above, if they comply with the requirements specified in (g)(1) and (2), below:
- (1) The permittee determines that the equipment is unsafe to inspect because inspecting personnel would be exposed to an imminent or potential danger as a consequence of complying with (c)(1) or (c)(2), above; and
- (2) The permittee has a written plan that requires inspection of the equipment as frequently as practicable during safe-to inspect times.
- (g) Any parts of the vapor recovery system that are designated, as described in (h)(2), below, as difficult to inspect are exempt from the inspection requirements of (c)(1) and (c)(2), above, if they comply with the requirements specified in (h)(1) through (3), below:
- (1) The permittee determines that the equipment cannot be inspected without elevating the inspecting personnel more than 2 meters above a support surface; and
- (2) The process unit within which the vapor recovery system is located becomes an affected facility through 40 CFR §§ 60.14 or 60.15, or the permittee designates less than 3.0 percent of the total number of vapor recovery system equipment as difficult to inspect; and
- (3) The permittee has a written plan that requires inspection of the equipment at least once every 5 years.

RECORDS

- (h) The permittee shall record the following:
- (1) Identification of all parts of the vapor recovery system that are designated as unsafe to inspect, an explanation of why the equipment is unsafe to inspect, and the plan for inspecting the equipment;
- (2) Identification of all parts of the vapor recovery system that are designated as difficult to inspect, an explanation of why the equipment is difficult to inspect, and the plan for inspecting the equipment;
- (3) For each inspection during which a leak is detected, a record of the information specified in 40 CFR § 60.486a(c);
- (4) For each inspection conducted in accordance with 40 CFR § 60.485a(b) during which no leaks are detected, a record



23-0119D



SECTION D. Source Level Plan Approval Requirements

that the inspection was performed, the date of the inspection, and a statement that no leaks were detected; and

- (5) For each visual inspection conducted in accordance with (c)(2), above, during which no leaks are detected, a record that the inspection was performed, the date of the inspection, and a statement that no leaks were detected.
- (i) The vapor recovery system used to comply with provisions of this subpart shall be operated at all times when emissions may be vented to them.
- # 016 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.482-1a]
 Subpart VVa Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals
 Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006
 Standards: General.
- (a) The permittee shall demonstrate compliance with the requirements of 40 CFR §§ 60.482-1a through 60.482-10a, as applicable, or 40 CFR § 60.480a(e) for all equipment within 180 days of initial startup.
- (b) Compliance with 40 CFR §§ 60.482-1a to 60.482-10a will be determined by review of records and reports, review of performance test results, and inspection using the methods and procedures specified in 40 CFR § 60.485a.
- (c) The permittee may request a determination of equivalence of a means of emission limitation to the requirements of 40 CFR §§ 60.482-2a, 60.482-3a, 60.482-5a, 60.482-6a, 60.482-7a, 60.482-8a, and 60.482-10a as provided in §60.484a. If the Administrator makes a determination that a means of emission limitation is at least equivalent to the requirements of 40 CFR §§ 60.482-2a, 60.482-3a, 60.482-5a, 60.482-6a, 60.482-7a, 60.482-8a, or 60.482-10a, the permittee shall comply with the requirements of that determination.
- (d) Equipment that the permittee designates as being in VOC service less than 300 hr/yr is excluded from the requirements of 40 CFR \S 60.482-2a through 60.482-11a, if it is identified as required in 40 CFR \S 60.486a(e)(6) and it meets any of the conditions specified in (e)(1) through (3), below.
- (1) the equipment is in VOC service only during startup and shutdown, excluding startup and shutdown between batches of the same campaign for a batch process;
- (2) the equipment is in VOC service only during process malfunctions or other emergencies; or
- (3) the equipment is backup equipment that is in VOC service only when the primary equipment is out of service.
- (e) If a dedicated batch process unit operates less than 365 days during a year, the permittee may monitor to detect leaks from pumps, valves, and open-ended valves or lines at the frequency specified as follows instead of monitoring as specified in 40 CFR §§ 60.482-2a, 60.482-7a, and 60.483.2a:
- (1) If used less than 25% of the hours of the year, then the equivalent monitoring frequency shall be as follows:
 - (i) Monthly-performed quarterly
 - (ii) Quarterly performed annually
 - (iii) Semiannally performed annually
- (2) If used 25% or more, but less than 50% of the hours of the year, then the equivalent monitoring frequency shall be as follows:
 - (i) Monthly performed quarterly
 - (ii) Quarterly performed semi-annually
 - (iii) Semiannally performed annually
- (3) If used 50% or more, but less than 75% of the hours of the year, then the equivalent monitoring frequency shall be as follows:
 - (i) Monthly performed bimonthly
 - (ii) Quarterly performed three quarters
 - (iii) Semiannally performed semiannually
- (4) If used 75% or more, but less than 100% of the hours of the year, then the equivalent monitoring frequency shall be as follows:
 - (i) Monthly performed monthly
 - (ii) Quarterly performed quarterly
 - (iii) Semiannally performed semiannually
- (f) Valves that are shared among two or more batch process units that are subject to VVa may be monitored at the frequencies specified in (f), above, provided the operating time of all such process units is considered.







- (g) The monitoring frequencies specified in (f), above, are not requirements for monitoring at specific intervals and can be adjusted to accommodate process operations The permittee may monitor at any time during the specified monitoring period (e.g., month, quarter, year), provided the monitoring is conducted at a reasonable interval after completion of the last monitoring campaign. Reasonable intervals are defined in (h)(1) through (4), below:
- (1) when monitoring is conducted quarterly, monitoring events must be separated by at least 30 calendar days;
- (2) when monitoring is conducted semiannually (i.e., once every 2 quarters), monitoring events must be separated by at least 60 calendar days:
- (3) when monitoring is conducted in 3 quarters per year, monitoring events must be separated by at least 90 calendar davs: and
- (4) when monitoring is conducted annually, monitoring events must be separated by at least 120 calendar days.
- (h) If the storage vessel is shared with multiple process units, the process unit with the greatest annual amount of stored materials (predominant use) is the process unit the storage vessel is assigned to. If the storage vessel is shared equally among process units, and one of the process units has equipment subject to Wa, the storage vessel is assigned to that process unit. If the storage vessel is shared equally among process units, none of which have equipment subject to Wa, the storage vessel is assigned to any process unit subject to Subpart Wa. If the predominant use of the storage vessel varies from year to year, then the permittee must estimate the predominant use initially and reassess every 3 years. The permittee must keep records of the information and supporting calculations that show how predominant use is determined. All equipment on the storage vessel must be monitored when in VOC service.
- # 017 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.482-4a] Subpart VVa - Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006 Standards: Pressure relief devices in gas/vapor service.
- (a) Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in 40 CFR § 60.485a(c).
- (b) After each pressure release, the pressure relief device shall be returned to a condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as soon as practicable, but no later than five (5) calendar days after the pressure release, except as provided in 40 CFR § 60.482-9a. No later than five (5) calendar days after the pressure release, the pressure relief device shall be monitored to confirm the conditions of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, by the methods specified in 40 CFR § 60.485a(c).
- (c) Any pressure relief device that is routed to a process or fuel gas system or equipped with a closed vent system capable of capturing and transporting leakage through the pressure relief device to a control device as described in 40 CFR § 60.482-10a is exempted from the requirements of (a) and (b) above.
- (d) Any pressure relief device that is equipped with a rupture disk upstream of the pressure relief device is exempt from the requirements of (a) and (b), above, provided that after each pressure release, the permittee installs a new rupture disk upstream of the pressure relief device as soon as practicable, but no later than five (5) calendar days after each pressure release, except as provided in 40 CFR § 60.482-9a.
- [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.482-5a] Subpart VVa - Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006 Standards: Sampling connection systems.
- (a) Each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in 40 CFR § 60.482-1a(c) and the following requirements:
- (1) gases displaced during filling of the sample container are not required to be collected or captured;
- (2) containers that are part of a closed-purge system must be covered or closed when not being filled or emptied;
- (3) gases remaining in the tubing or piping between the closed-purge system valve(s) and sample container valve(s) after the valves are closed and the sample container is disconnected are not required to be collected or captured; and
- (4) each closed-purge, closed-loop, or closed-vent system shall be designed and operated to meet requirements in either (a)(4)(i), (ii), (iii), or (iv), below:
 - (i) Return the purged process fluid directly to the process line;
 - (ii) Collect and recycle the purged process fluid to a process;
 - (iii) Capture and transport all the purged process fluid to a control device that complies with the requirements of 40 CFR





§ 60.482-10a; or

- (iv) Collect, store, and transport the purged process fluid to any of the following systems or facilities:
- (A) A waste management unit as defined in 40 CFR § 63.111, if the waste management unit is subject to and operated in compliance with the provisions of 40 CFR 63, Subpart G, applicable to Group 1 wastewater streams;
 - (B) A treatment, storage, or disposal facility subject to regulation under 40 CFR Part 262, 264, 265, or 266;
- (C) A facility permitted, licensed, or registered by a state to manage municipal or industrial solid waste, if the process fluids are not hazardous waste as defined in 40 CFR Part 261;
- (D) A waste management unit subject to and operated in compliance with the treatment requirements of 40 CFR § 61.348(a), provided all waste management units that collect, store, or transport the purged process fluid to the treatment unit are subject to and operated in compliance with the management requirements of 40 CFR §§ 61.343 through 347; or
- (E) A device used to burn off-specification used oil for energy recovery in accordance with 40 CFR Part 279, Subpart G, provided the purged process fluid is not hazardous waste as defined in 40 CFR Part 261.
- # 019 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.482-6a]
 Subpart VVa Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals
 Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006
 Standards: Open-ended valves or lines.
- (a) Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in 40 CFR § 60.482-1a(c), and (d) and (e), below. The cap, blind flange, plug, or second valve shall seal the open end at all times except during operations requiring process fluid flow through the open-ended valve or line.
- (b) Each open-ended valve or line equipped with a second valve shall be operated in a manner such that the valve on the process fluid end is closed before the second valve is closed.
- (c) When a double block-and-bleed system is being used, the bleed valve or line may remain open during operations that require venting the line between the block valves but shall comply with (a), above.
- (d) Open-ended valves or lines in an emergency shutdown system which are designed to open automatically in the event of a process upset are exempt from the requirements of (a), (b), and (c), above.
- (e) Open-ended valves or lines containing materials which would autocatalytically polymerize or would present an explosion, serious overpressure, or other safety hazard if capped or equipped with a double block and bleed system as specified in (a) through (c), above, are exempted from those requirements.
- # 020 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.482-7a]
 Subpart VVa Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals
 Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006
 Standards: Valves in gas/vapor service and in light liquid service.
- (a) Each valve shall be monitored monthly to detect leaks by the methods specified in 40 CFR § 60.485a(b) and shall comply with (b) through (d), below, except as provided in (e), and (f), below, 40 CFR §§ 60.482-1a(c) and (f), and 60.483-1a and 60.483-2a.
- (1) A valve that begins operation in gas/vapor service or light liquid service after the initial startup date for the process unit must be monitored according to (a) or (a)(2), of this condition, except for a valve that replaces a leaking valve and except as provided in (e), and (f), below, 40 CFR §§ 60.482-1a(c), and 60.483-1a and 60.483-2a:
- (2) The valve must be monitored for the first time within 30 days after the end of its startup period to ensure proper installation. If the existing valves in the process unit are monitored in accordance with 40 CFR §§ 60.483-1a or 60.483-2a, count the new valve as leaking when calculating the percentage of valves leaking as described in 40 CFR § 60.483-2a(b)(5). If less than 2.0 percent of the valves are leaking for that process unit, the valve must be monitored for the first time during the next scheduled monitoring event for existing valves in the process unit or within 90 days, whichever comes first.
- (b) If an instrument reading of 500 ppm or greater is measured, a leak is detected.
- (1) Any valve for which a leak is not detected for 2 successive months may be monitored the first month of every quarter, beginning with the next quarter, until a leak is detected. As an alternative to monitoring all of the valves in the first month of a quarter, the permittee may elect to subdivide the process unit into two or three subgroups of valves and monitor each subgroup in a different month during the quarter, provided each subgroup is monitored every 3 months. The permittee must keep records of the valves assigned to each subgroup.
- (2) If a leak is detected, the valve shall be monitored monthly until a leak is not detected for 2 successive months.
- (c) When a leak is detected, it shall be repaired as soon as practicable, but no later than fifteen (15) calendar days after the leak is detected, except as provided in 40 CFR § 60.482-9a. A first attempt at repair shall be made no later than five (5)








calendar days after each leak is detected.

- (d) First attempts at repair include, but are not limited to, the following best practices where practicable:
- (1) tightening of bonnet bolts:
- (2) replacement of bonnet bolts;
- (3) tightening of packing gland nuts; and
- (4) injection of lubricant into lubricated packing.
- (e) Any valve that is designated, as described in 40 CFR § 60.486a(e)(2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of (a), above, if the valve:
- (1) has no external actuating mechanism in contact with the process fluid;
- (2) is operated with emissions less than 500 ppm above background as determined by the method specified in 40 CFR § 60.485a(c); and
- (3) is tested for compliance with (e)(2), above, initially upon designation, annually, and at other times requested by the Administrator.
- (f) Any valve that is designated, as described in 40 CFR § 60.486a(f)(1), as an unsafe-to-monitor valve is exempt from the requirements of (a), above, if:
- (1) the permittee demonstrates that the valve is unsafe to monitor because monitoring personnel would be exposed to an immediate danger as a consequence of complying with (a); and
- (2) the permittee adheres to a written plan that requires monitoring of the valve as frequently as practicable during safe-tomonitor times.
- (g) Any valve that is designated, as described in 40 CFR § 60.486a(f)(2), as a difficult-to-monitor valve is exempt from the requirements of (a), above, if:
- (1) the permittee demonstrates that the valve cannot be monitored without elevating the monitoring personnel more than two (2) meters above a support surface;
- (2) the process unit within which the valve is located has less than 3.0 percent of its total number of valves designated as difficult-to-monitor; and
- (3) the permittee follows a written plan that requires monitoring of the valve at least once per calendar year.
- [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.482-9a] Subpart VVa - Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006 Standards: Delay of repair.
- (a) Delay of repair of equipment for which leaks have been detected will be allowed if repair within fifteen (15) days is technically infeasible without a process unit shutdown. Repair of this equipment shall occur before the end of the next process unit shutdown. Monitoring to verify repair must occur within fifteen (15) days after startup of the process unit.
- (b) Delay of repair of equipment will be allowed for equipment which is isolated from the process and which does not remain in VOC service.
- (c) Delay of repair for valves and connectors will be allowed if:
- (1) The permittee demonstrates that emissions of purged material resulting from immediate repair are greater than the fugitive emissions likely to result from delay of repair, and
- (2) When repair procedures are effected, the purged material is collected and destroyed or recovered in a control device complying with 40 CFR § 60.482-10a.
- (d) Delay of repair beyond a process unit shutdown will be allowed for a valve, if valve assembly replacement is necessary during the process unit shutdown, valve assembly supplies have been depleted, and valve assembly supplies had been sufficiently stocked before the supplies were depleted. Delay of repair beyond the next process unit shutdown will not be allowed unless the next process unit shutdown occurs sooner than six (6) months after the first process unit shutdown.
- (e) When delay of repair is allowed for a leaking valve, or connector that remains in service, the valve, or connector may be considered to be repaired and no longer subject to delay of repair requirements if two (2) consecutive monthly monitoring instrument readings are below the leak definition.
- [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.483-1a] Subpart VVa - Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006 Alternative standards for valves - allowable percentage of valves leaking.





- (a) The permittee may elect to comply with an allowable percentage of valves leaking of equal to or less than 2.0 percent.
- (b) The following requirements shall be met if the permittee wishes to comply with an allowable percentage of valves leaking:
- (1) The permittee must notify the Administrator that it has elected to comply with the allowable percentage of valves leaking before implementing this alternative standard, as specified in 40 CFR § 60.487a(d).
- (2) A performance test as specified in (c), below, shall be conducted initially upon designation, annually, and at other times as requested by the Administrator.
- (3) If a valve leak is detected, it shall be repaired in accordance with 40 CFR § 60.482-7a(d) and (e).
- (c) Performance tests shall be conducted in the following manner:
- (1) All valves in gas/vapor and light liquid service within the affected facility shall be monitored within 1 week by the methods specified in 40 CFR § 60.485a(b).
- (2) If an instrument reading of 500 ppm or greater is measured, a leak is detected.
- (3) The leak percentage shall be determined by dividing the number of valves for which leaks are detected by the number of valves in gas/vapor and light liquid service within the facility.
- (d) The permittee who elects to comply with this alternative standard shall not have a facility with a leak percentage greater than 2.0 percent, determined as described in 40 CFR § 60.485a(h).
- [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.483-2a] Subpart VVa - Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006 Alternative standards for valves - skip period leak detection and repair.
- (a) The permittee may elect to comply with one of the alternative work practices specified in (b)(1) and (2), below. The permittee must notify the Administrator before implementing one of the alternative work practices, as specified in 40 CFR § 60.487(d)a.
- (b) The permittee shall comply initially with the requirements for valves in gas/vapor service and valves in light liquid service, as described in 40 CFR § 60.482-7a.
- (1) After two (2) consecutive quarterly leak detection periods with the percent of valves leaking equal to or less than 2.0, the permittee may begin to skip one (1) of the quarterly leak detection periods for the valves in gas/vapor and light liquid service.
- (2) After five (5) consecutive quarterly leak detection periods with the percent of valves leaking equal to or less than 2.0, the permittee may begin to skip three (3) of the quarterly leak detection periods for the valves in gas/vapor and light liquid
- (3) If the percent of valves leaking is greater than 2.0, the permittee shall comply with the requirements as described in 40 CFR § 60.482-7a but can again elect to use this section.
- (4) The percent of valves leaking shall be determined as described in 40 CFR § 60.485a(h).
- (5) The permittee must keep a record of the percent of valves found leaking during each leak detection period.
- (6) A valve that begins operation in gas/vapor service or light liquid service after the initial startup date for a process unit following one of the alternative standards in this section must be monitored in accordance with 40 CFR § 60.482-7a(a)(2)(i) or (ii) before the provisions of this condition can be applied to that valve.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).







Source ID: 112 Source Name: COOLING TOWER

Source Capacity/Throughput: 50,000.000 Gal/HR WATER

PROC STAC Z112

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

Particulate matter (total PM) emissions from this cooling tower shall not exceed either of the following:

- (a) 0.02 gr/dscf, pursuant to 25 Pa. Code § 123.13 (c)(1)(iii); or
- (b) 0.40 tons in any 12 consecutive month period.

II. TESTING REQUIREMENTS.

002 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

- (a) The permittee shall collect a sample of the cooling water at locations where the cooling water enters and exits the heat exchanger and analyze it for VOCs to enable the early detection of leaks. For the purpose of this source, a leak is detected if the exit mean concentration is found to be greater than the entrance mean by at least 1 ppm or 10 percent of the entrance mean, whichever is greater.
- (b) The concentration of the VOCs in the cooling water shall be determined using any EPA-approved method listed in 40 CFR Part 136. The method shall be sensitive to concentrations as low as 1 ppm and the same method shall be used for both entrance and exit samples. Alternative methods may be used upon approval by the Department and the US EPA.
- (c) When a sample is found to contain VOCs, the permittee shall resample the following day to ensure reliability of the analysis.
- (d) The value from analyzed sample(s) shall be used in the monthly VOC emission calculation.
- (e) The testing frequency for VOC leaks shall be performed in accordance with the following:
- (1) monthly for the first 6 months after being placed into operation (or after a leak is detected);
- (2) quarterly thereafter as long as no leaks are detected; and
- (3) the Department reserves the right to change this frequency back to monthly based on the results of the leak testing.

III. MONITORING REQUIREMENTS.

003 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The permittee shall inspect the high-efficiency drift eliminators on this cooling tower on a 3-year (preventative maintenance cycle) basis.

004 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

Using a Department approved method, the permittee shall perform monthly testing for Total Dissolved Solids (TDS) in ppmw for use in demonstrating compliance with the particulate matter emission limits above.

005 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The permittee shall monitor the average circulation flow rate through this cooling tower on a monthly basis when this source is in operation.

006 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The permittee shall perform a daily visual and odor inspection of the cooling tower water basin for the presence of







hydrocarbons. If hydrocarbons are discovered (e.g. - bubbles, odor, sheen, etc...), the permittee shall follow the guidelines for leaks found in condition #009, below.

IV. RECORDKEEPING REQUIREMENTS.

007 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The following shall be kept for this cooling tower:

- (a) results of the 3-year (preventative maintenance cycle) inspections of the high efficiency drift eliminators;
- (b) monthly records of the total/suspended solids of the cooling water;
- (c) average circulation rate of cooling through this cooling tower;
- (d) manufacturer's specifications for the design drift rate for the cooling tower;
- (e) emissions of particulate matter and VOC, including VOCs from leaks (monthly and 12 consecutive month); and
- (f) results of the daily visual inspection of the cooling tower water basin.

008 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

To delay the repair of leaks, the permittee shall record the following information:

- (a) the reason(s) for delaying repair;
- (b) a schedule for completing the repair as soon as practical;
- (c) the date and concentration of the leak as first identified and the results of all subsequent testing/monitoring events during the delay of repair period; and
- (d) an estimate of the potential VOC emissions from the leaking cooling tower for each required delay of repair monitoring interval following the procedures below:
- (1) determine the leak concentration and convert the stripping gas leak concentration (in ppm) to an equivalent liquid concentration, in ppmw.
- (2) determine the mass flow rate of the cooling water at the monitoring location where the leak was detected. If the monitoring location is an individual cooling tower riser, determine the total cooling water mass flow rate. Cooling water mass flow rates may be determined using direct measurement, pump curves, heat balance calculations, or other engineering methods. Volumetric flow measurements may be used and converted to mass flow rates using the density of water at the specific monitoring location temperature or using the default density of water at 8.32 pounds per gallon;
- (3) for delay of repair monitoring intervals prior to repair of the leak, calculate the potential VOC emissions for the leaking cooling tower for the monitoring interval by multiplying the leak concentration in the cooling water (in ppmw), determined in (d)(1), above, by the mass flow rate of the cooling water determined in (d)(2), above, and by the duration of the delay of repair monitoring interval. The duration of the delay of repair monitoring interval is the time period starting at midnight on the day of the previous monitoring event or at midnight on the day the repair would have had to be completed if the repair had not been delayed, whichever is later, and ending at midnight of the day the of the current monitoring event; and
- (4) for delay of repair monitoring intervals ending with a repaired leak, calculate the potential VOC emissions by multiplying the duration of the final delay of repair monitoring interval by the leak concentration and cooling water flow rates determined for the last monitoring event prior to the re-monitoring event used to verify the leak was repaired. The duration of the final delay of repair monitoring interval is the time period starting at midnight of the day of the last monitoring event prior to remonitoring to verify the leak was repaired and ending at the time of the re-monitoring event that verified that the leak was repaired.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

009 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

When a VOC leak is detected, the permittee shall troubleshoot and investigate for the source of the leak. The first attempt to







isolate the leak and perform the necessary repairs shall be made no later than fourteen (14) days after the second sample results indicating a leak is returned.

010 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The leak shall be repaired within forty-five (45) days after identifying the leak, except as outlined in the "Delay of Repair" condition for this source. Actions that can be taken to achieve repair include but are not limited to:

- (a) physical modifications to the leaking heat exchanger, such as welding the leak or replacing a tube;
- (b) blocking the leaking tube within the heat exchanger:
- (c) changing the pressure so that water flows into the process fluid;
- (d) replacing the heat exchanger or heat exchanger bundle; or
- (e) isolating, bypassing, or otherwise removing the leaking heat exchanger from service until it is otherwise repaired.

011 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The permittee may delay the repair of a leaking heat exchanger if (a) or (b) below is met. The permittee must determine if a delay of repair is necessary as soon as practicable, but no later than forty-five (45) days after first identifying the leak.

- (a) If the repair is technically infeasible without a shutdown and the total VOC emissions would be less than 25% of the permitted emission limits if a repair would take place, the permittee may delay repair until the next scheduled shutdown of the heat exchanger. If, during subsequent monthly monitoring, the VOC leak rate has increased, the permittee shall repair the leak within thirty (30) days of the monitoring event indicating the increase.
- (b) If the necessary equipment, parts, or personnel are not available and the total VOC concentration does not increase for all monthly monitoring periods during the delay of repair, the permittee may delay the repair for a maximum of 120 calendar days. The permittee must demonstrate that the necessary equipment, parts, or personnel were not available. If, during subsequent monthly monitoring, the VOC concentration increases, the permittee must repair the leak within thirty (30) days of the monitoring event in which the leak was shown to increase.

012 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

- (a) The permittee shall not use chromium-based water treatment chemicals in this cooling tower.
- (b) The cooling tower and equipment shall be installed, maintained, and operated in accordance with manufacturer's specifications.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).




23-0119D



SECTION D. Source Level Plan Approval Requirements

Source ID: 117 Source Name: CRYOGENIC ETHANE TANK (300K BBL)

Source Capacity/Throughput: N/A ETHANE



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

001 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.115b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Reporting and recordkeeping requirements.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall keep the following records:

- (a) a copy of the operating plan;
- (b) a record of the measured values of the parameters monitored in accordance with 40 CFR § 60.113b(c)(2); and
- (c) a record of all periods of operation during which the flare pilot flame is absent.

002 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.116b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Monitoring of operations.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall keep readily accessible records showing the dimension of the storage vessel and an analysis showing the capacity of the storage vessel for the life of the source.

003 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.116b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Monitoring of operations.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall maintain a record of the VOL stored, the period of storage, and the maximum true vapor pressure of that VOL during the respective storage period. These records shall be kept for a minimum of five (5) years.







V. REPORTING REQUIREMENTS.

004 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.115b] Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984 Reporting and recordkeeping requirements.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall submit the following:

- (a) a report containing the measurements required by 40 CFR § 60.18(f) (1), (2), (3), (4), (5), and (6) shall be furnished to the Administrator and the Department as required by 40 CFR § 60.8. This report shall be submitted within six (6) months of the initial start-up date: and
- (b) semiannual reports of all periods in which the pilot flame was absent shall be furnished to the Administrator and the Department.

VI. WORK PRACTICE REQUIREMENTS.

005 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.112b] Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984 Standard for volatile organic compounds (VOC).

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

Emissions from this tank shall be controlled by a closed vent system designed to collect all vapors and gases discharged from the storage vessel and operated with no detectable emissions as indicated by an instrument reading of less than 500 ppm above background and visual inspections, as determined in 40 CFR § 60.485a(b).

Each of the two (2) cold flares shall be designed and operated to reduce inlet VOC emissions by 95 percent or greater. If a flare is used as the control device, it shall meet the specifications described in the general control device requirements in 40 CFR § 60.18.

VII. ADDITIONAL REQUIREMENTS.

[25 Pa. Code §127.12b] Plan approval terms and conditions.

This source consists one 300,000 bbl cryogenic ethane storage tank with a vapor recovery system. Ethane vapors will be condensed to a liquid state by the vapor recovery system before being hard-piped back to the storage tank.




23-0119D



SECTION D. Source Level Plan Approval Requirements

Source ID: 118 Source Name: CRYOGENIC BUTANE TANK (600K BBL)

Source Capacity/Throughput: N/A BUTANE



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

001 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.115b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Reporting and recordkeeping requirements.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall keep the following:

- (a) a copy of the operating plan;
- (b) a record of the measured values of the parameters monitored in accordance with 40 CFR § 60.113b(c)(2); and
- (c) a record of all periods of operation during which the flare pilot flame is absent.

002 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.116b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Monitoring of operations.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall keep readily accessible records showing the dimension of the storage vessel and an analysis showing the capacity of the storage vessel for the life of the source.

003 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.116b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Monitoring of operations.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall maintain a record of the VOL stored, the period of storage, and the maximum true vapor pressure of that VOL during the respective storage period. These records shall be kept for a minimum of five (5) years.







V. REPORTING REQUIREMENTS.

004 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.115b] Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984 Reporting and recordkeeping requirements.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall submit the following reports:

- (a) a report containing the measurements required by 40 CFR § 60.18(f) (1), (2), (3), (4), (5), and (6) shall be furnished to the Administrator and the Department as required by 40 CFR § 60.8. This report shall be submitted within six (6) months of the initial start-up date: and
- (b) semiannual reports of all periods in which the pilot flame was absent shall be furnished to the Administrator and the Department.

VI. WORK PRACTICE REQUIREMENTS.

005 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.112b] Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984 Standard for volatile organic compounds (VOC).

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

Emissions from this tank shall be controlled by a closed vent system designed to collect all vapors and gases discharged from the storage vessel and operated with no detectable emissions as indicated by an instrument reading of less than 500 ppm above background and visual inspections, as determined in 40 CFR § 60.485a(b).

Each of the two (2) cold flares shall be designed and operated to reduce inlet VOC emissions by 95 percent or greater. If a flare is used as the control device, it shall meet the specifications described in the general control device requirements in 40 CFR § 60.18.

VII. ADDITIONAL REQUIREMENTS.

[25 Pa. Code §127.12b] Plan approval terms and conditions.

This source consists one 600,000 bbl cryogenic butane storage tank with a vapor recovery system. Butane vapors will be condensed to a liquid state by the vapor recovery system before being hard-piped back to the storage tank.








Source ID: 119 Source Name: CRYOGENIC PROPANE TANK (900K BBL)

> Source Capacity/Throughput: N/A **PROPANE**



RESTRICTIONS.

No additional requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

001 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.115b] Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984 Reporting and recordkeeping requirements.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall keep the following records:

- (a) a copy of the operating plan;
- (b) a record of the measured values of the parameters monitored in accordance with 40 CFR § 60.113b(c)(2); and
- (c) a record of all periods of operation during which the flare pilot flame is absent.

[40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.116b] Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984 Monitoring of operations.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall keep readily accessible records showing the dimension of the storage vessel and an analysis showing the capacity of the storage vessel for the life of the source.

[40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.116b] Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984 Monitoring of operations.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall maintain a record of the VOL stored, the period of storage, and the maximum true vapor pressure of that VOL during the respective storage period. These records shall be kept for a minimum of five (5) years.







V. REPORTING REQUIREMENTS.

004 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.115b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Reporting and recordkeeping requirements.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall submit the following reports:

- (a) a report containing the measurements required by 40 CFR § 60.18(f) (1), (2), (3), (4), (5), and (6) shall be furnished to the Administrator and the Department as required by 40 CFR § 60.8. This report shall be submitted within six (6) months of the initial start-up date; and
- (b) semiannual reports of all periods in which the pilot flame was absent shall be furnished to the Administrator and the Department.

VI. WORK PRACTICE REQUIREMENTS.

005 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.112b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Standard for volatile organic compounds (VOC).

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

Emissions from this tank shall be controlled by a closed vent system designed to collect all vapors and gases discharged from the storage vessel and operated with no detectable emissions as indicated by an instrument reading of less than 500 ppm above background and visual inspections, as determined in 40 CFR § 60.485a(b).

Each of the two (2) cold flares shall be designed and operated to reduce inlet VOC emissions by 95 percent or greater. If a flare is used as the control device, it shall meet the specifications described in the general control device requirements in 40 CFR § 60.18.

VII. ADDITIONAL REQUIREMENTS.

006 [25 Pa. Code §127.12b] Plan approval terms and conditions.

This source consists one 900,000 bbl cryogenic propane storage tank with a vapor recovery system. Propane vapors will be condensed to a liquid state by the vapor recovery system before being hard-piped back to the storage tank.








Source ID: 120 Source Name: CRYOGENIC PROPANE TANK (600K BBL)

> Source Capacity/Throughput: N/A **PROPANE**



RESTRICTIONS.

No additional requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

001 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.115b] Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984 Reporting and recordkeeping requirements.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall keep the following records:

- (a) a copy of the operating plan;
- (b) a record of the measured values of the parameters monitored in accordance with 40 CFR § 60.113b(c)(2); and
- (c) a record of all periods of operation during which the flare pilot flame is absent.

[40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.116b] Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984 Monitoring of operations.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall keep readily accessible records showing the dimension of the storage vessel and an analysis showing the capacity of the storage vessel for the life of the source.

[40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.116b] Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984 Monitoring of operations.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall maintain a record of the VOL stored, the period of storage, and the maximum true vapor pressure of that VOL during the respective storage period. These records shall be kept for a minimum of five (5) years.







V. REPORTING REQUIREMENTS.

004 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.115b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Reporting and recordkeeping requirements.

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

The permittee shall submit the following reports:

- (a) a report containing the measurements required by 40 CFR § 60.18(f) (1), (2), (3), (4), (5), and (6) shall be furnished to the Administrator and the Department as required by 40 CFR § 60.8. This report shall be submitted within six (6) months of the initial start-up date; and
- (b) semiannual reports of all periods in which the pilot flame was absent shall be furnished to the Administrator and the Department.

VI. WORK PRACTICE REQUIREMENTS.

005 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.112b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Standard for volatile organic compounds (VOC).

[Additional authority for this condition is also derived from 25 Pa. Code 127.12b.]

Emissions from this tank shall be controlled by a closed vent system designed to collect all vapors and gases discharged from the storage vessel and operated with no detectable emissions as indicated by an instrument reading of less than 500 ppm above background and visual inspections, as determined in 40 CFR § 60.485a(b).

Each of the two (2) cold flares shall be designed and operated to reduce inlet VOC emissions by 95 percent or greater. If a flare is used as the control device, it shall meet the specifications described in the general control device requirements in 40 CFR § 60.18.

VII. ADDITIONAL REQUIREMENTS.

006 [25 Pa. Code §127.12b] Plan approval terms and conditions.

This source consists one 600,000 bbl cryogenic propane storage tank with a vapor recovery system. Propane vapors will be condensed to a liquid state by the vapor recovery system before being hard-piped back to the storage tank.







Source ID: C01 Source Name: COLD FLARE (MODIFIED)

Source Capacity/Throughput: 240.000 CF/HR NATURAL GAS (PILOT AND PUR)

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).





Source ID: C02 Source Name: COLD FLARE (NEW TANKS PROJECT)

Source Capacity/Throughput: 117.000 CF/HR NATURAL GAS (PILOT AND PUR)

I. RESTRICTIONS.

Emission Restriction(s).

001 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.18]

Subpart A - General Provisions

General control device requirements.

[Additional authority for this condition is also derived from 25 Pa. Code § 127.12b.]

The flare shall be designed for and operated with no visible emissions, except for periods not to exceed a total of five (5) minutes during any two (2) consecutive hours.

II. TESTING REQUIREMENTS.

002 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.18]

Subpart A - General Provisions

General control device requirements.

[Additional authority for this condition is also derived from 25 Pa. Code § 127.12b.]

The permittee shall use Department approved testing methods to demonstrate compliance with the standards for flares. These include, but are not limited to, the following:

- (a) EPA Test Method 22, with an observation period of two (2) hours, as found in Appendix A of 40 CFR Part 60 shall be used to determine the compliance of this flare with the visible emission provisions;
- (b) EPA Method 2, 2A, 2C, or 2D for determination of flare velocity. If needed, the unobstructed (free) cross-sectional area of the flare tip shall be used;
- (c) EPA Method 3A for determining flue gas composition and molecular weight;
- (d) EPA Method 18 for determination of Hydrocarbon constituents;
- (e) the net heating value of the gas being combusted in the flare shall be combusted as stated in 40 CFR § 60.485a(g)(4);
- (f) EPA Method 18 and ASTM D 2504-67 (or most recent equivalent revised method) shall be used to determine the concentration of sample component "i" in the equation stated in 40 CFR § 60.485a(g)(4); and
- (g) ASTM D 2382-76, or most recent equivalent revised method shall, be used to determine the net heat of combustion of component "i" referenced in 40 CFR § 60.485(g)(4), if published values are not available or cannot be calculated.

III. MONITORING REQUIREMENTS.

003 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.18]

Subpart A - General Provisions

General control device requirements.

[Additional authority for this condition is also derived from 25 Pa. Code § 127.12b.]

- (a) The permittee shall continuously monitor the presence of a pilot flame for this flare by using an infrared sensor or other device approved by the Department.
- (b) The permittee shall monitor the type and amount of fuel combusted in the flare on a daily basis.

IV. RECORDKEEPING REQUIREMENTS.

004 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.18]

Subpart A - General Provisions

General control device requirements.

[Additional authority for this condition is also derived from 25 Pa. Code § 127.12b.]

- (a) The permittee shall maintain hourly records for the presence of a pilot flame on this flare.
- (b) The permittee shall maintain daily records of the type and amount of fuel combusted in this flare.



23-0119D



SECTION D. Source Level Plan Approval Requirements

V. REPORTING REQUIREMENTS.

005 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.18]

Subpart A - General Provisions

General control device requirements.

[Additional authority for this condition is also derived from 25 Pa. Code § 127.12b.]

The permittee shall submit to the Department semi-annual exception reports of the date and time the pilot flame was not working.

VI. WORK PRACTICE REQUIREMENTS.

006 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.18]

Subpart A - General Provisions

General control device requirements.

[Additional authority for this condition is also derived from 25 Pa. Code § 127.12b.]

The permittee shall ensure that the flare is operated and maintained in conformance with its design.

007 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.18]

Subpart A - General Provisions

General control device requirements.


[Additional authority for this condition is also derived from 25 Pa. Code § 127.12b.]

- (a) The flare shall be operated with a flame present at all times.
- (b) The flare shall be used only with the net heating value of the gas being combusted is 300 Btu/scf or greater. The net heating value of the gas being combusted shall be determined by the methods specified in 40 CFR § 60.18(f).
- (c) The air-assisted flare shall be designed and operated with an exit velocity less than the maximum velocity, (Vmax), as determined by the method specified in 40 CFR § 60.18(f)(6).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this plan approval including Section B (Plan Approval General Requirements).






SECTION E. Alternative Operation Requirements.

No Alternative Operations exist for this Plan Approval facility.







SECTION F. Emission Restriction Summary.

Source Id	Source Description	
112	COOLING TOWER	
Emission Limit		Pollutant
0.020	gr/DRY FT3	TSP
0.400	Tons/Yr	TSP

Site Emission Restriction Summary

Emission Limit	Pollutant
----------------	-----------





SECTION G. Miscellaneous.



M Som

***** End of Report *****