

Rolling Knolls Landfill Settling Parties

Addendum 1 to the Data Gaps Sampling and Analysis Plan

Rolling Knolls Landfill Superfund Site

Chatham, New Jersey

August 2015



A handwritten signature in blue ink that reads "Suzanne J. Walls".

Suzanne Walls
Project Manager

A handwritten signature in blue ink that reads "Andrew Guthertz".

Andrew Guthertz
Staff Geologist

**Addendum 1 to the Data Gaps
Sampling and Analysis Plan**

Rolling Knolls Landfill Superfund
Site
Chatham, New Jersey

Prepared for:
Rolling Knolls Landfill Settling Parties

Prepared by:
ARCADIS U.S., Inc.
8 South River Road
Cranbury
New Jersey 08512
Tel 609 860 0590
Fax 609 860 0491

Our Ref.:
B0033202

Date:
August 2015

1. Introduction	1
1.1 Objectives	1
1.2 Data Gaps SAP Organization	2
2. Additional Soil and Sediment Sampling	3
2.1 Soil Sampling	3
2.1.1 Soil Sample Locations	3
2.1.2 Soil Sampling Procedures	4
2.1.3 Soil Sample Analyses	5
2.2 Sediment Sampling	6
2.2.1 Sediment Sample Locations	6
2.2.2 Sediment Sampling Procedures	6
2.2.3 Sediment Sample Analysis	6
2.3 Analytical Procedures	7
3. Schedule	8
4. Project Management	9
4.1 Staffing	9
4.2 Coordination	9
5. References	10

Tables

Table 1	Proposed Soil Sample Locations, Depths, and Analyses
---------	--

Figures

Figure 1	Site Location Map
Figure 2	Site Map
Figure 3a	Proposed Sampling Locations - North
Figure 3b	Proposed Sampling Locations - South

Figure 4 Project Organizational Chart

Acronyms and Abbreviations

Agreement	Administrative Settlement Agreement and Order on Consent
ARCADIS	ARCADIS U.S., Inc.
bgs	below ground surface
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
COCs	constituents of concern
CLP	Contract Laboratory Program
Data Gaps SAP	Data Gaps Sampling and Analysis Plan
GPS	global positioning satellite
GSNWR	Great Swamp National Wildlife Refuge
NJDEP	New Jersey Department of Environmental Protection
PPNDP	passively placed narrow diameter points
PCB	polychlorinated biphenyl
PID	photoionization detector
QA	quality assurance
QAPP	Quality Assurance Project Plan
SCSR	Site Characterization Summary Report
site	Rolling Knolls Landfill Superfund Site, located in Chatham Township, New Jersey
SOP	Standard Operating Procedure
SRS	Soil Remediation Standard
TestAmerica	TestAmerica Laboratories, Inc.

the Group	Chevron Environmental Management Company, Lucent Technologies Inc., (now known as Alcatel-Lucent USA Inc.) and Novartis Pharmaceuticals Corporation
TOC	total organic carbon
USEPA	United States Environmental Protection Agency
USFWS	United States Fish & Wildlife Service



Addendum 1 to the Data Gaps Sampling and Analysis Plan

Rolling Knolls Landfill
Superfund Site
Chatham, New Jersey

1. Introduction

On behalf of Chevron Environmental Management Company for itself and on behalf of Kewanee Industries, Inc., Lucent Technologies Inc., (now known as Alcatel-Lucent USA Inc.) and Novartis Pharmaceuticals Corporation (collectively, the Group), ARCADIS U.S., Inc. (ARCADIS) prepared this Addendum 1 to the Data Gaps Sampling and Analysis Plan (Data Gaps SAP) for the Rolling Knolls Landfill Superfund Site (the "site"), located in Chatham Township, New Jersey. The location of the site is shown in Figure 1, and the site features are shown in Figure 2.

The Data Gaps SAP was submitted to USEPA on September 17, 2014 and approved by the United States Environmental Protection Agency (USEPA) on November 18, 2014 (ARCADIS 2014a). Collection and analysis of soil, sediment, and groundwater samples proposed in the Data Gaps SAP was conducted from November 2014 to July 2015. By emails dated April 6 and April 9, 2015, the USEPA's remedial project manager (RPM) indicated that seven additional soil and sediment samples would be required to complete the Data Gap sampling and that the New Jersey Department of Environmental Protection (NJDEP) concurred with this position. On April 29, 2015, the Group submitted the Data Gaps SAP and Quality Assurance Project Plan (QAPP) addenda conforming to these requirements. On June 17, 2015, the USEPA and the NJDEP commented on the Data Gaps SAP and QAPP addenda, in part, by requiring 33 soil/sediment samples in addition to the 7 referenced in the early April email exchange. The agencies, the Group, and ARCADIS discussed these comments in a conference call on June 30, 2015. ARCADIS field verified and suggested changes to several of the proposed NJDEP sampling locations, and received comments on the suggested changes in an August 17, 2015 letter from USEPA. The sampling proposed in this Data Gaps SAP Addendum 1 is intended to comply with all requests made by the agencies in the June 17, 2015 letter, the June 30, 2015 conference call, and the August 17, 2015 letter.

1.1 Objectives

The objectives of the sampling proposed herein are to complete the objectives originally identified in Section 1.1 of the approved Data Gaps SAP (November 2014) and to address additional delineation concerns identified by the USEPA and NJDEP that were requested (letters dated June 17, 2015 and August 17, 2015) to further delineate the nature and extent of contamination at the site.



Addendum 1 to the Data Gaps Sampling and Analysis Plan

Rolling Knolls Landfill
Superfund Site
Chatham, New Jersey

In addition, the Group is proposing additional delineation sampling to that requested by USEPA and NJDEP. This addendum contains the sampling proposed by the USEPA, NJDEP, and the Group.

1.2 Data Gaps SAP Organization

This Data Gaps SAP is organized as described below.

- Section 2, Additional Soil and Sediment Sampling, presents each new task that will be conducted as part of the Data Gaps SAP and outlines proposed technical activities that will be conducted to complete each task.
- Section 3, Schedule, presents a schedule for the Data Gaps SAP activities.
- Section 4, Project Management, introduces the project team and describes the responsibilities of each project team member.
- Section 5, References, provides references used in the development of this Addendum 1 to the Data Gaps SAP.

A QAPP, submitted on September 19, 2014 and approved by the USEPA on December 18, 2014 (ARCADIS 2014b), provides supporting information on site conditions, sampling requirements and procedures, and laboratory analytical procedures. Certain worksheets in the QAPP have been revised to accompany this addendum. These revised worksheets are submitted as Addendum 1 to the QAPP.

2. Additional Soil and Sediment Sampling

2.1 Soil Sampling

2.1.1 Soil Sample Locations

The proposed soil sampling locations are shown on Figures 3a and 3b, along with previous surface soil sample results that were used to select the proposed locations. Soil sampling locations (sample numbers SS-165 through SS-176) are located off the boundary of the landfill in native soil, near where previous soil samples contained concentrations of one or more constituents of concern (COCs) exceeding its New Jersey Soil Remediation Standard (SRS). Proposed locations are also summarized in Table 1.

In general, the topography of the site is flat, and the landfill is slightly higher than the surrounding areas. Delineation samples collected outside the boundary of the landfill, often in areas that are at times inundated, are lower than the landfill because the landfill was constructed by filling a low-lying area. Areas where constituents could flow in runoff from the landfill were targeted for sampling in previous surface water and sediment sampling.

After the discussion between the Settling Parties and the agencies on June 30, 2015, NJDEP provided information on their proposed sample locations, and ARCADIS field-verified that several of these locations were in topographically lower areas. Where appropriate and approved by USEPA in their letter of August 17, 2015, modified locations will be sampled to help ensure that NJDEP's objective of sampling in a topographically low area will be met.

All perimeter locations are in potentially wet areas and are expected to consist of wetland soil. However, if these locations are below water at the time of collection, they will be designated sediment samples and will be collected using sediment sampling techniques (see Section 2.2). Soil sample locations SS-177 through SS-183 are located in the interior of the landfill.

The matrices at the proposed sample location were observed during a July 27, 2015 site visit conducted by ARCADIS and a representative of CDM (consultant to the USEPA). Site conditions may change in response to precipitation or other factors. As a result, samples that are anticipated to consist of soil may be inundated and considered sediment at the time of sampling, and samples that were below water at the

time of the site visit may be dry and considered soil at the time of sampling. The field crew will follow the appropriate standard operating procedure (SOP) (either SOP 14 [sediment sampling], SOP 5 [drilling procedures for soil sampling], or SOP 17 [manual procedures for soil sampling]) based on the current conditions during the time of sampling.

2.1.2 Soil Sampling Procedures

ARCADIS field personnel will advance soil borings to collect soil samples using a hand-driven Macrocore[®]. At sample locations SS-165 through SS-176, field personnel will use hand tools (e.g., slide-hammer) to advance a 2-inch-diameter by 2-foot-long stainless steel Macrocore[®] fitted with a dedicated acetate liner to 2 feet below ground surface (bgs). At sample locations SS-177 through SS-183 field personnel will advance a Macrocore[®] using a track mounted geoprobe to a depth below the landfilled materials. The Macrocore[®] cutting shoe may be equipped with a disposable, plastic basket to increase recovery of loose material. Other sampling methods (e.g., hand auger, shovel) may be used to collect soil samples if conditions at a proposed sampling location do not allow for advancement of or adequate recovery with a hand-driven Macrocore[®].

After the Macrocore[®] is advanced to the specified depth, field personnel will carefully extract the Macrocore[®] from the borehole to minimize soil loss, remove the acetate liner containing the soil core from the Macrocore[®], cut the acetate liner open, and photograph the soil core. Field personnel will record the length of each recovered soil core in a field log book then score the soil core at 6-inch intervals and field screen with a photoionization detector (PID). PID readings will be recorded in a field log book. If other sampling methods are required to collect soil, field personnel will attempt to remove a volume of soil approximately 1 foot long and 3 to 6 inches thick from 0.0 to 1.0 foot bgs and 1.0 to 2.0 feet bgs, while attempting to minimize soil disturbance. Field personnel will process this soil volume in the same manner as a soil core contained in a Macrocore[®] acetate liner, as described above.

The soil's physical characteristics and other relevant visual observations will be recorded in a field log book. When soil characterization is complete, a composite sample will be collected from the remaining soil in the soil core. At the locations off the landfill (SS-165 through SS-176) soil samples will be collected from the 0.0 to 1.0 foot bgs and 1.0 to 2.0 foot bgs. At the locations on the landfill, soil samples will be collected from the 1-foot interval beneath the landfilled material and the 1-foot interval above the clay layer that underlies the site. The VOC fraction will be collected from the

lower 6-inches within each of these intervals at sample locations where VOC analysis will be conducted.

Soil samples will be collected using decontaminated, non-dedicated stainless steel hand-tools (e.g., spoons, scoops or trowels) and bowls. Field personnel will place soil samples in laboratory-supplied containers. Field personnel will document, label, package and ship soil samples in accordance with procedures provided in Worksheet #21 of the QAPP (ARCADIS 2014b). Non-disposable sample equipment (e.g., stainless steel bowls and spoons, Macrocore[®], hand-auger, shovel) will be decontaminated between uses at subsequent sampling locations in accordance with the Equipment Decontamination SOP presented in the QAPP (ARCADIS 2014b).

Field personnel will advance the Macrocore[®] or other hand tools until adequate sample volume is obtained or until it is determined that a soil sample cannot be collected due to lack of soil at a sampling location. Field personnel will advance the Macrocore[®] or other tools a maximum of four times within 5 to 10 feet of each proposed sampling location in an attempt to obtain adequate sample volume. If adequate sample volume cannot be obtained after four attempts, the sampling area will be widened until adequate sample volume has been obtained.

Some sampling will take place in potential bog turtle habitat. Field personnel conducting sampling activities in potential bog turtle habitat will implement USFWS-recommended conservation measures as described in Section 3.1.1 of the Data Gaps SAP (ARCADIS 2014a).

The horizontal and vertical locations of all soil samples will be surveyed by a New Jersey licensed land surveyor.

2.1.3 Soil Sample Analyses

Soil samples will be analyzed for the COCs outlined in Table 1. The proposed soil samples that are off the boundary of the landfill (perimeter samples) are in native soil (SS-165 through SS-176). The proposed analyses for these perimeter samples include TCL SVOCs, SVOCs by SIM, PCBs (as Aroclors), pesticides, TAL metals, and cyanide. The proposed soil samples that are within the boundary of the landfill (interior samples) are in landfill material (SS-177 through SS-183). The proposed analyses for these interior samples include full TCL/TAL parameters and SVOCs by SIM.

Sample analyses for SS-173 and SS-174 will be held as contingent samples until results from SD-48 and SD-49 have been reviewed. If results from SD-48 and SD-49 indicate a connection to the landfill, SS-173 and SS-174 will be analyzed to further evaluate this connection.

2.2 Sediment Sampling

2.2.1 Sediment Sample Locations

The proposed sediment sampling locations (locations SD-45 through SD-69) are shown on Figures 3a and 3b, and are summarized in Table 1. The order of sampling will be from downstream to upstream locations. The position of sample locations may be adjusted based on accessibility or on other information gathered during field activities. If locations need to be relocated more than 10 feet from the proposed location, a Field Change Request will be submitted to USEPA for approval prior to sampling.

2.2.2 Sediment Sampling Procedures

Sediment samples will be collected in accordance with sampling procedures developed based on USEPA, USEPA ERT, and NJDEP sediment sample collection guidance documents (USEPA 1995, 1994; NJDEP 2005, 1998).

Sediment samples will be collected by advancing a dedicated Lexan[®] coring device or stainless steel Macrocore[®] sampler equipped with a dedicated acetate liner to a minimum of 1 foot beneath the surface water/sediment interface. One of these sampling methods will be selected based on site conditions at the time of sample collection. Each sediment core will be field screened with a PID. PID readings, descriptions of the sediment's physical characteristics, and other relevant visual observations will be recorded in a field log book. At sample locations where VOC analysis will be conducted (i.e., SD-61 and SD-62), a sample for VOC analysis will be collected from the 0.5 to 1.0-foot interval in accordance with NJDEP (1998). Sediment in the 0.0 to 0.5-foot interval will then be homogenized and transferred directly into laboratory-supplied containers for other analytical parameters. Field personnel will document, label, package and ship sediment samples in accordance with procedures provided in Worksheet #21 of the QAPP (ARCADIS 2014b).

The locations of all sediment samples will be surveyed by a New Jersey license land surveyor.

2.2.3 Sediment Sample Analysis

Sediment samples will be analyzed for the COCs outlined in Table 1. All of the proposed sediment samples are off the boundary of the landfill in native sediment. Since the purpose of these samples is to delineate the extent of COCs detected during implementation of the Data Gaps SAP, and the prior sampling (including the Data Gaps SAP and other sampling discussed in the Site Characterization Summary Report) at the site, the proposed analyses include TCL SVOCs, SVOCs by SIM, PCBs (as Aroclors), pesticides, TAL metals and cyanide. Sediment samples SD-61 and SD-62 (NJDEP samples 16 and 17, respectively) will be analyzed for full TCL/TAL parameters and SVOCs by SIM. VOCs are included in these two samples in order to delineate VOCs detected in soil samples SS-109 and POI-3. All sediment samples will also be analyzed for pH, total organic carbon, and grain size.

Sample analysis for SD-50 will be held as a contingent sample until results from SD-49 have been reviewed. If results from SD-49 indicate a connection to the landfill, SD-50 will be analyzed to further evaluate this connection.

2.3 Analytical Procedures

All analyses will be performed by TestAmerica Laboratories, Inc. (TestAmerica) using current USEPA methods. TestAmerica is a current participant in the Contract Laboratory Program (CLP). The analytical procedures are included in Table 1. Additional information on TestAmerica and the analytical procedures is provided in the QAPP (ARCADIS 2014b).



Addendum 1 to the Data Gaps Sampling and Analysis Plan

Rolling Knolls Landfill
Superfund Site
Chatham, New Jersey

3. Schedule

Implementation of the proposed soil and sediment sampling program will begin within 2 weeks after USEPA's approval of this Addendum 1 to the SAP and Addendum 1 of the QAPP. Sample collection will require approximately 4 weeks, and sample analyses will be completed 4 weeks after collection of the last sample. Data validation will require an additional 4 weeks after analysis of the last sample. Therefore, the total time to implement this work after USEPA approval is 12 weeks. If field conditions or other factors require changes to sample locations or methods, and/or if Field Change Requests must be submitted to and approved by USEPA, the schedule will be adjusted accordingly. The schedule for submittal of the final report will depend on the completion of this sampling and other tasks (monitoring well installation and sampling) which are not part of this addendum. The Group will compress this schedule if sampling, laboratory analysis, and/or data validation can be completed in less time than anticipated.



Addendum 1 to the Data Gaps Sampling and Analysis Plan

Rolling Knolls Landfill
Superfund Site
Chatham, New Jersey

4. Project Management

4.1 Staffing

Implementation of Data Gap SAP activities will require integration of personnel from various organizations, collectively referred to as the “Project Team.” Responsibilities of each member of the project team are presented in the QAPP (ARCADIS 2014b).

A list of key project management personnel is provided below.

Company/Organization	Title	Name	Phone Number
USEPA	Remedial Project Manager	Tanya Mitchell	212-637-4362
USEPA	QA Manager	TBD	TBD
NJDEP	Case Manager	Jill McKenzie	609-292-1993
The Group	Primary Contact	Gary Fisher	908-582-5771
Independent Consultant	Project Officer	John Persico	609-903-6227
ARCADIS	Project Manager	Suzanne Walls	865-777-3502
ARCADIS	QA Manager	Dennis Capria	315-446-2570

TBD – To be determined

4.2 Coordination

Personnel performing RI/FS Work Plan activities will be directed by representatives of the Project Team. A project organizational chart is provided as Figure 4.



Addendum 1 to the Data Gaps Sampling and Analysis Plan

Rolling Knolls Landfill
Superfund Site
Chatham, New Jersey

5. References

ARCADIS U.S., Inc. 2012. Site Characterization Summary Report.

ARCADIS U.S., Inc. 2014a. Data Gaps Sampling and Analysis Plan. November.

ARCADIS U.S., Inc. 2014b. Quality Assurance Project Plan. December.

New Jersey Department of Environmental Protection. 1998. Guidance for Sediment Quality Evaluations.

New Jersey Department of Environmental Protection. 2005. Field Sampling Procedures Manual.

USEPA. 1995. *Superfund Program Representative Sampling Guidance; Volume 5: Water and Sediment; Part 1 – Surface Water and Sediment*. Office of Emergency and Remedial Response, Office of Solid Waste and Emergency Response.

USEPA. 1994. *Sediment Sampling - SOP #: 2016*. Emergency Response Team.

Table 1
Sample Locations, Depths, and Analyses
Data Gaps Sampling and Analysis Plan Addendum 1
Rolling Knolls Landfill Superfund Site
Chatham, New Jersey

Sample ID	NJDEP Sample ID ¹	Sample Media	Depth Interval (Feet)	Sample Collection Method	Laboratory Analyses ²								Notes
					SVOCs	SVOCs - SIM	Full TCL/TAL	PCBs (as Aroclors)	PCB Congeners	Pesticides	TAL Metals and Cyanide	pH, TOC, Grain Size	
Soil Samples													
SS-165 ³	NA	Soil	0.0-1.0	Macrocore	X	X		X		X	X		
			1.0-2.0		X	X		X		X	X		
SS-166 ³	NA	Soil	0.0-1.0	Macrocore	X	X		X		X	X		
			1.0-2.0		X	X		X		X	X		
SS-167 ³	NA	Soil	0.0-1.0	Macrocore	X	X		X		X	X		
			1.0-2.0		X	X		X		X	X		
SS-168 ³	NA	Soil	0.0-1.0	Macrocore	X	X		X	X	X	X		
			1.0-2.0		X	X		X	X	X	X		
SS-169 ⁴	NA	Soil	0.0-1.0	Macrocore	X	X		X		X	X		
			1.0-2.0		X	X		X		X	X		
SS-170 ⁴	NA	Soil	0.0-1.0	Macrocore	X	X		X		X	X		
			1.0-2.0		X	X		X		X	X		
SS-171 ⁴	NA	Soil	0.0-1.0	Macrocore	X	X		X		X	X		
			1.0-2.0		X	X		X		X	X		
SS-172 ⁴	NA	Soil	0.0-1.0	Macrocore	X	X		X		X	X		
			1.0-2.0		X	X		X		X	X		
SS-173 ⁴	NA	Soil	0.0-1.0	Macrocore	X	X		X		X	X		Contingent on sample SD-48
			1.0-2.0		X	X		X		X	X		
SS-174 ⁴	NA	Soil	0.0-1.0	Macrocore	X	X		X		X	X		Contingent on sample SD-50
			1.0-2.0		X	X		X		X	X		
SS-175	6	Soil	0.0-1.0	Macrocore	X	X		X		X	X		
			1.0-2.0		X	X		X		X	X		
SS-176	14	Soil	0.0-1.0	Macrocore	X	X		X		X	X		
			1.0-2.0		X	X		X		X	X		
SS-177	29	Soil	TBD	Macrocore		X	X						
			TBD			X	X						
SS-178	30	Soil	TBD	Macrocore		X	X						
			TBD			X	X						
SS-179	31	Soil	TBD	Macrocore		X	X						
			TBD			X	X						
SS-180	32	Soil	TBD	Macrocore		X	X						
			TBD			X	X						
SS-181	33	Soil	TBD	Macrocore		X	X						
			TBD			X	X						
SS-182	34	Soil	TBD	Macrocore		X	X						
			TBD			X	X						
SS-183	35	Soil	TBD	Macrocore		X	X						
			TBD			X	X						
Sediment Samples													
SD-45 ³	NA	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-46 ³	NA	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-47 ³	NA	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-48 ⁴	NA	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-49 ⁴	NA	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-50 ⁴	NA	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	Contingent on sample SD-49
SD-51	2	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-52	3	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-53	4	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-54	5	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-55	7	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-56	8	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-57	9	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-58	10	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-59	12	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-60	13	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-61	16	Sediment	0.0 - 1.0	Grab sample		X	X					X	Delineation sample for SS-109
SD-62	17	Sediment	0.0 - 1.0	Grab sample		X	X					X	Delineation sample for POI-3
SD-63	18	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-64	19	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	

Table 1
Sample Locations, Depths, and Analyses
 Data Gaps Sampling and Analysis Plan Addendum 1
 Rolling Knolls Landfill Superfund Site
 Chatham, New Jersey

Sample ID	NJDEP Sample ID ¹	Sample Media	Depth Interval (Feet)	Sample Collection Method	Laboratory Analyses ²								Notes
					SVOCs	SVOCs - SIM	Full TCL/TAL	PCBs (as Aroclors)	PCB Congeners	Pesticides	TAL Metals and Cyanide	pH, TOC, Grain Size	
Sediment Samples (continued)													
SD-65	22	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-66	23	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-67	25	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-68	27	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	
SD-69	28	Sediment	0.0 - 1.0	Grab sample	X	X		X		X	X	X	

Abbreviations:

PCBs = polychlorinated biphenyls

VOC = volatile organic compound

SIM = selective ion monitoring

TOC = total organic carbon

TCL = target compound list

SVOC = semivolatile organic compound

TAL= target analyte list

NA = not applicable

TOC = total organic carbon

TBD = to be determined. Sample depth is contingent on the depth of landfilled material observed in the boring and the depth of the clay layer.

One sample will be collected immediately beneath the landfilled material and one sample will be collected immediately above the clay.

¹ - Complete NJDEP sample IDs were provide by NJDEP on July 20, 2015. These sample IDs are referenced in the August 17, 2015 comments from USEPA on Addendum 1 to the SAP and are included here for clarity.

² - Analyses included in the full TCL/TAL parameter list include: VOCs, SVOCs, PCBs (as Aroclors), pesticides, and metals plus cyanide.

Sample analyses will be conducted using the following analytical methods:

Target Compound List organics (VOCs, SVOCs, PCBs and pesticides) via SOM01.2, *Contract Laboratory Program (CLP Statement of Work for Organic Analysis)*.

Target Analyte List metals and cyanide via ISM01.3, *CLP Statement of Work for Inorganic Analyses*.

PCB Congeners via USEPA Method 1668A, *Chlorinated Biphenyl Congeners in Water, Soil, Sediment and Tissue by HRGC/HRMS*.


pH via USEPA Method 9045D.

TOC via the Lloyd Kahn method.

Grain size via ASTM D-422.


³ - Sample requested by USEPA

⁴ - Sample requested by the Group.

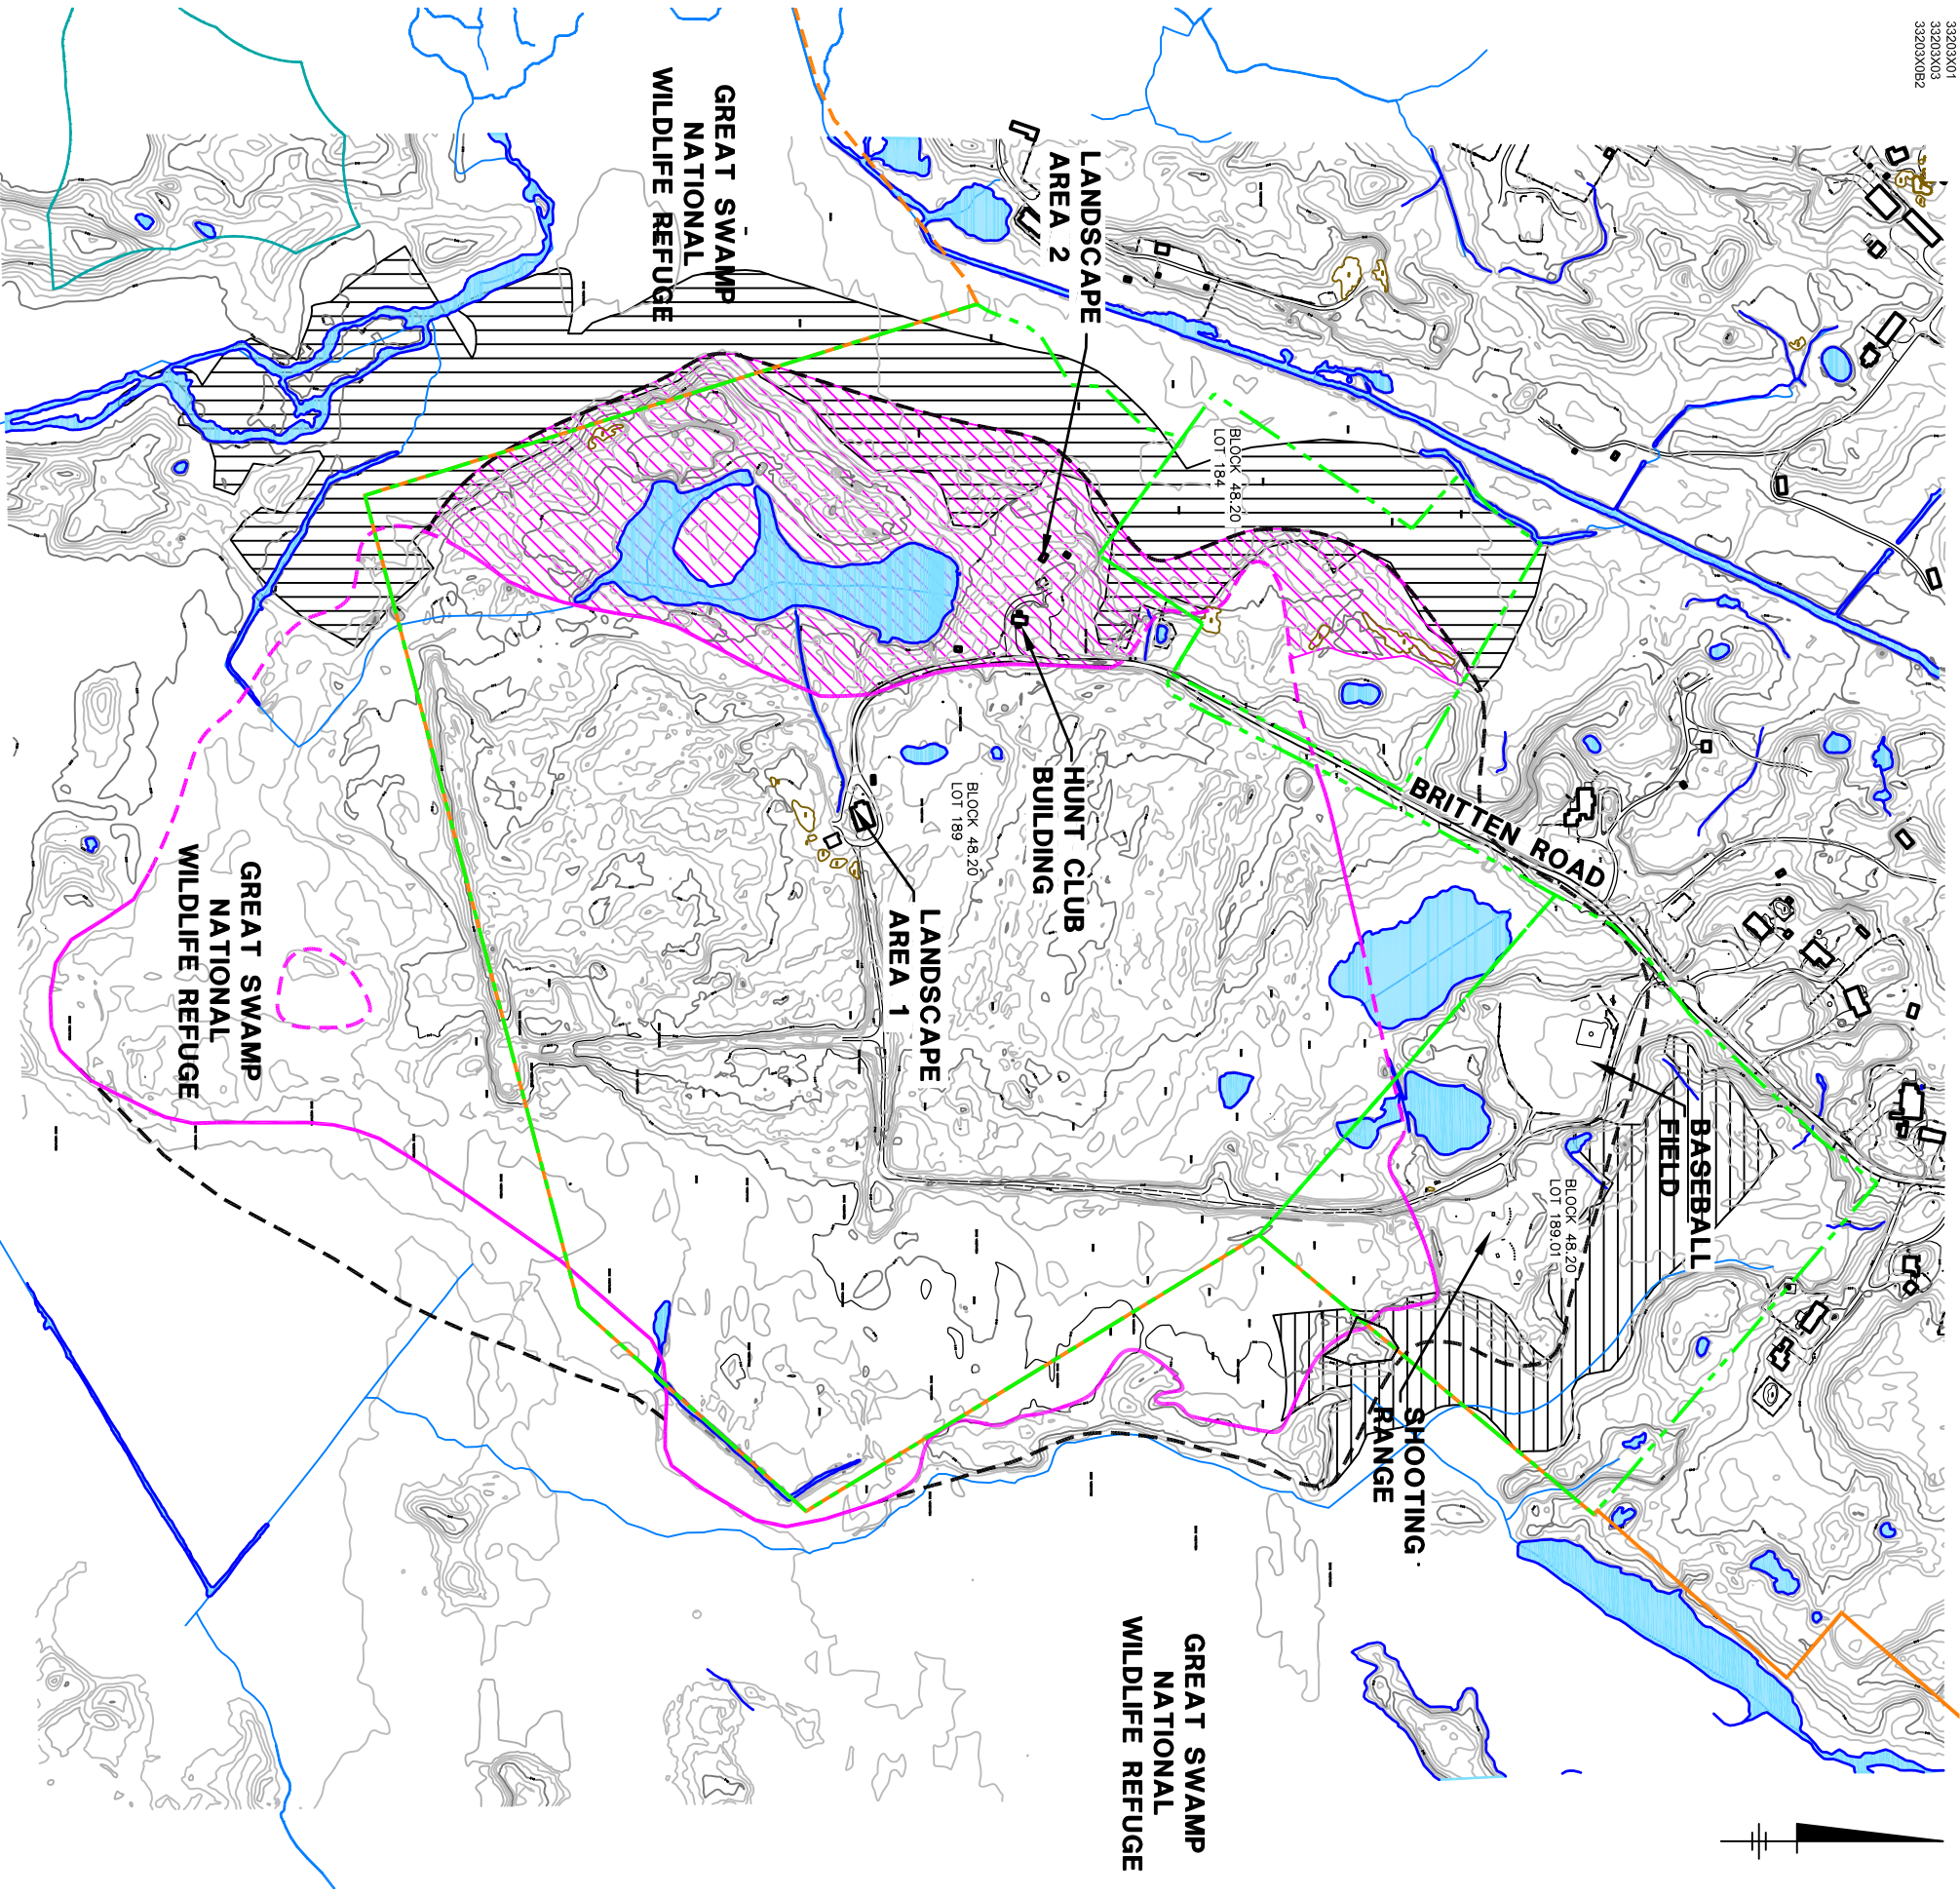

- LEGEND:**
- OPEN WATER
 - PRE-REMEDIATED INVESTIGATION PROJECTED EDGE OF LANDFILLED MATERIALS
 - EDGE OF LANDFILLED WASTES OBSERVED DURING TEST PIT ACTIVITIES (DASHED WHERE APPROXIMATE)
 - GREAT SWAMP NATIONAL WILDLIFE REFUGE PROPERTY BOUNDARY (DASHED WHERE APPROXIMATE)
 - TAX PARCELS
 - WASTE AND DEBRIS OBSERVED ON GROUND SURFACE BUT NOT OBSERVED OR ANTICIPATED TO BE BELOW GROUND SURFACE
 - POTENTIAL BOG TURTLE HABITAT AREA A (35.31 ACRES)
 - POTENTIAL BOG TURTLE HABITAT AREA B (10.89 ACRES)

- SOURCES:**
- BASEMAP FROM JAMES M. STEWART INC., LAND SURVEYORS, PHILADELPHIA, PA., (ELECTRONIC FILE: 292406.DWG DATED: 6/30/06)
 - TAX PARCEL DATA FOR CHATHAM TOWNSHIP WAS PROVIDED BY CIVIL SOLUTIONS.




- NOTES:**
- THE PRE-REMEDIATED INVESTIGATION PROJECTED EDGE OF LANDFILLED MATERIALS ON THIS FIGURE IS APPROXIMATE AS DRAWN AND IS BASED ON VISUAL OBSERVATIONS OF THE GROUND SURFACE MADE DURING SITE VISITS CONDUCTED JUNE 20, 2006 THROUGH JULY 14, 2006.
 - THE EDGE OF LANDFILLED WASTES OBSERVED DURING TEST PIT ACTIVITIES IS DRAWN BASED ON OBSERVATIONS OF MATERIALS EXCAVATED DURING TEST PIT ACTIVITIES CONDUCTED FROM JULY 26, 2007 TO SEPTEMBER 6, 2007 AND MARCH 26, 2008.
 - THE PORTION OF THE GREAT SWAMP NATIONAL WILDLIFE REFUGE (GSNWR) PROPERTY BOUNDARY ON THIS FIGURE WITHIN CHATHAM TOWNSHIP, NJ WAS OBTAINED FROM CHATHAM TOWNSHIP TAX PARCEL DATA PROVIDED BY CIVIL SOLUTIONS. THE PORTION OF THE GSNWR PROPERTY BOUNDARY ON THIS FIGURE OUTSIDE OF CHATHAM TOWNSHIP IS APPROXIMATE AND WAS OBTAINED FROM THE UNITED STATES FISH AND WILDLIFE SERVICE (GEOGRAPHIC INFORMATION SYSTEMS AND SPATIAL DATA).
 - BLOCK 48.20, LOTS 184 AND 189 ARE OWNED BY ROBERT J. MIELE AS TRUSTEE FOR THE TRUST CREATED BY THE LAST WILL AND TESTAMENT OF ANGELO J. MIELE. BLOCK 48.20, LOT 189.01 IS OWNED BY THE GREEN VILLAGE FIRE DEPARTMENT.

ROLLING KNOLLS LANDFILL SUPERFUND SITE
CHATHAM, NEW JERSEY
**DATA GAPS SAMPLING AND ANALYSIS PLAN
ADDENDUM 1**

SITE PLAN



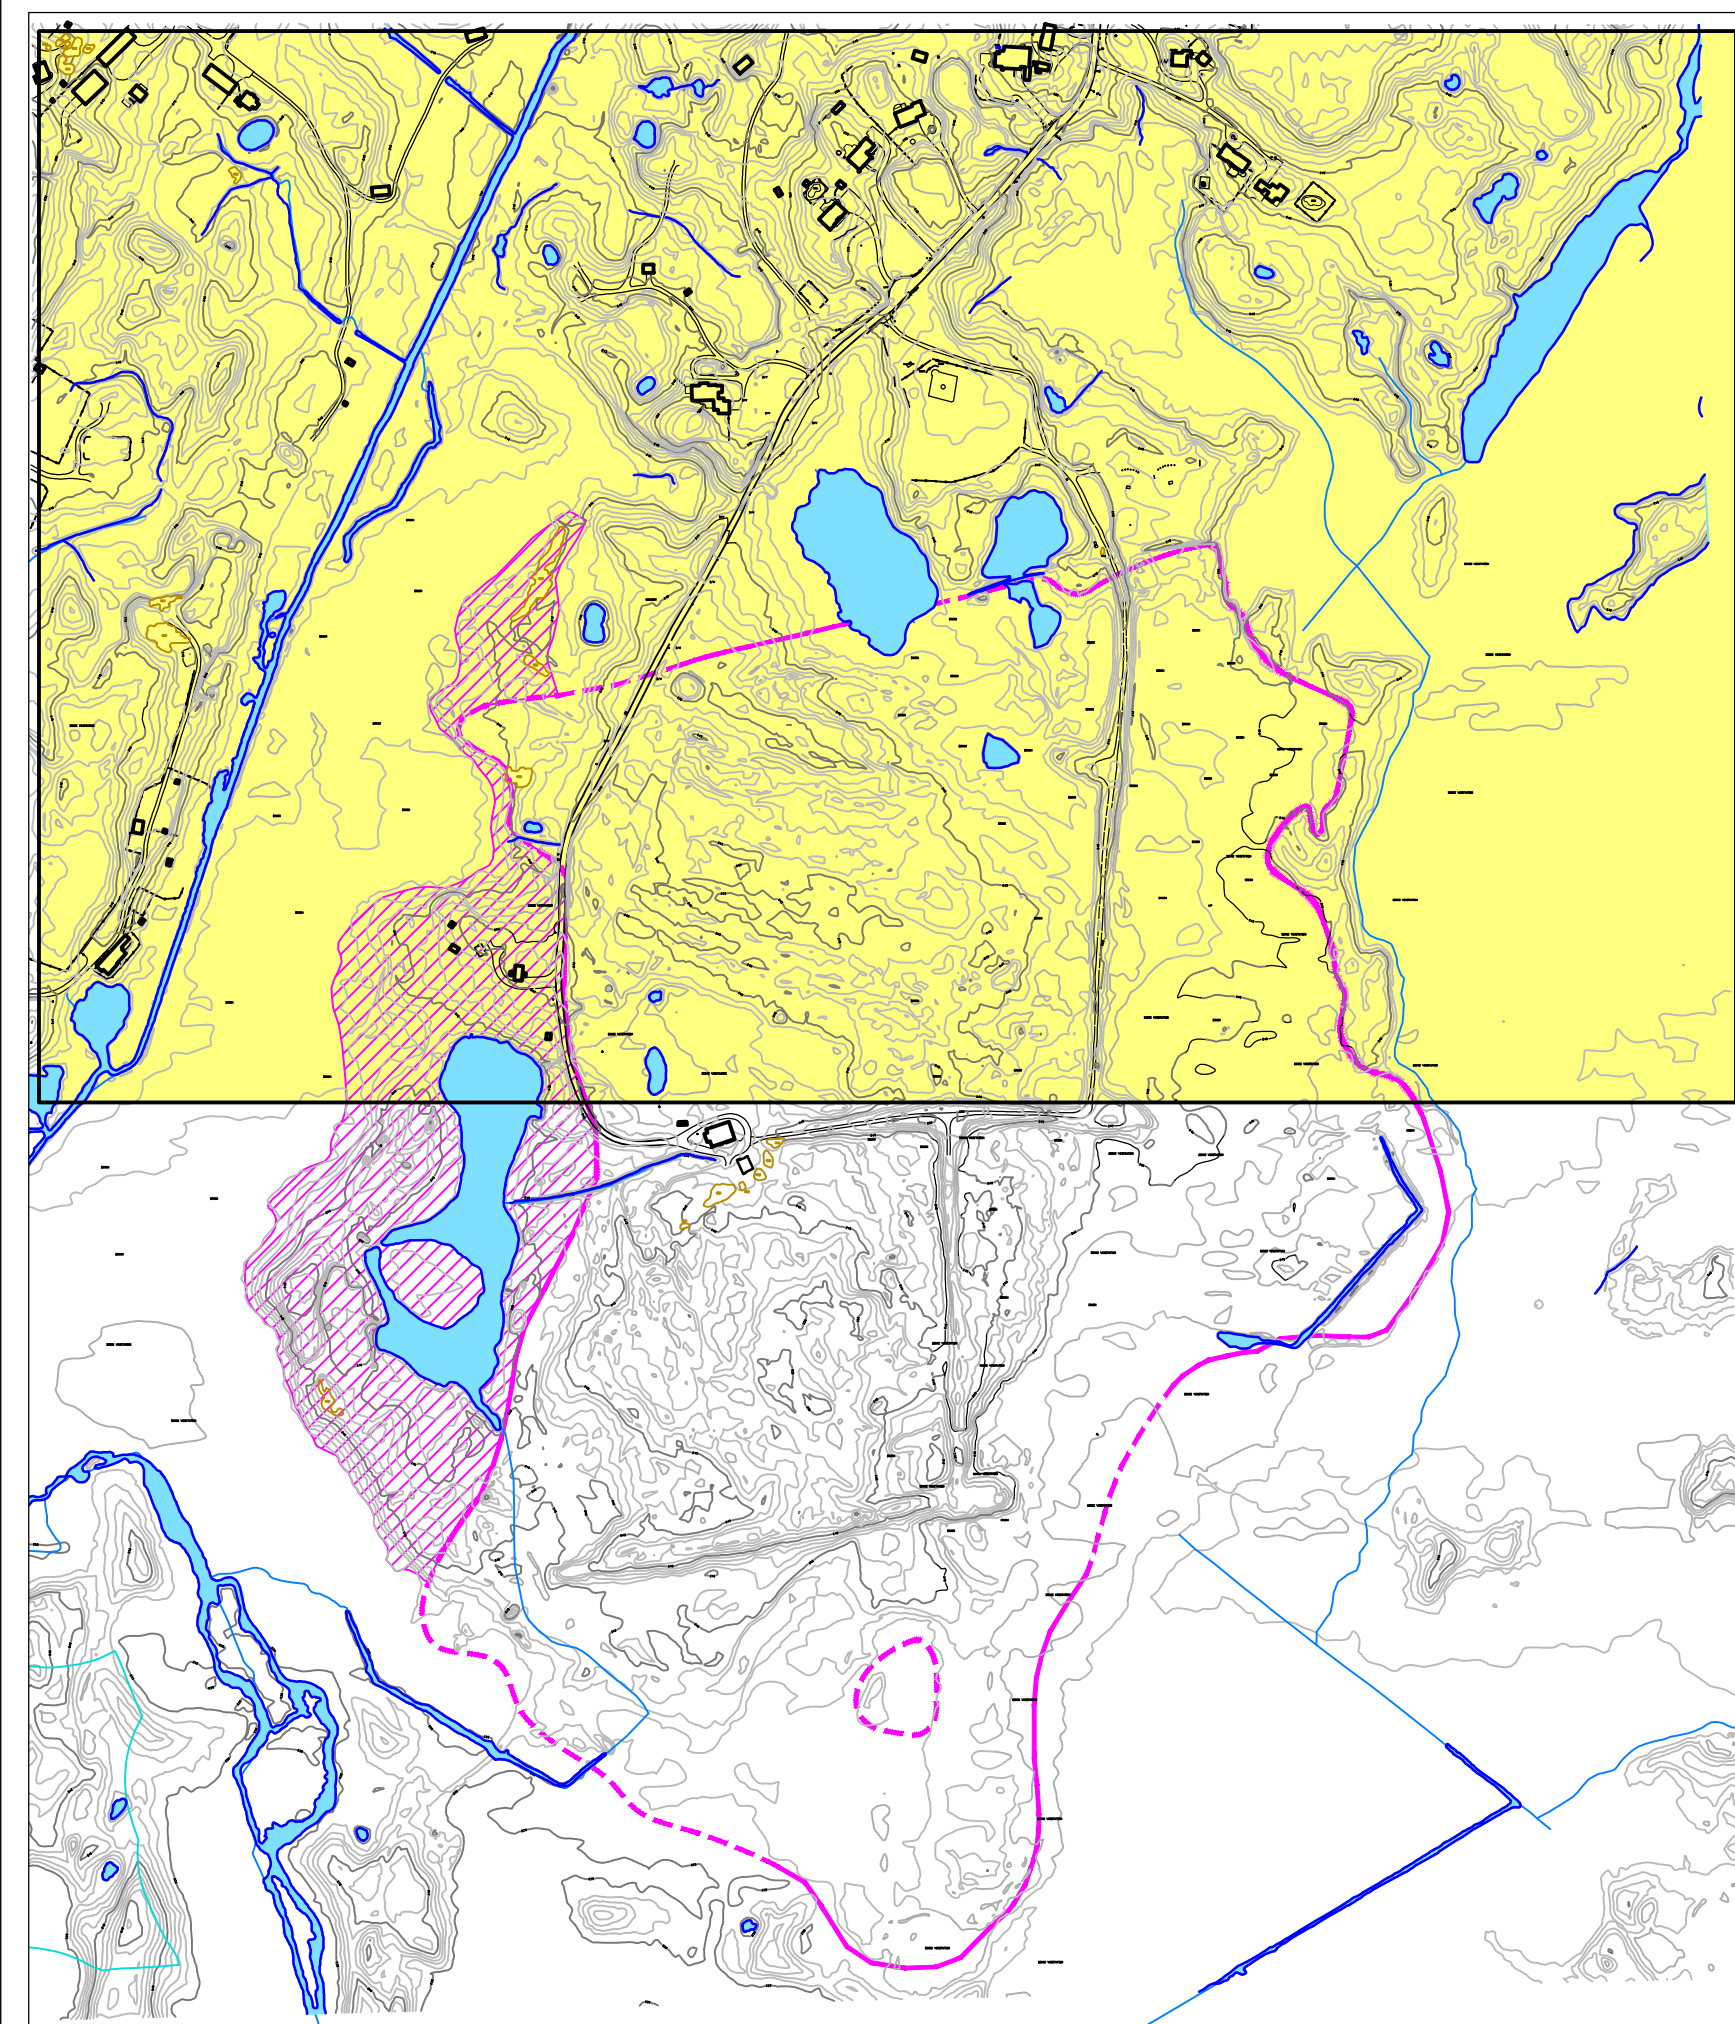

Depth(Feet)	SS-38	(0 - 1)	(8 - 10)
Date	8/31/2009	9/1/2009	9/1/2009
SVOCs			
Benzo(a)anthracene	5.4 D	0.0036 U	
Benzo(a)pyrene	6.9 D	0.0036 U	
Benzo(b)fluoranthene	0.71	0.0036 U	
Dibenz(a,h)anthracene			

Depth(Feet)	SS-47	(0 - 1)	(8 - 9)
Date	8/31/2009	8/31/2009	
SVOCs			
Benzo(a)anthracene	0.2 J	0.21 J	
Benzo(a)pyrene			
PCBs (Aroclors)			
Aroclor-1254	3.0	0.61	
Aroclor-1260	1.5 D	0.13	
Total PCBs (Aroclors)	5.35	1.47 J	
Metals			
Arsenic	23.1	5.5 J	
Lead	7,140	835	

Depth(Feet)	SS-109	(0 - 1)	
Date	9/20/2007		
SVOCs			
Benzo(a)pyrene	1		

Depth(Feet)	SS-125	(0 - 1)	
Date	11/20/2014		
SVOCs			
Benzo(a)pyrene	0.26		
PCBs (Aroclors)			
Aroclor-1254	0.26		
Total PCBs (Aroclors)	0.26		

Depth(Feet)	SS-12	(0 - 1)	
Date	9/20/2007		
SVOCs			
Benzo(a)pyrene	0.77 D		

Depth(Feet)	SS-42	(0 - 1)	
Date	8/28/2009		
SVOCs			
Benzo(a)pyrene	0.27 EJ		
PCBs (Aroclors)			
Aroclor-1254	1.1		
Aroclor-1260	1.1		
Total PCBs (Aroclors)	2.2		
Metals			
Lead	1,300		

NJDEP Soil Remediation Standards		
Constituent	Non-Residential	Residential
SVOCs		
Carbon Tetrachloride	2	0.6
Chloroform	2	0.6
Acetophenone	5	2
Benzo(a)anthracene	2	0.6
Benzo(a)pyrene	0.2	0.6
Benzo(b)fluoranthene	2	0.6
Dibenz(a,h)anthracene	0.2	0.2
Indeno(1,2,3-cd)pyrene	2	0.6
PCBs		
Aroclor-1242	1	0.2
Aroclor-1248	1	0.2
Aroclor-1254	1	0.2
Aroclor-1260	1	0.2
Aroclor-1262	1	0.2
Aroclor-1268	1	0.2
Total PCBs (Aroclors)	1	0.2
PCBs (Congeners)		
Total PCBs (Congeners)	1	0.2
Pesticides		
Aldrin	0.2	0.04
alpha-Chlordane	1	0.2
Dieldrin	0.2	0.04
gamma-Chlordane	1	0.2
Heptachlor	0.7	0.1
Heptachlor epoxide	0.3	0.07
Metals		
Antimony	450	31
Arsenic	19	19
Cadmium	78	78
Copper	45,000	3,100
Lead	800	400
Manganese	5,900	11,000
Mercury	65	23
Vanadium	1,100	78

Ecologically-Based Screening Levels for Sediment	
Constituent	Value
SVOCs	
Benzo(a)anthracene	0.182
PCBs	
Aroclor-1260	0.005
4,4'-DDE	0.005
Heptachlor	0.0006
Metals	
Arsenic	6
Cadmium	0.6
Copper	16
Cyanide	0.0001
Lead	3
Mercury	0.2
Zinc	120



Depth(Feet)	SS-36	(0 - 1)	
Date	8/31/2009		
SVOCs			
Benzo(a)anthracene	2.2		
Benzo(a)pyrene	2.3		
Benzo(b)fluoranthene	0.51 EJ		
Dibenz(a,h)anthracene	0.51 EJ		
Indeno(1,2,3-cd)pyrene	1.3 J		
PCBs (Aroclors)			
Aroclor-1254	1.5 DJ		
Total PCBs (Aroclors)	2.08 J		
Metals			
Lead	2,910		

Depth(Feet)	SS-153	(0 - 1)	
Date	11/20/2014		
SVOCs			
Benzo(a)pyrene	0.32 B		

Depth(Feet)	SS-150	(0 - 1)	
Date	12/31/2014		
SVOCs			
Benzo(a)pyrene	0.4		

Depth(Feet)	SS-147	(0 - 1)	
Date	12/30/2014		
SVOCs			
Benzo(a)pyrene	0.80 B		
Benzo(b)fluoranthene	0.93		

Depth(Feet)	SS-45	(0 - 1)	
Date	8/31/2009	8/31/2009	
SVOCs			
Benzo(a)pyrene	0.77	0.006	

Depth(Feet)	SS-55	(0 - 1)	(2 - 3)
Date	9/1/2009	9/1/2009	
SVOCs			
Benzo(a)anthracene	0.3 J	0.17 J	
Benzo(a)pyrene	1.5 DJ	0.049 J	
Aroclor-1254	1.4 D	0.73	
Total PCBs (Aroclors)	3.54 J	1.81	
Metals			
Antimony	1,960 J	2.8 J	
Arsenic	529 J	8.4 J	
Lead	16,500	934	

Depth(Feet)	SS-41	(0 - 1)	
Date	8/27/2009		
SVOCs			
Benzo(a)pyrene	0.26		

Depth(Feet)	SS-40	(0 - 1)	
Date	8/31/2009		
SVOCs			
Benzo(a)pyrene	0.25 J		
PCBs (Aroclors)			
Aroclor-1254	1.3 D		
Total PCBs (Aroclors)	1.56		
Pesticides			
alpha-Chlordane	2.5 D		
gamma-Chlordane	2.3 D		
Metals			
Lead	625		

Depth(Feet)	SS-148	(0 - 1)	
Date	12/30/2014		
SVOCs			
Benzo(a)pyrene	0.30 B		

Depth(Feet)	SS-151	(0 - 1)	
Date	11/21/2014		
SVOCs			
Benzo(a)pyrene	0.30 B		

Depth(Feet)	SS-44	(0 - 1)	
Date	9/1/2009		
SVOCs			
Benzo(a)pyrene	1.1 D		
PCBs (Aroclors)			
Aroclor-1254	1.83		
Total PCBs (Aroclors)	1.83		
Metals			
Lead	1,580		

Depth(Feet)	SS-51	(0 - 1)	
Date	8/28/2009		
SVOCs			
Benzo(a)pyrene	0.44		
PCBs (Aroclors)			
Aroclor-1248	1.6 D		
Aroclor-1254	3 D		
Total PCBs (Aroclors)	5.45		
Metals			
Lead	2,200		

Depth(Feet)	SS-53	(0 - 1)	
Date	9/17/2009		
SVOCs			
Benzo(a)pyrene	0.57		
PCBs (Aroclors)			
Aroclor-1242	4.1		
Aroclor-1254	5.6		
Aroclor-1260	1.2		
Total PCBs (Aroclors)	10.9		
Metals			
Lead	1,110 J		

Depth(Feet)	SS-52	(0 - 1)	
Date	8/31/2009		
SVOCs			
Benzo(a)anthracene	2.7		
Benzo(a)pyrene	3.2 J		
Benzo(b)fluoranthene	4.2 J		
Dibenz(a,h)anthracene	0.58 EJ		
PCBs (Aroclors)			
Aroclor-1242	9.4 D		
Aroclor-1254	5.3 D		
Total PCBs (Aroclors)	15.4		
PCBs (Congeners)			
Total PCBs (Congeners)	12.4 J		
Metals			
Lead	2,850		

Depth(Feet)	SS-59	(0 - 1)	
Date	8/27/2009		
SVOCs			
Benzo(a)pyrene	6.5 D		
Aroclor-1254	2.7 D		
Total PCBs (Aroclors)	10		
Metals			
Lead	1,250 J		

Depth(Feet)	SS-55	(0 - 1)	(2 - 3)
Date	9/1/2009	9/1/2009	
SVOCs			
Benzo(a)anthracene	0.3 J	0.17 J	
Benzo(a)pyrene	1.5 DJ	0.049 J	
Aroclor-1254	1.4 D	0.73	
Total PCBs (Aroclors)	3.54 J	1.81	
Metals			
Antimony	1,960 J	2.8 J	
Arsenic	529 J	8.4 J	
Lead	16,500	934	

Depth(Feet)	SS-54	(0 - 1)	
Date	8/23/2009		
SVOCs			
Benzo(a)pyrene	0.22 [0.24]		

Depth(Feet)	SS-145	(0 - 1)	
Date	12/30/2014		
SVOCs			
Benzo(a)pyrene	0.39		

Depth(Feet)	SS-33	(0 - 1)	
Date	11/6/2007		
SVOCs			
Benzo(a)pyrene	1 J		

Depth(Feet)	SS-32	(0 - 1)	
Date	11/6/2007		
SVOCs			
Benzo(a)pyrene	1 J		

Depth(Feet)	SS-144	(0 - 1)	
Date	12/30/2014		
SVOCs			
Benzo(a)pyrene	0.53		
PCBs (Aroclors)			
Aroclor-1248	35.1 B		
Lead	561 *		

Depth(Feet)	SS-143	(0 - 1)	
Date	12/30/2014		
SVOCs			
Benzo(a)pyrene	0.28 B		
PCBs (Aroclors)			
Aroclor-1248	79.9		

Depth(Feet)	SS-60	(0 - 1)	
Date	9/18/2009		
SVOCs			
Benzo(a)pyrene	0.32 [0.18 EJ]		
PCBs (Aroclors)			
Aroclor-1248	1.2 J		
Aroclor-1254	3.6 J		
Aroclor-1260	1.2 J		
Total PCBs (Aroclors)	6 J		
Pesticides			
Dieldrin	0.29 DJ		
Metals			
Lead	974		

Depth(Feet)	SS-63	(0 - 1)	(3.5 - 4.5)
Date	8/26/2009	8/26/2009	
SVOCs			
Benzo(a)pyrene	0.26	0.19 EJ	
PCBs (Aroclors)			
Aroclor-1242	0.24 U	2.8 D	
Aroclor-1248	7.7 DJ	0.24 U	
Aroclor-1254	5.3 DJ	4 D	
Total PCBs (Aroclors)	13.3 J	7.44	
PCBs (Congeners)			
Total PCBs (Congeners)	44.1 J	NA	
Metals			
Arsenic	19.3 J	24.3 J	
Lead	2,020 J	2,520 J	

Depth(Feet)	SS-49	(0 - 1)	
Date	8/31/2009		
SVOCs			
Benzo(a)pyrene	1.7		
Benzo(b)fluoranthene	2.4		
Dibenz(a,h)anthracene	0.25 EJ		
PCBs (Aroclors)			
Aroclor-1248	1.6 D		
Aroclor-1254	2.7 D		
Aroclor-1260	1.3 D		
Total PCBs (Aroclors)	5.6		
Metals			
Arsenic	21.1		
Lead	1,010		

Depth(Feet)	SS-71	(0 - 1)	
Date	8/26/2009		
SVOCs			
Benzo(a)pyrene	1.1 J		
PCBs (Aroclors)			
Aroclor-1248	1.1 J		
Total PCBs (Aroclors)	1.1 J		
Metals			
Lead	1,070 J		
Vanadium	6,140		


Depth(Feet)	SS-72	(0 - 1)	(9 - 10)
Date	8/25/2009	8/25/2009	
SVOCs			
Benzo(a)anthracene	66 D	0.05 J	
Benzo(a)pyrene	51 D	0.88	
Benzo(b)fluoranthene	49 D	1.2	
Dibenz(a,h)anthracene	51 D	1.3	
Indeno(1,2,3-cd)pyrene	12 J	0.15 J	
PCBs (Aroclors)			
Aroclor-1242	0.21 EJ	0.49 EJ [0.36 EJ]	
Aroclor-1248	0.061 U	0.061 U [2.8 D]	
Aroclor-1254	2.1 D	2.3 DJ [0.11 U]	
Total PCBs (Aroclors)	7.07 J	6.09	
PCBs (Congeners)			
Total PCBs (Congeners)	8.65 J	NA	
Metals			
Arsenic	26 J	12.6 J	
Lead	1,780 J	950 J	

Depth(Feet)	SS-73	(0 - 1)	(6 - 7)
Date	8/25/2009	8/25/2009	
SVOCs			
Benzo(a)pyrene	0.12 EJ	0.24 J	
PCBs (Aroclors)			
Aroclor-1242	0.11 U	1.7	
Aroclor-1248	1.3	0.19 U	
Aroclor-1254	2.5 D	1.3 J	
Total PCBs (Aroclors)	4.49	3.18 J	
Metals			
Lead	1,880 J	3,020 J	

Depth(Feet)	SS-74	(0 - 1)	(6 - 7)
Date	8/24/2009	8/24/2009	
SVOCs			
Benzo(a)anthracene	1	2.2	
Benzo(a)pyrene	1.1	2.7	
Benzo(b)fluoranthene	1.2	3.8 D	
Dibenz(a,h)anthracene	0.3 EJ	0.76 EJ	
PCBs (Aroclors)			
Aroclor-1254	0.039 U	1.3 D	
Total PCBs (Aroclors)	0.211 J	2.17	

	8/2/2009	
	0.32 [0.18 EJ]	
(ors)		
	1.2 DJ [1.3 DJ]	
	3.2 D [2.6 D]	

XREFS: IMAGES: PROJECTNAME: ---

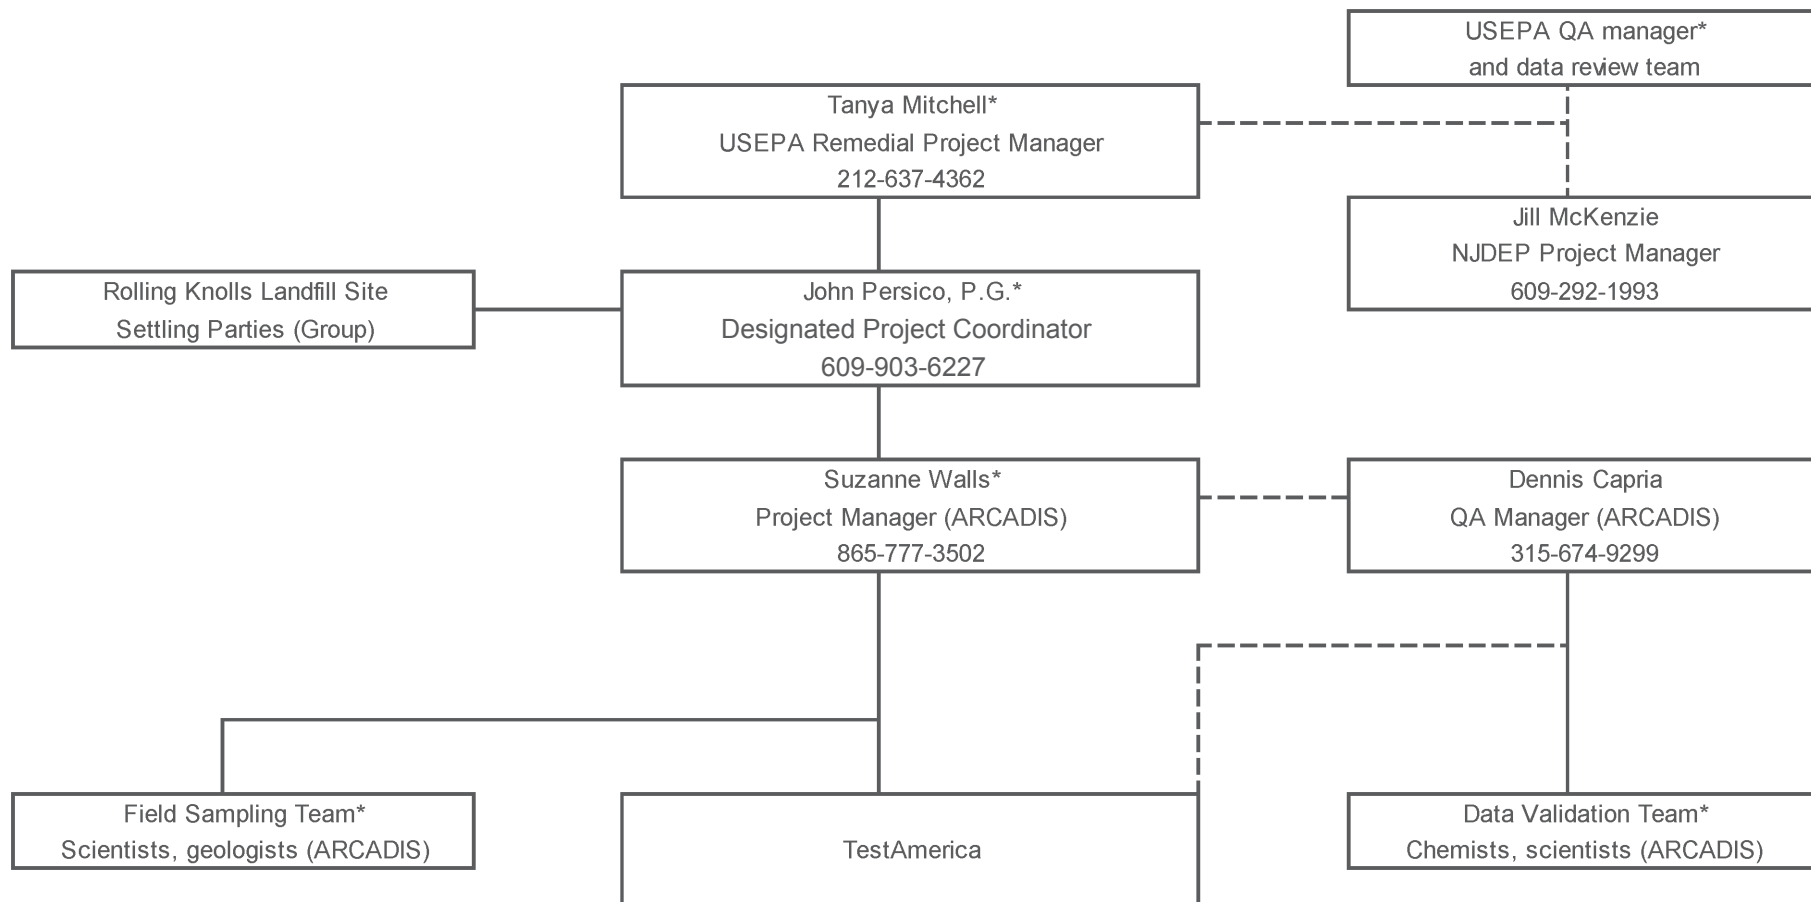

* - QAPP recipient

ROLLING KNOLLS LANDFILL SUPERFUND SITE
 CHATHAM, NEW JERSEY
**DATA GAPS SAMPLING AND ANALYSIS PLAN
 ADDENDUM 1**

PROJECT ORGANIZATIONAL CHART



FIGURE

4