

August 21, 2018

Mr. Devlin Piplic Director of Facilities Monroe School District 200 East Fremont Monroe, WA 98272

RE: 2018 Annual PCB Wipe Sampling Sky Valley Educational Center 351 Short Colombia Street Monroe, Washington

Dear Mr. Piplic:

PBS Engineering and Environmental, Inc. (PBS) performed Polychlorinated Biphenyl (PCB) surface testing for the annual monitoring program at the Sky Valley Educational Center (SVEC) located at 351 Short Columbia Street, Monroe, Washington. The following report discusses background information, methodology, findings and conclusions.

BACKGROUND INFORMATION

PCB-containing caulking and contaminated light fixture abatement activities were performed at the Sky Valley Educational Center (SVEC) in the Administration, Annex, Gymnasium, Classroom Pod/Library, and the Technology buildings during summer 2016.

PBS was requested to conduct annual surface PCB sampling in accordance with the SVEC, March 27, 2017 Quality Assurance Project Plan (QAPP) to evaluate the effectiveness of the abatement process.

METHODOLOGY

The following is a description of the surface sample collection and analysis process. The Monroe School District provided PBS with drawings that identified specific locations to be sampled. See attached sample location diagrams.

PBS collected surface samples in twelve (12) locations within the study area. The 2018 annual PCB surface sampling was performed using the wipe sampling method in 40 CFR Part 761. This method uses a gauze pad wetted with hexane and placed in a glass jar. The sample media was provided by ALS Laboratories. The hexane wetted gauze pad is wiped over a 100 cm² area using a disposable template as a guide and then placed in a glass jar. PBS personnel wore disposable nitrile gloves to protect against cross-contamination between samples. A total of two (2) field blanks were collected during this activity. The wipe samples were collected to evaluate the effectiveness of the epoxy sealant. The

Mr. Devlin Piplic 2018 Annual PCB Monitoring Report August 21, 2018 Page 2 of 3

samples were labeled with unique identification numbers, packaged and delivered with chain-of-custody documentation to ALS Laboratories. The samples were analyzed by EPA Method SW 8082 for PCBs. See attached laboratory report.

The EPA regulatory threshold for PCBs in surface wipes is 10 micrograms (µg) per 100 cm².

FINDINGS

The following is a summary of our laboratory findings for the surface sampling activity.

Laboratory results revealed all twelve (12) surface wipe samples collected during this annual monitoring event were below laboratory detection and therefore below the EPA threshold of 10 μ g/100 cm², see Table 1.

Table 1 - Wipe Sampling Results

Sample Number	Location	PCB Results (µg/100 cm²)
114-PCB-W	Admin building – Principals office - North window brick/metal transition	ND
115-PCB-W	Admin building – Staff room - West window brick/metal transition	ND
116-PCB-W	Admin building – Mail room - Window brick/metal transition	ND
117-PCB-W	North Pod – Room 17 - North window brick/metal transition	ND
118-PCB-W	North Pod – Room 20 – Southwest window brick/metal transition	
119-PCB-W	119-PCB-W East Pod – Room 13 - North window brick/metal transition	
120-PCB-W	East Pod – Room 12 - North window brick/metal transition	ND
121-PCB-W	South Pod – Room 7 - East window brick/metal transition	ND
122-PCB-W	South Pod – Room 3 - West window brick/metal transition	
123-PCB-W	123-PCB-W Gym building – Gathering place - Southwest window brick/metal transition	
124-PCB-W	Gym building – Girls Locker-room – Interior of North exterior door brick/metal transition	ND

Mr. Devlin Piplic 2018 Annual PCB Monitoring Report August 21, 2018 Page 3 of 3

125-PCB-W Annex building – Room E - South window ND brick/metal transition	
--	--

 μ g/100 cm² = micrograms/100 square centimeters ND = Not detected above reporting limits

CONCLUSIONS

Based on laboratory results of the surface wipe samples, no detectable PCBs were found.

Please do not hesitate to contact me if you have any questions regarding this letter report or require additional information.

Sincerely,

PBS Engineering and Environmental, Inc.

Justin Day Industrial Hygiene Technician

Reviewed by: Gregg Middaugh Senior Project Manager


Attachments: Sample location Diagrams

Surface Wipe Sample Laboratory Report

VALLEY F



HM1

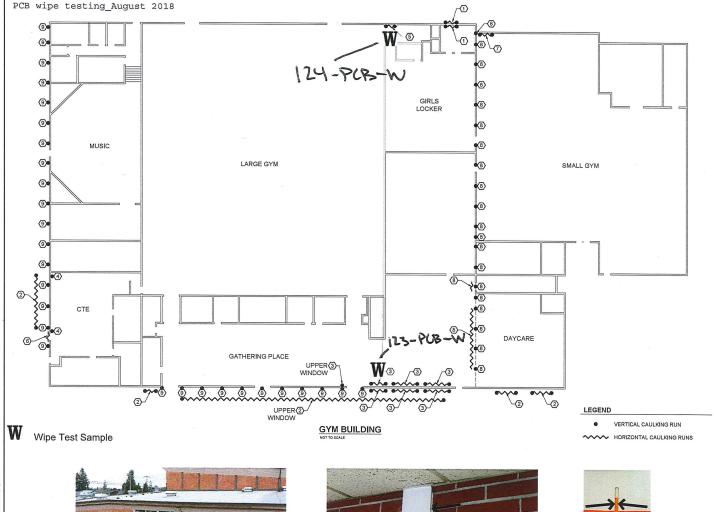


®PHOTO DETAIL

29PHOTO DETAIL

GENERAL NOTES

ALL ABATEMENT RELATED ACTIVITIES AT THIS PROJECT SITE SHALL COMPLY WITH DIVISION 01 AND 02 AND SPECIFICALLY SECTION 028400 PCB ACTIVITIES, CONTRACTOR TO VERIFY ALL ITEMS SHOWN, LOCATIONS AND QUANTITIES OF MATERIALS TO BE REMOVED, AND DIMENSIONS PRIOR TO REMOVAL, ANY DEVIATIONS FROM THE SPECIFICATION THAT ARE DISCOVERED BY THE CONTRACTOR SHALL BE REPORTED TO THE OWNERS REPRESENTATIVE PRIOR TO REMOVAL. THE DRAWINGS ARE FOR DIAGRAMMATIC PURPOSES ONLY, GENERAL LOCATIONS OF PCB-CONTAINING MATERIALS ARE DEPICTED DIAGRAMMATICALLY ON THE DRAWINGS. THE REMAINING MATERIAL LOCATIONS ARE DESCRIBED TEXTUALLY ON THESE DRAWINGS, QUANTITIES OF HAZARDOUS MATERIALS LISTED ON THIS SHEET ARE CONSIDERED ACCURATE TO WITHIN 1/- 10%. THE CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS, EQUIPMENT AND PERMITS FOR THE REMOVAL AND DISPOSAL OF THE QUANTITIES OF HAZARDOUS MATERIALS PROVIDED PLUS AN ADDITIONAL 10%. THE CONTRACTOR WILL BE COMPENSATED FOR QUANTITIES WHICH ARE GREATER THAN 110% OF THE TOTAL AND THE OWNER WILL DEDUCT FROM THE CONTRACT SUM QUANTITIES THAT ARE 90% OR LESS OF THE TOTAL.



- 3. ABATEMENT CONTRACTOR TO COORDINATE ALL ACTIVITIES WITH ALL OTHER ONSITE WORK INCLUDING, BUT NOT LIMITED TO: SCHEDULE, ACCESS, STAGING, ETC. ABATEMENT CONTRACTOR TO REPORT LOCATIONS AND QUANTITIES OF ALL HAZARDOUS MATERIALS TO BE REMOVED, TO THE OWNERS REPRESENTATIVE PRIOR TO ABATEMENT/DEMOLITION.
- THE CONTRACTOR SHALL REMOVE ALL ACCESSIBLE CAULKING IN ALL AREAS WITHOUT PERFORMING DEMOLITION OF BUILDING COMPONENTS.

KEY NOTES

®PHOTO DETAIL

REMOVE APPROX. 20 LF OF PCB-CONTAINING CAULKING LOCATED ON THE EXTERIOR AND INTERIOR METAL WINDOW FRAME ON THE GIRLS LOCKER ROOM NORTH PERIMETER WINDOW AS SHOWN.

REMOVE APPROX. 300 LF OF PCB-CONTAINING CAULKING ON THE EXTERIOR METAL WINDOW FRAMES ON ALL WINDOWS AT THE SOUTH AND WEST ELEVATIONS OF THE LARGE GYM BUILDING AS SHOWN. THIS INCLUDES CAULKING THAT EXISTS AROUND EACH WINDOW INFILL PANEL METAL FRAME TRANSITION ON THE WEST ELEVATION. THESE INFILL PANELS ARE CEMENT ASBESTOS

- REMOVE APPROX. 40 LF OF PCB-CONTAINING CAULKING LOCATED ON INTERIOR SIDE OF THE THREE LOWER WINDOWS AND THE UPPER WINDOW BANK EAST VERTICAL IN THE GATHERING PLACE
- REMOVE APPROX. 10 LF OF PCB-CONTAINING OF CAULK ON INTERIOR WINDOW FRAME VERTICALS IN THE CTE ROOM AS
- REMOVE APPROX. 18 LF OF PCB-CONTAINING OF CAULK ON
 (5) INTERIOR SIDE OF NORTH EXTERIOR GIRLS LOCKER ENTRY DOOR
- REMOVE APPROX. 18 LF OF PCB-CONTAINING OF CAULK ON EXTERIOR SIDE OF NORTH CTE ENTRY DOOR AS SHOWN.
- REMOVE APPROX. 18 LF OF PCB-CONTAINING OF CAULK ON THE INTERIOR SIDE OF THE NORTHWEST PERIMETER ENTRY DOOR FRAME OF THE SMALL GYM AS SHOWN. 7


REMOVE APPROX, 500 LF OF PCB-CONTAINING CAULKING LOCATED ON ALL VERTICAL STRUCTURAL METAL COLUMN TRANSITIONS THROUGHOUT THE EAST ELEVATION OF THE LARGE GYM AS SHOWN. THIS INCLUDES THE REMOVAL OF ALL CAULKING ON THE INTERIOR DEMISING WALL METAL BEAMS (VERTICAL AND HORIZONTAL) BETWEEN THE DAYCARE AND THE GATHERING PLACE/CAFETERIA AS SHOWN. THE CAULKING IS HEAVILY PAINTED THROUGHOUT THE WORK SCOPE AREA.

REMOVE APPROX. 780 LF OF PCB-CONTAINING CAULKING LOCATED ON ALL EXTERIOR VERTICAL STRUCTURAL METAL COLUMN TRANSITIONS THROUGHOUT THE LOWER WEST AND SOUTH ELEVATIONS OF THE LARGE GYM BUILDING AS SHOWN.



OF

EDUCATIONAL CENTER

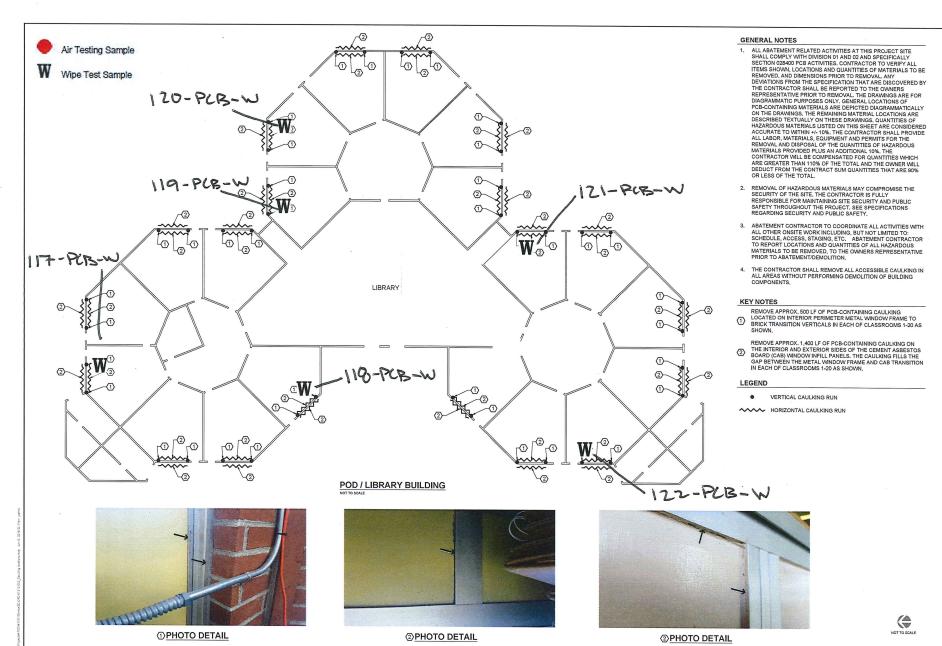

MONROE SCHOOL

POD/LIBRBAY BUILDING CAULKING ABATEMENT PLAN

SKY VALLEY EDUCATIONAL CENTER

SKY VALLEY
EDUCATIONAL CENTER
351 SHORT COLUMBIA STREET
MONROE, WASHINGTON

PROJECT:	41373,000
DRAWN:	JHD
CHECKED:	GM
DATE:	JUNE 2016
DWG NO.	SHEET NO.



GENERAL NOTES

- ALL ABATEMENT RELATED ACTIVITIES AT THIS PROJECT SITE SHALL COMPLY WITH DIVISION 01 AND 02 AND SPECIFICALLY SECTION 028400 PCB ACTIVITIES, CONTRACTOR TO VERIFY ALL ITEMS SHOWN, LOCATIONS AND QUANTITIES OF MATERIALS TO BE REMOVED, AND DIMENSIONS PRIOR TO REMOVAL, ANY DEVIATIONS FROM THE SPECIFICATION THAT ARE DISCOVERED BY THE CONTRACTOR SHALL BE REPORTED TO THE OWNERS REPRESENTATIVE PRIOR TO REMOVAL. THE DRAWINGS ARE FOR DIAGRAMMATIC PURPOSES ONLY, GENERAL LOCATIONS OF PCB-CONTAINING MATERIALS ARE DEPICTED DIAGRAMMATICALLY ON THE DRAWNINGS. THE REMAINING MATERIAL LOCATIONS ARE DESCRIBED TEXTUALLY ON THESE DRAWINGS, QUANTITIES OF HAZARDOUS MATERIALS LISTED ON THIS SHEET ARE CONSIDERED ACCURATE TO WITHIN +/- 10%. THE CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS, EQUIPMENT AND PERMITS FOR THE REMOVAL AND DISPOSAL OF THE QUANTITIES OF HAZARDOUS MATERIALS PROVIDED PLUS AN ADDITIONAL 10%. THE CONTRACTOR WILL BE COMPENSATED FOR QUANTITIES WHICH ARE GREATER THAN 110% OF THE TOTAL AND THE OWNER WILL DEDUCT FROM THE CONTRACT SUM QUANTITIES THAT ARE 90% OR LESS OF THE TOTAL.
- REMOVAL OF HAZARDOUS MATERIALS MAY COMPROMISE THE SECURITY OF THE SITE. THE CONTRACTOR IS FULLY RESPONSIBLE FOR MAINTAINING SITE SECURITY AND PUBLIC SAFETY THROUGHOUT THE PROJECT. SEE SPECIFICATIONS REGARDING SECURITY AND PUBLIC SAFETY.
- ABATEMENT CONTRACTOR TO COORDINATE ALL ACTIVITIES WITH ALL OTHER ONSITE WORK INCLUDING, BUT NOT LIMITED TO: SCHEDULE, ACCESS, STAGING, ETC. ABATEMENT CONTRACTOR TO REPORT LOCATIONS AND QUANTITIES OF ALL HAZARDOUS MATERIALS TO BE REMOVED, TO THE OWNERS REPRESENTATIVE PRIOR TO ABATEMENT/DEMOLITION.
- THE CONTRACTOR SHALL REMOVE ALL ACCESSIBLE CAULKING IN ALL AREAS WITHOUT PERFORMING DEMOLITION OF BUILDING COMPONENTS.

- REMOVE APPROX, 400 LF OF PCB-CONTAINING CAULKING LOCATED ON ALL INTERIOR METAL WINDOW SILL TRANSITIONS AND ALL EXTERIOR METAL WINDOW FRAME TRANSITIONS THROUGHOUT THE ADMINISTRATION BUILDING AS SHOWN.
- REMOVE APPROX. 175 LF OF PCB-CONTAINING CAULKING LOCATED ON ALL EXTERIOR VERTICAL STRUCTURAL METAL BEAM TRANSITIONS THROUGHOUT THE ADMINISTRATION BUILDING AS

VERTICAL CAULKING RUN

HORIZONTAL CAULKING RUN



ADMIN BUILDING CAULKING ABATEMENT PLAN SKY VALLEY EDUCATIONAL CENTER

SKY VALLEY EDUCATIONAL CENTER 351 SHORT COLUMBIA STREET MONROE, WASHINGTON

PROJECT: 41373.000 DRAWN: JUNE 2016

HM₃ OF

1

KEY NOTES 2 SHOWN. LEGEND



②PHOTO DETAIL



①③PHOTO DETAIL


GENERAL NOTES

- ALL ABATEMENT RELATED ACTIVITIES AT THIS PROJECT SITE SHALL COMPLY WITH DIVISION 01 AND 02 AND SPECIFICALLY SECTION 028400 PCB ACTIVITIES. CONTRACTOR TO VERIFY ALL SECTION UZAGAD PER ACTIVITIES. CONTRACTOR TO VERIFY ALL ITEMS SHOWI, LOCATIONS AND QUANTITIES OF MATERIALS TO BE REMOVED, AND DIMENSIONS PRIOR TO REMOVAL. ANY DEVIATIONS FROM THE SPECIFICATION THAT ARE DISCOVERED BY THE CONTRACTOR SHALL BE REPORTED TO THE OWNERS REPRESENTATIVE PRIOR TO REMOVAL. THE DRAWINGS ARE FOR DIAGRAMMATIC PURPOSES ONLY. CENTERAL LOCATIONS OF PERCONALINE MATERIALS AND EXPERIENCE AND ACCOUNTY. PCB-CONTAINING MATERIALS ARE DEPICTED DIAIGNAMATICALLY ON THE DRAWINGS, THE REMAINING MATERIAL LOCATIONS ARE DESCRIBED TEXTUALLY ON THESE DRAWINGS, QUANTITIES OF HAZARDOUS MATERIALS LISTED ON THIS SHEET ARE CONSIDERED ACCURATE TO WITHIN +/- 10%. THE CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS, EQUIPMENT AND PERMITS FOR THE REMOVAL AND DISPOSAL OF THE QUANTITIES OF HAZARDOUS REMOVAL AND IDEPOSAL OF HEAD QUANTITIES OF HAZARDOUS MATERIALS PROVIDED PLUS AN ADDITIONAL 10%. THE CONTRACTOR WILL BE COMPENSATED FOR QUANTITIES WHICH ARE GREATER THAN 110% OF THE TOTAL AND THE OWNER WILL DEDUCT FROM THE CONTRACT SUM QUANTITIES THAT ARE 90% DRIESED FAULT STOWN. OR LESS OF THE TOTAL
- RECURITY OF THE SITE. THE CONTRACTOR IS FULLY
 RESPONSIBLE FOR MAINTAINING SITE SECURITY AND PUBLIC
 SAFETY THROUGHOUT THE PROJECT. SEE SPECIFICATIONS
 DECARDING SECURITY AND PUBLIC SAFETY REGARDING SECURITY AND PUBLIC SAFETY.
- ALL OTHER ONSITE WORK INCLUDING, BUT NOT LIMITED TO: SCHEDULE, ACCESS, STAGING, ETC. ABATEMENT CONTRACTOR TO REPORT LOCATIONS AND QUANTITIES OF ALL HAZARDOUS MATERIALS TO BE REMOVED, TO THE OWNERS REPRESENTATIVE PRIOR TO ABATEMENT/DEMOLITION.

KEY NOTES

- REMOVE APPROX. 200 LF OF PCB-CONTAINING CAULKING LOCATED ON INTERIOR PERIMETER METAL WINDOW FRAME TRANSITIONS, THIS INCLUDES REMOVAL OF CAULKING WHICH EXISTS ON EXTERIOR METAL WINDOW FRAME TRANSITIONS ON THE NORTH AND SOUTH BUILDING ELEVATION WINDOWS AS
- REMOVE APPROX. 80 LF OF PCB-CONTAINING CAULKING ON WOOD CEILING/SOFFIT BEAMS AT PERIMETER WALL/CEILING TRANSITIONS IN ROOMS E, F AND PREP ROOM F AS SHOWN.
- REMOVE APPROX, 300 LF OF PCB AND ASBESTOS-CONTAINING TAN CAULKING LOCATED ON VARIOUS VERTICAL AND HORIZONTAL METAL WINDOW FRAME TRANSITIONS ON THE NORTH AND SOUTH ELEVATIONS OF THE ANNEX BUILDING AS SHOWN.
 - CAULKING ON BEAM





THE CONTRACTOR SHALL REMOVE ALL ACCESSIBLE CAULKING IN ALL AREAS WITHOUT PERFORMING DEMOLITION OF BUILDING COMPONENTS.



- VERTICAL CAULKING RUN
- WWW HORIZONTAL CAULKING RUN

SKY VALLEY EDUCATIONAL CENTER 351 SHORT COLUMBIA STREET MONROE, WASHINGTON

PROJECT:	41373,000	
DRAWN:	JHD	
CHECKED:	GM	
DATE:	JUNE 2016	
DWG NO.	SHEET NO.	



1

ANNEX BUILDING
CAULKING ABATEMENT PLAN

SKY VALLEY EDUCATIONAL CENTER

①23PHOTO DETAIL

Wipe Test Sample



10-Aug-2018

Gregg Middaugh
PBS
2517 Eastlake Ave. East, Suite 100
Seattle, WA 98102

Tel: (206) 255-4659

Fax:

Re: Sky VALLEY EC; 41373.000 Work Order: **1808122**

Dear Gregg,

ALS Environmental received 14 samples on 03-Aug-2018 09:30 AM for the analyses presented in the following report.

The analytical data provided relates directly to the samples received by ALS Environmental and for only the analyses requested.

QC sample results for this data met laboratory specifications. Any exceptions are noted in the Case Narrative, or noted with qualifiers in the report or QC batch information. Should this laboratory report need to be reproduced, it should be reproduced in full unless written approval has been obtained from ALS Laboratory Group. Samples will be disposed in 30 days unless storage arrangements are made.

The total number of pages in this report is 20.

If you have any questions regarding this report, please feel free to contact me.

Sincerely,

Shawn Smythe

Electronically approved by: Shawn Smythe

Shawn Smythe Project Manager

ADDRESS 4388 Glendale Milford Rd. Cincinnati, OH 45242- | PHONE (513) 733-5336 | FAX (513) 733-5347

ALS GROUP USA, CORP. Part of the ALS Group. An ALS Limited Company

ALS Environmental Date: 10-Aug-18

Client: PBS

Project: Sky VALLEY EC; 41373.000

Work Order: 1808122

Work Order Sample Summary

Lab Samp II	Client Sample ID	<u>Matrix</u>	Tag Number	Collection Date	Date Received	Hold
1808122-01	114-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-02	115-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-03	116-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-04	117-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-05	118-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-06	119-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-07	120-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-08	121-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-09	122-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-10	123-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-11	124-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-12	125-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-13	126-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	
1808122-14	127-PCB-W	Wipe		8/2/2018	8/3/2018 09:30	

ALS Environmental

Date: 10-Aug-18

Client: PBS

Project: Sky VALLEY EC; 41373.000 Case Narrative

Work Order: 1808122

The analytical data provided relates directly to the samples received by ALS Environmental and for only the analyses requested.

Results relate only to the items tested and are not blank corrected unless indicated.

QC sample results for this data met laboratory specifications. Any exceptions are noted in the Case Narrative, or noted with qualifiers in the report or QC batch information. Should this laboratory report need to be reproduced, it should be reproduced in full unless written approval has been obtained from ALS Environmental. Samples will be disposed in 30 days unless storage arrangements are made.

ALS is an EPA recognized NLLAP laboratory for lead paint, soil, and dust wipe analyses under its AIHA-LAP accreditation.

CN Page 1 of 1

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 **Lab ID:** 1808122-01

Sample ID: 114-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Date: 10-Aug-18

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 **Lab ID:** 1808122-02

Sample ID: 115-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Date: 10-Aug-18

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 **Lab ID:** 1808122-03

Sample ID: 116-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Date: 10-Aug-18

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 Lab ID: 1808122-04

Sample ID: 117-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Date: 10-Aug-18

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 **Lab ID:** 1808122-05

Sample ID: 118-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Date: 10-Aug-18

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 **Lab ID:** 1808122-06

Sample ID: 119-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Date: 10-Aug-18

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 Lab ID: 1808122-07

Sample ID: 120-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Note:

Date: 10-Aug-18

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 **Lab ID:** 1808122-08

Sample ID: 121-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Note:

Date: 10-Aug-18

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 Lab ID: 1808122-09

Sample ID: 122-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Date: 10-Aug-18

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 Lab ID: 1808122-10

Sample ID: 123-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Date: 10-Aug-18

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 **Lab ID:** 1808122-11

Sample ID: 124-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Date: 10-Aug-18

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 **Lab ID:** 1808122-12

Sample ID: 125-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Date: 10-Aug-18

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 **Lab ID:** 1808122-13

Sample ID: 126-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Date: 10-Aug-18

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Client: PBS Work Order: 1808122

Project: Sky VALLEY EC; 41373.000 **Lab ID:** 1808122-14

Sample ID: 127-PCB-W Matrix: WIPE

Collection Date: 8/2/2018

Analytical Results

Date: 10-Aug-18

Analyses

PCBS WIPE		Method: SW8082	Area 0 cm2	Analyst: KB
Date Analyzed: 8/10/2018		Reporting Limit		
	μg/sample	μg/sample	ug/100cm2	
Aroclor 1016	ND	1.0	NA	
Aroclor 1221	ND	1.0	NA	
Aroclor 1232	ND	1.0	NA	
Aroclor 1242	ND	1.0	NA	
Aroclor 1248	ND	1.0	NA	
Aroclor 1254	ND	1.0	NA	
Aroclor 1260	ND	1.0	NA	
Aroclor 1262	ND	1.0	NA	
Aroclor 1268	ND	1.0	NA	

Client: PBS

Work Order: 1808122

Project: Sky VALLEY EC; 41373.000

QC BATCH REPORT

Date: 10-Aug-18

Batch ID: 52476	Instrument ID GC3			Method	: SW808	2						
MBLK Sample II Client ID:	D MBLK-52476-52476	Run ID: G	C2 19	202104			μg/sar 180698	•	Analysis Prep Date: 8/8	S Date: 8/1	0/2018 DF: 1	
Chefit ID.		Kuii ib. G	IC3_10	OUOTUA		ечио.	100096		·	72010		
Analyte	Re	esult	PQL	SPK Val	SPK Ref Value	%	6REC	Control Limit	RPD Ref Value	%RPD	RPD Limit	Qual
Aroclor 1016		ND	1.0									
Aroclor 1221		ND	1.0									
Aroclor 1232		ND	1.0									
Aroclor 1242		ND	1.0									
Aroclor 1248		ND	1.0									
Aroclor 1254		ND	1.0									
Aroclor 1260		ND	1.0									
Aroclor 1262		ND	1.0									
Aroclor 1268		ND	1.0									
Surr: Decachlorobiph	nenyl (0.46	0	0.5		0	92	14.6-145	()		
Surr: Tetrachloro-m-x		269	0	0.5		0	53.8	24.4-141	()		
Client ID:		Run ID: G	C3_18	80810A			μg/sar 180698	-	Prep Date: 8/8	s Date: 8/1 s /2018	DF: 1	
Analyte	Re	sult	PQL	SPK Val	Value	%	6REC	Limit	Value	%RPD	Limit	Qual
Aroclor 1260	7.	017	1.0	10		0	70.2	38.1-135	()		
Surr: Decachlorobiph	nenyl 0.	434	0	0.5		0	86.8	14.6-145	()		
Surr: Tetrachloro-m-x	xylene 0.	244	0	0.5		0	48.8	19.7-105	()		
LCSD Sample II	D LCSD-52476-52476					Units:	μg/sar	nple	Analysis	Date: 8/1	0/2018	
Client ID:		Run ID: G	C3_18	80810A			180699	-	Prep Date: 8/8		DF: 1	
Analyte	Re	esult	PQL	SPK Val	SPK Ref Value	0/	6REC	Control Limit	RPD Ref Value	%RPD	RPD Limit	Qual
Aroclor 1260		974	1.0	10			89.7	38.1-135)		
Surr: Decachlorobiph		432	0	0.5		0	86.4	14.6-145)		
Surr: Tetrachloro-m-	•	432 243	0	0.5		0	48.6	24.4-141)		
	s were analyzed in this		18 18 18	08122-01A 08122-04A 08122-07A 08122-10A 08122-13A	180 180 180	08122 08122 08122 08122 08122	-02A -05A -08A -11A	180 180 180	8122-03A 8122-06A 8122-09A 8122-12A			

ALS Environmental

Date: 10-Aug-18

Client: PBS QUALIFIERS,

Project: Sky VALLEY EC; 41373.000
WorkOrder: 1808122

ACRONYMS, UNITS

Qualifier	<u>Description</u>
*	Value exceeds Regulatory Limit
a	Not accredited
В	Analyte detected in the associated Method Blank above the Reporting Limit
E	Value above quantitation range
Н	Analyzed outside of Holding Time
J	Analyte detected below quantitation limit
n	Not offered for accreditation
ND	Not Detected at the Reporting Limit
O	Sample amount is > 4 times amount spiked
P	Dual Column results percent difference > 40%
R	RPD above laboratory control limit
S	Spike Recovery outside laboratory control limits
U	Analyzed but not detected above the MDL
Acronym	<u>Description</u>
DUP	Method Duplicate
E	EPA Method
LCS	Laboratory Control Sample
LCSD	Laboratory Control Sample Duplicate
MBLK	Method Blank
MDL	Method Detection Limit
MQL	Method Quantitation Limit
MS	Matrix Spike
MSD	Matrix Spike Duplicate
PDS	Post Digestion Spike
PQL	Practical Quantitaion Limit
SDL	Sample Detection Limit
SW	SW-846 Method
2	2 2 2 2

 $\mu g/sample$

Sample Receipt Checklist

Client Name: PBS-SEATTLE			Date/Time	Received: 03	3-Aug-18	<u>3 09:30</u>	
Work Order: <u>1808122</u>			Received b	y: <u>\$</u>	<u>SNH</u>		
Checklist completed by Stephanie H arrir		ug-18	Reviewed by:	Shawn Smy	the		10-Aug-18
eSignature Matrices: Carrier name:	-	Date		eSignature			Date
Shipping container/cooler in good condition?		Yes 🗸	No 🗌	Not Present	: 🗆		
Custody seals intact on shipping container/coo	ler?	Yes \square	No 🗌	Not Present	✓		
Custody seals intact on sample bottles?		Yes \square	No 🗌	Not Present	✓		
Chain of custody present?		Yes 🗹	No 🗌				
Chain of custody signed when relinquished and	d received?	Yes 🗹	No 🗌				
Chain of custody agrees with sample labels?		Yes 🗹	No 🗌				
Samples in proper container/bottle?		Yes 🗹	No 🗆				
Sample containers intact?		Yes 🗹	No 🗆				
Sufficient sample volume for indicated test?		Yes 🗹	No 🗌				
All samples received within holding time?		Yes 🗹	No 🗌				
Container/Temp Blank temperature in complian	nce?	Yes 🗹	No 🗌				
Temperature(s)/Thermometer(s):							
Cooler(s)/Kit(s):							
Water - VOA vials have zero headspace?		Yes	No 🗆	No VOA vials su	ubmitted	✓	
Water - pH acceptable upon receipt?		Yes	No 🗌	N/A			
pH adjusted? pH adjusted by:		Yes	No 🗆	N/A 🔽			
Login Notes:							
				- — — — —			
				- — — — — —			- — — — — –
Client Contacted:	Date Contacted:		Person	Contacted:			
Contacted By:	Regarding:						
Comments:							
CorrectiveAction:						000	Danis 4 of 4



ANALYTICAL REQUEST FORM

RESULTS REQUIRED BY___

RUSH Status Required - ADDITIONAL CHARGE

REGULAR Status

808122

COOLER WETTER KEPACK

CUSTODY SEALS: NONE

COOLER TEMP:

COOLER PACKAGE SAMPLES

STD / PRTY MAIL UPS

FEDEX ALS COURIER

OTHER:

		nine proprieta de la constante	CONTACT	TALS LABORATORY GROUP PRIOR TO SENDING SAMPLES
Data \$12/14	Purchase Order No.			Dilling Address (if different)
		0.051.	A Davis	Billing Address (if different)
	e PBS ENGL	U		
	17 Pastlace			
City City	e WA	State	1510Z	
	act Creege			Quote No.
Email Address	gregg. miss.	augh Op	obsusa.lo	m Sampling Site Sky valley EC
Telephone (7	255. 465	7		Date/Time of Collection 41373 - 500
Fax Telephone			entransportation and the second secon	and the state of t
				PL= / 49/100 cm2
Laboratory Use Only	Client Sample Number	Media Type	Sample Volume (Liters)	ANALYSES REQUESTED - Use Method Number if Known
0	114-RB-W	MIGE		SW SUSZ AdmenPernipals office N. WINDOW
OL	115-PCB-W			Adriustate evon W. window
03	118-PB-W		Martin Carlo	Adam Marl Evon window
ay	117-PUB-W			Mp00 - Rm 17
as	118-PCB-W			N 200 - Rm 20
OP	119-PLB-W			E poo - Rm 13
O7	120-PUB-W		реги (голизована года очени при чени положени подвидения вы	E poo - Rm 12
<u>08</u>	121-PUB-W	THE SECURITION ASSESSMENT OF THE SECURITION OF THE SECURIT	ner i manigari nemanan i salah malan angan. Se angan ne semanan	5. 200 - Rm 7
09	172-PCB-W		ANNUAL VIRGINIA DE	5. pob - Rm 3
10	123-PCB-W		kuni hanka kiri pilata ir maggangari ribantir gʻirir kumbingi pagayun yalangun ri	Gym bld - gothering place window
(1	124-PB-W	**************************************		Cyn bld - giels lockerson Duorto Er
12	-125-PCB-W		en sicilation in Live manifestation (n.), as no return matrice, we in all other passes.	Annex - Room E
13	121-PCB-N	Anne () And () () () Anne (anne () () anne (anne () anne		Blank I
14	127-PCB-W	WIPE	THE PROPERTY OF THE PROPERTY O	SWADBZ BLANKZ
AT THE RESIDENCE OF THE PARTY O			eranena og seg miljerhot i mentnir jelmik i klining i guuggende sudaha	
			40	
Failure to	complete all por	tions of t	his form n	nay delay analysis. Please fill in this form LEGIBLY.
CHAIN OF	CUSTODY			
Relinquished by: (Signature)	1	38AAAM VANAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA	Date /	
(orgnature)	Mans.	200 00000000000000000000000000000000000	130	15 (Signature) 10930
Relinquished by: (Signature)	0	- 1	Date /	Time Received by (Signature) Date / Time
5. 4. 4. 4. 4. 4. 4. 4. 4. 4. 4. 4. 4. 4. 4	elementarione (in true scientist remain red.) Colombia representation representation representation (in the colombia red.)	A CHARLES ON STATE OF		DELIVERY METHOD: TOOLING METHOD MONE

ALS | ENVIRONMENTAL 4388 Glendale Milford Road / Cincinnati, OH 452 | CLIENT | DROP BOX