

CEI WHITE PAPER – Stormwater Design and Construction of Cape Cod BMPs



Design and Construction of Green Infrastructure Stormwater BMPs on Cape Cod – A Demonstration, Education and Outreach Project

Introduction

In ~~2014 summer 2008~~, the U.S. Environmental Protection Agency (EPA) began a project seeking design and construction of two green infrastructure ~~(GI)~~ stormwater best management practice (BMP) projects on Cape Cod in Massachusetts to serve as a model for promoting public awareness and building public support for problems and challenges associated with stormwater. The primary objectives were to design and construct two ~~GI green infrastructure~~ stormwater BMPs to treat nitrogen, and monitor both BMPs for a period of years ~~(or longer)~~ to evaluate stormwater flows and water quality parameters.

Locations

Stakeholder call-out box:

A critical goal of this project is to promote public awareness and build support among community members ~~for GI~~. Therefore, numerous stakeholders were engaged throughout the project, beginning prior to project startup, throughout the design and permitting process, throughout construction, and finally after completion as part of ongoing public outreach efforts. Stakeholders ranged from federal agencies such as EPA; state agencies including MassDEP; regional organizations including the Cape Cod Commission (CCC) and the Association for the Preservation of Cape Cod; local municipalities of Barnstable and Chatham; municipal departments including the Department of Public Works Conservation Commission, Parks and Recreation; and finally neighborhood residents interested in the project. Each group had differing goals and concerns, including project budget, schedule and construction techniques, ease of maintenance, landscaping and project beautification. All stakeholder goals had to be successfully balanced throughout project design and construction

To seek interested communities, EPA initiated a preliminary site selection process which targeted eight southern Cape Cod communities with stormwater draining to Nantucket Sound. Each community was responsible for identifying potential sites on publicly-owned property that would be suitable for BMP construction. Ideal sites would be suitably large enough for BMP construction, located close to waterbodies along the south coast of Cape Cod, have an existing municipal separate storm sewer system (MS4) draining a large watershed in close proximity, and have public visibility and space for informational signs and/or kiosks. Communities must also be willing to operate and maintain the BMPs, and provide in-kind services to help the project succeed. Additional consideration would be given to proposed locations draining to impaired waterbodies or those with an approved Total Maximum Daily Load (TMDL) for nitrogen.

EPA then performed a detailed review on all proposed sites to determine the best candidate locations. Based on the above criteria, two potential locations were

selected, one in Barnstable and a second in Chatham. Sites are as follows:

CEI WHITE PAPER – Stormwater Design and Construction of Cape Cod BMPs



1. Barnstable: Gateway Marina / Hyannis Inner Harbor park area located near the intersection South Street and Pleasant Street. This location abuts an existing drainage line that discharges to the Hyannis Inner Harbor, which is listed on the Massachusetts Final Year 2012 Integrated List of Waters as a Category 5 waterbody (Segment ID: MA96-82) impaired by both Fecal Coliform and Total Nitrogen.



2. Chatham: an undeveloped parcel located at the intersection of Oyster Pond Furlong and Absegami Run. This location abuts an existing drainage line that discharges to Oyster Pond, which is listed on the Massachusetts Final Year 2012 Integrated List of Waters as a Category 4a waterbody (Segment ID: MA96-45) with TMDLs prepared for both Fecal Coliform (EPA ID# 36772) and Total Nitrogen (EPA ID #36219).

Once selected communities and sites were finalized, EPA selected a Design Team, consisting of two consultants to provide a turnkey solution for each location. Selected firms consisted of the following:

- WaterVision (WV) of Acton Massachusetts – responsible for overall project implementation, budgeting, education and outreach, and sampling program design, and;
- Comprehensive Environmental Inc. (CEI) of Marlborough Massachusetts – responsible for project design, BMP construction, and development of an Operation and Maintenance (O&M) plan for each location.

After a kickoff meeting with EPA and separate meetings with each community, the Design Team began to design and size BMPs at each location. Using a combination of information provided by each town and desktop analysis of the surrounding area, CEI assessed the estimated total watershed size, land usage and impervious area, and general layout of the contributing drainage system. Both sites are in urban settings, with considerably impervious watersheds. The Barnstable location had an estimated 6.9-acre watershed, of which approximately 3.5 acres was classified as impervious (51%), while Chatham had an even larger estimated 16.9-acre watershed with approximately 5.7-acres or impervious area (34%).

Site Constraints


Potential BMP storage is controlled by several factors, primarily available space for construction and depth to groundwater, which serve to limit potential BMP space in three dimensions. The entire parcel at the Barnstable location totaled approximately 0.35-acres, however, this location is an existing park area with a brick walkway serving to connect an overflow parking area with

CEI WHITE PAPER – Stormwater Design and Construction of Cape Cod BMPs



the ferry terminal. Stakeholders wished to preserve the walkway and public access portion of this area, thereby restricting available surface space to approximately 0.15-acres.

The Chatham location is much larger, totaling several acres in size. However, an existing drainage ditch traverses through the middle of the site. This ditch also has wetlands associated with it, and thus is regulated under the Massachusetts Wetland Protection Act, as well as local bylaw requirements. As such, available space is restricted to approximately 0.29-acres of surface space, nearly all of which is located within regulated wetland buffer areas.

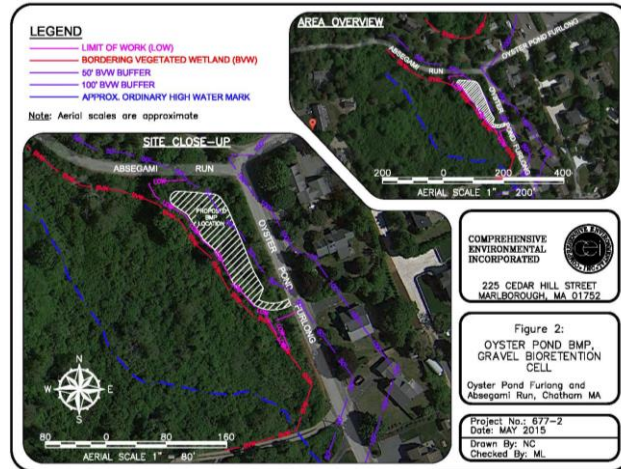

Based on the location of each site (close to the harbor and close to wetlands), groundwater depth was expected to be shallow. To determine actual depth to groundwater, CEI performed onsite soil borings at each location which indicated that groundwater was very shallow, at approximately 1 to 2-feet below the existing ground surface. An important requirement for gravel wetland systems is to avoid mixing between stormwater and groundwater. Due to the shallow groundwater system, the system will have to be lined with an impermeable **barrier** to prevent mixing between stormwater and groundwater.

BMP Choice

Due to the highly visible location within the park at Barnstable and the public demonstration and outreach component of the project, BMPs had to be both functional to treat stormwater and aesthetically pleasing. BMPs such as a gravel wetland are highly functional, but less aesthetically pleasing, whereas a bioretention rain garden is visually appealing but generally is not capable of treating the required volume of stormwater from the large contributing watersheds associated with this project. Therefore, a hybrid bioretention and gravel wetland system was chosen for implementation at each site, ~~thereby~~ combining the aesthetic component of a bioretention system with the storage and treatment capacity of a gravel wetland. **The** BMP would generally consist of an aerobic surface bioretention system capable of ponding a large volume of stormwater and an anaerobic subsurface gravel wetland cell. This aerobic-to-anaerobic treatment train is critical to the removal of nitrogen.

Nitrogen can be removed from stormwater through both aerobic and anaerobic processes. When stormwater enters the surficial bioretention area and is exposed to oxygen, limited aerobic

Formatted: Strikethrough

CEI WHITE PAPER – Stormwater Design and Construction of Cape Cod BMPs



Denitrification call-out box:

Denitrification is the biochemical reduction of oxidized nitrogen anions, nitrate (NO₃⁻) and nitrite (NO₂⁻) by microorganisms as terminal electron acceptor oxidizing agents during respiration. This process produces the gaseous products nitric oxide (NO), nitrous oxide (N₂O) and ultimately nitrogen gas (N₂), completing the nitrogen cycle. The general sequence is as follows: NO₃⁻ → NO₂⁻ → NO + N₂O → N₂. The end products, N₂O and N₂ are gases that re-enter the atmosphere. Denitrification can occur readily in anaerobic environments with oxygen concentrations less than 10% and an available organic carbon source to act as an electron donor.

denitrification occurs with the assistance of microorganisms. In this process, microorganisms simultaneously utilize oxygen and nitrate during respiration in a chemical reaction that typically produces nitrous oxide and a lesser amount of nitrogen gas. A more efficient process takes place through anaerobic denitrification

(see call-out box), where bacteria in conditions deprived of oxygen are forced to use nitrogen during respiration in a process that converts nitrate and nitrite present in stormwater primarily into nitrogen gas.

Sizing

As part of EPA's PWS, the Design Team was responsible for sizing the BMP for stormwater treatment. Due to the large size of contributing watersheds, BMP sizing would have to be maximized to the extent practical as allowed within the site constraints outlined previously. Early in the design process, the 1-inch water quality volume (WQv) represented a target treatment volume for each site, depending on available room for treatment at each site. Conservatively assuming that 100% of precipitation translates to runoff on impervious surfaces, the water quality volume for each site is calculated as follows:

- Barnstable WQv = 1" * (3.5 acres) * (43,560 sf / acre) * 1' / 12" = 12,705 cubic feet
- Chatham WQv = 1" * (5.7 acres) * (43,560 sf / acre) * 1' / 12" = 20,691 cubic feet

Due to the substantial water quality volumes, it quickly became evident that the large contributing watersheds combined with limited available room for BMP construction would make this target infeasible. Fortunately, nitrate and nitrite are highly soluble which allows BMPs designed for control of nitrogen to be designed for smaller volumes than might be designed for other pollutants, such as total suspended solids, bacteria, phosphorus, or for the control of flooding. Previous research by TetraTech and UNH (not entirely sure how we want to cite this or if we can even mention other companies?) indicated that it is possible to appreciably control nitrogen by capturing and treating runoff from small-scale events (e.g., 0.2 to 0.4-inch rainfall events) and the early portions of larger storm events while safely bypassing excess stormwater.

Based on available space at each location, subsurface gravel wetland cells ~~or~~ internal storage reservoirs (ISRs) ~~or~~ were designed to be as large as possible while still maintaining good design practices. This included considerations such as minimizing environmental resource area disturbances where possible, maintaining side slopes no steeper than 2:1, and allowing access for maintenance. Final ISR dimensions were designed as follows:

- Barnstable ISR: 16-feet wide by 100-feet long, 2-feet deep; and

Formatted: Strikethrough

CEI WHITE PAPER – Stormwater Design and Construction of Cape Cod BMPs



- Chatham ISR: 22-feet wide by 120-feet long, 2-feet deep.

Per the Evaluation and Optimization of Bioretention Design for Nitrogen and Phosphorus Removal by the UNH Stormwater Center under the Design of a Bioretention-Gravel Wetland Hybrid [\[is this a technical reference?\]](#), a gravel wetland typically contains about 25% of the design storage volume (DSv) in the crushed stone ISR. Therefore, the total design storage volume is equivalent to four times the ISR volume (ISRv). Using a stone reservoir void ratio conservatively estimated to be 0.3, the DSv at each location may be calculated as follows:

- Barnstable DSv = $4 * (16' * 100' * 2) * (0.3 \text{ void ratio}) = 3,840 \text{ cubic feet}$
- Chatham DSv = $4 * (22' * 120' * 2) * (0.3 \text{ void ratio}) = 6,336 \text{ cubic feet}$

These volumes above translate to approximately 30 percent of the water quality volume. As the water quality volume is equivalent to the 1-inch storm event, the design storm volume at each location is approximately equal to the 0.30- inch storm event.

Design and Construction

Construction at both sites entailed installation of a new deep-sump manhole within the existing stormwater drain line to provide pretreatment by allowing sediment particles to settle out, helping to keep the BMP free of sediment and making maintenance easier. This structure was also equipped with a diversion wall, effectively making it serve as an inlet control structure. In its finished configuration, small storms up to 0.3-inches in size, as well as the beginning part of larger storms, are designed to encounter [the](#) diversion wall where stormwater is directed into the BMP via a new pipe. This structure is also designed such that larger storms exceeding the design capacity of the BMP will flow over the diversion wall and continue through the existing drainage pipes, similar to existing conditions.

Upon leaving the inlet structure, stormwater directed into the BMP will pass through

Schedule call-out box:

Both Cape Cod communities expressed concern that construction could impact the busy summer tourist season. This was a particular concern in Barnstable, as the proposed BMP would be constructed in a small park in the downtown area which is frequently used as a cut-through for customers using the ferries to Nantucket and Martha's Vineyard. For the Chatham project, the site was located away from busy areas of town, with traffic generally limited to local residents and a small amount of boat ramp traffic. Additionally, most construction could take place off the road without disrupting traffic flow. After coordinating with both communities, it was decided that the Barnstable project would be constructed in the spring, and could therefore be completed during the tourist offseason so that construction would not disrupt foot traffic through the park during the busy summer months. In Chatham, work taking place off the street could be performed throughout the summer, however road work would take place during the fall months after the busy tourist season comes to an end and boat ramp traffic slows.

CEI WHITE PAPER – Stormwater Design and Construction of Cape Cod BMPs



a dedicated sampling manhole which will be equipped with monitoring equipment at a later date before flowing into the aerobic portion of the BMP. Here, it is exposed to aerobic bacteria for aerobic oxidation and nitrogen conversion. In order to adequately store the stormwater volume equivalent to a 0.3-inch storm, stormwater is allowed to pond up to a depth of approximately 1.6 feet in Barnstable and 2.4 feet in Chatham.



Hyannis Inner Harbor BMP: pre-construction

Formatted: Centered

The bulk of the surface aerobic portion is lined to maximize the flow path through the ISR. A small portion is left unlined as part of an infiltration zone to connect the aerobic



Hyannis Inner Harbor BMP: construction

zone to the anaerobic zone. This area, comprised of highly permeable sand and gravel supplemented with organic material, allows stormwater to quickly percolate into the underlying anaerobic gravel cell. Additionally, this area was seeded with shredded newspaper to provide a carbon source to assist with the denitrification process and speed anaerobic bacteria development [speeds transition to the anaerobic zone / conditions]. A perforated riser pipe was also incorporated into both BMPs to provide additional capacity, should the infiltration zone become plugged. Once in the anaerobic cell, bacteria provide

Formatted: Centered

denitrification as previously outlined.

Stormwater migrates through the ISR to an outlet control structure equipped with 1-inch diameter orifices, designed to slowly release stormwater over a 24-hour to 48-hour period in order to maximize flow path through the anaerobic zone for optimal denitrification. Outlet orifices are ~~also~~ located at the top of the ISR, thereby keeping this zone fully saturated at all times and in anaerobic conditions. Once released from the BMP, stormwater will flow through a second dedicated sampling



Hyannis Inner Harbor BMP: completed

Formatted: Strikethrough

Formatted: Centered

CEI WHITE PAPER – Stormwater Design and Construction of Cape Cod BMPs




manhole to be equipped with monitoring equipment at a later date. Overflow from the Barnstable BMP flows back into the existing drainage line where it flows into Hyannis Inner Harbor, similar to existing conditions while the Chatham BMP outlets stormwater into the wetland complex at the rear of the site. Both BMPs are also equipped with overflow/bypass manholes that will collect and safely bypass stormwater that exceeds the capacity of the BMP.

Addition design elements included a perimeter drain around both BMPs to prevent mixing of groundwater with stormwater. A maintenance road was also be constructed at the Chatham location to provide maintenance access. Maintenance requirements are anticipated to be relatively minor in nature. Communities will need to periodically monitor the deep sump inlet control structure and clean out sediment if needed. Periodic landscaping will also be required to trim excess vegetation growth. Each community will be ~~was also~~ provided with an Operation and Maintenance Plan to document future required action.

Both BMPs are designed as a plug-flow system, such that stormwater will remain within the ISR until the next storm occurs. This future storm will exert a hydraulic head on stormwater from the first storm within the subsurface gravel wetland cell, and thus push it out of the overflow structure to make room for the new storm.

Landscaping

Landscaping was an important feature at both BMP sites, both to provide nutrient uptake through the root systems and for aesthetic reasons. Because of the Barnstable BMP's location within the park area, the BMP had to incorporate plantings to suitably accentuate the beauty of the bioretention area. For this reason, the Cape Cod Commission designed a planting plan consisting of several hundred planting plugs. Native species were chosen to be particularly drought, flood, and salt tolerant. The Chatham BMP was planted with grass seed within the basin itself, however the side slopes were planted with native shrubs to provide slope stabilization, wildlife habitat, and project beautification.

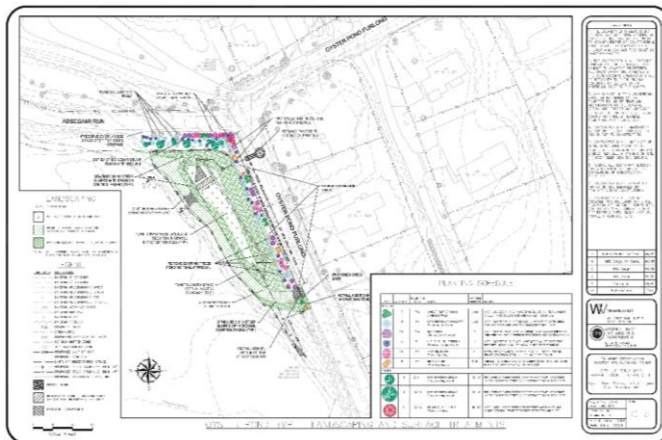

Chatham BMP landscaping plan

Formatted: Centered

CEI WHITE PAPER – Stormwater Design and Construction of Cape Cod BMPs



Future Monitoring

As a final project component, both BMPs will be equipped with sampling equipment at a later date, designed to analyze stormwater flows and water quality parameters of stormwater influent, effluent, and stormwater bypasses of each system. Federal and state environmental agencies will monitor both sites to evaluate water quality parameter removal efficiencies realized by installing these BMPs ~~for incorporation into future regulatory guidance documents~~. Sampling is expected to commence approximately 1 year after systems are brought online in order to allow bacteria to “seed” within each BMP, and will likely continue for at least 2 years.

Formatted: Strikethrough