Application for Certification

Part 1

FORD MOTOR COMPANY

APPLICATION FOR CERTIFICATION – PART I

2011 MODEL YEAR

Durability Group: BFMXDPDNNF1B

Evaporative Family: n/a

Test Group: BFMXD06.761A

Durability Group Description: Four Stroke, Diesel Cycle
Diesel Fueled, Direct Diesel Injection, Catalyst Code F

Test Group Description: 6.7L V8
Federal HDV1 / California MDV (8,501-10,000 lb GVWR)

Applicable Standards: Federal HDV1 / California ULEV II

Carlines Covered:
F250/F350 4x2/4x4 Complete and Box Delete

Vehicle Tested:

BFA1-6.7-J-008 config. 0: (FTP TN: BFMX10007808, HWY TN: BFMX10007809)

Release Date: March 29, 2010

For Questions, Contact:
Alyssa Werthman 313 323-2706
(awerthma@ford.com)

Part 1 Application Index

§ 00.00.00.00 Cover Page

§ 02.00.00.00 Durability Group Description

§ 03.00.00.00 Evaporative/ Refueling Family Description

§ 04.00.00.00 Durability Procedure Description

§ 05.00.00.00 Test Group Description

§ 06.00.00.00 Test Vehicle Description

§ 07.00.00.00 Test Results
- 07.00.01.00 EPA Certification Summary Information (CSI) report(s)

§ 08.00.00.00 Emission Testing Waiver Statements

§ 09.00.00.00 OBDII System Description

§ 11.00.00.00 AECD Descriptions

§ 12.00.00.00 Description of Vehicles Covered by Certificate and Test Parameters
- 12.00.01.00 Common Family Parameters
- 12.00.02.00 Calibration Description
- 12.00.03.00 Calibration Parts List
- 12.00.04.00 Special Test Procedures
- 12.00.05.00 Test Vehicle Requirements
- 12.00.06.00 Vehicle Description Reports

§ 14.00.00.00 Request for Certification

§ 15.00.00.00 Other Information
- 15.00.01.00 Fee Filing Form

§ 16.00.00.00 Confidential Information
- 16.00.01.00 Family Catalyst Information
- 16.00.03.00 OBD II Deficiency Summary
- 16.00.04.00 DF Summary
- 16.05.01.CC AECD Description Templates

§ 17.00.00.00 California ARB Information
- 17.00.01.00 Certification Review Sheet
- 17.00.02.00 Supplemental Data Sheet
- 17.00.03.00 VECI Label

§ 18.00.00.00 Revisions

Part 2 Application Index
(Running change updates)

SECTION 2

Durability Group Description

For a description of the Durability Group for this test group refer to Section 16.00.00.00 of the Common Section.

SECTION 3

Evaporative/Refueling Family Description

Not applicable for diesel vehicles

03.00.00.00

SECTION 4

Durability Procedure Description

For a description of the Durability Procedure,
refer to Section 16.00.00.00 of the Common Section.

ED_002078G_00021612-00006

SECTION 5

Test Group Description

For a description of this Test Group, refer to the Cover Page (00.00.00.00) and to the Test Results Section (07.00.00.00) of this application.

SECTION 6

Test Vehicle Description

For a description of this Test Vehicles utilized in this Test Group, refer to Section 07.00.00.00 of this application.

SECTION 7

EPA Certification Summary Information Report

(Test Results)

07.00.00.00

Certification Summary Information Report

Manufacturer	Ford Motor Company	**Manufacturer Code**	FMX
Test Group	BFMXD06.761A	**Evaporative/Refueling Family**	N/A
Certificate Number	N/A	**CARB Executive Order #**	N/A
Certificate Issue Date	N/A	**Certificate Revision Date**	N/A
Certificate Effective Date	N/A	**Conditional Certificate**	
CSI Revision #	N/A	**CSI Revision Date**	01/26/2010
Model Year	2011		

Test Group Information

CSI Type	Update for Correction	**Running Change Reference Number**	N/A
Drive Source	Combustion Engine	**EPA Vehicle Class**	HDV1, M6
Federal Clean Fuel Vehicle	No	**Federal Clean Fuel Vehicle Standard**	
Federal Clean Fuel Vehicle ILEV	No	**California Partial Zero Emissions Vehicle Indicator**	No
Durability Group Name	BFMXDPDNNF1B	**Durability Group Equivalency Factor**	1.0
Fuel Category	Single Fuel	**Fuel(s)**	Diesel
Reduced Fee Test Group	No		
Certification Region Codes			
Introduction into Commerce Date	N/A	**CAP2000 Conditional Certificate?**	N/A

Mfr Test Group Comments

F-Series Super-Duty 8,501-10K

Exhaust/Evap Standards Comments

Certification Summary Information Report

Manufacturer	Ford Motor Company	**Manufacturer Code**	FMX
Test Group	BFMXD06.761A	**Evaporative/Refueling Family**	N/A
Certificate Number	N/A	**CARB Executive Order #**	N/A
Certificate Issue Date	N/A	**Certificate Revision Date**	N/A
Certificate Effective Date	N/A	**Conditional Certificate**	
CSI Revision #	N/A	**CSI Revision Date**	01/26/2010
Model Year	2011		

Models Covered by this Certificate

Manufacturer	Division	Carline	Certification Region Code	Drive System	Transmission			
					Trans Type	Lockup	Creeper Gear	# of Gears
Ford Motor Company	1 - Ford Division	390 - F350 2WD DIESEL	Fed	R	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	392 - F350 4WD DIESEL	Fed	P	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	324 - F250 2WD BED DELETE DIESEL	CA	R	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	326 - F350 2WD BED DELETE DIESEL	Fed	R	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	324 - F250 2WD BED DELETE DIESEL	Fed	R	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	326 - F350 2WD BED DELETE DIESEL	CA	R	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	330 - F250 PICKUP 4WD DIESEL	CA	P	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	327 - F350 4WD BED DELETE DIESEL	Fed	P	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	325 - F250 4WD BED DELETE DIESEL	CA	P	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	315 - F250 PICKUP 2WD Diesel	CA	R	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	325 - F250 4WD BED DELETE DIESEL	Fed	P	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	327 - F350 4WD BED DELETE DIESEL	CA	P	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	315 - F250 PICKUP 2WD Diesel	Fed	R	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	330 - F250 PICKUP 4WD DIESEL	Fed	P	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	392 - F350 4WD DIESEL	CA	P	SA	Yes	No	6
Ford Motor Company	1 - Ford Division	390 - F350 2WD DIESEL	CA	R	SA	Yes	No	6

Certification Summary Information Report

Manufacturer	Ford Motor Company	**Manufacturer Code**	FMX
Test Group	BFMXD06.761A	**Evaporative/Refueling Family**	N/A
Certificate Number	N/A	**CARB Executive Order #**	N/A
Certificate Issue Date	N/A	**Certificate Revision Date**	N/A
Certificate Effective Date	N/A	**Conditional Certificate**	
CSI Revision #	N/A	**CSI Revision Date**	01/26/2010
Model Year	2011		

Engine Description

Hybrid Type		**Hybrid Description**	
Engine Type	4-Stroke Compression Ignition		
Engine Description			
4-Stroke Compression Ignition			
Engine Block Arrangement	V-shaped engine		
Engine Block Arrangement Description			
Basic Fuel Metering Systems(s)	Direct Diesel Injection,	**Number of Cylinders/Rotors**	8

Engine Configuration Number 1

Engine Displacement (liters)	6.7	**Engine Rated Horsepower**	390
Number of Inlet Valves Per Cylinder	2	**Number of exhaust Valves Per Cylinder**	2
Air Aspiration Method	Turbocharged	**Number of Air Aspiration Devices**	1
Air Aspiration Device Configuration	Single	**Charge Air Cooler Type**	Liquid

Cylinder Deactivation Description - N/A

Variable Valve Timing System Description - N/A

Variable Valve Lift System - N/A

Sensor Information

Number of Knock Sensors	0		
Sensor # 1		**Sensor Type**	Nitrogen oxide

Sensor Comments - N/A

Exhaust Gas Recirculation	Yes	**EGR Type**	Electronic/Electric
Cooled Exhaust Gas Recirculation	Yes		
Closed Loop Air Injection System	No	**Air Injection Type**	

Engine Configuration Comments - null

After Treatment Device(s) (ATD)

ATD Number	ATD Type	ATD Precious Metal	Substrate Material	Substrate Construction
1	Diesel Particulate Filter	Platinum + Paladium	Ceramic	Monolith
2	Oxidation catalyst	Platinum + Paladium	Ceramic	Monolith
3	Selective Catalytic Reduction	Copper-Zeolite	Ceramic	Monolith

After Treatment Device (ATD) Comments

DOC, SCR, DPF

Direct Ozone Reduction (DOR) Device Not Equipped

Emission Control Device Comments

Certification Summary Information Report

Manufacturer	Ford Motor Company	**Manufacturer Code**	FMX
Test Group	BFMXD06.761A	**Evaporative/Refueling Family**	N/A
Certificate Number	N/A	**CARB Executive Order #**	N/A
Certificate Issue Date	N/A	**Certificate Revision Date**	N/A
Certificate Effective Date	N/A	**Conditional Certificate**	
CSI Revision #	N/A	**CSI Revision Date**	01/26/2010
Model Year	2011		

Emission Data Vehicle Information

Vehicle ID / Configuration	BFA1-6.7-J-008 / 0		
Transmission Type	Semi-Automatic	**# of Transmission Gears**	6
Engine Code	BFA17A0508	**Axle Ratio**	3.55
Fuel(s)	Diesel / Not Applicable	**Vehicle Fuel Category**	Single Fuel
Displacement (liters)	6.7	**Rated Horsepower**	390
Equivalent Test Weight (pounds)	10000	**Air Aspiration Method**	Turbocharged
Test Drive Code	Part-time 4-Wheel Drive	**SIL Usage**	Not eqipped
Aged Emission Components	120,000 (mi)		

Dynamometer Coefficients Test Procedure: City/Highway/Evap

Dynamometer Target Coefficients	a=84.62 (lbf)	b=1.6037 (lbf/mph)	c=0.03891 (lbf/mph**2)
Dynamometer Set Coefficients	a=64.22 (lbf)	b=-0.7255 (lbf/mph)	c=0.05901 (lbf/mph**2)

Test Vehicle Comments

F-350 Crew Cab 4x4

Certification Summary Information Report

Manufacturer	Ford Motor Company	**Manufacturer Code**	FMX
Test Group	BFMXD06.761A	**Evaporative/Refueling Family**	N/A
Certificate Number	N/A	**CARB Executive Order #**	N/A
Certificate Issue Date	N/A	**Certificate Revision Date**	N/A
Certificate Effective Date	N/A	**Conditional Certificate**	
CSI Revision #	N/A	**CSI Revision Date**	01/26/2010
Model Year	2011		

Test #	BFMX10007808	**Exhaust Test # for this Evap Test**	N/A
Test Procedure	CVS 75 and later (w/o can. load)	**Test Fuel Type**	Cert Diesel 7-15 ppm Sulfur
Test Date	01/21/2010	**DF Type**	Mfr. Determined
4WD Dyno?	No	**State of Charge Delta**	

Test Comments

diesel data Official test

Exhaust Standards

Sales Area	Useful Life	Emission Name	Rounded Result	Cert Level	Std	Vehicle Class	Std Level	NMOG / NMHC	RAF	Deterioration Factor Add DF	Deterioration Factor Mult DF	Diesel Adjustment Factor Up	Diesel Adjustment Factor Down	Pass/Fail
Fed	120,000 miles	NOX	0.11	0.2	0.2	HDV1	Federal HDV (8500-10,000 GVWR)			0.05		0.010000	-0.370000	Pass
Fed	120,000 miles	CO	0.28	0.5	7.3	HDV1	Federal HDV (8500-10,000 GVWR)			0.21		0.000000	-0.070000	Pass
Fed	120,000 miles	HC-NM	0.0148	0.034	0.195	HDV1	Federal HDV (8500-10,000 GVWR)			0.0192		0.000100	-0.003900	Pass
Fed	120,000 miles	PM	0.000	0.01	0.02	HDV1	Federal HDV (8500-10,000 GVWR)			0.005		0.000200	-0.007400	Pass
Fed	120,000 miles	HCHO	0.0072	0.007	0.032	HDV1	Federal HDV (8500-10,000 GVWR)			0.0000		-0.000100	0.002100	Pass
CA	120,000 miles	NMOG	0.0148	0.034	0.143	M6	California LEV-II ULEV	1.00		0.0192		0.000100	-0.003900	Pass
CA	120,000 miles	NOX	0.11	0.2	0.2	M6	California LEV-II ULEV			0.05		0.010000	-0.370000	Pass
CA	120,000 miles	CO	0.28	0.5	6.4	M6	California LEV-II ULEV			0.21		0.000000	-0.070000	Pass
CA	120,000 miles	PM	0.000	0.01	0.06	M6	California LEV-II ULEV			0.005		0.000200	-0.007400	Pass
CA	120,000 miles	HCHO	0.0072	0.007	0.016	M6	California LEV-II ULEV			0.0000		-0.000100	0.002100	Pass

Certification Summary Information Report

Manufacturer	Ford Motor Company	**Manufacturer Code**	FMX
Test Group	BFMXD06.761A	**Evaporative/Refueling Family**	N/A
Certificate Number	N/A	**CARB Executive Order #**	N/A
Certificate Issue Date	N/A	**Certificate Revision Date**	N/A
Certificate Effective Date	N/A	**Conditional Certificate**	
CSI Revision #	N/A	**CSI Revision Date**	01/26/2010
Model Year	2011		

Test #	BFMX10007809	**Exhaust Test # for this Evap Test**	N/A
Test Procedure	HWFE	**Test Fuel Type**	Cert Diesel 7-15 ppm Sulfur
Test Date	01/21/2010	**DF Type**	Mfr. Determined
4WD Dyno?	No	**State of Charge Delta**	

Test Comments

diesel data Official test

Exhaust Standards

Sales Area	Useful Life	Emission Name	Rounded Result	Cert Level	Std	Vehicle Class	Std Level	NMOG / NMHC	RAF	Deterioration Factor Add DF	Deterioration Factor Mult DF	Diesel Adjustment Factor Up	Diesel Adjustment Factor Down	Pass/Fail
CA	120,000 miles	NOX	0.02	0.1	0.4	M6	California LEV-II ULEV			0.05		0.010000	-0.370000	Pass

SECTION 8

Emission Testing Waiver Statements

For applicable test waiver statements, refer to Section 14.00.00.00 of the Common Section.

ED_002078G_00021612-00016

SECTION 9

OBD-II System Description

For a description of the OBD System utilized for this Test Group, refer to Section 16.06.00.00 of the Common Section.

ED_002078G_00021612-00017

SECTION 11

AECD Description

For a description of the AECDs utilized in this Test Group, refer to Section 16.05.01.CC of this application.

SECTION 12

Description of Vehicles Covered by Certificate and Testing Parameters

12.00.00.00

Vehicle Program: F-Series Super Duty

Test Group Information	
Vehicle/Engine Class	HDV1/MDV
Vehicle Fuel Category	*Single Fuel*
Operating Fuel 1	*Diesel*
Operating Fuel 2	*Diesel*

Engine Displacement (liters)	6.7L
Engine Cooling medium	OAT Coolant
SAE net HP @ RPM (prem fuel)	390hp @ 2800 rpm
SAE net HP @ RPM (prem fuel)	
SAE net HP @ RPM (prem fuel)	
SAE net torque ft-lb @ RPM (prem fuel)	731 ft-lbs @ 1600 rpm
SAE net torque ft-lb @ RPM (prem fuel)	
Cylinder Deactivation	N
Variable Valve Timing (VVT)	N
Variable Valve Lift	N
Number of Inlet Valves Per Cylinder	2
Number of Exhaust Valves Per Cylinder	2
Air Aspiration Method*	*Turbocharged (TC)*
Number of Air Aspiration Devices	1
Air Aspiration Configuration	*N=Single*
Charge Air Cooler Type* (TG-51)	*Liquid*
Number of Charge Air Cooler	1
Charge Air Cooler Configuration	*Single*

Exhaust Emission Control System:	
Exhaust Gas Recirculation (EGR)*	Yes
Cooled EGR	Yes
EGR Type	*EEGR=Electronic/Electric*
Electronic Controls	PCM
Closed Loop Air Injection System	N
Air injection Type (AIR)*	NA=Not applicable
Location of injected air	None
Direct Ozone Reduction (DOR) Device	NE=Not equipped

Calibrations that Vary with Time or Dist.	See Common Section
Maintenance Schedule	*Normal*
Compression ratio (nominal)	16.2:1
Cylinder head design Ref. (08.05)	OHV

Camshaft Timing: (with VCT fully advanced)	no VCT
Cam Phase – Computer Controlled	
Int valve opens (° BTDC)	30.5
Int valve closes (° ABDC)	57.4
Int valve duration (°)	267.8
Int valve maximum lift (mm)	8.55
Exh valve opens (° BBDC)	75.2
Exh valve closes (° ATDC)	42.1
Exh valve duration (°)	297.3
Exh valve maximum lift (mm)	8.84
Valve lash (N/A for RFF)	Hydraulic Lash Adj

Fuel Metering System	Direct Diesel (DDI)

After-Treatment Device Information	
After-Treatment Type	DPF=Diesel Particulate
After-Treatment Configuration	DOC, DPF, SCR
After-Treatment Type/size/code	Ref. 16.00.01

Feedback Sensor Type:	
Knock sensor	NO
Oxygen sensor (O_2S)*	NO
Heated oxygen sensor (HO_2S)*	NO
Air/Fuel Sensor (AFS)*	NO
Heated Air/Fuel Sensor (HAFS)*	NO
Feedback Sensor Configuration	NOx Sensor

HEV/ZEV General Information	Not Apllicable
HEV Class	
Energy Storage Device Category	
Battery Type:	
Number of Batteries:	
Total Weight of Batteries (kg):	
Total Battery Pack(s) Voltage:	
Battery Pack(s) Energy Capacity using C3 procedure (Ah)	
Complete Battery Pack(s) Specific Energy (Whr/kg):	
Battery Charger Type	
Number of Capacitors	
Capacitor Rating (Farads)	
HEV Electric Drive System Peak Power	
HEV Traction Drive System Voltage (V):	
HEV Traction Drive Boost:	
HEV Idle Start/Stop:	
Regenerative Braking Type	
Regenerative Braking Source	
Driver Controlled Regenerative Braking	
Number of Drive Motor/Generators	
Motor/Generator Type	
Rated Motor/Generator Power	
Fuel Cell Description	
Fuel Cell On-Board H2 Storage Capacity	
Usable H2 Fill Capacity	

* - VECI Label Content

Exhaust Calibration	Application	Transmission	Leak Check	Vehicle
BFA17A0508, 09, 10, 11	50s	6R140	na	F250/350 wide frame

Reference Specifications

Idle RPM	PCM Controlled
Target (BASE) in Drive ; (A/C-off / A/C-on)	600/600 RPM A/T
Target (BASE) in Neutral ((A/C-off / A/C-on)	600/600 RPM A/T

Special conditions which may require idle speeds higher than BASE are listed below:

Potential Idle Speed Modifier	Function Utilized (Y/ N)	Purpose
Low or high air charge temperature	N	Heater, A/C or engine cooling performance
Low catalyst temperature	N	Achieve/maintain light off
Low engine coolant temperature	Y	Combustion stability
Low or high ambient temperature	Y	Heater or A/C performance
High transmission oil temperature	Y	Ensure adequate fluid pressure
Low battery voltage	Y	Avoid stalling or no-start
High Alternator load	N	Preserve battery life and avoid low voltage
High-speed fan operation	N	For engine and A/C condenser cooling
Extended neutral idle time	N	Maintain catalyst temperature
Power steering pressure	N	Ensure adequate P/S assistance
High Altitude	N	Maintain air mass flow to avoid stalling
Alternate calibration	N	Use to prevent issues during plant drives/marshalling
Drive Speed Control or Shift Delay	N	Increase engine speed to improve cabin heating or cooling

Fuel Injector	102 mg/stroke @ max power	
Fuel Pressure Reg	0 - 2000 bar (30,000 psi)	
Crankcase CCV Valve	orifice (no electronics)	0-205 Liters/min
EGR valve	0 - 130 kg/hr	
High Temp Thermostat (2)	Start to Open: 85ºC (1) Start to Open: 95ºC (2)	
Low temp Thermostat (2)	Start to Open: 20ºC (1) Start to Open: 45ºC (2)	

Powertrain Control Module (PCM) -- PCM controlled calibrations for emission-related components are described in the AECD section 16.05.

2011 MY 6.7L P473
Chassis Dynamometer Exhaust Emissions Parts List
UNDER 10K
INITIAL CERTIFICATION

Engine Family(ies)	Certification Level	Calibration(s)	w/PCM Assembly Part #	TCM
BFMXD06.761A	Initial Cert.	BFA17A0508	(P473) BC3A–12A650–BVD	BC3A-14C337-CD
	RC #61A-004	BFA17A0509	(P473) BC3A–12A650–BVE	BC3A-14C337-CE
	RC #61A-005	BFA17A0510	(P473) BC3A–12A650–BVF	BC3A-14C337-CF
	RC #61A-006	BFA17A0511	(P473) BC3A–12A650–BVG	BC3A-14C337-CF

Application Updates

Log Number	Description of Update

02/09/2010: 61A-004: Update 12B533 per w.p. 03.14.01-4365
New Part: BC3A – 12B533 – AD
Old Part: BC3A – 12B533 – AC (remains alternate)

02/09/2010: 61A-005: Update 5K202 per w.p. 03.14.01-4396
New Part: BC3A – 15K202 – BD
Old Part: BC3A – 5K202 – BC (remains alternate)

---------- All Other Exhaust Emission Parts ---------

Part Name (Quantity if more than 1)	Part Number
Catalyst (P473)	BC34 – 5H240 –AD
Fuel Pump Assembly	BC3Q – 9B395 – CB
Camshaft Position Sensor	BC3Q - 12K073 - AA
Crankshaft Position Sensor	BC3Q - 6C315 - CA
CCV Valve	BC3Q – 6A785 – AD
EGR Valve Assy	BC3Q – 9D475 – CE
EGR Vacuum Reg	BC3Q – 9F454 – CA
EGR Pressure Sensor (DPFE)	8C34 – 9J460 – AA
EGR Cooler Bypass Valve	BC3Q - 9U433 – AF
EGR Coolant Temp. Sensor	BC3A – 12B591 - BA
Fuel Injector (8)	BC3Q - 9K546 – AD
Volume (fuel) Control Valve	BC3Q – 9J307 – AA
Fuel Temperature Sensor	BC3Q – 9F951 – AA
Fuel Rail Pressure Sensor	BC3Q – 9F838 – AA
Pedal Position Sensor Assembly (ETC) (Fixed)	BC3A – 9F836 – DB
Mass Air Flow/Intake Air Temperature Sensor	BR31 - 12B579 - AA
Nox Sensor	BC3A – 5J299 – EA
Nox Control Module	BC3A – 5K202 – BD
Nox Control Module	BC3A – 5K202 – BC (alt)
Electric Throttle Body	BC3Q – 9F991 – DA
Fuel Rail Pressure Regulator Valve	BC3Q – 9C968 – AA

Test Group: BFMXD06.761A
Issued: January 26, 2010
Revised: February 16, 2010

Mech Vacuum Pump	BC3Q – 2A451 – DB
Exhaust Manifold Pressure Sensor	BC3A – 5H295 – AD
Urea Injector	AL3E – 5J281 – AB
Urea Heated Resv.	BC34 – 5J225 – BA
Urea Supply Module (1)	BC34 – 5J229 – EA
Var. Geo. Turbo Charge Control (VGTC)	BC3Q – 6F089 – AA
Var. Geometry Turbocharger (VGT)	BC3Q – 9G438 – AC
Glow Plug	BC3Q – 6M090 – BB
Glow Plug Control Mod.	BC3A – 12B533 – AD
Glow Plug Control Mod.	BC3A – 12B533 – AC (alt)
Intake Manifold Pressure Sensor (MAP)	BC3Q – 9F479 – AC
Engine Coolant Temp. Sensor (ECT)	3F1A – 12A648 – AA
Ambient Temp. Sensor	AU5T – 12A647 – AC
Ambient Temp. Sensor	AE53 – 12A647 – AA (alt)

Special Test Procedures

4K Diesel Testing Overview

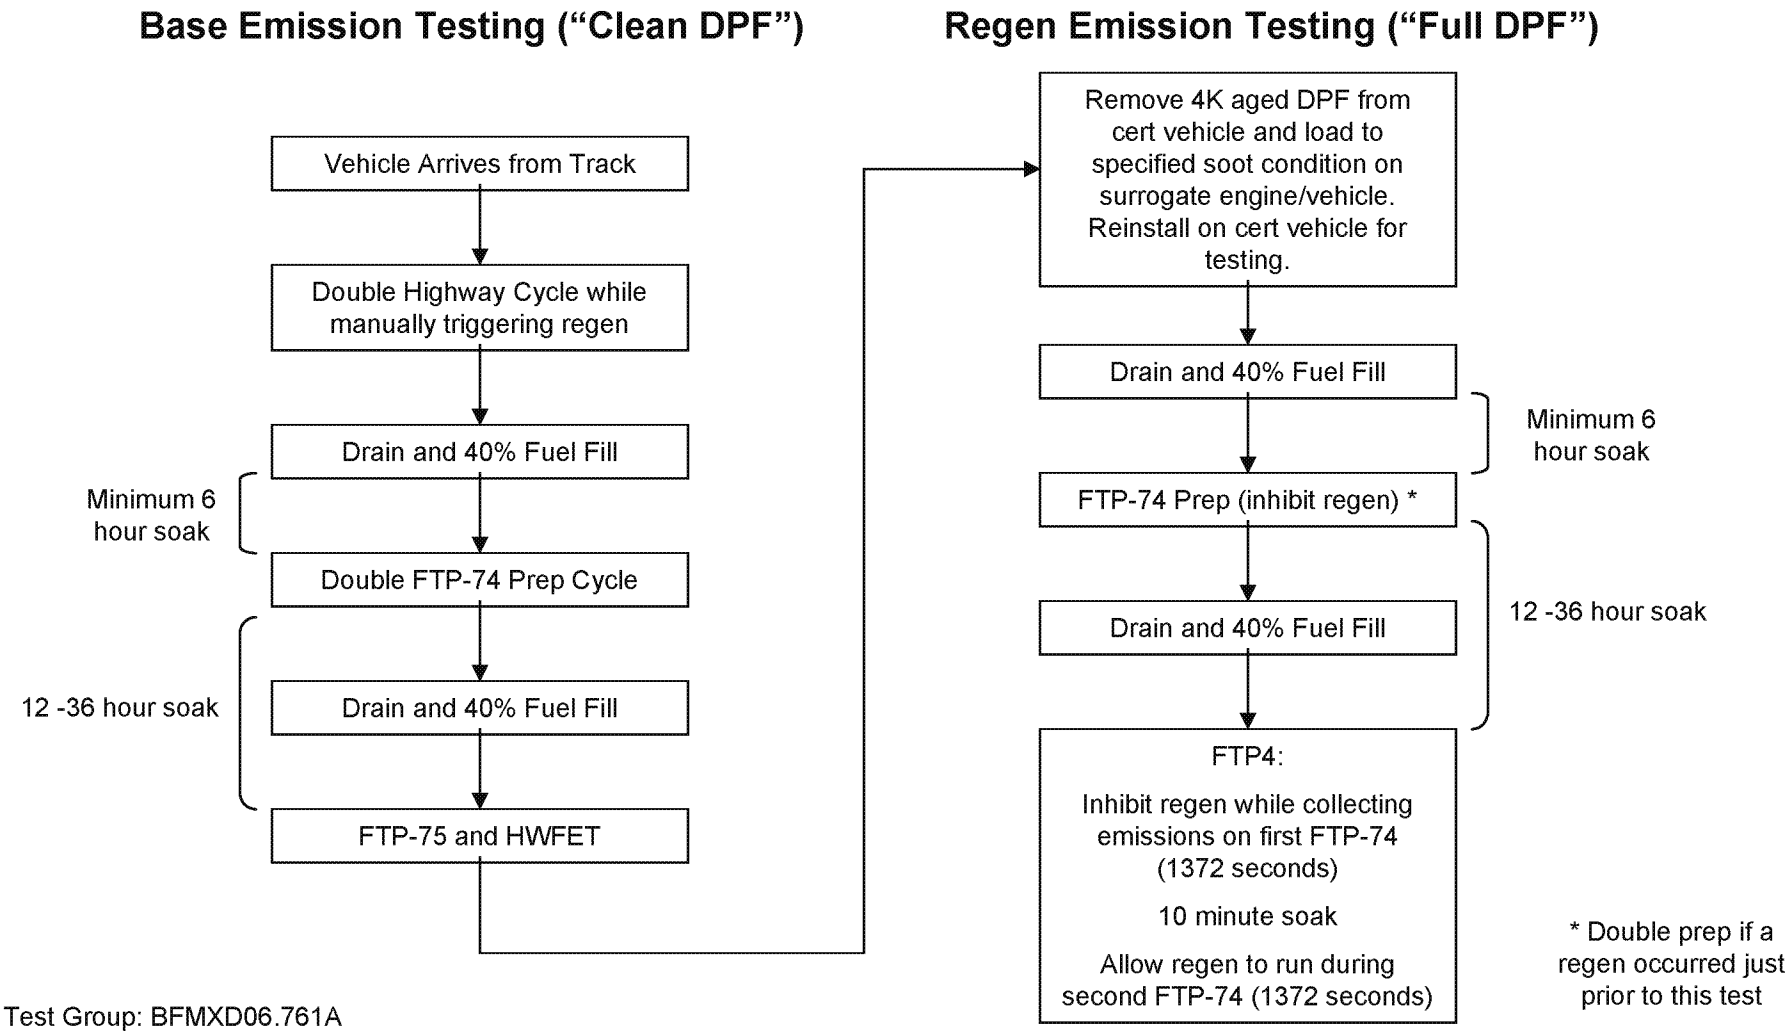

Test Group: BFMXD06.761A

Issued: January 26, 2010

Revised:

2011 TEST VEHICLE REQUIREMENTS

	Durability Data Vehicle	CAP2000 Emission Data Vehicle Exhaust
Evap. Emission Family	n/a	n/a
Displacement Liters	6.7L	6.7L
Engine Code	DDBC1_P19CUX_DFV32_W889	BFA17A0508
Fuel Tank Code	TY	TS
Catalyst Code	*	*
Exhaust Control System	TC/DDI/CAC/EGR-C/OC PTOX/SCR-U	TC/DDI/CAC/EGR-C/OC PTOX/SCR-U
Model	F350 4x4 SRW	F-350 4x4 Crew Cab SRW (simulating F-350 4x4 Box Delete SRW)
Transmission	Auto-6	Auto-6
Shift Schedule	NA	NA
Equivalent Test Weight	8500 lbs	10000 lbs
THP/DPA	f_0=76.16, f_1=0.9342, f_2=0.04165	f_0=84.62, f_1=1.6037 f_2=0.03891
Axle Ratio	3.73	3.55
N/V Ratio - RPM/MPH		25.1
Tires	LT245/75R17	LT275/70R18
ACTUAL TEST VEHICLES		
Model Year	2011	2011
Engine Family	BFMXD06.761A	BFMXD06.761A
Vehicle ID No	BFA1-6.7-889	BFA1-6.7-J-008
Configuration Number		0

* See Section 16

- Exhaust emissions testing performed at R08 calibration level.

- The R09 calibration does not adversely affect emissions. With R09, improvements were made to turbo boost control, cold and hot idle fuel control, cold combustion NVH, transmission control of engine speed and one-touch integrated start. In addition new software content was added for the cooling fan and speed control and the calibration was matured for EI-AECD timers. In addition, several revisions were made to DPF regeneration and

many OBD enhancements were incorporated. Pressure control modifications and a change in downshifts were made in the transmission calibration for shift quality improvements.

- The R10 calibration does not adversely affect emissions. With R10, changes were made to DPF regeneration and urea/SCR control. Refinements to idle speed control and cooling fan control were made and idle gains for PTO were modified for improved stability and increased rpm range. In addition, changes for service tool and end of line were implemented, as well as revisions for EGR cooler fouling protection, pedal diagnostics and the torque to fuel calibration. Dew point temperature thresholds were increased to avoid water impact on the NOx sensor and additional OBD maturity/robustness actions were taken. Additional transmission calibration changes were made for shift improvements.

- The R11 calibration does not adversely affect emissions. R11 incorporates a 30% torque derate for sensor faults resulting in urea/SCR system deactivation. In addition, the urea quality monitor was made continuous, i.e., decoupled from urea refill and the urea dosing fault for clogged or blocked line detection will be turned to MIL with a 30% torque derate.

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088481	5088480	5088482	5088478	5088477	5088484	5088479	5088483
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Short	Short	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	7629	7629	7629	7629	7497	7497	7497	7497
LVW - ETW	8000	8000	8000	8000	8000	8000	8000	8000
Loaded Weight	7929	7929	7929	7929	7797	7797	7797	7797
ALVW - ETW	9000	9000	9000	9000	8500	8500	8500	8500
Adj. Loaded Weight	8764	8764	8814	8814	8698	8698	8748	8748
GVWR	9900	9900	10000	10000	9900	9900	10000	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.5	24.2	24.5	24.5	24.2	24.5	24.2
Max N/V Ratio	25.9	26.4	25.9	26.4	26.4	25.9	26.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R18
Max Tire Size	LT275/65R18	LT265/70R17	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT265/70R17	LT275/65R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088522	5088520	5088519	5088521	5088453	5088454	5088501	5088503
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	REGULAR CAB	REGULAR CAB	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	8954	8954	8954	8954	6839	6839	8164	8164
LVW - ETW	9500	9500	9500	9500	7000	7000	8500	8500
Loaded Weight	9254	9254	9254	9254	7139	7139	8464	8464
ALVW - ETW	9500	9500	9500	9500	8500	8500	9000	9000
Adj. Loaded Weight	9427	9427	9477	9477	8320	8320	8982	8982
GVWR	9900	9900	10000	10000	9800	9800	9800	9800
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.5	24.2	24.5	24.5	24.2	24.5	24.2
Max N/V Ratio	25.9	26.4	25.9	26.4	26.4	25.9	26.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R18
Max Tire Size	LT275/65R18	LT265/70R17	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT265/70R17	LT275/65R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088467	5088459	5088460	5088465	5088461	5088462	5088510	5088508
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE
Wheelbase	Long	Long	Long	Long	Short	Short	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	7329	7329	7329	7329	7203	7203	8654	8654
LVW - ETW	7500	7500	7500	7500	7500	7500	9000	9000
Loaded Weight	7629	7629	7629	7629	7503	7503	8954	8954
ALVW - ETW	8500	8500	8500	8500	8500	8500	9500	9500
Adj. Loaded Weight	8614	8614	8664	8664	8502	8502	9277	9277
GVWR	9900	9900	10000	10000	9800	9800	9900	9900
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.5	24.5	24.2	24.5	24.2	24.2	24.5
Max N/V Ratio	25.9	26.4	26.4	25.9	26.4	25.9	25.9	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17
Max Tire Size	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088511	5088507	5088390	5088389	5088395	5088401	5088387	5088391
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TS	TS	TS	TS	TS	TS	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8654	8654	8136	8136	8136	8136	8136	8136
LVW - ETW	9000	9000	8500	8500	8500	8500	8500	8500
Loaded Weight	8954	8954	8436	8436	8436	8436	8436	8436
ALVW - ETW	9500	9500	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	9327	9327	9018	9018	9018	9068	9068	9068
GVWR	10000	10000	9900	9900	9900	10000	10000	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.55	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.5	24.5	23.4	24.4	24.4	23.4	24.5
Max N/V Ratio	25.9	26.4	26.4	25.9	24.4	24.4	25.9	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R20	LT275/65R20	LT275/65R18	LT245/75R17
Max Tire Size	LT275/65R18	LT265/70R17	LT265/70R17	LT275/70R18	LT275/65R20	LT275/65R20	LT275/70R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088349	5088352	5088383	5088353	5088377	5088350	5088438	5088440
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB BOX DELETE	CREW CAB BOX DELETE
Wheelbase	Short	Short	Short	Short	Short	Short	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7905	7905	7905	7905	7905	7905	9461	9461
LVW - ETW	8000	8000	8000	8000	8000	8000	10000	10000
Loaded Weight	8205	8205	8205	8205	8205	8205	9761	9761
ALVW - ETW	9000	9000	9000	9000	9000	9000	9500	9500
Adj. Loaded Weight	8902	8902	8902	8952	8952	8952	9680	9680
GVWR	9900	9900	9900	10000	10000	10000	9900	9900
Min Axle Ratio	3.31	3.31	3.55	3.31	3.55	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.5	24.4	24.5	24.4	23.4	24.5	23.4
Max N/V Ratio	25.9	26.4	24.4	26.4	24.4	25.9	26.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT275/65R20	LT245/75R17	LT275/65R20	LT275/65R18	LT245/75R17	LT275/65R18
Max Tire Size	LT275/70R18	LT265/70R17	LT275/65R20	LT265/70R17	LT275/65R20	LT275/70R18	LT265/70R17	LT275/70R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088441	5088437	5088332	5088316	5088318	5088315	5088319	5088327
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TS	TS	TY	TY	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB BOX DELETE	CREW CAB BOX DELETE	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	9461	9461	7263	7263	7263	7263	7263	7263
LVW - ETW	10000	10000	7500	7500	7500	7500	7500	7500
Loaded Weight	9761	9761	7563	7563	7563	7563	7563	7563
ALVW - ETW	9500	9500	8500	8500	8500	8500	8500	8500
Adj. Loaded Weight	9730	9730	8582	8582	8582	8632	8632	8632
GVWR	10000	10000	9900	9900	9900	10000	10000	10000
Min Axle Ratio	3.31	3.31	3.55	3.31	3.31	3.31	3.31	3.55
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	23.4	24.4	23.4	24.5	23.4	24.5	24.4
Max N/V Ratio	26.4	25.9	24.4	25.9	26.4	25.9	26.4	24.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R18	LT275/65R20	LT275/65R18	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R20
Max Tire Size	LT265/70R17	LT275/70R18	LT275/65R20	LT275/70R18	LT265/70R17	LT275/70R18	LT265/70R17	LT275/65R20
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088406	5088407	5088408	5088405	5088365	5088345	5088336	5088375
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TY	TY	TY	TY	TS	TS	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8588	8588	8588	8588	7775	7775	7775	7775
LVW - ETW	9000	9000	9000	9000	8000	8000	8000	8000
Loaded Weight	8888	8888	8888	8888	8075	8075	8075	8075
ALVW - ETW	9000	9000	9500	9500	9000	9000	9000	9000
Adj. Loaded Weight	9244	9244	9294	9294	8838	8838	8838	8888
GVWR	9900	9900	10000	10000	9900	9900	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.55	3.31	3.31	3.55
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.5	24.5	23.4	24.4	23.4	24.5	24.4
Max N/V Ratio	25.9	26.4	26.4	25.9	24.4	25.9	26.4	24.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R20	LT275/65R18	LT245/75R17	LT275/65R20
Max Tire Size	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18	LT275/65R20	LT275/70R18	LT265/70R17	LT275/65R20
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088335	5088344	5088339	5088337	5088364	5088334	5088333	5088371
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TS	TS	TY	TY	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Short	Short	Short	Short	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7775	7775	7649	7649	7649	7649	7649	7649
LVW - ETW	8000	8000	8000	8000	8000	8000	8000	8000
Loaded Weight	8075	8075	7949	7949	7949	7949	7949	7949
ALVW - ETW	9000	9000	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	8888	8888	8774	8774	8774	8824	8824	8824
GVWR	10000	10000	9900	9900	9900	10000	10000	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.55	3.31	3.31	3.55
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	23.4	24.5	23.4	24.4	24.5	23.4	24.4
Max N/V Ratio	26.4	25.9	26.4	25.9	24.4	26.4	25.9	24.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R18	LT275/65R20	LT245/75R17	LT275/65R18	LT275/65R20
Max Tire Size	LT265/70R17	LT275/70R18	LT265/70R17	LT275/70R18	LT275/65R20	LT265/70R17	LT275/70R18	LT275/65R20
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088421	5088424	5088426	5088422	5088712	5088713	5088714	5088711
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TS	TS	TS	TS	TS	TS	TS	TS
Vehicle Line	F250	F250	F250	F250	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X2	4X2	4X2	4X2
Curb Weight	9100	9100	9100	9100	7628	7628	7733	7733
LVW - ETW	9500	9500	9500	9500	8000	8000	8000	8000
Loaded Weight	9400	9400	9400	9400	7928	7928	8033	8033
ALVW - ETW	9500	9500	9500	9500	9000	9000	9000	9000
Adj. Loaded Weight	9500	9500	9550	9550	8764	8814	8816	8866
GVWR	9900	9900	10000	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.5	24.5	23.4	24.5	24.5	24.2	24.2
Max N/V Ratio	25.9	26.4	26.4	25.9	26.4	26.4	25.9	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18
Max Tire Size	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088707	5088705	5088706	5088710	5088754	5088753	5088758	5088755
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TY	TY	TY	TY	TS	TS	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE
Wheelbase	Short	Short	Short	Short	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	7497	7497	7602	7602	8953	8953	9058	9058
LVW - ETW	8000	8000	8000	8000	9500	9500	9500	9500
Loaded Weight	7797	7797	7902	7902	9253	9253	9358	9358
ALVW - ETW	8500	8500	9000	9000	9500	9500	9500	9500
Adj. Loaded Weight	8698	8748	8751	8801	9426	9476	9479	9529
GVWR	9900	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.5	24.2	24.2	24.5	24.5	24.2	24.2
Max N/V Ratio	26.4	26.4	25.9	25.9	26.4	26.4	25.9	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18
Max Tire Size	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088669	5088670	5088692	5088677	5088678	5088691	5088729	5088732
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	6870	6870	6975	6975	6975	6975	8195	8195
LVW - ETW	7000	7000	7500	7500	7500	7500	8500	8500
Loaded Weight	7170	7170	7275	7275	7275	7275	8495	8495
ALVW - ETW	8500	8500	8500	8500	8500	8500	9000	9000
Adj. Loaded Weight	8385	8435	8438	8438	8488	8488	9048	9098
GVWR	9900	10000	9900	9900	10000	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.55	3.31	3.31	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.31	3.31	3.55	3.55	3.55
Min N/V Ratio	24.5	24.5	25.9	24.2	24.2	25.9	24.5	24.5
Max N/V Ratio	26.4	26.4	25.9	24.2	24.2	25.9	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088733	5088731	5088689	5088687	5088683	5088680	5088684	5088679
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	8300	8300	7329	7329	7434	7434	7202	7202
LVW - ETW	8500	8500	7500	7500	7500	7500	7500	7500
Loaded Weight	8600	8600	7629	7629	7734	7734	7502	7502
ALVW - ETW	9000	9000	8500	8500	8500	8500	8500	8500
Adj. Loaded Weight	9100	9150	8614	8664	8667	8717	8551	8601
GVWR	9900	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.2	24.5	24.5	24.2	24.2	24.5	24.5
Max N/V Ratio	25.9	25.9	26.4	26.4	25.9	25.9	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088681	5088682	5088741	5088742	5088743	5088744	5072084	5088599
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0503	BFA17A0508
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB
Wheelbase	Short	Short	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X4	4X4
Curb Weight	7307	7307	8654	8654	8759	8759	9565	8135
LVW - ETW	7500	7500	9000	9000	9000	9000	10000	8500
Loaded Weight	7607	7607	8954	8954	9059	9059	9865	8435
ALVW - ETW	8500	8500	9500	9500	9500	9500	10000	9000
Adj. Loaded Weight	8604	8654	9277	9327	9330	9380	9782	9018
GVWR	9900	10000	9900	10000	9900	10000	10000	9900
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.55	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.2	24.5	24.5	24.2	24.2	25.1	24.5
Max N/V Ratio	25.9	25.9	26.4	26.4	25.9	25.9	25.1	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT275/70R18	LT245/75R17
Max Tire Size	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT275/70R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088593	5088615	5088595	5088612	5088596	5088588	5088585	5088590
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TS	TS	TS	TS	TS	TY	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Long	Short	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8135	8240	8240	8240	8240	7965	7965	8070
LVW - ETW	8500	8500	8500	8500	8500	8500	8500	8500
Loaded Weight	8435	8540	8540	8540	8540	8265	8265	8370
ALVW - ETW	9000	9000	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	9068	9070	9070	9120	9120	8932	8982	8985
GVWR	10000	9900	9900	10000	10000	9900	10000	9900
Min Axle Ratio	3.31	3.55	3.31	3.55	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.4	23.4	24.4	23.4	24.5	24.5	23.4
Max N/V Ratio	26.4	24.4	25.9	24.4	25.9	26.4	26.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R20	LT275/65R18	LT275/65R20	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18
Max Tire Size	LT265/70R17	LT275/65R20	LT275/70R18	LT275/65R20	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088606	5088603	5088586	5088656	5088657	5088653	5088654	5088535
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TY	TY	TY	TS	TS	TS	TS	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	REGULAR CAB
Wheelbase	Short	Short	Short	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8070	8070	8070	9460	9460	9565	9565	7293
LVW - ETW	8500	8500	8500	10000	10000	10000	10000	7500
Loaded Weight	8370	8370	8370	9760	9760	9865	9865	7593
ALVW - ETW	9000	9000	9000	9500	9500	9500	10000	8500
Adj. Loaded Weight	8985	9035	9035	9680	9730	9732	9782	8596
GVWR	9900	10000	10000	9900	10000	9900	10000	9900
Min Axle Ratio	3.55	3.55	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.4	24.4	23.4	24.5	24.5	23.4	23.4	24.5
Max N/V Ratio	24.4	24.4	25.9	26.4	26.4	25.9	25.9	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R20	LT275/65R20	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17
Max Tire Size	LT275/65R20	LT275/65R20	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18	LT275/70R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088532	5088541	5088531	5088540	5088533	5088622	5088624	5088621
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7293	7398	7398	7398	7398	8618	8618	8723
LVW - ETW	7500	7500	7500	7500	7500	9000	9000	9000
Loaded Weight	7593	7698	7698	7698	7698	8918	8918	9023
ALVW - ETW	8500	8500	8500	8500	8500	9500	9500	9500
Adj. Loaded Weight	8646	8649	8649	8699	8699	9259	9309	9312
GVWR	10000	9900	9900	10000	10000	9900	10000	9900
Min Axle Ratio	3.31	3.55	3.31	3.55	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.31	3.55	3.31	3.55	3.55	3.31
Min N/V Ratio	24.5	24.4	23.4	24.4	23.4	24.5	24.5	23.4
Max N/V Ratio	26.4	25.9	24.2	25.9	24.2	26.4	26.4	24.2
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R18	LT275/65R18	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18
Max Tire Size	LT265/70R17	LT275/65R20	LT275/70R18	LT275/65R20	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18
Alt Tire 1		LT275/70R18		LT275/70R18				
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088630	5088633	5088625	5088557	5088561	5088583	5088549	5088550
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TY	TY	TY	TS	TS	TS	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8723	8723	8723	7775	7775	7880	7880	7880
LVW - ETW	9000	9000	9000	8000	8000	8000	8000	8000
Loaded Weight	9023	9023	9023	8075	8075	8180	8180	8180
ALVW - ETW	9500	9500	9500	9000	9000	9000	9000	9000
Adj. Loaded Weight	9312	9362	9362	8838	8888	8890	8890	8940
GVWR	9900	10000	10000	9900	10000	9900	9900	10000
Min Axle Ratio	3.55	3.55	3.31	3.31	3.31	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.31	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	25.1	25.1	23.4	24.5	24.5	24.4	23.4	23.4
Max N/V Ratio	25.9	25.9	24.2	26.4	26.4	24.4	25.9	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R20	LT275/65R18	LT275/65R18
Max Tire Size	LT275/70R18	LT275/70R18	LT275/70R18	LT265/70R17	LT265/70R17	LT275/65R20	LT275/70R18	LT275/70R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088580	5088554	5088555	5088569	5088551	5088553	5088565	5088642
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TS	TY	TY	TY	TY	TY	TY	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB BOX DELETE
Wheelbase	Long	Short	Short	Short	Short	Short	Short	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7880	7648	7648	7753	7753	7753	7753	9100
LVW - ETW	8000	8000	8000	8000	8000	8000	8000	9500
Loaded Weight	8180	7948	7948	8053	8053	8053	8053	9400
ALVW - ETW	9000	9000	9000	9000	9000	9000	9000	9500
Adj. Loaded Weight	8940	8774	8824	8826	8826	8876	8876	9500
GVWR	10000	9900	10000	9900	9900	10000	10000	9900
Min Axle Ratio	3.55	3.31	3.31	3.55	3.31	3.31	3.55	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.4	24.5	24.5	24.4	23.4	23.4	24.4	24.5
Max N/V Ratio	24.4	26.4	26.4	24.4	25.9	25.9	24.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R20	LT245/75R17	LT245/75R17	LT275/65R20	LT275/65R18	LT275/65R18	LT275/65R20	LT245/75R17
Max Tire Size	LT275/65R20	LT265/70R17	LT265/70R17	LT275/65R20	LT275/70R18	LT275/70R18	LT275/65R20	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5088639	5088637	5088641
Displacement	6.7	6.7	6.7
Calibration	BFA17A0508	BFA17A0508	BFA17A0508
Fuel Tank(s)	TS	TS	TS
Vehicle Line	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE
Wheelbase	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV
Drive	4X4	4X4	4X4
Curb Weight	9100	9205	9205
LVW - ETW	9500	9500	9500
Loaded Weight	9400	9505	9505
ALVW - ETW	9500	9500	9500
Adj. Loaded Weight	9550	9552	9602
GVWR	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55
Min N/V Ratio	24.5	23.4	23.4
Max N/V Ratio	26.4	25.9	25.9
A/C	Y	Y	Y
Altitude Exempt	N	N	N
Altitude Intend use	--	--	--
Calibration Application	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R18	LT275/65R18
Max Tire Size	LT265/70R17	LT275/70R18	LT275/70R18
Alt Tire 1			
Alt Tire 2			
Alt Tire 3			
Alt Tire 4			
Alt Tire 5			
Alt Tire 6			
Alt Tire 7			

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091283	5091281	5091280	5091278	5091282	5091285	5091284	5091279
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Short	Short	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	7629	7629	7629	7629	7497	7497	7497	7497
LVW - ETW	8000	8000	8000	8000	8000	8000	8000	8000
Loaded Weight	7929	7929	7929	7929	7797	7797	7797	7797
ALVW - ETW	9000	9000	9000	9000	8500	8500	8500	8500
Adj. Loaded Weight	8764	8764	8814	8814	8698	8698	8748	8748
GVWR	9900	9900	10000	10000	9900	9900	10000	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.5	24.5	24.2	24.5	24.2	24.2	24.5
Max N/V Ratio	25.9	26.4	26.4	25.9	26.4	25.9	25.9	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17
Max Tire Size	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091321	5091320	5091323	5091322	5091254	5091255	5091302	5091303
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	REGULAR CAB	REGULAR CAB	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	8954	8954	8954	8954	6839	6839	8164	8164
LVW - ETW	9500	9500	9500	9500	7000	7000	8500	8500
Loaded Weight	9254	9254	9254	9254	7139	7139	8464	8464
ALVW - ETW	9500	9500	9500	9500	8500	8500	9000	9000
Adj. Loaded Weight	9427	9427	9477	9477	8320	8320	8982	8982
GVWR	9900	9900	10000	10000	9800	9800	9800	9800
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.2	24.2	24.5	24.5	24.2	24.5	24.2
Max N/V Ratio	26.4	25.9	25.9	26.4	26.4	25.9	26.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R18
Max Tire Size	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT265/70R17	LT275/65R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091264	5091261	5091260	5091268	5091262	5091263	5091311	5091308
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE
Wheelbase	Long	Long	Long	Long	Short	Short	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	7329	7329	7329	7329	7203	7203	8654	8654
LVW - ETW	7500	7500	7500	7500	7500	7500	9000	9000
Loaded Weight	7629	7629	7629	7629	7503	7503	8954	8954
ALVW - ETW	8500	8500	8500	8500	8500	8500	9500	9500
Adj. Loaded Weight	8614	8614	8664	8664	8502	8502	9277	9277
GVWR	9900	9900	10000	10000	9800	9800	9900	9900
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.5	24.5	24.2	24.5	24.2	24.2	24.5
Max N/V Ratio	25.9	26.4	26.4	25.9	26.4	25.9	25.9	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17
Max Tire Size	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091313	5091309	5091190	5091201	5091189	5091203	5091194	5091188
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TS	TS	TS	TS	TS	TS	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8654	8654	8136	8136	8136	8136	8136	8136
LVW - ETW	9000	9000	8500	8500	8500	8500	8500	8500
Loaded Weight	8954	8954	8436	8436	8436	8436	8436	8436
ALVW - ETW	9500	9500	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	9327	9327	9018	9018	9018	9068	9068	9068
GVWR	10000	10000	9900	9900	9900	10000	10000	10000
Min Axle Ratio	3.31	3.31	3.31	3.55	3.31	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.5	23.4	24.4	24.5	24.4	23.4	24.5
Max N/V Ratio	25.9	26.4	25.9	24.4	26.4	24.4	25.9	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT275/65R18	LT275/65R20	LT245/75R17	LT275/65R20	LT275/65R18	LT245/75R17
Max Tire Size	LT275/65R18	LT265/70R17	LT275/70R18	LT275/65R20	LT265/70R17	LT275/65R20	LT275/70R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091155	5091182	5091150	5091154	5091151	5091184	5091239	5091241
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB BOX DELETE	CREW CAB BOX DELETE
Wheelbase	Short	Short	Short	Short	Short	Short	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7905	7905	7905	7905	7905	7905	9461	9461
LVW - ETW	8000	8000	8000	8000	8000	8000	10000	10000
Loaded Weight	8205	8205	8205	8205	8205	8205	9761	9761
ALVW - ETW	9000	9000	9000	9000	9000	9000	9500	9500
Adj. Loaded Weight	8902	8902	8902	8952	8952	8952	9680	9680
GVWR	9900	9900	9900	10000	10000	10000	9900	9900
Min Axle Ratio	3.31	3.55	3.31	3.31	3.31	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.4	24.5	23.4	24.5	24.4	24.5	23.4
Max N/V Ratio	25.9	24.4	26.4	25.9	26.4	24.4	26.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R20	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R20	LT245/75R17	LT275/65R18
Max Tire Size	LT275/70R18	LT275/65R20	LT265/70R17	LT275/70R18	LT265/70R17	LT275/65R20	LT265/70R17	LT275/70R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091243	5091238	5091131	5091119	5091120	5091127	5091116	5091118
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TS	TS	TY	TY	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB BOX DELETE	CREW CAB BOX DELETE	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	9461	9461	7263	7263	7263	7263	7263	7263
LVW - ETW	10000	10000	7500	7500	7500	7500	7500	7500
Loaded Weight	9761	9761	7563	7563	7563	7563	7563	7563
ALVW - ETW	9500	9500	8500	8500	8500	8500	8500	8500
Adj. Loaded Weight	9730	9730	8582	8582	8582	8632	8632	8632
GVWR	10000	10000	9900	9900	9900	10000	10000	10000
Min Axle Ratio	3.31	3.31	3.55	3.31	3.31	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.5	24.4	23.4	24.5	24.4	24.5	23.4
Max N/V Ratio	25.9	26.4	24.4	25.9	26.4	24.4	26.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT275/65R20	LT275/65R18	LT245/75R17	LT275/65R20	LT245/75R17	LT275/65R18
Max Tire Size	LT275/70R18	LT265/70R17	LT275/65R20	LT275/70R18	LT265/70R17	LT275/65R20	LT265/70R17	LT275/70R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091207	5091210	5091209	5091206	5091148	5091166	5091145	5091139
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TY	TY	TY	TY	TS	TS	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8588	8588	8588	8588	7775	7775	7775	7775
LVW - ETW	9000	9000	9000	9000	8000	8000	8000	8000
Loaded Weight	8888	8888	8888	8888	8075	8075	8075	8075
ALVW - ETW	9000	9000	9500	9500	9000	9000	9000	9000
Adj. Loaded Weight	9244	9244	9294	9294	8838	8838	8838	8888
GVWR	9900	9900	10000	10000	9900	9900	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.5	24.5	23.4	24.5	24.4	23.4	23.4
Max N/V Ratio	25.9	26.4	26.4	25.9	26.4	24.4	25.9	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R20	LT275/65R18	LT275/65R18
Max Tire Size	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18	LT265/70R17	LT275/65R20	LT275/70R18	LT275/70R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091162	5091134	5091164	5091138	5091136	5091135	5091160	5091140
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TS	TS	TY	TY	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Short	Short	Short	Short	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7775	7775	7649	7649	7649	7649	7649	7649
LVW - ETW	8000	8000	8000	8000	8000	8000	8000	8000
Loaded Weight	8075	8075	7949	7949	7949	7949	7949	7949
ALVW - ETW	9000	9000	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	8888	8888	8774	8774	8774	8824	8824	8824
GVWR	10000	10000	9900	9900	9900	10000	10000	10000
Min Axle Ratio	3.55	3.31	3.55	3.31	3.31	3.31	3.55	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.4	24.5	24.4	24.5	23.4	24.5	24.4	23.4
Max N/V Ratio	24.4	26.4	24.4	26.4	25.9	26.4	24.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R20	LT245/75R17	LT275/65R20	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R20	LT275/65R18
Max Tire Size	LT275/65R20	LT265/70R17	LT275/65R20	LT265/70R17	LT275/70R18	LT265/70R17	LT275/65R20	LT275/70R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091226	5091227	5091223	5091222	5091512	5091515	5091516	5091513
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TS	TS	TS	TS	TS	TS	TS	TS
Vehicle Line	F250	F250	F250	F250	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X2	4X2	4X2	4X2
Curb Weight	9100	9100	9100	9100	7628	7628	7733	7733
LVW - ETW	9500	9500	9500	9500	8000	8000	8000	8000
Loaded Weight	9400	9400	9400	9400	7928	7928	8033	8033
ALVW - ETW	9500	9500	9500	9500	9000	9000	9000	9000
Adj. Loaded Weight	9500	9500	9550	9550	8764	8814	8816	8866
GVWR	9900	9900	10000	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	23.4	23.4	24.5	24.5	24.5	24.2	24.2
Max N/V Ratio	26.4	25.9	25.9	26.4	26.4	26.4	25.9	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18
Max Tire Size	LT265/70R17	LT275/70R18	LT275/70R18	LT265/70R17	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091508	5091507	5091506	5091509	5091555	5091554	5091556	5091559
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TY	TY	TY	TY	TS	TS	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE
Wheelbase	Short	Short	Short	Short	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	7497	7497	7602	7602	8953	8953	9058	9058
LVW - ETW	8000	8000	8000	8000	9500	9500	9500	9500
Loaded Weight	7797	7797	7902	7902	9253	9253	9358	9358
ALVW - ETW	8500	8500	9000	9000	9500	9500	9500	9500
Adj. Loaded Weight	8698	8748	8751	8801	9426	9476	9479	9529
GVWR	9900	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.5	24.2	24.2	24.5	24.5	24.2	24.2
Max N/V Ratio	26.4	26.4	25.9	25.9	26.4	26.4	25.9	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18
Max Tire Size	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091470	5091472	5091479	5091492	5091493	5091478	5091532	5091531
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	6870	6870	6975	6975	6975	6975	8195	8195
LVW - ETW	7000	7000	7500	7500	7500	7500	8500	8500
Loaded Weight	7170	7170	7275	7275	7275	7275	8495	8495
ALVW - ETW	8500	8500	8500	8500	8500	8500	9000	9000
Adj. Loaded Weight	8385	8435	8438	8438	8488	8488	9048	9098
GVWR	9900	10000	9900	9900	10000	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.55	3.55	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.31	3.55	3.55	3.31	3.55	3.55
Min N/V Ratio	24.5	24.5	24.2	25.9	25.9	24.2	24.5	24.5
Max N/V Ratio	26.4	26.4	24.2	25.9	25.9	24.2	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091530	5091535	5091484	5091482	5091480	5091491	5091483	5091486
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	8300	8300	7329	7329	7434	7434	7202	7202
LVW - ETW	8500	8500	7500	7500	7500	7500	7500	7500
Loaded Weight	8600	8600	7629	7629	7734	7734	7502	7502
ALVW - ETW	9000	9000	8500	8500	8500	8500	8500	8500
Adj. Loaded Weight	9100	9150	8614	8664	8667	8717	8551	8601
GVWR	9900	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.2	24.5	24.5	24.2	24.2	24.5	24.5
Max N/V Ratio	25.9	25.9	26.4	26.4	25.9	25.9	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091488	5091481	5091542	5091544	5091546	5091543	5091395	5091394
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	CREW CAB	CREW CAB
Wheelbase	Short	Short	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X4	4X4
Curb Weight	7307	7307	8654	8654	8759	8759	8135	8135
LVW - ETW	7500	7500	9000	9000	9000	9000	8500	8500
Loaded Weight	7607	7607	8954	8954	9059	9059	8435	8435
ALVW - ETW	8500	8500	9500	9500	9500	9500	9000	9000
Adj. Loaded Weight	8604	8654	9277	9327	9330	9380	9018	9068
GVWR	9900	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.2	24.5	24.5	24.2	24.2	24.5	24.5
Max N/V Ratio	25.9	25.9	26.4	26.4	25.9	25.9	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091412	5091397	5091398	5091418	5091389	5091387	5091390	5091406
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Short	Short	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8240	8240	8240	8240	7965	7965	8070	8070
LVW - ETW	8500	8500	8500	8500	8500	8500	8500	8500
Loaded Weight	8540	8540	8540	8540	8265	8265	8370	8370
ALVW - ETW	9000	9000	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	9070	9070	9120	9120	8932	8982	8985	8985
GVWR	9900	9900	10000	10000	9900	10000	9900	9900
Min Axle Ratio	3.55	3.31	3.31	3.55	3.31	3.31	3.31	3.55
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.4	23.4	23.4	24.4	24.5	24.5	23.4	24.4
Max N/V Ratio	24.4	25.9	25.9	24.4	26.4	26.4	25.9	24.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R20	LT275/65R18	LT275/65R18	LT275/65R20	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R20
Max Tire Size	LT275/65R20	LT275/70R18	LT275/70R18	LT275/65R20	LT265/70R17	LT265/70R17	LT275/70R18	LT275/65R20
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091386	5091409	5091455	5091459	5091457	5091454	5091333	5091336
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	REGULAR CAB	REGULAR CAB
Wheelbase	Short	Short	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8070	8070	9460	9460	9565	9565	7293	7293
LVW - ETW	8500	8500	10000	10000	10000	10000	7500	7500
Loaded Weight	8370	8370	9760	9760	9865	9865	7593	7593
ALVW - ETW	9000	9000	9500	9500	9500	10000	8500	8500
Adj. Loaded Weight	9035	9035	9680	9730	9732	9782	8596	8646
GVWR	10000	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.55	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.4	24.5	24.5	23.4	23.4	24.5	24.5
Max N/V Ratio	25.9	24.4	26.4	26.4	25.9	25.9	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R20	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT275/70R18	LT275/65R20	LT265/70R17	LT265/70R17	LT275/70R18	LT275/70R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091332	5091342	5091344	5091337	5091425	5091422	5091435	5091423
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7398	7398	7398	7398	8618	8618	8723	8723
LVW - ETW	7500	7500	7500	7500	9000	9000	9000	9000
Loaded Weight	7698	7698	7698	7698	8918	8918	9023	9023
ALVW - ETW	8500	8500	8500	8500	9500	9500	9500	9500
Adj. Loaded Weight	8649	8649	8699	8699	9259	9309	9312	9312
GVWR	9900	9900	10000	10000	9900	10000	9900	9900
Min Axle Ratio	3.31	3.55	3.55	3.31	3.31	3.31	3.55	3.31
Max Axle Ratio	3.31	3.55	3.55	3.31	3.55	3.55	3.55	3.31
Min N/V Ratio	23.4	24.4	24.4	23.4	24.5	24.5	25.1	23.4
Max N/V Ratio	24.2	25.9	25.9	24.2	26.4	26.4	25.9	24.2
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18
Max Tire Size	LT275/70R18	LT275/65R20	LT275/65R20	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18	LT275/70R18
Alt Tire 1		LT275/70R18	LT275/70R18					
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091424	5091430	5091356	5091350	5091355	5091379	5091377	5091353
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8723	8723	7775	7775	7880	7880	7880	7880
LVW - ETW	9000	9000	8000	8000	8000	8000	8000	8000
Loaded Weight	9023	9023	8075	8075	8180	8180	8180	8180
ALVW - ETW	9500	9500	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	9362	9362	8838	8888	8890	8890	8940	8940
GVWR	10000	10000	9900	10000	9900	9900	10000	10000
Min Axle Ratio	3.31	3.55	3.31	3.31	3.31	3.55	3.55	3.31
Max Axle Ratio	3.31	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	25.1	24.5	24.5	23.4	24.4	24.4	23.4
Max N/V Ratio	24.2	25.9	26.4	26.4	25.9	24.4	24.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R20	LT275/65R20	LT275/65R18
Max Tire Size	LT275/70R18	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18	LT275/65R20	LT275/65R20	LT275/70R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091354	5091351	5091352	5091372	5091369	5091363	5091438	5091443
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509	BFA17A0509
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE
Wheelbase	Short	Short	Short	Short	Short	Short	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7648	7648	7753	7753	7753	7753	9100	9100
LVW - ETW	8000	8000	8000	8000	8000	8000	9500	9500
Loaded Weight	7948	7948	8053	8053	8053	8053	9400	9400
ALVW - ETW	9000	9000	9000	9000	9000	9000	9500	9500
Adj. Loaded Weight	8774	8824	8826	8826	8876	8876	9500	9550
GVWR	9900	10000	9900	9900	10000	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.55	3.55	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.5	23.4	24.4	24.4	23.4	24.5	24.5
Max N/V Ratio	26.4	26.4	25.9	24.4	24.4	25.9	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R20	LT275/65R20	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT265/70R17	LT265/70R17	LT275/70R18	LT275/65R20	LT275/65R20	LT275/70R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5091439	5091440
Displacement	6.7	6.7
Calibration	BFA17A0509	BFA17A0509
Fuel Tank(s)	TS	TS
Vehicle Line	F350	F350
Wheel Configuration	Sngl RW	Sngl RW
Body Style	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE
Wheelbase	Long	Long
Trans Code Combo	A CV	A CV
Drive	4X4	4X4
Curb Weight	9205	9205
LVW - ETW	9500	9500
Loaded Weight	9505	9505
ALVW - ETW	9500	9500
Adj. Loaded Weight	9552	9602
GVWR	9900	10000
Min Axle Ratio	3.31	3.31
Max Axle Ratio	3.55	3.55
Min N/V Ratio	23.4	23.4
Max N/V Ratio	25.9	25.9
A/C	Y	Y
Altitude Exempt	N	N
Altitude Intend use	--	--
Calibration Application	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18
Max Tire Size	LT275/70R18	LT275/70R18
Alt Tire 1		
Alt Tire 2		
Alt Tire 3		
Alt Tire 4		
Alt Tire 5		
Alt Tire 6		
Alt Tire 7		

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093862	5093865	5093866	5093864	5093867	5093863	5093868	5093861
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Short	Short	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	7629	7629	7629	7629	7497	7497	7497	7497
LVW - ETW	8000	8000	8000	8000	8000	8000	8000	8000
Loaded Weight	7929	7929	7929	7929	7797	7797	7797	7797
ALVW - ETW	9000	9000	9000	9000	8500	8500	8500	8500
Adj. Loaded Weight	8764	8764	8814	8814	8698	8698	8748	8748
GVWR	9900	9900	10000	10000	9900	9900	10000	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.5	24.5	24.2	24.2	24.5	24.2	24.5
Max N/V Ratio	25.9	26.4	26.4	25.9	25.9	26.4	25.9	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT275/65R18	LT245/75R17
Max Tire Size	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT275/65R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093903	5093904	5093906	5093905	5093837	5093839	5093885	5093887
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	REGULAR CAB	REGULAR CAB	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	8954	8954	8954	8954	6839	6839	8164	8164
LVW - ETW	9500	9500	9500	9500	7000	7000	8500	8500
Loaded Weight	9254	9254	9254	9254	7139	7139	8464	8464
ALVW - ETW	9500	9500	9500	9500	8500	8500	9000	9000
Adj. Loaded Weight	9427	9427	9477	9477	8320	8320	8982	8982
GVWR	9900	9900	10000	10000	9800	9800	9800	9800
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.5	24.2	24.5	24.5	24.2	24.5	24.2
Max N/V Ratio	25.9	26.4	25.9	26.4	26.4	25.9	26.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R18
Max Tire Size	LT275/65R18	LT265/70R17	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT265/70R17	LT275/65R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093848	5093845	5093846	5093843	5093844	5093849	5093894	5093892
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE
Wheelbase	Long	Long	Long	Long	Short	Short	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	7329	7329	7329	7329	7203	7203	8654	8654
LVW - ETW	7500	7500	7500	7500	7500	7500	9000	9000
Loaded Weight	7629	7629	7629	7629	7503	7503	8954	8954
ALVW - ETW	8500	8500	8500	8500	8500	8500	9500	9500
Adj. Loaded Weight	8614	8614	8664	8664	8502	8502	9277	9277
GVWR	9900	9900	10000	10000	9800	9800	9900	9900
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.5	24.2	24.5	24.5	24.2	24.2	24.5
Max N/V Ratio	25.9	26.4	25.9	26.4	26.4	25.9	25.9	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17
Max Tire Size	LT275/65R18	LT265/70R17	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093891	5093896	5093782	5093771	5093776	5093773	5093772	5093781
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TS	TS	TS	TS	TS	TS	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8654	8654	8136	8136	8136	8136	8136	8136
LVW - ETW	9000	9000	8500	8500	8500	8500	8500	8500
Loaded Weight	8954	8954	8436	8436	8436	8436	8436	8436
ALVW - ETW	9500	9500	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	9327	9327	9018	9018	9018	9068	9068	9068
GVWR	10000	10000	9900	9900	9900	10000	10000	10000
Min Axle Ratio	3.31	3.31	3.55	3.31	3.31	3.31	3.31	3.55
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.2	24.4	24.5	23.4	24.5	23.4	24.4
Max N/V Ratio	26.4	25.9	24.4	26.4	25.9	26.4	25.9	24.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R18	LT275/65R20	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R18	LT275/65R20
Max Tire Size	LT265/70R17	LT275/65R18	LT275/65R20	LT265/70R17	LT275/70R18	LT265/70R17	LT275/70R18	LT275/65R20
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093734	5093763	5093736	5093761	5093735	5093733	5093823	5093824
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB BOX DELETE	CREW CAB BOX DELETE
Wheelbase	Short	Short	Short	Short	Short	Short	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7905	7905	7905	7905	7905	7905	9461	9461
LVW - ETW	8000	8000	8000	8000	8000	8000	10000	10000
Loaded Weight	8205	8205	8205	8205	8205	8205	9761	9761
ALVW - ETW	9000	9000	9000	9000	9000	9000	9500	9500
Adj. Loaded Weight	8902	8902	8902	8952	8952	8952	9680	9680
GVWR	9900	9900	9900	10000	10000	10000	9900	9900
Min Axle Ratio	3.31	3.55	3.31	3.55	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.4	23.4	24.4	24.5	23.4	24.5	23.4
Max N/V Ratio	26.4	24.4	25.9	24.4	26.4	25.9	26.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R20	LT275/65R18	LT275/65R20	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R18
Max Tire Size	LT265/70R17	LT275/65R20	LT275/70R18	LT275/65R20	LT265/70R17	LT275/70R18	LT265/70R17	LT275/70R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093822	5093821	5093714	5093699	5093703	5093700	5093711	5093701
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TS	TS	TY	TY	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB BOX DELETE	CREW CAB BOX DELETE	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	9461	9461	7263	7263	7263	7263	7263	7263
LVW - ETW	10000	10000	7500	7500	7500	7500	7500	7500
Loaded Weight	9761	9761	7563	7563	7563	7563	7563	7563
ALVW - ETW	9500	9500	8500	8500	8500	8500	8500	8500
Adj. Loaded Weight	9730	9730	8582	8582	8582	8632	8632	8632
GVWR	10000	10000	9900	9900	9900	10000	10000	10000
Min Axle Ratio	3.31	3.31	3.55	3.31	3.31	3.31	3.55	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.5	24.4	24.5	23.4	23.4	24.4	24.5
Max N/V Ratio	25.9	26.4	24.4	26.4	25.9	25.9	24.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT275/65R20	LT245/75R17	LT275/65R18	LT275/65R18	LT275/65R20	LT245/75R17
Max Tire Size	LT275/70R18	LT265/70R17	LT275/65R20	LT265/70R17	LT275/70R18	LT275/70R18	LT275/65R20	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093789	5093792	5093790	5093793	5093718	5093748	5093727	5093719
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TY	TY	TY	TY	TS	TS	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8588	8588	8588	8588	7775	7775	7775	7775
LVW - ETW	9000	9000	9000	9000	8000	8000	8000	8000
Loaded Weight	8888	8888	8888	8888	8075	8075	8075	8075
ALVW - ETW	9000	9000	9500	9500	9000	9000	9000	9000
Adj. Loaded Weight	9244	9244	9294	9294	8838	8838	8838	8888
GVWR	9900	9900	10000	10000	9900	9900	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	23.4	23.4	24.5	23.4	24.4	24.5	24.5
Max N/V Ratio	26.4	25.9	25.9	26.4	25.9	24.4	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT275/65R18	LT275/65R20	LT245/75R17	LT245/75R17
Max Tire Size	LT265/70R17	LT275/70R18	LT275/70R18	LT265/70R17	LT275/70R18	LT275/65R20	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093728	5093756	5093757	5093722	5093717	5093745	5093721	5093720
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TS	TS	TY	TY	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Short	Short	Short	Short	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7775	7775	7649	7649	7649	7649	7649	7649
LVW - ETW	8000	8000	8000	8000	8000	8000	8000	8000
Loaded Weight	8075	8075	7949	7949	7949	7949	7949	7949
ALVW - ETW	9000	9000	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	8888	8888	8774	8774	8774	8824	8824	8824
GVWR	10000	10000	9900	9900	9900	10000	10000	10000
Min Axle Ratio	3.31	3.55	3.55	3.31	3.31	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.4	24.4	23.4	24.5	24.4	23.4	24.5
Max N/V Ratio	25.9	24.4	24.4	25.9	26.4	24.4	25.9	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R20	LT275/65R20	LT275/65R18	LT245/75R17	LT275/65R20	LT275/65R18	LT245/75R17
Max Tire Size	LT275/70R18	LT275/65R20	LT275/65R20	LT275/70R18	LT265/70R17	LT275/65R20	LT275/70R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093806	5093808	5093809	5093805	5094098	5094096	5094099	5094095
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TS	TS	TS	TS	TS	TS	TS	TS
Vehicle Line	F250	F250	F250	F250	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X2	4X2	4X2	4X2
Curb Weight	9100	9100	9100	9100	7628	7628	7733	7733
LVW - ETW	9500	9500	9500	9500	8000	8000	8000	8000
Loaded Weight	9400	9400	9400	9400	7928	7928	8033	8033
ALVW - ETW	9500	9500	9500	9500	9000	9000	9000	9000
Adj. Loaded Weight	9500	9500	9550	9550	8764	8814	8816	8866
GVWR	9900	9900	10000	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	23.4	23.4	24.5	24.5	24.5	24.2	24.2
Max N/V Ratio	26.4	25.9	25.9	26.4	26.4	26.4	25.9	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18
Max Tire Size	LT265/70R17	LT275/70R18	LT275/70R18	LT265/70R17	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094093	5094090	5094091	5094089	5094139	5094138	5094142	5094137
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TY	TY	TY	TY	TS	TS	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE
Wheelbase	Short	Short	Short	Short	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	7497	7497	7602	7602	8953	8953	9058	9058
LVW - ETW	8000	8000	8000	8000	9500	9500	9500	9500
Loaded Weight	7797	7797	7902	7902	9253	9253	9358	9358
ALVW - ETW	8500	8500	9000	9000	9500	9500	9500	9500
Adj. Loaded Weight	8698	8748	8751	8801	9426	9476	9479	9529
GVWR	9900	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.5	24.2	24.2	24.5	24.5	24.2	24.2
Max N/V Ratio	26.4	26.4	25.9	25.9	26.4	26.4	25.9	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18
Max Tire Size	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094053	5094054	5094062	5094075	5094076	5094061	5094114	5094113
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	6870	6870	6975	6975	6975	6975	8195	8195
LVW - ETW	7000	7000	7500	7500	7500	7500	8500	8500
Loaded Weight	7170	7170	7275	7275	7275	7275	8495	8495
ALVW - ETW	8500	8500	8500	8500	8500	8500	9000	9000
Adj. Loaded Weight	8385	8435	8438	8438	8488	8488	9048	9098
GVWR	9900	10000	9900	9900	10000	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.55	3.55	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.31	3.55	3.55	3.31	3.55	3.55
Min N/V Ratio	24.5	24.5	24.2	25.9	25.9	24.2	24.5	24.5
Max N/V Ratio	26.4	26.4	24.2	25.9	25.9	24.2	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094118	5094116	5094064	5094066	5094067	5094072	5094063	5094068
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	8300	8300	7329	7329	7434	7434	7202	7202
LVW - ETW	8500	8500	7500	7500	7500	7500	7500	7500
Loaded Weight	8600	8600	7629	7629	7734	7734	7502	7502
ALVW - ETW	9000	9000	8500	8500	8500	8500	8500	8500
Adj. Loaded Weight	9100	9150	8614	8664	8667	8717	8551	8601
GVWR	9900	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.2	24.5	24.5	24.2	24.2	24.5	24.5
Max N/V Ratio	25.9	25.9	26.4	26.4	25.9	25.9	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094073	5094070	5094128	5094126	5094127	5094125	5093980	5093982
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	CREW CAB	CREW CAB
Wheelbase	Short	Short	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X4	4X4
Curb Weight	7307	7307	8654	8654	8759	8759	8135	8135
LVW - ETW	7500	7500	9000	9000	9000	9000	8500	8500
Loaded Weight	7607	7607	8954	8954	9059	9059	8435	8435
ALVW - ETW	8500	8500	9500	9500	9500	9500	9000	9000
Adj. Loaded Weight	8604	8654	9277	9327	9330	9380	9018	9068
GVWR	9900	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.2	24.5	24.5	24.2	24.2	24.5	24.5
Max N/V Ratio	25.9	25.9	26.4	26.4	25.9	25.9	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093978	5094002	5093977	5094004	5093969	5093971	5093985	5093973
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Short	Short	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8240	8240	8240	8240	7965	7965	8070	8070
LVW - ETW	8500	8500	8500	8500	8500	8500	8500	8500
Loaded Weight	8540	8540	8540	8540	8265	8265	8370	8370
ALVW - ETW	9000	9000	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	9070	9070	9120	9120	8932	8982	8985	8985
GVWR	9900	9900	10000	10000	9900	10000	9900	9900
Min Axle Ratio	3.31	3.55	3.31	3.55	3.31	3.31	3.55	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.4	23.4	24.4	24.5	24.5	24.4	23.4
Max N/V Ratio	25.9	24.4	25.9	24.4	26.4	26.4	24.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R20	LT275/65R18	LT275/65R20	LT245/75R17	LT245/75R17	LT275/65R20	LT275/65R18
Max Tire Size	LT275/70R18	LT275/65R20	LT275/70R18	LT275/65R20	LT265/70R17	LT265/70R17	LT275/65R20	LT275/70R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093970	5093989	5094041	5094037	5094039	5094040	5093916	5093915
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	REGULAR CAB	REGULAR CAB
Wheelbase	Short	Short	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8070	8070	9460	9460	9565	9565	7293	7293
LVW - ETW	8500	8500	10000	10000	10000	10000	7500	7500
Loaded Weight	8370	8370	9760	9760	9865	9865	7593	7593
ALVW - ETW	9000	9000	9500	9500	9500	10000	8500	8500
Adj. Loaded Weight	9035	9035	9680	9730	9732	9782	8596	8646
GVWR	10000	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.55	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.4	24.5	24.5	23.4	23.4	24.5	24.5
Max N/V Ratio	25.9	24.4	26.4	26.4	25.9	25.9	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R20	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT275/70R18	LT275/65R20	LT265/70R17	LT265/70R17	LT275/70R18	LT275/70R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093919	5093927	5093926	5093918	5094006	5094008	5094017	5094009
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7398	7398	7398	7398	8618	8618	8723	8723
LVW - ETW	7500	7500	7500	7500	9000	9000	9000	9000
Loaded Weight	7698	7698	7698	7698	8918	8918	9023	9023
ALVW - ETW	8500	8500	8500	8500	9500	9500	9500	9500
Adj. Loaded Weight	8649	8649	8699	8699	9259	9309	9312	9312
GVWR	9900	9900	10000	10000	9900	10000	9900	9900
Min Axle Ratio	3.31	3.55	3.55	3.31	3.31	3.31	3.55	3.31
Max Axle Ratio	3.31	3.55	3.55	3.31	3.55	3.55	3.55	3.31
Min N/V Ratio	23.4	24.4	24.4	23.4	24.5	24.5	25.1	23.4
Max N/V Ratio	24.2	25.9	25.9	24.2	26.4	26.4	25.9	24.2
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18
Max Tire Size	LT275/70R18	LT275/65R20	LT275/65R20	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18	LT275/70R18
Alt Tire 1		LT275/70R18	LT275/70R18					
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094013	5094005	5093941	5093944	5093955	5093945	5093938	5093963
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8723	8723	7775	7775	7880	7880	7880	7880
LVW - ETW	9000	9000	8000	8000	8000	8000	8000	8000
Loaded Weight	9023	9023	8075	8075	8180	8180	8180	8180
ALVW - ETW	9500	9500	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	9362	9362	8838	8888	8890	8890	8940	8940
GVWR	10000	10000	9900	10000	9900	9900	10000	10000
Min Axle Ratio	3.55	3.31	3.31	3.31	3.55	3.31	3.31	3.55
Max Axle Ratio	3.55	3.31	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	25.1	23.4	24.5	24.5	24.4	23.4	23.4	24.4
Max N/V Ratio	25.9	24.2	26.4	26.4	24.4	25.9	25.9	24.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R20	LT275/65R18	LT275/65R18	LT275/65R20
Max Tire Size	LT275/70R18	LT275/70R18	LT265/70R17	LT265/70R17	LT275/65R20	LT275/70R18	LT275/70R18	LT275/65R20
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5093933	5093937	5093966	5093934	5093935	5093964	5094024	5094021
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510	BFA17A0510
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE
Wheelbase	Short	Short	Short	Short	Short	Short	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7648	7648	7753	7753	7753	7753	9100	9100
LVW - ETW	8000	8000	8000	8000	8000	8000	9500	9500
Loaded Weight	7948	7948	8053	8053	8053	8053	9400	9400
ALVW - ETW	9000	9000	9000	9000	9000	9000	9500	9500
Adj. Loaded Weight	8774	8824	8826	8826	8876	8876	9500	9550
GVWR	9900	10000	9900	9900	10000	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.55	3.31	3.31	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.5	24.4	23.4	23.4	24.4	24.5	24.5
Max N/V Ratio	26.4	26.4	24.4	25.9	25.9	24.4	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT245/75R17	LT275/65R20	LT275/65R18	LT275/65R18	LT275/65R20	LT245/75R17	LT245/75R17
Max Tire Size	LT265/70R17	LT265/70R17	LT275/65R20	LT275/70R18	LT275/70R18	LT275/65R20	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094025	5094023
Displacement	6.7	6.7
Calibration	BFA17A0510	BFA17A0510
Fuel Tank(s)	TS	TS
Vehicle Line	F350	F350
Wheel Configuration	Sngl RW	Sngl RW
Body Style	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE
Wheelbase	Long	Long
Trans Code Combo	A CV	A CV
Drive	4X4	4X4
Curb Weight	9205	9205
LVW - ETW	9500	9500
Loaded Weight	9505	9505
ALVW - ETW	9500	9500
Adj. Loaded Weight	9552	9602
GVWR	9900	10000
Min Axle Ratio	3.31	3.31
Max Axle Ratio	3.55	3.55
Min N/V Ratio	23.4	23.4
Max N/V Ratio	25.9	25.9
A/C	Y	Y
Altitude Exempt	N	N
Altitude Intend use	--	--
Calibration Application	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18
Max Tire Size	LT275/70R18	LT275/70R18
Alt Tire 1		
Alt Tire 2		
Alt Tire 3		
Alt Tire 4		
Alt Tire 5		
Alt Tire 6		
Alt Tire 7		

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094553	5094556	5094552	5094559	5094558	5094554	5094557	5094555
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Short	Short	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	7629	7629	7629	7629	7497	7497	7497	7497
LVW - ETW	8000	8000	8000	8000	8000	8000	8000	8000
Loaded Weight	7929	7929	7929	7929	7797	7797	7797	7797
ALVW - ETW	9000	9000	9000	9000	8500	8500	8500	8500
Adj. Loaded Weight	8764	8764	8814	8814	8698	8698	8748	8748
GVWR	9900	9900	10000	10000	9900	9900	10000	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.5	24.5	24.2	24.2	24.5	24.2	24.5
Max N/V Ratio	25.9	26.4	26.4	25.9	25.9	26.4	25.9	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT275/65R18	LT245/75R17
Max Tire Size	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT275/65R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094596	5094595	5094597	5094594	5094530	5094528	5094577	5094576
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	REGULAR CAB	REGULAR CAB	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	8954	8954	8954	8954	6839	6839	8164	8164
LVW - ETW	9500	9500	9500	9500	7000	7000	8500	8500
Loaded Weight	9254	9254	9254	9254	7139	7139	8464	8464
ALVW - ETW	9500	9500	9500	9500	8500	8500	9000	9000
Adj. Loaded Weight	9427	9427	9477	9477	8320	8320	8982	8982
GVWR	9900	9900	10000	10000	9800	9800	9800	9800
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.2	24.2	24.5	24.2	24.5	24.2	24.5
Max N/V Ratio	26.4	25.9	25.9	26.4	25.9	26.4	25.9	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R18	LT245/75R17
Max Tire Size	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT275/65R18	LT265/70R17	LT275/65R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094539	5094536	5094534	5094540	5094541	5094535	5094587	5094583
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE
Wheelbase	Long	Long	Long	Long	Short	Short	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	7329	7329	7329	7329	7203	7203	8654	8654
LVW - ETW	7500	7500	7500	7500	7500	7500	9000	9000
Loaded Weight	7629	7629	7629	7629	7503	7503	8954	8954
ALVW - ETW	8500	8500	8500	8500	8500	8500	9500	9500
Adj. Loaded Weight	8614	8614	8664	8664	8502	8502	9277	9277
GVWR	9900	9900	10000	10000	9800	9800	9900	9900
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.5	24.5	24.2	24.2	24.5	24.2	24.5
Max N/V Ratio	25.9	26.4	26.4	25.9	25.9	26.4	25.9	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT275/65R18	LT245/75R17
Max Tire Size	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT275/65R18	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094582	5094584	5094463	5094465	5094471	5094462	5094466	5094470
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TS	TS	TS	TS	TS	TS	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8654	8654	8136	8136	8136	8136	8136	8136
LVW - ETW	9000	9000	8500	8500	8500	8500	8500	8500
Loaded Weight	8954	8954	8436	8436	8436	8436	8436	8436
ALVW - ETW	9500	9500	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	9327	9327	9018	9018	9018	9068	9068	9068
GVWR	10000	10000	9900	9900	9900	10000	10000	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.55	3.31	3.31	3.55
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.2	24.5	23.4	24.4	24.5	23.4	24.4
Max N/V Ratio	26.4	25.9	26.4	25.9	24.4	26.4	25.9	24.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R18	LT275/65R20	LT245/75R17	LT275/65R18	LT275/65R20
Max Tire Size	LT265/70R17	LT275/65R18	LT265/70R17	LT275/70R18	LT275/65R20	LT265/70R17	LT275/70R18	LT275/65R20
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094427	5094425	5094457	5094458	5094424	5094430	5094512	5094514
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB BOX DELETE	CREW CAB BOX DELETE
Wheelbase	Short	Short	Short	Short	Short	Short	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7905	7905	7905	7905	7905	7905	9461	9461
LVW - ETW	8000	8000	8000	8000	8000	8000	10000	10000
Loaded Weight	8205	8205	8205	8205	8205	8205	9761	9761
ALVW - ETW	9000	9000	9000	9000	9000	9000	9500	9500
Adj. Loaded Weight	8902	8902	8902	8952	8952	8952	9680	9680
GVWR	9900	9900	9900	10000	10000	10000	9900	9900
Min Axle Ratio	3.31	3.31	3.55	3.55	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.5	24.4	24.4	23.4	24.5	24.5	23.4
Max N/V Ratio	25.9	26.4	24.4	24.4	25.9	26.4	26.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT275/65R20	LT275/65R20	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18
Max Tire Size	LT275/70R18	LT265/70R17	LT275/65R20	LT275/65R20	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094515	5094513	5094391	5094392	5094402	5094406	5094390	5094395
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TS	TS	TY	TY	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB BOX DELETE	CREW CAB BOX DELETE	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	9461	9461	7263	7263	7263	7263	7263	7263
LVW - ETW	10000	10000	7500	7500	7500	7500	7500	7500
Loaded Weight	9761	9761	7563	7563	7563	7563	7563	7563
ALVW - ETW	9500	9500	8500	8500	8500	8500	8500	8500
Adj. Loaded Weight	9730	9730	8582	8582	8582	8632	8632	8632
GVWR	10000	10000	9900	9900	9900	10000	10000	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.55	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.5	23.4	24.5	24.4	24.4	24.5	23.4
Max N/V Ratio	25.9	26.4	25.9	26.4	24.4	24.4	26.4	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT275/65R18	LT245/75R17	LT275/65R20	LT275/65R20	LT245/75R17	LT275/65R18
Max Tire Size	LT275/70R18	LT265/70R17	LT275/70R18	LT265/70R17	LT275/65R20	LT275/65R20	LT265/70R17	LT275/70R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094484	5094482	5094485	5094480	5094414	5094442	5094413	5094408
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TY	TY	TY	TY	TS	TS	TS	TS
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8588	8588	8588	8588	7775	7775	7775	7775
LVW - ETW	9000	9000	9000	9000	8000	8000	8000	8000
Loaded Weight	8888	8888	8888	8888	8075	8075	8075	8075
ALVW - ETW	9000	9000	9500	9500	9000	9000	9000	9000
Adj. Loaded Weight	9244	9244	9294	9294	8838	8838	8838	8888
GVWR	9900	9900	10000	10000	9900	9900	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.5	24.5	23.4	23.4	24.4	24.5	24.5
Max N/V Ratio	25.9	26.4	26.4	25.9	25.9	24.4	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT275/65R20	LT245/75R17	LT245/75R17
Max Tire Size	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18	LT275/70R18	LT275/65R20	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094439	5094412	5094417	5094446	5094421	5094411	5094409	5094445
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TS	TS	TY	TY	TY	TY	TY	TY
Vehicle Line	F250	F250	F250	F250	F250	F250	F250	F250
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Short	Short	Short	Short	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7775	7775	7649	7649	7649	7649	7649	7649
LVW - ETW	8000	8000	8000	8000	8000	8000	8000	8000
Loaded Weight	8075	8075	7949	7949	7949	7949	7949	7949
ALVW - ETW	9000	9000	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	8888	8888	8774	8774	8774	8824	8824	8824
GVWR	10000	10000	9900	9900	9900	10000	10000	10000
Min Axle Ratio	3.55	3.31	3.31	3.55	3.31	3.31	3.31	3.55
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.4	23.4	23.4	24.4	24.5	24.5	23.4	24.4
Max N/V Ratio	24.4	25.9	25.9	24.4	26.4	26.4	25.9	24.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R20	LT275/65R18	LT275/65R18	LT275/65R20	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R20
Max Tire Size	LT275/65R20	LT275/70R18	LT275/70R18	LT275/65R20	LT265/70R17	LT265/70R17	LT275/70R18	LT275/65R20
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094496	5094499	5094497	5094498	5094786	5094787	5094790	5094789
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TS	TS	TS	TS	TS	TS	TS	TS
Vehicle Line	F250	F250	F250	F250	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X2	4X2	4X2	4X2
Curb Weight	9100	9100	9100	9100	7628	7628	7733	7733
LVW - ETW	9500	9500	9500	9500	8000	8000	8000	8000
Loaded Weight	9400	9400	9400	9400	7928	7928	8033	8033
ALVW - ETW	9500	9500	9500	9500	9000	9000	9000	9000
Adj. Loaded Weight	9500	9500	9550	9550	8764	8814	8816	8866
GVWR	9900	9900	10000	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.5	24.5	23.4	24.5	24.5	24.2	24.2
Max N/V Ratio	25.9	26.4	26.4	25.9	26.4	26.4	25.9	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18
Max Tire Size	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094780	5094781	5094785	5094782	5094828	5094831	5094829	5094830
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TY	TY	TY	TY	TS	TS	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE
Wheelbase	Short	Short	Short	Short	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	7497	7497	7602	7602	8953	8953	9058	9058
LVW - ETW	8000	8000	8000	8000	9500	9500	9500	9500
Loaded Weight	7797	7797	7902	7902	9253	9253	9358	9358
ALVW - ETW	8500	8500	9000	9000	9500	9500	9500	9500
Adj. Loaded Weight	8698	8748	8751	8801	9426	9476	9479	9529
GVWR	9900	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.5	24.2	24.2	24.5	24.5	24.2	24.2
Max N/V Ratio	26.4	26.4	25.9	25.9	26.4	26.4	25.9	25.9
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18
Max Tire Size	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094744	5094745	5094752	5094767	5094766	5094753	5094804	5094806
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	6870	6870	6975	6975	6975	6975	8195	8195
LVW - ETW	7000	7000	7500	7500	7500	7500	8500	8500
Loaded Weight	7170	7170	7275	7275	7275	7275	8495	8495
ALVW - ETW	8500	8500	8500	8500	8500	8500	9000	9000
Adj. Loaded Weight	8385	8435	8438	8438	8488	8488	9048	9098
GVWR	9900	10000	9900	9900	10000	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.55	3.55	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.31	3.55	3.55	3.31	3.55	3.55
Min N/V Ratio	24.5	24.5	24.2	25.9	25.9	24.2	24.5	24.5
Max N/V Ratio	26.4	26.4	24.2	25.9	25.9	24.2	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094805	5094809	5094754	5094756	5094765	5094755	5094761	5094760
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X2	4X2
Curb Weight	8300	8300	7329	7329	7434	7434	7202	7202
LVW - ETW	8500	8500	7500	7500	7500	7500	7500	7500
Loaded Weight	8600	8600	7629	7629	7734	7734	7502	7502
ALVW - ETW	9000	9000	8500	8500	8500	8500	8500	8500
Adj. Loaded Weight	9100	9150	8614	8664	8667	8717	8551	8601
GVWR	9900	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.2	24.5	24.5	24.2	24.2	24.5	24.5
Max N/V Ratio	25.9	25.9	26.4	26.4	25.9	25.9	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094758	5094759	5094819	5094817	5094821	5094816	5094669	5094668
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE	CREW CAB	CREW CAB
Wheelbase	Short	Short	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X2	4X2	4X2	4X2	4X2	4X2	4X4	4X4
Curb Weight	7307	7307	8654	8654	8759	8759	8135	8135
LVW - ETW	7500	7500	9000	9000	9000	9000	8500	8500
Loaded Weight	7607	7607	8954	8954	9059	9059	8435	8435
ALVW - ETW	8500	8500	9500	9500	9500	9500	9000	9000
Adj. Loaded Weight	8604	8654	9277	9327	9330	9380	9018	9068
GVWR	9900	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.2	24.2	24.5	24.5	24.2	24.2	24.5	24.5
Max N/V Ratio	25.9	25.9	26.4	26.4	25.9	25.9	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17	LT275/65R18	LT275/65R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094672	5094687	5094686	5094670	5094660	5094662	5094661	5094681
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TS	TS	TS	TS	TY	TY	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB	CREW CAB
Wheelbase	Long	Long	Long	Long	Short	Short	Short	Short
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8240	8240	8240	8240	7965	7965	8070	8070
LVW - ETW	8500	8500	8500	8500	8500	8500	8500	8500
Loaded Weight	8540	8540	8540	8540	8265	8265	8370	8370
ALVW - ETW	9000	9000	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	9070	9070	9120	9120	8932	8982	8985	8985
GVWR	9900	9900	10000	10000	9900	10000	9900	9900
Min Axle Ratio	3.31	3.55	3.55	3.31	3.31	3.31	3.31	3.55
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.4	24.4	23.4	24.5	24.5	23.4	24.4
Max N/V Ratio	25.9	24.4	24.4	25.9	26.4	26.4	25.9	24.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R20	LT275/65R20	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R20
Max Tire Size	LT275/70R18	LT275/65R20	LT275/65R20	LT275/70R18	LT265/70R17	LT265/70R17	LT275/70R18	LT275/65R20
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094665	5094685	5094730	5094729	5094732	5094728	5094606	5094609
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	CREW CAB	CREW CAB	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	CREW CAB BOX DELETE	REGULAR CAB	REGULAR CAB
Wheelbase	Short	Short	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8070	8070	9460	9460	9565	9565	7293	7293
LVW - ETW	8500	8500	10000	10000	10000	10000	7500	7500
Loaded Weight	8370	8370	9760	9760	9865	9865	7593	7593
ALVW - ETW	9000	9000	9500	9500	9500	10000	8500	8500
Adj. Loaded Weight	9035	9035	9680	9730	9732	9782	8596	8646
GVWR	10000	10000	9900	10000	9900	10000	9900	10000
Min Axle Ratio	3.31	3.55	3.31	3.31	3.31	3.31	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	24.4	24.5	24.5	23.4	23.4	24.5	24.5
Max N/V Ratio	25.9	24.4	26.4	26.4	25.9	25.9	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R20	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17
Max Tire Size	LT275/70R18	LT275/65R20	LT265/70R17	LT265/70R17	LT275/70R18	LT275/70R18	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094614	5094607	5094608	5094618	5094697	5094696	5094708	5094699
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TY	TY
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7398	7398	7398	7398	8618	8618	8723	8723
LVW - ETW	7500	7500	7500	7500	9000	9000	9000	9000
Loaded Weight	7698	7698	7698	7698	8918	8918	9023	9023
ALVW - ETW	8500	8500	8500	8500	9500	9500	9500	9500
Adj. Loaded Weight	8649	8649	8699	8699	9259	9309	9312	9312
GVWR	9900	9900	10000	10000	9900	10000	9900	9900
Min Axle Ratio	3.55	3.31	3.31	3.55	3.31	3.31	3.55	3.31
Max Axle Ratio	3.55	3.31	3.31	3.55	3.55	3.55	3.55	3.31
Min N/V Ratio	24.4	23.4	23.4	24.4	24.5	24.5	25.1	23.4
Max N/V Ratio	25.9	24.2	24.2	25.9	26.4	26.4	25.9	24.2
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R18	LT275/65R18
Max Tire Size	LT275/65R20	LT275/70R18	LT275/70R18	LT275/65R20	LT265/70R17	LT265/70R17	LT275/70R18	LT275/70R18
Alt Tire 1	LT275/70R18			LT275/70R18				
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094701	5094705	5094632	5094630	5094640	5094628	5094631	5094647
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TY	TY	TS	TS	TS	TS	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	REGULAR CAB BOX DELE	REGULAR CAB BOX DELE	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB
Wheelbase	Long	Long	Long	Long	Long	Long	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	8723	8723	7775	7775	7880	7880	7880	7880
LVW - ETW	9000	9000	8000	8000	8000	8000	8000	8000
Loaded Weight	9023	9023	8075	8075	8180	8180	8180	8180
ALVW - ETW	9500	9500	9000	9000	9000	9000	9000	9000
Adj. Loaded Weight	9362	9362	8838	8888	8890	8890	8940	8940
GVWR	10000	10000	9900	10000	9900	9900	10000	10000
Min Axle Ratio	3.31	3.55	3.31	3.31	3.55	3.31	3.31	3.55
Max Axle Ratio	3.31	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	23.4	25.1	24.5	24.5	24.4	23.4	23.4	24.4
Max N/V Ratio	24.2	25.9	26.4	26.4	24.4	25.9	25.9	24.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18	LT245/75R17	LT245/75R17	LT275/65R20	LT275/65R18	LT275/65R18	LT275/65R20
Max Tire Size	LT275/70R18	LT275/70R18	LT265/70R17	LT265/70R17	LT275/65R20	LT275/70R18	LT275/70R18	LT275/65R20
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094627	5094636	5094652	5094626	5094624	5094654	5094715	5094717
Displacement	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
Calibration	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511	BFA17A0511
Fuel Tank(s)	TY	TY	TY	TY	TY	TY	TS	TS
Vehicle Line	F350	F350	F350	F350	F350	F350	F350	F350
Wheel Configuration	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW	Sngl RW
Body Style	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE
Wheelbase	Short	Short	Short	Short	Short	Short	Long	Long
Trans Code Combo	A CV	A CV	A CV	A CV	A CV	A CV	A CV	A CV
Drive	4X4	4X4	4X4	4X4	4X4	4X4	4X4	4X4
Curb Weight	7648	7648	7753	7753	7753	7753	9100	9100
LVW - ETW	8000	8000	8000	8000	8000	8000	9500	9500
Loaded Weight	7948	7948	8053	8053	8053	8053	9400	9400
ALVW - ETW	9000	9000	9000	9000	9000	9000	9500	9500
Adj. Loaded Weight	8774	8824	8826	8826	8876	8876	9500	9550
GVWR	9900	10000	9900	9900	10000	10000	9900	10000
Min Axle Ratio	3.31	3.31	3.55	3.31	3.31	3.55	3.31	3.31
Max Axle Ratio	3.55	3.55	3.55	3.55	3.55	3.55	3.55	3.55
Min N/V Ratio	24.5	24.5	24.4	23.4	23.4	24.4	24.5	24.5
Max N/V Ratio	26.4	26.4	24.4	25.9	25.9	24.4	26.4	26.4
A/C	Y	Y	Y	Y	Y	Y	Y	Y
Altitude Exempt	N	N	N	N	N	N	N	N
Altitude Intend use	--	--	--	--	--	--	--	--
Calibration Application	50ST	50ST	50ST	50ST	50ST	50ST	50ST	50ST
Min Tire Size	LT245/75R17	LT245/75R17	LT275/65R20	LT275/65R18	LT275/65R18	LT275/65R20	LT245/75R17	LT245/75R17
Max Tire Size	LT265/70R17	LT265/70R17	LT275/65R20	LT275/70R18	LT275/70R18	LT275/65R20	LT265/70R17	LT265/70R17
Alt Tire 1								
Alt Tire 2								
Alt Tire 3								
Alt Tire 4								
Alt Tire 5								
Alt Tire 6								
Alt Tire 7								

Vehicle Description Report

Application: 50 ST
Test Group: BFMXD06.761A

ID Number	5094713	5094712
Displacement	6.7	6.7
Calibration	BFA17A0511	BFA17A0511
Fuel Tank(s)	TS	TS
Vehicle Line	F350	F350
Wheel Configuration	Sngl RW	Sngl RW
Body Style	SUPER CAB BOX DELETE	SUPER CAB BOX DELETE
Wheelbase	Long	Long
Trans Code Combo	A CV	A CV
Drive	4X4	4X4
Curb Weight	9205	9205
LVW - ETW	9500	9500
Loaded Weight	9505	9505
ALVW - ETW	9500	9500
Adj. Loaded Weight	9552	9602
GVWR	9900	10000
Min Axle Ratio	3.31	3.31
Max Axle Ratio	3.55	3.55
Min N/V Ratio	23.4	23.4
Max N/V Ratio	25.9	25.9
A/C	Y	Y
Altitude Exempt	N	N
Altitude Intend use	--	--
Calibration Application	50ST	50ST
Min Tire Size	LT275/65R18	LT275/65R18
Max Tire Size	LT275/70R18	LT275/70R18
Alt Tire 1		
Alt Tire 2		
Alt Tire 3		
Alt Tire 4		
Alt Tire 5		
Alt Tire 6		
Alt Tire 7		

SECTION 14

Request for Certification

14.00.00.00

Vehicle Environmental Engineering
Environmental & Safety Engineering

Allen Park Test Laboratory
1500 Enterprise Drive, Suite 3W-200
Allen Park, Michigan 48101-2053

January 26, 2010

Mr. Marty Reineman
Certification Division
Mobile Source Pollution Control
U. S. Environmental Protection Agency
2000 Traverwood Drive
Ann Arbor, Michigan 48105

Dear Mr. Reineman:

Ford Motor Company (Ford) herewith submits its Part I Application for Certification for 2010 model year diesel-powered heavy-duty vehicles (HDVs) contained in Ford's 50 state test group BFMXD06.761A. We have elected to optionally certify these vehicles on the chassis dynamometer, as allowed under 40 CFR 86.1863-07. The test fuel used is Federal ultra low sulfur diesel.

The EPA certification and in-use exhaust emission standards applicable to this test group are:

Certification FTP Standards (g/mi)	**Useful Life**	**NMHC**	**CO**	**NOx**	**PM**	**HCHO**
HDV (8,501-10,000 lb GVWR)	120K	0.195	7.3	0.2	0.02	0.032

Based on Ford Motor Company's good engineering judgment, all the vehicles described in this Application are designed to comply with the applicable full useful life standards, as described above.

This Part I application for certification has been prepared in accordance with the standardized format recommended by EPA via its mail out # VPCD-99-06 (LDV, LDT, SVM), subject: "CAP 2000 Implementation: Guidance Documents and Workshop", dated April 22, 1999. Therefore, in accordance with the provisions of 40 CFR 86.1844-01(d)(14), Ford requests that a Certificate of Conformity be issued for the HDV test group listed in this Application for Certification.

Please contact Alyssa Werthman at 313-323-2706, if you have any questions regarding this submission.

Sincerely

Todd M. Fagerman, Manager
Car and Truck Certification
Certification Programs

Vehicle Environmental Engineering
Environmental & Safety Engineering

Allen Park Test Laboratory
1500 Enterprise Drive, Suite 3W200
Allen Park, Michigan 48101- 2053

January 26, 2010

Ms. Annette Hebert, Chief
Mobile Source Operations Division
Haagen-Smit Laboratory
P. O. Box 8001
9528 Telstar Avenue
El Monte, California 91734-8001

Dear Ms. Hebert:

Ford Motor Company (Ford) herewith submits its Part I Application for Certification for 2010 model year diesel-powered medium duty vehicles (MDVs) contained in Ford's 50 state test group BFMXD06.761A. The test fuel used is Federal ultra low sulfur diesel.

The FTP certification and in-use standards applicable to this test group for vehicles offered in California are as follows:

Certification FTP Standards (g/mi)	Useful Life	NMOG	CO	NOx	PM	HCHO
LEV II ULEV (8,501-10,000 lb GVWR)	120K	0.143	6.4	0.2	0.06	0.016

Based on Ford Motor Company's good engineering judgment, all the vehicles described in this Application are designed to comply with the applicable intermediate and full useful life standards, as described above.

This Part I application for certification has been prepared in accordance with the standardized format recommended by EPA via its mail out # VPCD-99-06 (LDV, LDT, SVM), subject: "CAP 2000 Implementation: Guidance Documents and Workshop"' dated April 22, 1999. This Application has also been prepared in accordance with the California Air Resources Board, Final Regulation Order, Amendments to Sections 1960.1, 1960.5, 1961, and 1962 Title 13, California Code of Regulations (As Amended August 4, 2005). Therefore, in accordance with the provisions of 40 CFR 86.1844-01(d)(14), Ford requests that an Executive Order be issued for the MDV test group listed in this Application for Certification.

Please contact Alyssa Werthman at 313-323-2706, if you have any questions regarding this submission.

Sincerely

Todd M. Fagerman, Manager
Car and Truck Certification
Certification Programs

cc: Yuh Jiun Tan

Vehicle Environmental Engineering
Environmental & Safety Engineering

Allen Park Test Laboratory
1500 Enterprise Drive, Suite 3W-200
Allen Park, Michigan 48101-2053

February 16, 2010

Mr. Marty Reineman
Certification Division
Mobile Source Pollution Control
U. S. Environmental Protection Agency
2000 Traverwood Drive
Ann Arbor, Michigan 48105

Dear Mr. Reineman:

Ford Motor Company (Ford) herewith submits an update to its Part I Application for Certification for 2011 model year diesel-powered heavy-duty vehicles (HDVs) contained in Ford's 50 state test group BFMXD06.761A (8,501-10,000 lb GVWR). We have elected to optionally certify these vehicles on the chassis dynamometer, as allowed under 40 CFR 86.1863-07. The test fuel used is Federal ultra low sulfur diesel.

This submission incorporates documentation updates pertaining to the R09 through R11 calibration levels. Details of the changes included in these calibrations are given in section 12.00.05.00 of the Application. The R11 calibration is planned to be implemented for initial production of the 2011 MY 6.7L diesel and contains changes that were requested by the California ARB. Specifically, as part of the R11 calibration release, Ford will implement a 30% torque derate for sensor faults resulting in DEF/SCR system deactivation. In addition, the diesel exhaust fluid (DEF) quality monitor will be made continuous, i.e., decoupled from DEF refill. Also, the DEF dosing fault for a clogged or blocked line detection will be turned to MIL with the same 30% derate. No new certification testing was conducted.

Based on Ford Motor Company's good engineering judgment, all the vehicles described in this Application are designed to comply with the applicable full useful life standards, as described above.

This Part I application for certification has been prepared in accordance with the standardized format recommended by EPA via its mail out # VPCD-99-06 (LDV, LDT, SVM), subject: "CAP 2000 Implementation: Guidance Documents and Workshop", dated April 22, 1999. Future calibration changes will be submitted via the standard running change process. Although Ford has already received EPA certification for this test group we are submitting this information as an update to the Part I documentation to align with the ARB submission update.

Please contact Alyssa Werthman at 313-323-2706, if you have any questions regarding this submission.

Sincerely

Todd M. Fagerman, Manager
Car and Truck Certification
Certification Programs

Vehicle Environmental Engineering
Environmental & Safety Engineering

Allen Park Test Laboratory
1500 Enterprise Drive, Suite 3W200
Allen Park, Michigan 48101- 2053

February 16, 2010

Ms. Annette Hebert, Chief
Mobile Source Operations Division
Haagen-Smit Laboratory
P. O. Box 8001
9528 Telstar Avenue
El Monte, California 91734-8001

Dear Ms. Hebert:

Ford Motor Company (Ford) herewith submits an update to its Part I Application for Certification for 2011 model year diesel-powered medium duty vehicles (MDVs) contained in Ford's 50 state test group BFMXD06.761A (8,501-10,000 lb GVWR). The test fuel used is Federal ultra low sulfur diesel.

As discussed during conference calls on February 10-11, 2010, Ford plans to implement several changes to meet ARB requirements for non-conditional certification. Specifically, as part of our R11 calibration release, Ford will implement a 30% torque derate for sensor faults resulting in DEF/SCR system deactivation. In addition, the diesel exhaust fluid (DEF) quality monitor will be made continuous, i.e., decoupled from DEF refill. Also, the DEF dosing fault for a clogged or blocked line detection will be turned to MIL with the same 30% derate. The R11 calibration is planned to be implemented for initial production of the 2011 MY 6.7L F-Series Super Duty. This Application update is to incorporate minor documentation updates pertaining to the R09-R11 calibration releases. The majority of the Application content, including test data and certification levels, remains the same as the previous version that was submitted. Based on this update, Ford expects to receive non-conditional certification for this diesel test group, upon demonstration of compliance with all applicable regulations.

This Part I application for certification has been prepared in accordance with the standardized format recommended by EPA via its mail out # VPCD-99-06 (LDV, LDT, SVM), subject: "CAP 2000 Implementation: Guidance Documents and Workshop"' dated April 22, 1999. This Application has also been prepared in accordance with the California Air Resources Board, Final Regulation Order, Amendments to Sections 1960.1, 1960.5, 1961, and 1962 Title 13, California Code of Regulations (As Amended August 4, 2005). Therefore, in accordance with the provisions of 40 CFR 86.1844-01(d)(14), Ford requests that an Executive Order be issued for the MDV test group listed in this Application for Certification.

Please contact Alyssa Werthman at 313-323-2706, if you have any questions regarding this submission.

Sincerely

Neil Whitbeck /fn

Todd M. Fagerman, Manager
Car and Truck Certification
Certification Programs

cc: Yuh Jiun Tan

SECTION 15

Other Information

15.00.00.00

U.S. Environmental Protection Agency

Motor Vehicle and Engine Compliance Program Fee Filing Form

305981

Date:12/3/2009

Manufacturer Contact Information:

Manufacturer Name:	Ford Motor Company	Fax Number:	(313) 845-4165	(optional)
Contact Name:	Todd Fagerman	Email Address:	tfagerma@ford.com	
Phone Number:	(313) 594-0680			

Calendar Year: 2010~

Test Group or Engine Family Name: BFMXH06.761A → to be corrected to BFMXD06.761A

For dual U.S. / IMO Marine only, also give IMO name:

Certification Request Type: (•) On Highway ( ) Nonroad

On-Highway Certification Types:

(•) **LDV** - Light-duty Vehicles (Chassis Certification - Federal Certificate)
LDT - Light-duty Trucks (Chassis Certification - Federal Certificate)
MDPV - Medium-duty Passenger Vehicles (Chassis Certification - Federal Certificate)
HDV - Heavy-duty Vehicles (Chassis Certification - Federal Certificate)

( ) **HDE** - Heavy-duty Engine (Engine Dynamometer Certification - Federal Certificate)

( ) **LD ICI** - Light-duty Vehicles for Independent Commercial Importers
MDPV ICI - Medium-duty Passenger Vehicles for Independent Commercial Importers
HDV ICI - Heavy-duty Vehicles for Independent Commercial Importers

( ) **MOTORCYCLE** - On-highway Motorcycles (includes Independent Commercial Importers)

( ) **LDV** - Light-duty Vehicles (Chassis Certification -California-Only Certificate)
LDT - Light-duty Trucks (Chassis Certification -California-Only Certificate)
MDPV - Medium-duty Passenger Vehicles (Chassis Certification -California-Only Certificate)
HDV - Heavy-duty Vehicles (Chassis Certification -California-Only Certificate)

( ) **HDE CALIF-ONLY** - Heavy-duty Engine California - Only Certification

( ) **HDV EVAP-ONLY** - Heavy-duty Evaporative System Only

Nonroad Certification Types:

( ) **NR CI** - Nonroad Engine Compression-Ignition (includes Independent Commercial Importers and excludes Locomotives, Marine and Recreational)
( ) **NR SI** - Nonroad Spark-Ignition (includes Independent Commercial Importers)
( ) **Locomotives** - All Locomotives (includes Independent Commercial Importers)
( ) **Recreational** - Recreational Vehicles (except marine engines and includes Independent Commercial Importers)
( ) **All Marine** - (excludes spark-ignition inboard/sterndrive engines and includes Independent Commercial Importers)

Fee Payment Information:

Do you qualify for reduced fee? No

Are you an Independent Commercial Importer? No

Make of the model(s) (list all that apply, separated by commas):

Model name(s) of vehicle or engine under this engine family/test group (list all that apply, separated by commas):

Year of the vehicle(s) or engine(s) (list all that apply, separated by commas):

VIN(s) of the model(s) (list all that apply, separated by commas. Enter "TBD" if unknown):

Has a certificate been issued?

What is the total number of the vehicles or engines covered?

What is the aggregate total retail value of the vehicles or engines covered? $

Payment Details:

Amount Owed (U.S. Funds Only): $ 34,849

Payment Type:

Enter the check number:

SECTION 17

California ARB Requirements

17.00.00.00

E.O.#_____

2011 AIR RESOURCES BOARD CERTIFICATION REVIEW SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer Ford Motor Company Exh. Test Group: BFMXD06.761A Evap. Fam.: n/a

Engine Code Types: CA____ 49S____ 50S X ORVR: Yes___ No X

Exhaust Std: LEV2___ ULEV2 X SULEV2 ___ SULEV2+PZEV ___ U.S. EPA: _____

Vehicle Class(es) Select all that apply: PC_____ T1L2 (< 6,000 GVW; 0-3750 LVW) _____
T2L2 (<6,000 GVW; 3751-5750 LVW)_____ T3L2 (6,001-8,500 GVW; 3751-5750 ALVW) _____
T4L2 (6,001-8,500 GVW; 5751-8,500 ALVW) _____ M4L2 (8,500 – 10,000 GVW) X
M5L2 (10,001 – 14,000 GVW) _____

Single Cert Std for Multi-Class Eng Fam: ___ specify: (N/A, PC, T1L2, T2L2, T3L2, T4L2, M4L2, M5L2)

Exhaust Useful life: 100K ___ 120K X 150K ___ Evap Useful life: 100K ___ 120K ___ 150K ___

Exhaust In-Use Standard: Full X Alternative ____ Evap In-Use Standard: Full ____ Alternative___

Fuel Type(s): Dedicated X Flex-Fuel___ Dual-Fuel___ Bi-Fuel____ Gasoline___ Diesel X
CNG____ LNG____ LPG_____ M85_____ E85 _____ Other (specify):_____

Exh Emiss Test Fuel(s): Tier 2 Unleaded _____ Indo___ CBG___ CNG___ LPG___ M85___

Diesel: 13 CCR 2282__ 40 CFR 86.113-90__ 40 CFR 86.113-94__ E85__ Other(specify): X (40 CFR 86.113-07)

Evaporative Emission Test Procedure: California_____ Federal

Evaporative Emission Standard: LEV_____ LEV2____ Federal_____

Service Accumulation: Std AMA_____ Mod AMA___ Mfr Bench_____ Other Standard Road Cycle (SRC)

NMOG Test Procedure: N/A___ Std X Equiv___ R/L Test Procedure: SHED ____ Pt.Source____

Engine Configuration V-8 Displacement: 6.7 Liters 409 Cubic inches

Exhaust Control System and Special Features: TC / DDI / CAC / EGR-C / OC / PTOX / SCR-U
(Use abbreviations per SAE J1930 SEP91)

EPA Certificate _____

NOTE: These 8,501-10,000 lb GVWR diesel trucks are exempt for evaporative and refueling emissions requirements

Test Vehicle Information	Durability Vehicle	Emission Data Vehicle
C/O MY or C/A MY & ID	2011 BFA1-6.7-889	2011 BFA1-6.7-J-008
Vehicle Log Page(s)	n/a	n/a
Zero Mile Books	n/a	n/a
Maint. Logs & Engr. Eval.	n/a	n/a

2011 AIR RESOURCES BOARD CERTIFICATION REVIEW SHEET

PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES E.O.#_____

Manufacturer: Ford Motor Company Test Group: BFMXD06.761A Evaporative Family: n/a

Emission Data Vehicle ID	Engine Code & Disp.	Test Location	Trans	ETW	DPA		PROJECTED EMISSIONS (grams/mile, except, grams/test for evaporative tests)[1] MPG City/Hwy	NMOG*	CO	NOx	HCHO	PM	Hwy NOx	City / Hwy CO_2	3-DAY D+HS	EVAPORATIVE R/L	2-DAY D+HS	ORVR
BFA1-6.7-J-008	BFA17A0508	FORD	A	10000	---	(120K)	n/a / n/a	0.034	0.5	0.2	0.007	0.01	0.1	703 / 455	n/a	n/a	n/a	n/a
(1) The EDV' above complies with standards at 120K:								0.143	6.4	0.2	0.016	0.06	0.4	n/a	n/a	n/a	n/a	n/a
NMOG values include RAF(s) of:							Not Applicable_X_		NMOG_____		Methane (CNG or LNG only)_____							
Emissions include additive DFs (with applicable RAF) for 120K of:								0.0192	0.21	0.05	0.0000	0.005	0.05	n/a	n/a	n/a	n/a	n/a
Emissions include regenerative upward adjustment factors (UAFs)** of:								0.0001	0.00	0.01	-0.0001	0.000	0.01	n/a	n/a	n/a	n/a	n/a

* NMOG = NMHC for diesel vehicles.
**DPF regeneration upward adjustment factors based on 4K base and regeneration emissions testing at Ford.

Remarks:_____

Application
Processed by _____ Date _____ Reviewed by _____ Date _____

Test Group: BFMXD06.761A
Issued: January 26, 2010
Revised:

E.O.#_____

2011 MODEL-YEAR AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer Ford Motor Company Exh. Test Group: _BFMXD06.761A_ Evap. Fam.: _n/a_____

Engine Code Types: CA____ 49S____ 50S_X_ ORVR: Yes___ No_X__

Exhaust Std: LEV2___ ULEV2_X__ SULEV2 ___ SULEV2+PZEV ___ U.S. EPA: _____

Vehicle Class(es) Select all that apply: PC_____ T1L2 (< 6,000 GVW;0-3750 LVW) _____
T2L2 (<6,000 GVW, 3751-5750 LVW)_____ T3L2 (6,001-8,500 GVW; 3751-5750 ALVW) _____
T4L2 (6,001-8,500 GVW; 5751-8,500 ALVW) _____ M4L2 (8,500 – 10,000 GVW) _X__
M5L2 (10,001 – 14,000 GVW) _____

Single Cert Std for Multi-Class Eng Fam: ___ specify: N/A, PC, T1L2, T2L2, T3L2, T4L2, M4L2, M5L2)

Exhaust Useful life: 100K ___ 120K _X_ 150K ___ Evap Useful life: 100K ___ 120K ___ 150K ___

Exhaust In-Use Standard: Full _X__ Alternative ____ Evap In-Use Standard: Full ____ Alternative___

Fuel Type(s): Dedicated_X__ Dual-Fuel___ Flex-Fuel____ Bi-Fuel____ Gasoline___ Diesel_X__
CNG____ LNG____ LPG_____ M85_____ E85 _____ Other (specify): _____

Exh Emiss Test Fuel(s): Tier 2 Unleaded _X___ Indo___ CBG___ CNG___ LPG___ M85_____
Diesel: 13 CCR 2282__ 40 CFR 86.113-90_ 40 CFR 86.113-94 E85__Other(specify):X (40 CFR 86.113-07)

Evaporative Emission Test Procedure: California_____ Federal

Evaporative Emission Standard: LEV2_____ Federal_____

Service Accumulation: Std AMA_____ Mod AMA___ Mfr Bench_____ Other Standard Road Cycle (SRC)

NMOG Test Procedure: N/A___ Std_X_ Equiv___ R/L Test Procedure: SHED___ Pt.Source___

Engine Configuration __V-8___ Displacement: _6.7 Liters 409 Cubic inches

Valves/Cyl: __2___ Rated HP: 390 @ 2800___ RPM

Engine: Front_X__ Mid_____ Rear_____ Drive: Fwd_____ RWD_X__ 4WD-FT___ 4WD-PT_X

Exhaust Control System and Special Features: TC / DDI / CAC / EGR-C / OC / PTOX / SCR-U
(Use abbreviations per SAE J1930 SEP91)

Engine Code	Vehicle Models	Trans. A-Auto M-Man	ETW	DPA
BFA17A0508, 09, 10, 11	F250/350 Pickup/Box Delete 4x2/4x4 SRW	A	*	*

* Refer to section 12.00.06.00 for ETW and 12.01.02.00 of the Common Section for associated DPA

Test Group: BFMXD06.761A
Issued: January 26, 2010
Revised: February 16, 2010

180 MAX.

45 MAX.

Ford Motor Company
VEHICLE EMISSION CONTROL INFORMATION

Conforms to regulations: 2011 MY

U.S. EPA: HDV **OBD:** CA II **FUEL:** Diesel

California: ULEV II MDV **OBD:** CA II **FUEL:** Diesel

TC/DDI/CAC/EGR-C/OC/PTOX/SCR-U | No adjustments needed.

6.7L-Group: BFMXD06.761A

▽BW7E-9C485-**U K N** △

180 MAX.

45 MAX.

Ford Motor Company
VEHICLE EMISSION CONTROL INFORMATION

Conforms to regulations: 2011 MY Incomplete

Weight limits refer to Emission Certification only.
DO NOT EXCEED VEHICLE GVWR (See Incomplete Vehicle Manual)

U.S. EPA: HDV **OBD:** CA II **FUEL:** Diesel

California: ULEV II MDV **OBD:** CA II **FUEL:** Diesel

Completed Vehicle Maximums: GVWR: 10,000# max.
CurbW: 9565# max. Frontal Area: 40.5 ft2 max.

TC/DDI/CAC/EGR-C/OC/PTOX/SCR-U
No adjustments needed.

6.7L-Group: BFMXD06.761A

▽BW7E-9C485-**U M C** △

Test Group: BFMXD06.761A
Issued: January 26, 2010
Revised:

SECTION 18

Revisions

18.00.00.00

APPLICATION REVISIONS

BFMXD06.761A

NO.	DATE	PAGE(S)	DESCRIPTION
Initial Cert Update	2/1/10	16.05.01.CC	Added EI-AECD Timer Numbering Descriptions.
Initial Cert Update #2	2/10/10	16.05.01.CC	Minor updates made at ARB request to DEF-DEP, EGR-WARMUP and DPF descriptions. Additional revisions: EGR-COLD-IAT includes new EGR rampout from 0 to -2.5 degC, EGR-HOT-INDUCT removed since it is not applicable to chassis cert and AECD Timers updated to indicate timers stop about 8,000 ft.
Initial Cert Update #3	2/16/10	12.00.02.00 12.00.03.00 12.00.05.00 12.00.06.00 14 – Cover Letter Update 16.00.03.00 16.05.01.CC 17.00.02.00	Updates to include part numbers and configurations associated with the R09-R11 calibrations. Also includes an update to the OBD II Deficiency Summary to list the assigned deficiencies and to the EI-AECD timer table to add "Enablement Status PID" columns. The R11 calibration will be implemented for initial production and incorporates ARB required changes to force a 30% derate for sensor faults resulting in DEF/SCR system deactivation. In addition, the DEF dosing fault for clogged or blocked line detection is turned to MIL with the 30% derate and the DEF quality monitor will be made continuous (decoupled from DEF refill). No new cert testing was conducted.

Application for Certification

Part 2