2013 Compensatory Mitigation Monitoring Report

L.E. Carpenter & Company, Borough of Wharton, Morris County, NJ

Cardno JFNew Project No. 040229





Document Information

Prepared for TRC

Project Name L.E. Carpenter & Company

Project Number 040229

Project Manager Kelly Rice

Date November 10, 2013

Prepared for:




30 Patewood Drive, Suite 300, Greenville, South Carolina 29615

Prepared by:



11181 Marwill Avenue, West Olive, Michigan 49460



This Page Intentionally Left Blank

Table of Contents Introduction1-1 2 Monitoring......2-1 3 Vegetative Community4-3 4 5 Maintenance5-5 6 Hydrology and Water Quality......6-6 7 Wildlife Habitat7-6 8 Soils......8-7 Sedimentation and Erosion Control.....9-8 9 10 11 References.......11-8 **Appendices** Appendix A Planting List Appendix B Wetland Mitigation Sampling Data Sheets Appendix C Photographs of Wetland Development

Tables

Appendix D

Table 4-1	A summary of species diversity in the emergent zone	4-3
Table 4-2	A summary of species diversity in the forested/scrub-shrub zone	4-3
Table 4-3	A summary of species diversity in the transition zone	4-4
Table 7-1	Comprehensive list of wildlife observations in the mitigation wetland	7-6
Table 8-1	Soil profile review	8-7

Figures

Figure 1	Location Map
Figure 2	USGS Topographic Map
Figure 3	Aerial Photograph
Figure 4	Mitigation Monitoring Ma

NJDEP Permit 1439-04-0001.1

Acronyms

LEC L.E. Carpenter

NAD North American Datum

NJDEP New Jersey Department of Environmental Protection

RAWP Remedial Action Work Plan

RC relative cover

RΙ Remedial Investigation

ROD Record of Decision

U.S. Environmental Protection Agency **USEPA**

USGS U.S. Geological Survey

1 Introduction

L.E. Carpenter & Company (LEC) implemented a Remedial Action Work Plan (RAWP) for the impacted portion of their + 14.6-acre site (approximately 4.7 acres of disturbed area) located at 170 North Main Street, Borough of Wharton, Morris County, New Jersey (Figure 1). The site comprises Block 301, Lot 1 and Block 703, Lot 30 on the Borough of Wharton tax map. The project area is located in the USGS Dover, New Jersey quadrangle with center state plane coordinates of N 754326.5 E 470891.83 (NAD 1983) (Figure 2). A 2002 aerial photograph of the project site is also included (Figure 3).

Due to the parcel's previous utilization for mining and forging throughout the 1700's and 1800's, and vinyl manufacturing from 1943 to 1987, contaminated soils and groundwater were identified on the site. TRC, Inc. (TRC), on behalf of LEC, worked with the U.S. Environmental Protection Agency (USEPA) and the New Jersey Department of Environmental Protection (NJDEP) to implement the RAWP for those impacted areas of the property.

As part of the RAWP, several "Hot Spots" (areas exhibiting either inorganic or organic contaminant concentrations in soil in excess of the 1994 Record of Decision (ROD) cleanup criteria) were identified across the site for removal. Several areas identified for contaminant removal overlapped with jurisdictional wetlands on site. A total of 0.337 acre of jurisdictional wetlands was temporarily impacted as a result of site remediation activities (Figure 4). This acreage consisted of a 0.003 acre and 0.009 acre lobe of forested/scrub-shrub wetland on site, 0.286 acre of forested/scrub-shrub and emergent marsh wetland to the east on the Wharton Enterprise property, and 0.039 acre of the Air Products open-water drainage channel relocation to the northeast. Due to the fact that project activities and wetlands extend off site onto adjacent properties, the project area or site referenced in this plan includes the LEC parcel, several acres of the Wharton Enterprises parcel to the east, and the Air Products drainage channel to the northeast.

Upon completion of cleanup activities, the entire 0.337 acre of wetland disturbance was restored and enhanced as more diverse emergent wetland communities. All temporary wetland impacts were restored and mitigated for at their current locations. A Wetland Mitigation Construction Final Report, dated August 28, 2005, was submitted to the NJDEP upon completion of restoration activities.

The main source of hydrology for the restored wetland is a direct surface water flow from the Rockaway River. The wetland area was restored to pre-cleanup grades. The intention was to restore and enhance the pre-existing wetland so that there is no-net loss of wetlands as a result of the clean-up work completed by LEC.

The primary means through which wetland vegetation will be established in the mitigation area is through planting native seed and bare root stock trees, as well as natural colonization from the adjacent wetland areas. For a list of planted species within the mitigation area and transition zone, see Appendix A.

2 Monitoring

Annual monitoring of the mitigation area was proposed originally for five years. Due to the installation of the monitoring wells on site and subsequent disturbance, the site has continued to be monitored. Annual monitoring will continue unless it is apparent the wetland has been successfully established, upon which case the permittee will propose elimination of any subsequent reports in writing to the NJDEP. Only upon written concurrence from the NJDEP will any reporting requirements be eliminated.

LEC will submit annual reports to the NJDEP by December 31 of each monitoring year in accordance with the requirements outlined in the NJDEP Mitigation Project Monitoring Reports Checklist for Completeness. The monitoring reports will, at a minimum, include the following:

- 1. Photographs of the wetland mitigation areas.
- 2. Assessment of vegetative communities and evaluation of whether a dominance of wetland species exists (according to federal wetland indicator status of species identified).
- Wildlife utilization evaluation.
- 4. Hydrology evaluation.
- Soil evaluation.
- 6. Sediment loading evaluation.
- 7. Evaluation of sideslope and transition area conditions.
- 8. Evaluation of overall progress toward successful achievement of wetland creation as designed, per each of the performance standards dictated for the project. Perform a comparative assessment between existing conditions and the performance standards.

This document will serve as the ninth annual monitoring report.

3 Methods

A spring site visit was completed on May 21-22, 2013 followed by a thorough review of the mitigation site on September 5, 2013. During the May visit, conditions were overcast with a temperature of 80° F while conditions were sunny with scattered clouds and 70° F during the September site visit. During the May and September site visits, the invasive species of purple loosestrife (*Lythrum salicaria*) and reed canary grass (*Phalaris arundinacea*) were chemically treated. During the September site visit, common reed (*Phragmites australis*) was chemically treated, and autumn olive (*Elaeagnus umbellata*) and multiflora rose (*Rosa multiflora*) were cut and the stumps treated to prevent further spread.

The wetland was walked using the random meander method. All plant species encountered during the walk-through were recorded on inventory data sheets until no new plant species were observed (Appendix B). Plant names were used as listed in Gleason and Cronquist (1991).

Three permanent transects were set up in order to measure percent cover of vegetation in the wetland (Figure 4). Several 1-square meter (m²) plots were laid along the transect in order to measure the vegetative cover. A percent cover value was assigned to each species found in the plots. Total vegetative cover was calculated by averaging the vegetative cover from each plot along the transect (Appendix B).

Information on hydrology was collected using evidence provided by soil pits. Permanent reference points were located at the beginning of each transect so that water levels are recorded in the same location from year-to-year. The site was also inspected for problems such as erosion, sedimentation, and water quality issues. Signs of wildlife use were recorded during the walk-through. Finally, permanent photopoint locations were identified and reference photographs were taken.

4 Vegetative Community

The data from the plots was used to describe the vegetative cover. Of the total wetland and transition areas, an average of 96% was vegetated and 4% was bare soil. This was a slight decrease in vegetative cover by 1% from 2012. The total vegetative cover in the emergent zone was 93.5% (95% in 2012), while the vegetative cover of the forested zone was 94% (100% in 2012). The vegetative cover in the transition zone increased from 96% in 2012 to 100% in 2013. The total number of species increased in the emergent zone, while the total number decreased in the forested zone. The actual vegetative cover by native wetland indicator species increased significantly in the emergent zone, and remained the same in the forested zone compared to 2012 (Tables 4-1 and 4-2). The total number of species in the transition zone decreased from 2012, yet remains high considering the small size of the transition zone (Table 4-3).

Table 4-1 A summary of species diversity in the emergent zone

Year	Total # Species	# Native Wetland Indicator Species (NWIS)	# Native Species	Percent Vegetative Cover	Percent Actual Cover by NWIS
2005	49	19 (39%)	29 (59%)	77%	11%
2006	46	24 (52%)	31 (67%)	90%	38%
2007	56	36 (64%)	44 (79%)	78%	31%
2008	48	24 (50%)	32 (67%)	89%	39%
2009	71	39 (55%)	50 (70%)	100%	41%
2010	86	43 (50%)	56 (65%)	98%	30%
2011	87	49 (56%)	59 (68%)	96%	31%
2012	93	51 (55%)	63 (68%)	95%	29%
2013	98	53 (54%)	68 (69%)	93.5%	51%

Dominant species, based on relative cover (RC), in the emergent zone include barnyard grass (*Echinochloa crusgalli*) (17.6% RC), rice cut grass (*Leersia oryzoides*) (17.2% RC), long scaled nut sedge (*Cyperus strigosus*) (12.6% RC), and small carp grass (*Arthraxon hispidus*) (15.0% RC). Dominant species in the forested/scrub-shrub zone include small carp grass (28.9% RC), long scaled nut sedge (8.9% RC), birdsfoot trefoil (*Lotus corniculata*) (7.5% RC), and rice cut grass (6.2% RC). Dominant species in the transition zone include Japanese stilt grass (*Microstegium vimineum*) (24.0% RC), birdsfoot trefoil (9.9% RC), yellow sweet clover (*Melilotus officinalis*) (9.1% RC), common ragweed (*Ambrosia artemisiifolia*) (6.6% RC), grass-leaved goldenrod (*Euthamia graminifolia*) (6.3% RC), and tall goldenrod (*Solidago altissima*) (6.3% RC).

Table 4-2 A summary of species diversity in the forested/scrub-shrub zone

Year	Total # Species	# Native Wetland Indicator Species (NWIS)	# Native Species	Percent Vegetative Cover	Percent Actual Cover by NWIS
2005	51	23 (45%)	34 (67%)	82%	10%
2006	53	29 (55%)	41 (77%)	98%	26%
2007	54	23 (43%)	36 (67%)	82%	41%
2008	70	37 (53%)	48 (69%)	98%	53%
2009	76	36 (47%)	55 (72%)	98%	55%

Year	Total # Species	# Native Wetland Indicator Species (NWIS)	# Native Species	Percent Vegetative Cover	Percent Actual Cover by NWIS
2010	92	42 (46%)	59 (64%)	92%	34%
2011	98	47 (48%)	68 (69%)	95%	34%
2012	106	57 (54%)	71 (67%)	100%	38%
2013	96	48 (50%)	68 (71%)	94%	38%

Table 4-3 A summary of species diversity in the transition zone

Year	Total # Species	# Native Wetland Indicator Species (NWIS)	# Native Species	Percent Vegetative Cover
2005	37	7 (19%)	19 (51%)	62%
2006	49	10 (31%)	28 (57%)	94%
2007	63	19 (30%)	39 (62%)	100%
2008	69	14 (20%)	38 (55%)	97%
2009	61	18 (30%)	34 (56%)	99%
2010	66	19 (29%)	37 (56%)	92%
2011	73	24 (33%)	42 (58%)	94%
2012	84	44 (52%)	49 (58%)	96%
2013	77	27 (35%)	43 (56%)	100%

The following invasive species were observed within the mitigation wetlands during the 2013 monitoring visit: reed canary grass, purple loosestrife, common reed, autumn olive, and multiflora rose. Since the monitoring period began, purple loosestrife and reed canary grass have been found around the eastern perimeter of the emergent and forested zones. A few plants of common reed remained present within the mitigation area. Autumn olive remained present in both the emergent and forested zones though the numbers had decreased significantly since cut-stump herbicide treatments began in 2010. Multiflora rose was scattered throughout the mitigation area though the numbers have also significantly decreased since herbicide treatments began.

In the emergent zone, the relative cover of purple loosestrife was 3.3%, the lowest level since monitoring began (2007-7.4% RC, 2008-4.9% RC, 2009-3.8% RC, 2010-4.5% RC, 2011-9.9% RC, and 2012-3.0% RC). The relative cover of reed canary grass also decreased to 2.5% (2007-3.4% RC, 2008-2.7% RC, 2009-3.5%, 2010-4.4%, 2011-4.2%, and 2012-4.4%).

In the forested zone, purple loosestrife had a relative cover of 1.4% (2006-5.3% RC, 2007-4.2% RC, 2008-2.0% RC, 2009-3.5% RC, 2010-1.0%, 2011-7.4% RC, 2012-2.1% RC). Reed canary grass, while present in the forested zone, was not found within the transect plots.

The other invasive species previously mentioned were not present in high enough numbers to appear in the transect data. All invasive species will continue to be selectively treated using wetland-approved herbicides. Annual treatments will be performed twice each year through September 2014, or until invasive populations have been effectively controlled.

During the 2007 site visit, it was noted that all of the planted (June 28, 2005) bareroot trees and shrubs had died through a combination of drought conditions and deer predation. In May of 2008, 275 supplemental bareroot trees and shrubs were installed (Appendix A) with predator guards to encourage sufficient coverage to meet mitigation requirements. During the August 28, 2008 site visit, 165 trees and

shrubs were sampled to determine survival. Of the 165 sampled trees, a total of 73 live trees were counted (44.2% survival) in 2008, and 61 (37% survival) in 2009. During the 2010 site visit the total number of live trees sampled was 50 (30% survival), and none were found living during the 2011 site visit.

A Supplemental Remedial Investigation (RI) was required by the USEPA and NJDEP. This Supplemental RI was completed during the fourth quarter of 2011. As a follow up to the Supplemental RI, a bench scale treatability study was conducted on the soil and underlying groundwater within the wetland mitigation area to determine an appropriate remedial alternative. TRC presented the use of a phytoremediation pilot study within the wetlands area of the site, which was approved by the USEPA and NJDEP. The pilot study included the installation of 51 trees along the south edge of the forested zone and north edge of the emergent zone within the wetland mitigation area. The species planted were a combination of river birch (*Betula nigra*) and weeping willow (*Salix babylonica*). The trees were installed on mounds and were six to nine feet high in 15-gallon pots. At the time of the September 2013 site visit, all of the planted trees appeared to be healthy. It was noted during a subsequent site visit by TRC that an animal had damaged the bark on approximately 50% of the single stem trees. TRC installed predator guards to help protect the trees from further damage. The installation of these guards was completed during November 2013.

5 Maintenance

Invasive or noxious vegetation can oftentimes prevent or hinder the successful establishment of native species in a wetland mitigation area. For this reason, a routine wetland maintenance program is being implemented at the LEC project site. This program includes semi-annual site visits to assess and treat (if necessary) any invasive species found on the property. Based on knowledge of the site and adjacent communities, chemical applications have been selected as the most effective maintenance tool for control of invasive species. Invasive species on the site were chemically treated on May 22 and September 5, 2013. As previously mentioned, additional invasive species control measures were implemented during the September 5, 2013 site visit. It had been noted during previous visits that autumn olive and multiflora rose were beginning to increase in the emergent and forested zones. These species were cut to within at least 6" of the ground and then a 50% glyphosate mixture was applied manually using a sponge. This method was chosen, despite being more labor intensive, due to its selectivity and minimal damage to surrounding vegetation.

The purple loosestrife population had increased during the wet growing season of 2011. Herbicide treatments during the 2012 and 2013 site visits have returned the purple loosestrife population to pre-2011 levels around 3% RC.

Subsequent to permit issuance and after the restored wetland areas had been planted, several federal agency personnel raised a concern over the use of barnyard grass (*Echinochloa crusgalli*) in the wetland restoration seed mix. Due to the fact that several respected botanical sources disagree on the status of barnyard grass as a native versus non-native species, it was decided that barnyard grass populations on the project site will be monitored. If at any time it is determined that barnyard grass is having a detrimental effect on the mitigation area or prohibiting the establishment of other native species, it will be effectively controlled during the semi-annual maintenance site inspections. During the 2013 site visit, barnyard grass had a relative cover of 3.7% within the forested zone transect, and 17.6% relative cover within the emergent zone transect. The increase in barnyard grass may be attributed to the repeated disturbance on site over the past two years. While the increase should not be ignored, it is anticipated that the native plant species will return to dominance after sufficient time has passed since the previous disturbance.

6 Hydrology and Water Quality

During the May site visit, hydrology was present throughout the emergent and forested zones ranging from saturation at the surface to 4 inches of inundation in both the emergent and forested zones. During the September site visit, the soil was saturated at the surface with up to 1 inch of inundation. Soil pits indicated the presence of the water table 2" below the soil surface.

7 Wildlife Habitat

Evidence of wildlife use was present in the mitigation wetland (Table 7-1). The presence of white-tailed deer and Canada Goose continue to be evident, though herbivory by these species does not appear to have caused detrimental harm to the herbaceous species. The complete loss of all planted trees in 2005 may be directly related to the herbivory by white-tailed deer.

Table 7-1 Comprehensive list of wildlife observations in the mitigation wetland

BIRDS	
Scientific Name	Common Name
Agelaius phoeniceus	Red-winged Blackbird
Ardea herodias	Great Blue Heron
Branta canadensis	Canada Goose*
Buteo jamaicensis	Red-Tailed Hawk*
Colaptes auratus	Northern Flicker
Cyanocitta cristata	Blue Jay
Dumetella carolinensis	Gray Catbird*
Hirundo rustica	Barn Swallow*
Melospiza melodia	Song Sparrow*
Poecile atricapilla	Black-capped Chickadee*
Quiscalus quiscula	Common Grackle*
Troglodytes aedon	House Wren
Turdus migratorius	American Robin
Tyrannus tyrannus	Eastern Kingbird
Zenaida macroura	Mourning Dove
AMPHIBIANS/REPTILES	
Scientific Name	Common Name
Chrysemys picta	Eastern painted turtle
Rana clamitans	Green frog*
Rana sphenocephala	Southern leopard frog
Thamnophis sirtalis	Common garter snake

MAMMALS	
Scientific Name	Common Name
Odocoileus virginianus	White-tailed deer*
Procyon lotor	Raccoon*
INSECTS	
Scientific Name	Common Name
Papilio glaucus	Tiger swallowtail
Family Acrididae	Short-horned grasshoppers*
Order Mantodea	Praying mantis species
Order Odonata	Red dragonflies
Order Odonata	Blue damselflies
Libellula pulchella	Twelve-spot skimmer

^{*}Observed in 2013

8 Soils

During the 2013 site visit, soil characteristics and textures were not specifically examined due to the fact that this had previously been documented in June 2005. Results of the soil profile review were presented in the Wetland Mitigation Construction Final Report, dated August 28, 2005, and are again presented below (Table 8-1).

Table 8-1 Soil profile review

Boring ID and Location	Soil Depth	Munsell Soil Color	Soil Texture
Boring 1	0-10"	10YR 4/3	Loam
(40.54.15.00748N 74.34.31.41719W)	10-20"	10YR 3/3	Loam
Boring 2	0-13"	10YR 4/2	Loamy clay
(40.54.14.42438N 74.34.31.14259W)	13-20"	10YR 3/2	Loamy clay
Boring 3	0-15"	10YR 4/3	Loam
(40.54.13.75148N 74.34.31.31904W)	15-20"	10YR 3/1	Loamy clay
Boring 4	0-2"	10YR 4/3	Loam
(40.54.13.94790N 74.34.29.98567W)	2-20"	10YR 3/2	Loam
Boring 5	0-9"	10YR 4/3	Loam
(40.54.14.63046N 74.34.29.45719W)	9-20"	10YR 3/2	Loam
Boring 6 (40.54.12.80847N 74.34.34.70682W)	0-20"	10YR 3/3	Loam

9 Sedimentation and Erosion Control

As a result of the March 2013 tree installation on site, most of the herbaceous vegetation in the central part of the mitigation area had been disturbed or eliminated, and bare ground was present during the May 2013 site visit. TRC contracted with Cardno JFNew to seed this disturbed ground in 2013 with a mix of native wetland species similar to the original seeding mix (Appendix A). Seeding of the disturbed area was completed on May 22, 2013, and the site had successfully re-vegetated by the September 2013 site visit (Appendix C). No current erosion control issues exist on site.

10 Conclusions

The mitigation area was constructed during an extremely dry growing season, and late installation of seed and bare root trees, as well as herbivory by white-tailed deer and Canada Goose, were causes for the slow development of the mitigation wetland areas. However, during the May 29, 2008 site visit, 275 bare root trees and shrubs were installed with predator guards to compensate for the complete mortality of the 2005 woody plant installation. Despite the loss of the 2008 plantings, it is expected that the forested zone will continue to develop through natural succession as the large trees within and surrounding the mitigation wetland provide a heavy seed source for future colonization. Future sampling of this establishment will occur as the small seedlings increase in size. The phytoremediation plantings approved by the USEPA and NJDEP have increased the number of large tree stock in the mitigation wetland. The survival of these larger trees will continue to be documented during future monitoring visits. The actual percent cover by native wetland species has increased since construction of the site, but still remains lower than the required 85% cover by native wetland species. The diversity of each of the zones is very high with consideration to the size of each zone. The slight decrease in the number of species on site from the 2012 visits is attributable to the disturbance caused by the implementation of the phytoremediation plantings. The seeding of the disturbed area during the May 22, 2013 site visit appears to have sufficiently established vegetation throughout the mitigation area. It is anticipated that the total species diversity will continue to increase as the vegetation establishes. During the 2013 site visits, there were 98 species identified in the emergent zone, 96 species in the forested zone, and 77 species in the transition zone.


At this time, it is recommended that LEC continue maintenance visits for invasive species control to eliminate or effectively control their presence in the wetland mitigation and transition areas. While the invasive species control performed on the autumn olive and multiflora rose since 2010 has reduced the population, small shrubs continue to establish on site. The presence of a large population of autumn olive immediately adjacent to the mitigation area will continue to serve as a seed source for future establishment. Future visits will address the presence of these species on an as-needed basis.

Due to the fact that wetland communities surround the mitigation site and the elevations of the site were restored to pre-existing contours with no impedance to surface or groundwater flow, we expect that wetland and transition zone restoration will continue to progress and be successful.

11 References

Gleason, Henry and Arthur Cronquist. 1991. Manual of Vascular Plants of North-eastern United States and Adjacent Canada. D. Van Nostrand Company, New York, New York. 910 pp.

L.E. Carpenter & Company Site FIGURES

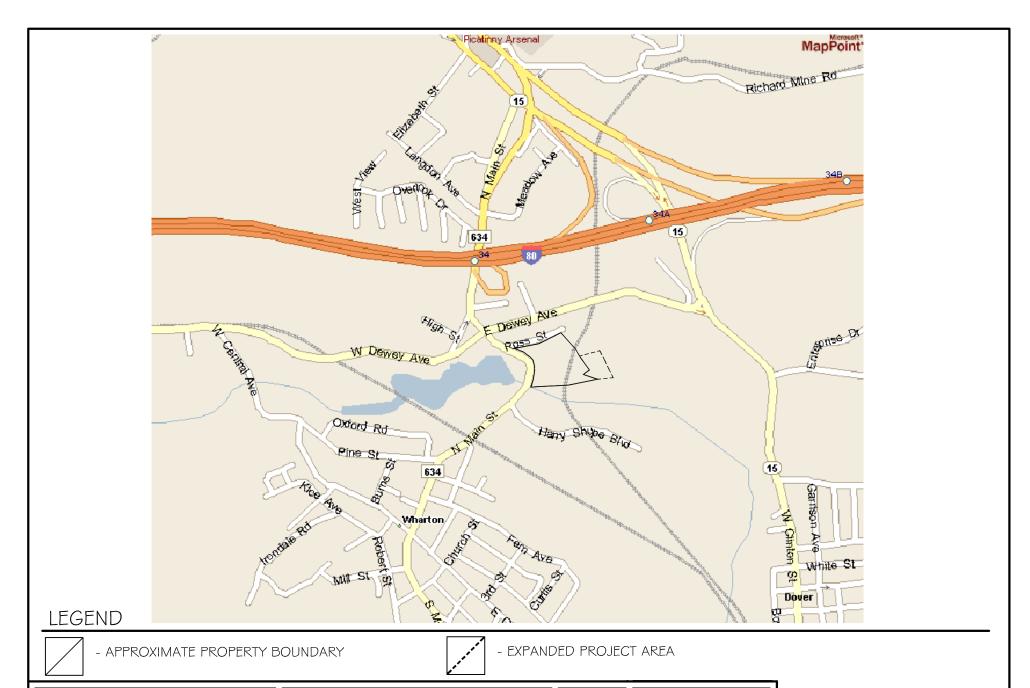


Cardno JFNew

Western Michigan 11181 Marwill Avenue West Olive, Michigan 49460 616-847-1680 www.cardnojfnew.com FIGURE I - LOCATION MAP

L.E. CARPENTER WHARTON, NEW JERSEY



SCALE: NTS
DATE: 12.13.11
FILE: 040229LocationMap

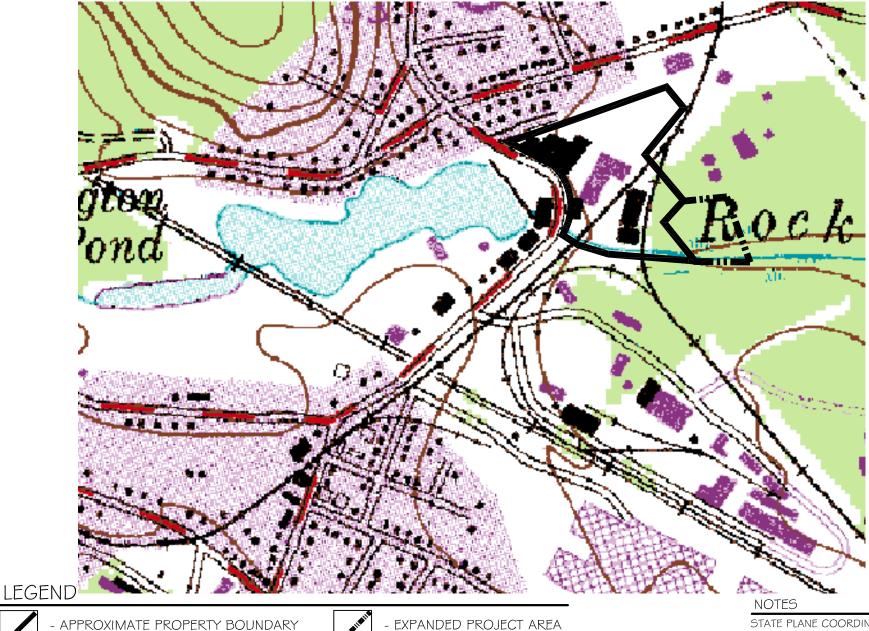





Western Michigan 11181 Marwill Avenue West Olive, Michigan 49460 616-847-1680 www.cardnojfnew.com

FIGURE 2 - USGS MAP

L.E. CARPENTER WHARTON, NEW JERSEY





SCALE: NTS DATE: 12.30.10

HUC-14 CODE 02030103030070 FILE: 040229USGSmap

STATE PLANE COORDINATES -754326.58N 47089 | .83E (NAD83)

SOURCE: USGS DOVER, NJ QUADRANGLE

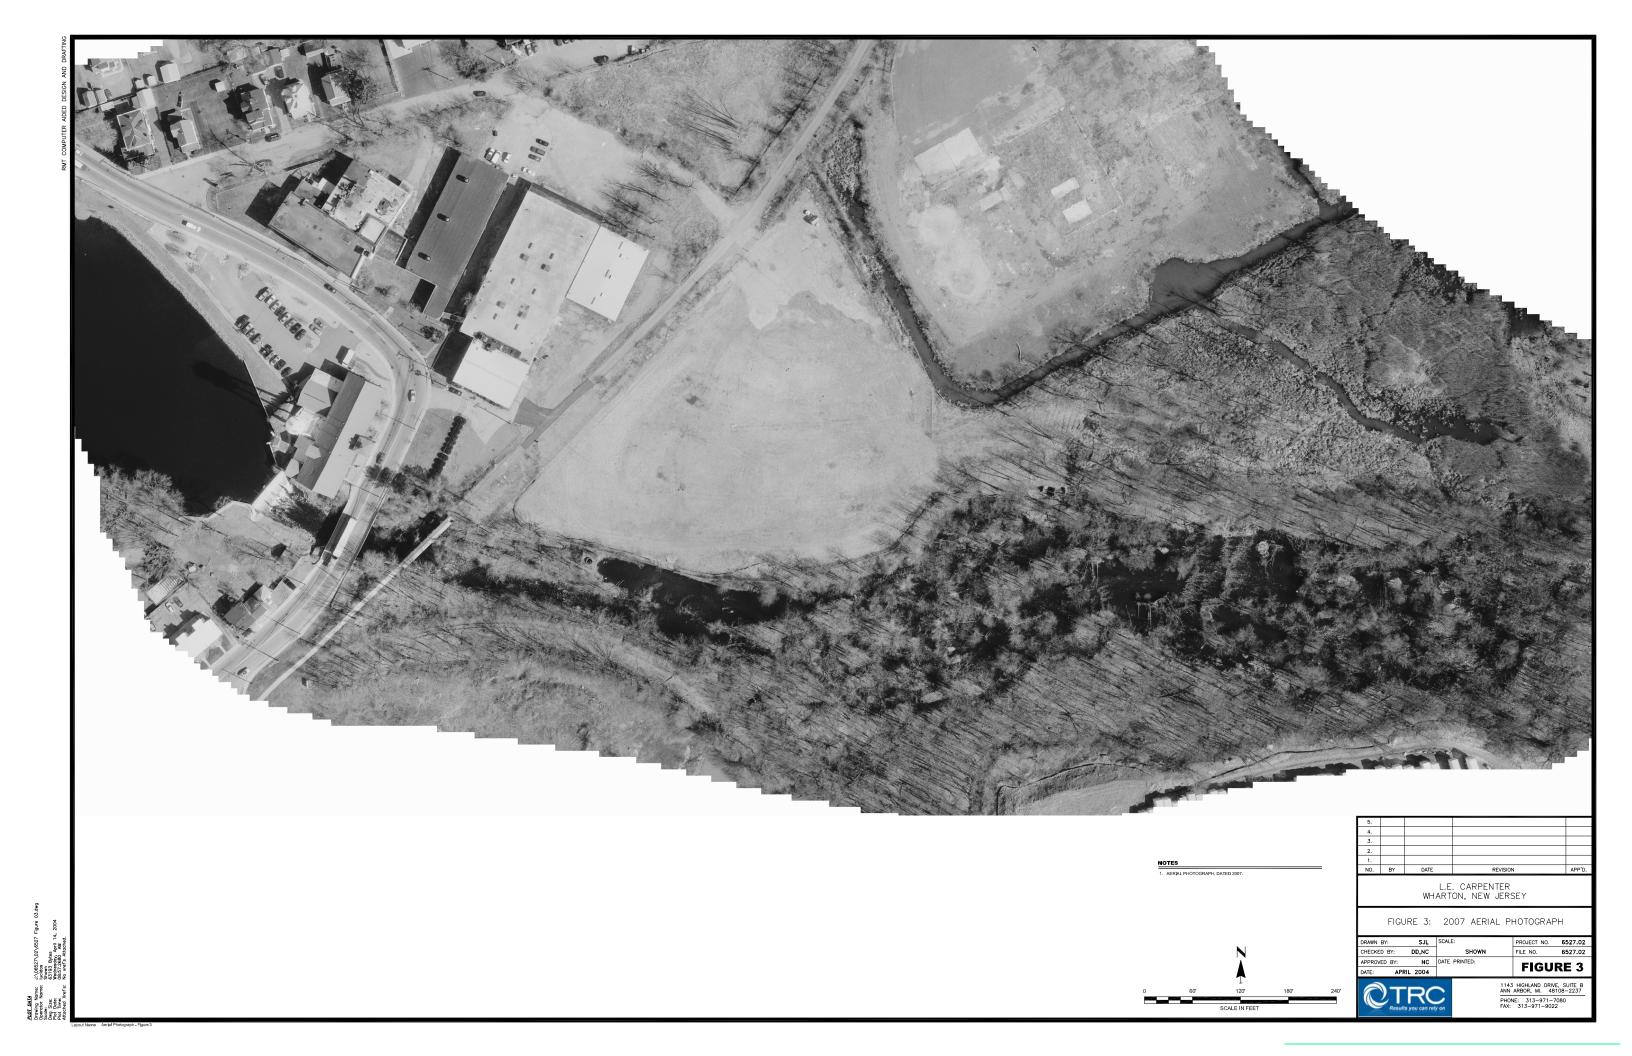

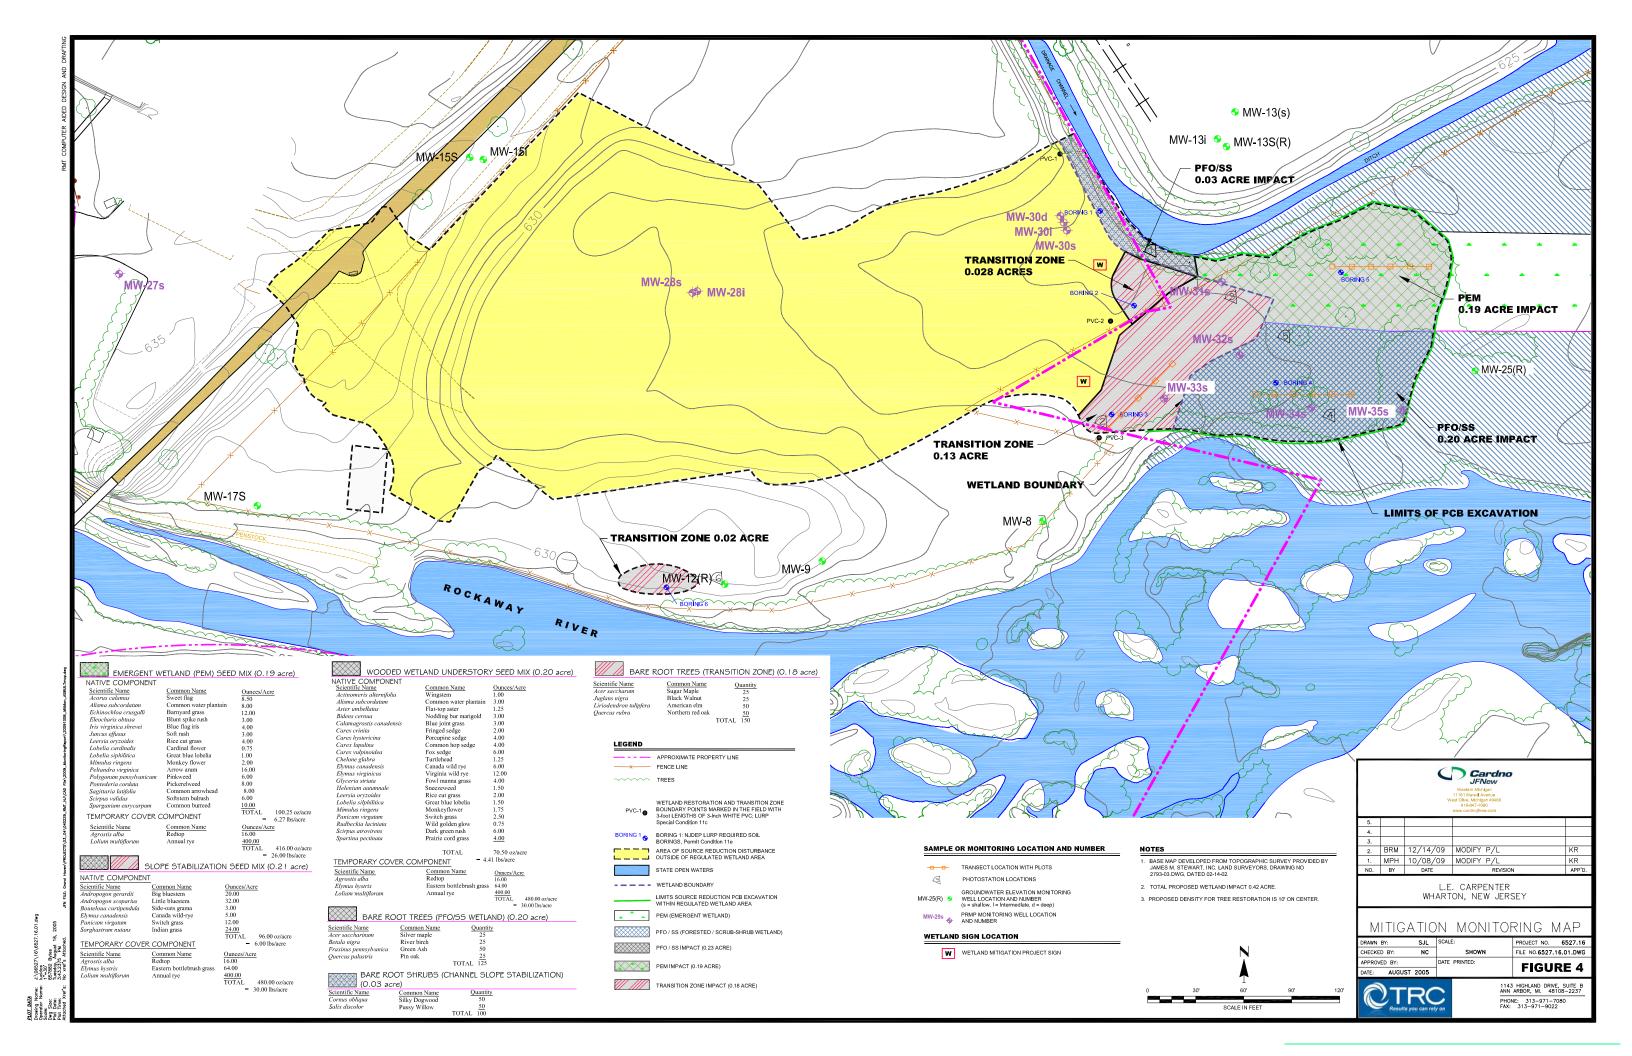

L.E. Carpenter & Company Site

APPENDIX



PLANTING LIST

2005 INITIAL PLANTINGS

EMERGENT WETLAND IMPACT AREA (0.19 acre)

Emergent Wetland Seed Mix (32.27 pounds/acre)

Scientific Name	Common Name	Ounces/Acre
Acorus calamus	Sweet flag	8.50
Alisma subcordatum	Common water plantain	8.00
Echinochloa crusgalli	Barnyard grass	12.00
Eleocharis ovata	Blunt spike rush	3.00
Iris virginica shrevei	Blue flag iris	4.00
Juncus effusus	Soft rush	3.00
Leersia oryzoides	Rice cut grass	4.00
Lobelia cardinalis	Cardinal flower	0.75
Lobelia siphilitica	Great blue lobelia	1.00
Mimulus ringens	Monkey flower	2.00
Peltandra virginica	Arrow arum	16.00
Polygonum pensylvanicum	Pinkweed	6.00
Pontederia cordata	Pickerelweed	8.00
Sagittaria latifolia	Common arrowhead	8.00
Scirpus validus	Softstem bulrush	6.00
Sparganium eurycarpum	Common burreed	<u>10.00</u>
TOTAL NATIVE FORBS AND GRASSES		100.25 = (6.27 lbs/acre)

Temporary Cover Component

Scientific Name	Common Name	Ounces/Acre
Agrostis gigantea	Redtop	16.00
Lolium perenne	Annual rye	<u>400.00</u>
TOTAL		416.00 = (26.00 lbs/acre)

FORESTED/SCRUB-SHRUB IMPACT AREA (0.20 acre)

Wooded Wetland Understory Seed Mix (34.41 pounds/acre)

Native Component

Scientific Name	Common Name	Ounces/Acre
Alisma subcordatum	Common water plantain	3.00
Aster umbellatus	Flat-top aster	1.25
Bidens cernua	Nodding bur marigold	3.00
Calamagrostis canadensis	Blue joint grass	3.00
Carex crinita	Fringed sedge	2.00
Carex hystericina	Porcupine sedge	4.00
Carex lupulina	Common hop sedge	4.00
Carex vulpinoidea	Fox sedge	6.00
Chelone glabra	Turtlehead	1.25
Elymus canadensis	Canada wild rye	6.00
Elymus virginicus	Virginia wild rye	12.00
Glyceria striata	Fowl manna grass	4.00
Helenium autumnale	Sneezeweed	1.50
Leersia oryzoides	Rice cut grass	2.00
Lobelia silphilitica	Great blue lobelia	1.50
Mimulus ringens	Monkeyflower	1.75
Panicum virgatum	Switch grass	2.50
Rudbeckia laciniata	Wild golden glow	0.75
Scirpus atrovirens	Dark green rush	6.00
Spartina pectinata	Prairie cord grass	4.00
Verbesina alternifolia	Wingstem	<u>1.00</u>
TOTAL NATIVE FORBS AND GRASSE	ES .	70.50 = (4.41 lbs/acre

TOTAL NATIVE FORBS AND GRASSES 70.50 = (4.41 lbs/acre)

Temporary Cover Component

Scientific Name	Common Name	Ounces/Acre
Agrostis gigantea	Redtop	16.00
Elymus hystrix	Eastern bottlebrush grass	64.00
Lolium multiflorum	Annual rye	<u>400.00</u>
TOTAL		480.00 = (30.00 lbs/acre)

Native Trees and Shrubs

Scientific Name	Common Name	Quantity
Acer saccharinum	Silver maple	25
Betula nigra	River birch	25
Fraxinus pennsylvanica	Green ash	50
Quercus palustris	Pin oak	<u>25</u>
TOTAL TREES		125

DRAINAGE CHANNEL SIDESLOPE IMPACT AREA (0.03 acre)

Slope Stabilization Mix (36.00 pounds/acre)

Native Component

Scientific Name	Common Name	Ounces/Acre
Andropogon gerardii	Big bluestem	20.00
Bouteloua curtipendula	Side-oats grama	3.00
Elymus canadensis	Canada wild-rye	5.00
Panicum virgatum	Switch grass	12.00
Schizachyrium scoparium	Little bluestem	32.00
Sorghastrum nutans	Indian grass	<u>24.00</u>
TOTAL NATIVE GRASSES		96.00 = (6.00 lbs/acre)

Temporary Cover Component

Scientific Name	Common Name	Ounces/Acre
Agrostis gigantea	Redtop	16.00
Elymus hystrix	Eastern bottlebrush grass	64.00
Lolium perenne	Annual rye	400.00
TOTAL		480.00 = (30.00 lbs/acre)

Native Trees and Shrubs

Scientific Name	Common Name	Quantity
Cornus amomum	Silky dogwood	50
Salix discolor	Pussy willow	<u>50</u>
TOTAL TREES		100

TRANSITION ZONE IMPACT AREA (0.18 acre)

Slope Stabilization Mix (36.00 pounds/acre)

Native Component

Scientific Name	Common Name	Ounces/Acre
Andropogon gerardii	Big bluestem	20.00
Bouteloua curtipendula	Side-oats grama	3.00
Elymus canadensis	Canada wild-rye	5.00
Panicum virgatum	Switch grass	12.00
Schizachyrium scoparium	Little bluestem	32.00
Sorghastrum nutans	Indian grass	<u>24.00</u>
TOTAL NATIVE GRASSES		96.00 = (6.00 lbs/acre)

Temporary Cover Component

Scientific Name	Common Name	Ounces/Acre
Agrostis gigantea	Redtop	16.00
Elymus hystrix	Eastern bottlebrush grass	64.00
Lolium perenne	Annual rye	<u>400.00</u>
TOTAL		480.00 = (30.00 lbs/acre)

Native Trees and Shrubs

Scientific Name	Common Name	Quantity
Acer saccharum	Sugar maple	25
Juglans nigra	Black walnut	25
Liriodendron tulipifera	Tulip tree	50
Quercus rubra	Red oak	<u>50</u>
TOTAL TREES		150

2008 Supplemental Plantings

Native Trees and Shrubs Replant

Scientific Name	Common Name	Quantity
Acer rubrum	Red maple	25
Acer saccharinum	Silver maple	25
Betula nigra	River birch	25
Cornus amomum	Silky dogwood	25
Cornus sericea	Red-osier dogwood	50
Liriodendron tulipifera	Tulip tree	25
Quercus palustris	Pin oak	25
Quercus rubra	Red oak	25
Salix nigra	Black willow	25
Ulmus americana	American elm	<u>25</u>
TOTAL TREES/SHRUBS		275

2013 Supplemental Plantings

Native 15-Gallon Trees

Scientific Name	Common Name	Quantity
Salix babylonica	Black willow	25
Betula nigra	River birch	<u>26</u>
TOTAL TREES		51

L.E. Carpenter & Company Site

APPENDIX

B

WETLAND MITIGATION SAMPLING DATA SHEETS

DATA ENTRY FORM			
MITIGATION WETLAND MONITORING			
Special Site Notes: None			
Project Number: 040229	Project Name/Location: TRC/New Jersey		
General Site Conditions: Site fully vegetated.	Date: September 5, 2013		
Past and Present Weather: Sunny and 70°F	Site Hydrology: Saturated at surface to 2" of inundation. Water table present in		
Wildlife: See report	soil pit at 2" below soil surface.		

VEGETATION SAMPLING DATA

Transect 1: Tra	nsition Zone				
Plot Number	Species Names	Rel. Cover	Plot Number	Species Names	Rel. Cover
Plot 1	Euthamia graminifolia	10%	Plot 4	Arthraxon hispidus	15%
PIOL I	Juncus effusus	10%	11014	Lotus corniculata	15%
		3%	-	Ambrosia artemisiifolia	
	Penstemon digitalis				15%
	Solidago altissima	8%	-	Rumex crispus	2%
	Agrostis gigantea	15%	_	Aster pilosus	5%
	Microstegium vimineum	45%	_	Euthamia graminifolia	5%
	Lythrum salicaria	20%	_	Helenium autumnale	2%
	Carex vulpinoidea			Microstegium vimineum	55%
	Coronilla varia	2%		Setaria glauca	2%
	Juncus tenuis	5%	=	Cyperus strigosus	2%
21.1.0	Out to the co		-	Polygonum punctatum	1%
Plot 2	Setaria glauca	3%	\dashv	Solidago altissima	3%
	Cyperus strigosus	3%	-	Artemisia vulgaris	2%
	Daucus carota	2%	_	Erigeron strigosus	1%
	Euthamia graminifolia	5%			
	Microstegium vimineum	45%	Plot 5	Sorghastrum nutans	20%
	Artemisia vulgaris	10%	_	Euthamia graminifolia	15%
	Lotus corniculata	35%	_	Solidago altissima	25%
	Solidago altissima	2%	_	Aster pilosus	10%
	Melilotus officinalis	5%		Juncus tenuis	25%
	Ambrosia artemisiifolia	5%		Juncus effusus	10%
	Echinochloa crus-galli	2%		Lythrum salicaria	5%
	Arthraxon hispidus	3%			
	Rumex crispus	1%			
	Andropogon gerardii	5%			
	Panicum capillare	2%			
	Elymus canadensis	2%			
Plot 3	Melilotus officinalis	50%	_		
	Setaria glauca	10%	_		
	Ambrosia artemisiifolia	20%	-		
	Panicum dichotomiflorum	5%	-		
	Echinochloa crus-galli	3%	-		
	Arthraxon hispidus	10%	-		
	Euthamia graminifolia	3%	-		
	Lotus corniculata	10%	-		
	Panicum capillare	5%	4		
			_		

	VEGETATION SAMPLING DA	NTA		
Transition Zone Inventory				
Acer rubrum	Fraxinus pennsylvanica	Solidago juncea		
Achillea millefolium	Geranium maculatum	Solidago rugosa		
Agrostis gigantea	Glechoma hederacea	Sorghastrum nutans		
Ambrosia artemisiifolia	Helenium autumnale	Taraxacum officinale		
Andropogon gerardii	Humulus lupulus	Trifolium repens		
Apocynum cannabinum	Hypericum perforatum	Verbascum thapsus		
Artemisia vulgaris	Juncus effusus	Verbena hastata		
Arthraxon hispidus	Juncus tenuis	Verbena urticifolia		
Aster pilosus	Lamium purpureum			
Barbarea vulgaris	Lespedeza capitata			
Betula nigra	Lonicera tatarica			
Bidens frondosus	Lotus corniculata			
Carex crinita	Lythrum salicaria			
Carex rosea	Melilotus officinalis			
Carex vulpinoidea	Mentha spicata			
Carya cordiformis	Microstegium vimineum			
Celastrus orbiculatus	Oxalis stricta			
Centaurea maculosa	Panicum capillare			
Chrysanthemum leucanthemum	Panicum dichotomiflorum			
Cirsium arvense	Panicum virgatum			
Cornus amomum	Penstemon digitalis			
Coronilla varia	Plantago lanceolata			
Cyperus strigosus	Plantago major			
Datura stramonium	Poa compressa			
Daucus carota	Polygonum punctatum			
Echinochloa crus-galli	Populus deltoides			
Elaeagnus umbellata	Potentilla simplex			
Elymus canadensis	Rosa multiflora			
Elymus virginicus	Rubus allegheniensis			
Epilobium angustifolium	Rumex crispus			
Erigeron strigosus	Salix nigra			
Eupatorium perfoliatum	Setaria faberi			
Eupatorium rugosum	Setaria glauca			
Euthamia graminifolia	Solidago altissima			

		VEGETATION	SAMPLING DATA		
Transect 2: Emergent Wetland Zone					
Plot Number	Species Names	Rel. Cover	Plot Number	Species Names	Rel. Cover
Plot 1	Polygonum sagittatum	15%	Plot 3	Leersia oryzoides	25%
	Phalaris arundinacea	15%		Euthamia graminifolia	5%
	Impatiens capensis	5%		Echinochloa crus-galli	10%
	Erechtites hieracifolia	15%		Cyperus strigosus	25%
	Lotus corniculata	3%		Setaria glauca	2%
	Microstegium vimineum	10%		Lotus corniculata	5%
	Cyperus strigosus	5%		Lythrum salicaria	3%
	Ambrosia artemisiifolia	2%		Panicum capillare	2%
	Arthraxon hispidus	10%		Bidens polylepis	1%
	Echinochloa crus-galli	2%		Eleocharis obtusa	3%
	Asclepias incarnata	2%		Juncus tenuis	3%
	Leersia oryzoides	5%		Arthraxon hispidus	10%
	Pilea pumila	7%		Trifolium repens	2%
	Mikania scandens	1%		Panicum dichotomiflorum	2%
	Acalypha rhomboidea	2%			
	Polygonum punctatum	3%	Plot 4	Echinochloa crus-galli	50%
	Lythrum salicaria	2%		Cyperus strigosus	10%
				Leersia oryzoides	15%
Plot 2	Lotus corniculata	5%		Eleocharis obtusa	15%
	Echinochloa crus-galli	10%		Lotus corniculata	2%
	Arthraxon hispidus	20%		Arthraxon hispidus	2%
	Microstegium vimineum	2%		Lythrum salicaria	2%
	Polygonum sagittatum	5%		Trifolium repens	1%
	Mentha spicata	3%		Polygonum sagittatum	1%
	Lythrum salicaria	5%		Panicum dichotomiflorum	5%
	Cyperus strigosus	7%		Asclepias incarnata	1%
	Bidens cernuus	3%			
	Sparganium eurycarpum	5%			
	Pilea pumila	5%			
	Melilotus officinalis	3%			
	Bidens frondosus	2%			
	Setaria glauca	2%			
	Leersia oryzoides	20%			
	Fraxinus pennsylvanica	2%			
	Epilobium angustifolium	1%			
	Juncus effusus	3%			
	Polygonum punctatum	1%	7		

Transect 2: Emergent Wetland Zone					
Plot Number	Species Names	Rel. Cover	Plot Number	Species Names	Rel. Cover
Plot 5	Echinochloa crus-galli	20%	Plot 6	Ambrosia artemisiifolia	2%
	Panicum dichotomiflorum	5%		Cyperus strigosus	20%
	Cyperus strigosus	10%		Echinochloa crus-galli	15%
	Lythrum salicaria	5%		Euthamia graminifolia	3%
	Panicum capillare	5%		Lotus corniculata	10%
	Polygonum sagittatum	2%		Setaria glauca	5%
	Euthamia graminifolia	2%		Lythrum salicaria	3%
	Epilobium angustifolium	1%		Plantago major	1%
	Lotus corniculata	3%		Microstegium vimineum	2%
	Setaria glauca	1%		Arthraxon hispidus	5%
	Bidens frondosus	2%		Bidens connatus	2%
	Leersia oryzoides	30%		Juncus tenuis	3%
	Eleocharis obtusa	5%		Leersia oryzoides	10%
	Cyperus flavescens	2%		Solidago altissima	3%
	Polygonum punctatum	2%		Bidens frondosus	2%
	Bidens connatus	3%		Panicum dichotomiflorum	10%
				Panicum capillare	5%

VEGETATION SAMPLING DATA

Emergent Wetland Zone Inventory

Hydrology: Soil saturated at surface to 1" inundation. Free water in soil pit 2" below soil surface in non-inundated areas.

Species Names	Species Names	Species Names
Abutilon theophrasti	Cyperus flavescens	Panicum capillare
Acalypha rhomboidea	Cyperus strigosus	Panicum dichotomiflorum
Acer rubrum	Desmodium ciliare	Parthenocissus quinquefolia
Acer saccharinum	Echinochloa crus-galli	Phalaris arundinacea
Achillea millefolium	Elaeagnus umbellata	Phragmites australis
Agrostis gigantea	Eleocharis obtusa	Picea glauca
Alliaria petiolata	Eleusine indica	Pilea pumila
Ambrosia artemisiifolia	Epilobium angustifolium	Plantago major
Arisaema triphyllum	Erechtites hieracifolia	Polygonum pensylvanicum
Artemisia vulgaris	Eupatorium perfoliatum	Polygonum punctatum
Arthraxon hispidus	Euthamia graminifolia	Polygonum sagittatum
Asclepias incarnata	Fraxinus pennsylvanica	Polygonum virginianum
Aster lanceolatus	Galium concinnum	Potentilla simplex
Aster pilosus	Geum canadense	Quercus palustris
Aster umbellatus	Helenium autumnale	Rosa multiflora
Barbarea vulgaris	Humulus lupulus	Rubus allegheniensis
Betula nigra	Impatiens capensis	Rumex crispus
Bidens cernuus	Iris virginica	Sagittaria latifolia
Bidens connatus	Juncus effusus	Salix nigra
Bidens frondosus	Juncus tenuis	Scirpus pungens
Bidens polylepis	Leersia oryzoides	Scirpus validus
Boehmeria cylindrica	Lindera benzoin	Setaria glauca
Carex crinita	Lobelia cardinalis	Solidago altissima
Carex hystericina	Lobelia siphilitica	Sparganium eurycarpum
Cares lupulina	Lonicera tatarica	Toxicodendron radicans
Carex vulpinoidea	Lotus corniculata	Trifolium repens
Celastrus orbiculatus	Lycopus americanus	Typha angustifolia
Cerastium fontanum	Lythrum salicaria	Typha latifolia
Chenopodium album	Melilotus officinalis	Ulmus rubra
Chrysanthemum leucanthemum	Mentha spicata	Verbena hastata
Circaea lutetiana	Microstegium vimineum	Verbena urticifolia
Cirsium arvense	Mikania scandens	Vicia sativa
Cornus amomum	Oxalis stricta	

			SAMPLING DATA		
Dist Novel or	O No		ested Wetland Zone		5.1.0
Plot Number	Species Names	Rel. Cover	Plot Number	Species Names	Rel. Cover
Plot 1	Humulus Iupulus	2%	Plot 3 (cont.)	Trifolium repens	5%
	Arthraxon hispidus	45%	_	Polygonum punctatum	1%
	Epilobium angustifolium	1%	_	Lotus corniculata	5%
	Typha latifolia	15%	_	Polygonum sagittatum	1%
	Cyperus strigosus	15%	_	Bidens cernuus	2%
	Aster pilosus	1%		Leersia oryzoides	10%
	Pilea pumila	2%		Panicum dichotomiflorum	10%
	Leersia oryzoides	30%		Lythrum salicaria	2%
				Microstegium vimineum	2%
Plot 2	Arthraxon hispidus	60%		Plantago major	5%
	Setaria glauca	7%		Carex lupulina	10%
	Cyperus strigosus	10%		Mentha spicata	2%
	Polygonum pensylvanicum	2%			
	Euthamia graminifolia	3%	Plot 4	Echinochloa crus-galli	10%
	Panicum capillare	10%		Bidens cernuus	5%
	Bidens cernuus	2%		Cyperus strigosus	10%
	Lythrum salicaria	2%		Lotus corniculata	10%
	Helenium autumnale	1%		Panicum dichotomiflorum	25%
	Trifolium repens	3%		Arthraxon hispidus	10%
	Lotus corniculata	3%		Mentha spicata	3%
	Trifolium pratense	1%		Cyperus flavescens	5%
	Echinochloa crus-galli	3%		Euthamia graminifolia	5%
	Panicum dichotomiflorum	1%	7	Panicum capillare	3%
	Polygonum sagittatum	1%		Eleocharis obtusa	5%
	Folygonum sagillalum	1 76	_		
21-4-0	Anthonorum biomidum	2007	-	Trifolium repens	5%
Plot 3	Arthraxon hispidus	20%	\dashv	Helenium autumnale	1%
	Eupatorium rugosum	2%	=	Juncus tenuis	2%
	Cyperus flavescens	5%			
	Panicum capillare	5%	Plot 5	Artemisia vulgaris	2%
	Setaria glauca	3%	_	Setaria glauca	10%
	Polygonum pensylvanicum	1%	_	Echinochloa crus-galli	3%
	Echinochloa crus-galli	5%	4	Eupatorium rugosum	2%
	Cyperus strigosus	15%		Epilobium angustifolium	1%

		Transect 3: For	ested Wetland Zone	•	
Plot Number	Species Names	Rel. Cover	Plot Number	Species Names	Rel. Cover
Plot 5 (cont.)	Arthraxon hispidus	20%	Plot 6	Setaria glauca	5%
	Lotus corniculata	15%		Cyperus strigosus	3%
	Microstegium vimineum	5%		Arthraxon hispidus	30%
	Panicum dichotomiflorum	3%		Echinochloa crus-galli	3%
	Polygonum pensylvanicum	2%		Bidens frondosus	3%
	Euthamia graminifolia	8%		Helenium autumnale	2%
	Humulus lupulus	1%		Melilotus officinalis	5%
	Solidago altissima	3%		Ambrosia artemisiifolia	8%
	Trifolium repens	5%		Lythrum salicaria	3%
	Bidens connatus	2%		Trifolium repens	3%
	Plantago major	5%		Plantago major	5%
	Arctium minus	3%		Polygonum punctatum	2%
	Panicum capillare	5%		Artemisia vulgaris	3%
	Cyperus flavescens	3%		Lotus corniculata	15%
	Helenium autumnale	3%		Panicum capillare	3%
	Cyperus strigosus	4%		Daucus carota	2%
	Ambrosia artemisiifolia	8%			

VEGETATION SAMPLING DATA

Forested Wetland Zone Inventory

Hydrology: Soil saturated at surface to 2" inundation. Free water in soil pit 2" below soil surface in non-inundated areas.

Species Names	Species Names	Species Names
Acalypha rhomboidea	Elaeagnus umbellata	Panicum dichotomiflorum
Acer rubrum	Eleocharis obtusa	Parthenocissus quinquefolia
Acer saccharinum	Eleusin indica	Penthorum sedoides
Achillea millefolium	Elymus canadensis	Phalaris arundinacea
Ambrosia artemisiifolia	Epilobium angustifolium	Picea glauca
Arctium minus	Erechtites hieracifolia	Pilea pumila
Artemisia vulgaris	Erigeron strigosus	Plantago major
Arthraxon hispidus	Eupatorium perfoliatum	Polygonum convolvulus
Asclepias incarnata	Eupatorium rugosum	Polygonum pensylvanicum
Aster lanceolatus	Euthamia graminifolia	Polygonum sagittatum
Aster pilosus	Fragaria virginiana	Potentilla simplex
Betula nigra	Galium concinnum	Quercus palustris
Bidens cernuus	Glechoma hederacea	Rosa multiflora
Bidens connatus	Helenium autumnale	Rubus allegheniensis
Bidens frondosus	Humulus lupulus	Rumex crispus
Boehmeria cylindrica	Impatiens capensis	Sagittaria latifolia
Carex crinita	Juncus effusus	Salix nigra
Carex hystericina	Juncus tenuis	Setaria glauca
Carex lupulina	Leersia oryzoides	Solidago altissima
Carex lurida	Lindera benzoin	Symplocarpus foetidus
Carex rosea	Liriodendron tulipifera	Toxicodendron radicans
Carex vulpinoidea	Lobelia siphilitica	Trifolium pratense
Celastrus orbiculatus	Lonicera tatarica	Trifolium repens
Chenopodium album	Lotus corniculata	Typha angustifolia
Circaea lutetiana	Lycopus americanus	Typha latifolia
Cirsium arvense	Lythrum salicaria	Ulmus rubra
Cornus amomum	Melilotus officinalis	Verbena hastata
Cyperus flavescens	Mentha spicata	Verbena urticifolia
Cyperus strigosus	Microstegium vimineum	Verbesina alternifolia
Datura stramonium	Mikania scandens	Vicia sativa
Daucus carota	Myosotis scorpioides	
Desmodium ciliare	Oxalis stricta	
Echinochloa crus-galli	Panicum capillare	

L.E. Carpenter & Company Site

APPENDIX

C

PHOTOGRAPHS OF WETLAND DEVELOPMENT



Photo 1. Photo along Emergent Zone transect, facing west (May 21, 2013)



Photo 2. Photo along Forested Zone transect, facing west (May 22, 2013)

Site Photographs
May 2013
L.E. Carpenter & Company
Wetland Restoration Area
Wharton, Morris County, New Jersey

Cardno JFNew # 040229



11181 Marwill Avenue West Olive, MI 49460 Phone 616-847-1680 / Fax 616-847-9970 www.jfnew.com



Photo 3. Photo along Transition Zone transect, facing north (May 21, 2013)



Photo 4. Photo showing recently planted trees, facing east (May 22, 2013)

Site Photographs
May 2013
L.E. Carpenter & Company
Wetland Restoration Area
Wharton, Morris County, New Jersey

Cardno JFNew # 040229



11181 Marwill Avenue West Olive, MI 49460 Phone 616-847-1680 / Fax 616-847-9970 www.jfnew.com



Photo 5. Photo along Emergent Zone transect, facing west (September 5, 2013)



Photo 6. Photo along Forested Zone transect, facing west (September 5, 2013)

Site Photographs
September 2013
L.E. Carpenter & Company
Wetland Restoration Area
Wharton, Morris County, New Jersey

Cardno JFNew # 040229



11181 Marwill Avenue West Olive, MI 49460 Phone 616-847-1680 / Fax 616-847-9970 www.jfnew.com



Photo 7. Photo along Transition Zone transect, facing north (September 5, 2013)

Site Photographs
September 2013
L.E. Carpenter & Company
Wetland Restoration Area
Wharton, Morris County, New Jersey

Cardno JFNew # 040229



L.E. Carpenter & Company Site

APPENDIX

D

NJDEP PERMIT 1439-04-0001.1



State of New Jersey

Richard J. Codey

Acting Governor

Department of Environmental Protection

Bradley M. Campbell Commissioner

Land Use Regulation Program
P.O. Box 439, Trenton, NJ 08625-0439
Fax # (609) 292-8115
www.state.nj.us/dcp/landuse

FEB 2 5 2005

Mr. Nicholas Clevett RMT, Inc., Michigan 2025 E. Beltline Avenue SE, Suite 402 Grand Rapids, MI 49546

RE: Authorization for Freshwater Wetlands Statewide General Permit No. 4

File No.: 1439-04-0001.1 (FWW 040001)

Applicant: L.E. Carpenter & Company

Block: 301; Lot: 1

Block: 801; Lots: 3, 4, & 5

Wharton Borough, Morris County Nearest Waterway: Rockaway River

Passaic River Basin

Dear Mr. Clevett:

The Land Use Regulation Program has reviewed the referenced application for a Statewide General Permit authorization pursuant to the requirements of the Freshwater Wetlands Protection Act Rules at N.J.A.C. 7:7A. The proposed activity is authorized by Statewide General Permit No. 4, which allows regulated activities in freshwater wetlands, transition areas and State open waters for the investigation, cleanup or removal of hazardous substances or pollutants, which are undertaken, authorized or otherwise expressly approved in writing by the Department of Environmental Protection (Department).

Limit of Authorized Disturbance

The approved plans are prepared by RMT, Inc., dated February 21, 2005, last revised February 21, 2005, and entitled:

"L.E. Carpenter, Wetland and Stream Encroachment Permit Applications, Wharton, New Jersey"

"F3 - Wetland Impact Map", Sheet No. F3 of 7;

"F4 - Wetland Restoration Plan", Sheet No. F4 of 7;

"F5 - Construction Staging and Excavation Plan", Sheet No. F5 of 7;

"F6 - Final Grading Plan", Sheet No. F6 of 7;

"F7 - Details", Sheet No. F7 of 7

Page 2

Based on the approved plans, the authorized activity involves the disturbance of approximately 0.42 of an acre of freshwater wetlands and/or State open waters and approximately 0.19 acres of wetland transition areas for removal of contaminated soil and restoration of the disturbed areas. Any additional disturbance of freshwater wetlands, State open waters or transition areas besides that shown on the approved plans shall be considered a violation of the Freshwater Wetlands Protection Act unless the activity is exempt or a permit is obtained prior to the start of the disturbance from the Land Use Regulation Program.

Permit Conditions

The activities allowed by this authorization shall comply with the following conditions. Failure to comply with these conditions shall constitute a violation of the Freshwater Wetlands Protection Act (N.J.S.A. 13:9B-1 et seq.).

Special Conditions

- 1. All regulated activities at this existing Superfund site must be in accordance with the requirements of the Department's Site Remediation Program and the United States Environmental Protection Agency, including any requirements contained within an approved Remedial Action Workplan.
- 2. In order to protect the trout maintenance and trout stocked waters of the Rockaway River, any proposed grading or construction activities within the banks of this river are prohibited between March 15 and June 15 of each year. In addition, any activity within the 100-year flood plain or flood hazard area of this watercourse which could introduce sediment into said stream or which could cause an increase in the natural level of turbidity is also prohibited during this period. The Department reserves the right to suspend all regulated activities on site should it be determined that the applicant has not taken proper precautions to ensure continuous compliance with this condition.
- 3. All backfill soils shall consist of clean, suitable material free from toxic pollutants in toxic amounts.
- 4. In addition to restoration of the wetland transition area as shown on the approved plan entitled "F4- Wetland Restoration Plan", the applicant shall also restore an area of wetland transition area not currently shown on the plan. This area extends 50' from the wetlands on the Wharton Enterprise property. These wetlands are classified as Intermediate resource value. This additional wetland transition area is drawn on the attached map portion. The restoration of this additional area shall be consistent with the notes on Sheet No. F4 of 7.
- 5. The mitigation project must be conducted prior to or concurrent with the construction of the approved project.

Page 3

- 6. Mitigate for the loss of <u>0.16 acres</u> of emergent wetlands and <u>0.26 acres</u> of forested and scrub/shrub wetlands through an on-site restoration project as shown on the plan entitled "F4 Wetland Restoration Plan, L.E. Carpenter, Wetland and Stream Encroachment Permit Applications, Wharton, New Jersey", dated February 21, 2005, last revised February 21, 2005, and prepared by RMT, Inc. In the event there is a conflict between the permit conditions and the approved mitigation plan and proposal the permit conditions take precedent.
- 7. The permittee shall notify the Land Use Regulation Program, in writing, at least thirty (30) days in advance of the start of construction of the wetland mitigation project for an on-site pre-construction meeting between the permittee, the contractor, the consultant and the Program.
- 8. The mitigation designer must be present during critical stages of construction of the mitigation project this includes but is not limited to herbicide applications, sub-grade inspection, final grade inspection, and planting inspection to ensure the intent of the mitigation design and their predicted wetland hydrology is realized in the landscape. Mitigation designs are not static documents and changes may be necessary to ensure success of the project. It shall be the prerogative of the mitigation consultant to make changes to the design should field conditions warrant such action.
- 9. Immediately following final grading of the site, a disc must be run over the site to eliminate compaction. The mitigation designer must be present to oversee this phase of the project and confirm with the Department this activity has occurred prior to planting of the site.
- 10. Immediately following the final grading of the mitigation site and prior to planting, the permittee shall notify the Program for a post-grading construction meeting between the permittee, contractor, consultant and the Program. The permittee must give the Program at least thirty (30) days notice prior to the date of this meeting.
- 11. Within 30 days following the final grading and planting of the mitigation project, the permittee shall submit a final report to the Land Use Regulation Program. The final report shall contain, at a minimum, the following information:
 - a. A completed WETLAND MITIGATION PROJECT COMPLETION OF CONSTRUCTION FORM (attached) which certifies that the mitigation project has been constructed as designed and that the proposed area of wetland creation, restoration or enhancement has been accomplished;
 - b. As built plans which depict final grade elevations at one foot contours and include a table of the species and quantities of vegetation that were planted including any grasses that may have been used for soil stabilization purposes;
 - c. Show on the as-built plans that the boundaries of the wetland mitigation area has been visibly marked with 3 inch white PVC pipe extending 4 feet above the ground surface. The stakes must remain on the site for the entire monitoring period;

Page 4

- d. Photos of the constructed wetland mitigation project with a photo location map as well as the GPS waypoints in NJ state plane coordinates NAD 1983;
- e. To document that the required amount of soil has been placed/replaced over the entire area of the mitigation site, provide a minimum of 6 soil profile descriptions to a depth of 20 inches. The location of each soil profile description should be depicted on the as built plan as well as provide the GPS waypoints in NJ state plane coordinates NAD 1983:
- f. Submit soil test results demonstrating at least 8% organic carbon content (by weight) was incorporated into the A-horizon for sandy soil and for all other soil types 12% organic content or if manmade top soil was used it consisted of equal volumes of organic and mineral materials;
- g. The permittee shall post the mitigation area with several permanent signs, which identify the site as a wetland mitigation project and that mowing, cutting, dumping and draining of the property is prohibited; and
- h. The sign must also state the name of the permittee, LURP permit number along with a contact name and phone number.
- 12. If the Program determines that the mitigation project is not constructed in conformance with the approved plan, the permittee will be notified in writing and will have 60 days to submit a proposal to indicate how the project will be corrected. No financial surety will be released by the Program until the permittee demonstrates that the mitigation project is constructed in conformance with the approved plan, all soil has been stabilized and there is no active erosion.
- 13. The permittee shall monitor the mitigation project for 5 full growing seasons if it is a proposed forested or scrub/shrub wetland and 3 full growing seasons for an emergent wetland or State open water after the mitigation project has been constructed. The permittee shall submit monitoring reports to the Land Use Regulation Program no later than December 31st of each monitoring year (All monitoring reports must include the standard items identified in the attachment and the information requested below).
- 14. All monitoring report will include all the following information (see attached monitoring report checklist):
 - a. All monitoring reports except the final one must include documentation that it is anticipated, based on field data, that the goals of the wetland mitigation project including the transition area, as stated in the approved wetland mitigation proposal and the permit will be satisfied. If the permittee is finding problems with the mitigation project and does not anticipate the site will be a full success then recommendations on how to rectify the problems must be included in the report with a time frame in which they will be completed;
 - b. All monitoring reports except the final one must include field data to document that the site is progressing towards 85 percent survival and 85 percent area coverage of mitigation plantings or target hydrophytes (Target hydrophytes are non-invasive native species to the area and similar to ones identified on the mitigation planting plan). If the proposed plant community is a scrub/shrub or a forested wetland the permittee must also demonstrate each year with data that the woody species are thriving, increasing in stem density and height each year. If the field data shows that the mitigation project is failing to meet the vegetation survival, coverage and health goals, the monitoring

Page 5

report should contain a discussion of steps that will be taken to rectify the problem, including a schedule of implementation;

- c. All monitoring reports except the final one must include documentation of any invasive or noxious species (see below for list of species) colonizing the site and how they are being eliminated. The permittee is required to eliminate either through hand-pulling, application of a pesticide or other Department approved method any occurrence of an invasive/noxious species on the mitigation site during the monitoring period;
- d. All monitoring reports except the final one must include documentation that demonstrates the proposed hydrologic regime as specified in the mitigation proposal appears to be met. If the permittee is finding problems with the mitigation project and does not anticipate the proposed hydrologic regime will be or has not been met then recommendations on how to rectify the problem must be included in the report along with a time frame within which it will be completed;
- e. The final monitoring report must include documentation to demonstrate that the goals of the wetland mitigation project including the required transition area, as stated in the approved wetland mitigation proposal and the permit, has been satisfied. Documentation for this report will also include a field wetland delineation of the wetland mitigation project based on techniques as specified in the <u>Federal Manual for Identifying and Delineating Jurisdictional Wetlands</u> (1989);
- f. The final monitoring report must include documentation the site has an 85 percent survival and 85 percent area coverage of the mitigation plantings or target hydrophytes. The permittee must also document that all plant species are healthy and thriving and if the proposed plant community contains trees demonstrate that the trees are at least five feet in height;
- g. The final monitoring report must include documentation demonstrating the site is less than 10 percent occupied by invasive or noxious species such as but not limited to Phalaris arundinacea (Reed canary grass), Phragmities australis (Common reed grass), Pueraria lobata (Kudzu), Typha latifloia (Broad-leaved cattail), Typha angustifolia (Narrowed leaved cattail), Lythrum salicaria (Purple loosestrife), Ailanthus altissima (Tree-of-heaven), Berberis thunbergi (Japanese barberry), Berberis vulgaris (Common barberry), Elaeagnus angustifloia (Russian olive), Elaeagnus umbellata (Autumn olive), Ligustrum obtusifolium (Japanese privet), Ligustrum vulgare (Common privet) and Rosa multiforia (Multiflora rose);
- h. The final monitoring report must include documentation that demonstrates that the proposed hydrologic regime as specified in the mitigation proposal, which proves the mitigation site is a wetland has been satisfied. The documentation shall include when appropriate monitoring well data, stream gauge data, photographs and field observation notes collected throughout the monitoring period; and
- i. The final monitoring report must include documentation that the site contains hydric soils or there is evidence of reduction occurring in the soil throughout the delineated wetlands.
- 15. Once the required monitoring period has expired and the permittee has submitted the final monitoring report, the Program will make the finding that the mitigation project is either a

Page 6

success or a failure. This mitigation project will be considered successful if the permittee demonstrates all of the following:

- a. That the goals of the wetland mitigation project including acreage and the required transition area, as stated in the approved wetland mitigation proposal and the permit, has been satisfied. The permittee must submit a field wetland delineation of the wetland mitigation project based on the <u>Federal Manual for Identifying and Delineating Jurisdictional Wetlands</u> (1989) which shows the exact acreage of State open waters, emergent, scrub/shrub and/or forested wetlands in the mitigation area;
- b. The site has an 85 percent survival and 85 percent area coverage of the mitigation plantings or target hydrophytes which are species native to the area and similar to ones identified on the mitigation planting plan. All plant species in the mitigation area are healthy and thriving. All trees are at least five feet in height;
- c. The site is less than 10 percent occupied by invasive or noxious species such as but not limited to *Phalaris arundinacea* (Reed canary grass), *Phragmities australis* (Common reed grass), *Pueraria montana* (Kudzu), *Typha latifloia* (Broad-leaved cattail), *Typha angustifolia* (Narrowed leaved cattail), *Lythrum salicaria* (Purple loosestrife), *Ailanthus altissima* (Tree-of-heaven), *Berberis thunbergi* (Japanese barberry), *Berberis vulgaris* (Common barberry), *Elaeagnus angustifloia* (Russian olive), *Elaeagnus umbellata* (Autumn olive), *Ligustrum obtusifolium* (Japanese privet), *Ligustrum vulgare* (Common privet) and *Rosa multiforia* (Multiflora rose);
- d. The site contains hydric soils or there is evidence of reduction occurring in the soil; and,
- e. The proposed hydrologic regime as specified in the mitigation proposal, which proves the mitigation site is a wetland has been satisfied.
- 16. If the mitigation project is considered a failure, the permittee is required to submit a revised mitigation plan to rectify the wetland mitigation site. The plan shall be submitted within 60 days of receipt of the letter from the Program indicating the wetland mitigation project was a failure.
- 17. The permittee shall assume all liability for accomplishing corrective work should the Program determine that the compensatory mitigation has not been 100% satisfactory. Remedial work may include re-grading and/or replanting the mitigation site. This responsibility is incumbent upon the permittee until such time that the Department makes the finding that the mitigation project is successful.

In addition to the above conditions and the conditions noted at N.J.A.C. 7:7A 4.3 and 5.4, the following general conditions must be met for the activity authorized under this Statewide General Permit:

General Conditions:

18. All fill and other earth work on the lands encompassed within this permit authorization shall be stabilized in accordance with "Standards for Soil Erosion and Sediment Control in New Jersey" to prevent eroded soil from entering adjacent waterways or wetlands at any time during and subsequent to construction.

Page 7

- 19. This permit is revocable in accordance with DEP regulations and State law.
- 20. The issuance of this permit shall not be deemed to affect in any way other actions by the Department on any future application.
- 21. The activities shown on the approved plans shall be constructed and/or executed in conformity with any notes and details on said plans and any conditions stipulated herein.
- 22. No change in plans or specifications shall be made except with the prior written permission of the Department.
- 23. The granting of this authorization shall not be construed to in any way affect the title or ownership of the property, and shall not make the Department or the State a party in any suit or question of ownership of the property.
- 24. This permit is not valid and no work shall be undertaken pursuant to this authorization until all other required federal, state, and local approvals, licenses and permits necessary for commencement of work onsite have been obtained.
- 25. A complete, legible copy of this permit shall be kept at the work site and shall be exhibited upon request of any person.
- 26. The permittee shall allow the Program the right to inspect the construction site and also shall provide the Bureau of Coastal and Land Use Compliance and Enforcement, NJDEP, 401 East State Street, P.O. Box 422, Trenton, New Jersey 08625 with written notification 7 days prior to the start of the authorized work.
- 27. This authorization is valid for five years from the date of this letter unless more stringent standards are adopted by rule prior to this date.

Transition Area

The wetlands affected by this permit authorization are of Ordinary and Intermediate resource value. The wetland located associated with the drainage channel located along the eastern side of the site are classified as Ordinary resource value. No standard transition area is required adjacent to Ordinary resource value wetlands. The wetlands located on the adjacent Wharton Enterprise property are classified as Intermediate resource value and have a standard required transition area or buffer of 50 feet. In addition, all of the wetlands are classified as priority wetlands by the United States Environmental Protection Agency since they drain into the Passaic River Basin. This General Permit includes a transition area waiver that allows encroachment only in that portion of the transition area that has been determined by the Department to be necessary to accomplish the regulated activities. Any additional regulated activities conducted within the standard transition area shall require a separate transition area

Page 8

waiver from the Program. Regulated activities within a transition area are defined at N.J.A.C. 7:7A-2.6.

Consistency with the Areawide Water Quality Management Plan

This project has not been reviewed for consistency with the relevant Water Quality Management Plan or Statewide Water Quality Management Planning Rules (N.J.A.C. 7:15). As such, there is no intended or implied approval regarding additional permits which may be required from the Department. For treatment works approvals, the consistency determination will be performed by the Bureau of Engineering and Permitting (North/South) which may be contacted at (609) 292-6894 for North (Middlesex, Hunterdon and Counties north) or (609) 633-1139 for South (Mercer, Monmouth and Counties south). For general information concerning the water quality management planning process, please contact the Division of Watershed Management at (609) 633-1179.

Appeal of Decision

In accordance with N.J.A.C. 7:7A-1.7, any person who is aggrieved by this decision may request a hearing within 30 days of the decision date by writing to: New Jersey Department of Environmental Protection, Office of Legal Affairs, Attention: Adjudicatory Hearing Requests, P.O. Box 402, Trenton NJ 08625. This request must include a completed copy of the Administrative Hearing Request Checklist.

If you have any questions regarding this authorization, please contact Susan Michniewski of our staff at (609) 633-9277. Please reference the above file number.

Sincerely.

Mark A. Godfrey, Supervisor
Morris & Bergen Counties Region

Money. Gophing

Bureau of Inland Regulation

Attachments (map sketch, mitigation forms)

c. Anthony Cinque, Site Remediation Program

Jodale Legg, Land Use Regulation Program - Mitigation Unit

Nadine White, Land Use Regulation Program

Bureau of Coastal and Land Use Compliance and Enforcement

Wharton Borough Clerk

Wharton Borough Construction Official

Wharton Borough Planning Board

Wharton Borough Environmental Commission