NATIONWIDE ENVIRONMENTAL SERVICES, INC.

6th Avenue West Business Park
14818 W 6th Ave. Suite 5A
Golden, CO 80401

January 27, 2014

Mr. Tim Drexler
Remedial Project Manager
U.S. Environmental Protection Agency
77 West Jackson Boulevard, HSRM-6J
Chicago, IL 60604

Mr. Doyle W. Wilson
Illinois Environmental Protection Agency
1021 North Grand Avenue East
P.O. Box 19276
Springfield, IL 62794-9276

RE: Southeast Rockford Ground Water NPL Site
Ground Water Monitoring Report
Semi-Annual Monitoring Event – November/December 2013

US EPA RECORDS CENTER REGION 5
521813

Gentlemen:

Nationwide Environmental Services, Inc. (NES) is submitting the semi-annual monitoring report presenting the analytical data and data interpretation summary for ground water quality monitoring samples collected at the Southeast Rockford Ground Water NPL Site (the Site) during the November/December 2013 semi-annual monitoring event. The ground water monitoring data obtained for the current reporting period will be submitted in an MS Excel™ file separately via e-mail.

The pertinent Site information and monitoring data are presented in the report as follows:

- The locations of the monitoring wells comprising the Site ground water monitoring network are shown in **Figure 1**.
- Analytical results for collected samples are summarized in **Table 1** and present concentrations for the chemicals of concern (COC) identified in Section VI of the Site Record of Decision (ROD) and for vinyl chloride.
- The historical analytical results for samples collected from the Site ground water monitoring network, by monitoring well location, are presented in **Table 2**.
- The ground water elevations for this sampling event are presented in **Table 3**.
- The validated laboratory data sheets and data quality summaries including relevant analytical quality assurance/quality control (QA/QC) are provided in **Appendix A**.
- The field sampling sheets containing field sampling information for the current monitoring event are contained in **Appendix B**.

NES continues to coordinate efforts with IEPA to share ground water data obtained from common monitoring well locations at the Site. NES is not aware of IEPA sample collection from Site monitoring locations for the current reporting period and no comparative Site data from IEPA is presented in this report.

The field sampling activity and analytical procedures utilized for the current monitoring event were performed in accordance with the Quality Assurance Project Plan (as amended 2008) and the Field Sampling Plan (as amended 2010). A few minor issues occurred during the event that resulted in a departure from established procedures as follows:

- MW-16 was sampled for water quality parameters; however, there was no measurement of the water level because the well casing was recently damaged, preventing access for a down-hole measurement.
- MW-114B was not sampled for water quality parameters or water level because the well casing was damaged, preventing access to the water column.
- MW-203 was sampled by low flow method using a temporary sampling pump. The permanent well pump installed in MW-203 was removed by an unknown party and replaced with a well cap since the last sampling event.
- MW-206C was not sampled because of recent construction activities occurring at the Rock River Water Reclamation District, where the well is located.

An action plan to address the recently damaged ground water monitoring well locations MW-16 and MW-114B has been provided separately to the agency. The action plan provides for completing repairs once more favorable weather conditions occur.

A series of graphs depicting historical total volatile organic compound (VOC) concentrations for select wells are enclosed to show total VOC concentration trends occurring at these monitoring locations. Although the graphs depict analytical results from 1999 to the present, the evaluation of the total VOCs presented in this report is principally devoted to changes, if any, from the previous semi-annual sampling event conducted in May/June 2013. The enclosed graphs reveal that fluctuations in total VOC concentrations in ground water have occurred over the period that samples have been collected at the Site. The causal factors for VOC concentration variability are presumed to be source area remedial activities performed by others, variation in ground water levels, precipitation events, etc. However, NES is not aware of any specifics that would allow an interpretation of the data, other than the general observations presented in the following section.

Monitoring Data Review

Overall, total VOC concentrations have generally decreased across the Site since inception of the long-term monitoring program in March 1999. The ratios of parent VOC compound concentrations to associated breakdown product concentrations indicate biodegradation, comprising a component of natural attenuation, may be occurring at the Site. The presence of vinyl chloride and chloroethane in ground water samples are further indicators that natural attenuation may be occurring at the Site.

The status of total VOC concentrations at certain monitoring well locations, relative to the previous monitoring event (May/June 2013), are summarized below. The noted monitoring well locations are located proximate to, or down-gradient from, identified source areas. The Site source areas are segregated by general geographic location within the Site for the purpose of this report.

East-Source Area 7

The majority of total VOC concentrations reported for ground water monitoring locations near the Area 7 source area have generally decreased or remained relatively stable from the previous sampling event, except as noted. Relative increases were noted for individual VOC concentrations in the water quality samples collected from MW-102A/B and MW-133B/C. Several VOCs were reported above the maximum contaminant level (MCL) at locations MW-101A/B/C/D, MW-102A/B/C, and MW-133B/C. During the previous monitoring event, VOCs were reported above MCLs at these same locations with the exception of MW-102B.

North-Source Areas 4, 9, 10, & 11

The majority of total VOC concentrations reported for ground water monitoring locations in the identified source areas have generally decreased or remained relatively stable from the previous sampling event, except as noted. Relative increases were noted for individual VOC concentrations in the water quality samples collected from MW-113A. Several VOCs were reported above the MCL at locations MW-16, MW-113A/B, MW-121, MW-124, and MW-203. During the previous monitoring event, VOCs were reported above MCLs at these same locations.

West-Rock River

Total VOC concentrations reported for ground water monitoring locations in the area of the Site bordering the east side of the Rock River have generally decreased or remained stable from the previous sampling event, except as noted. Relative increases in specific VOC constituent concentrations did occur in the water quality samples collected from MW-47, MW-117B/D, MW-205A/B, and MW-206A/B. Several VOCs were reported above the MCL at MW-117B/C/D, MW-204, MW-205A/B, and MW-206A/B. During the previous monitoring event, VOCs were reported above MCLs at these same locations with the addition of MW-206C.

Please contact me at telephone (303) 232-2134 if you have any questions regarding the information provided or require any additional information.

Sincerely,

William B. Dotterer,
Sr. Project Manager

cc: Nadine Miller, City of Rockford

Enclosures

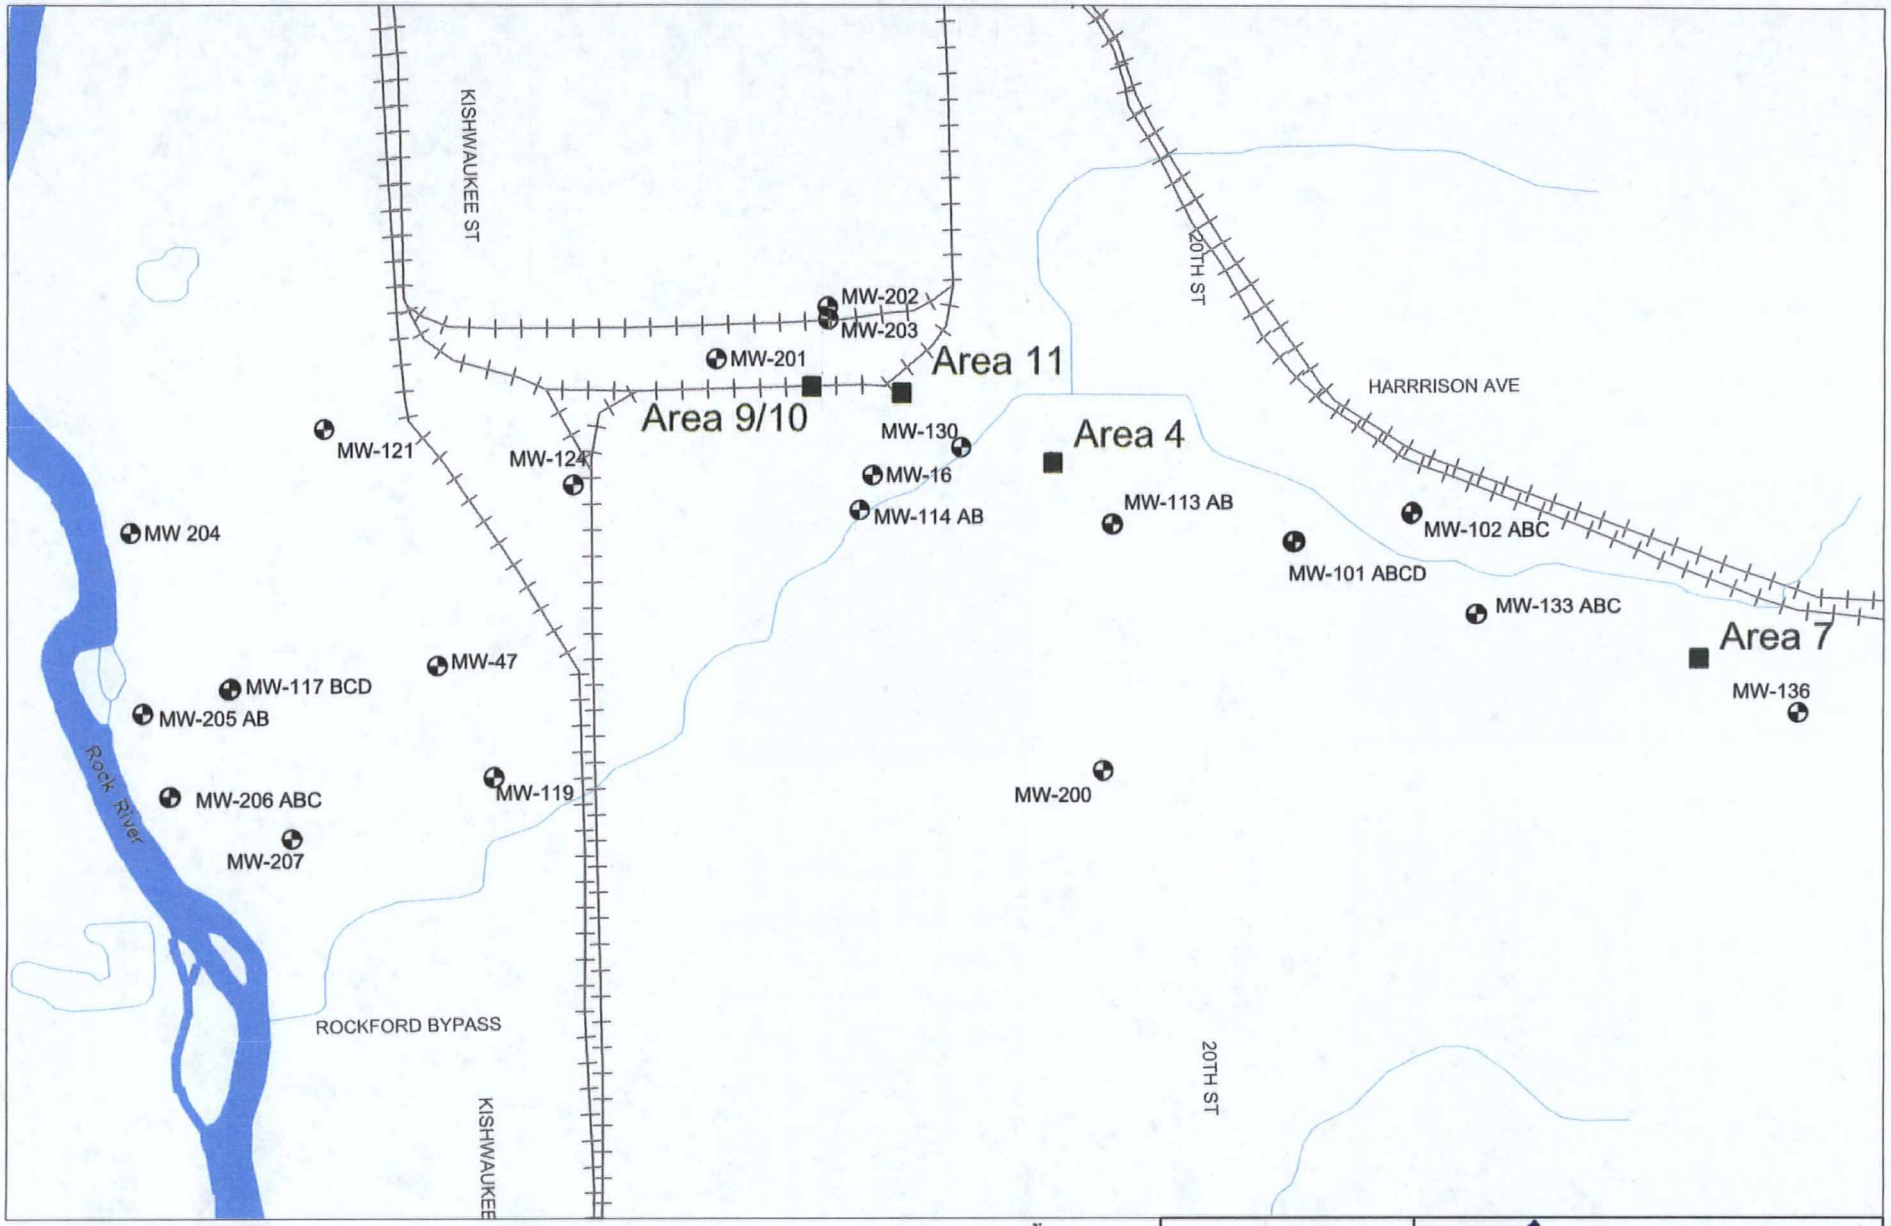

N
W E
S
0 1000' 2000'

LEGEND

Monitoring Well

Area

Figure 1
Southeast Rockford NPL Site
Ground Water Monitoring Network
and Source Locations
Winnebago County, Illinois

Southeast Rockford Superfund Site
Monitoring Wells Near Area 7

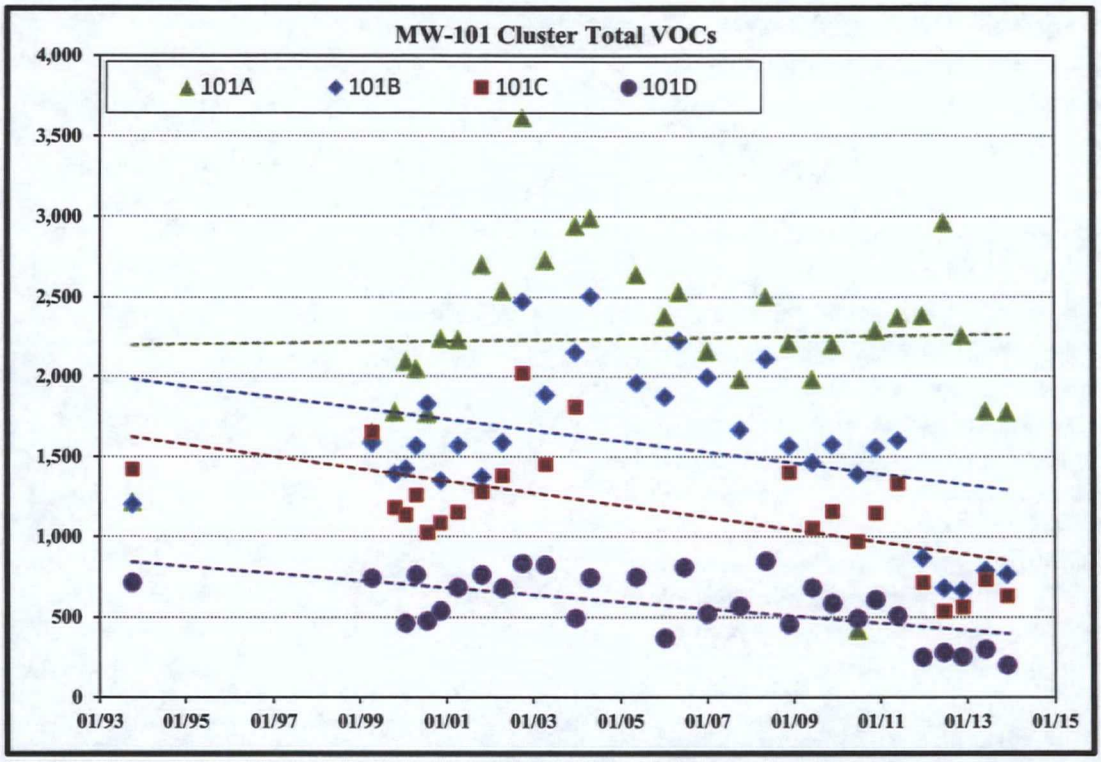

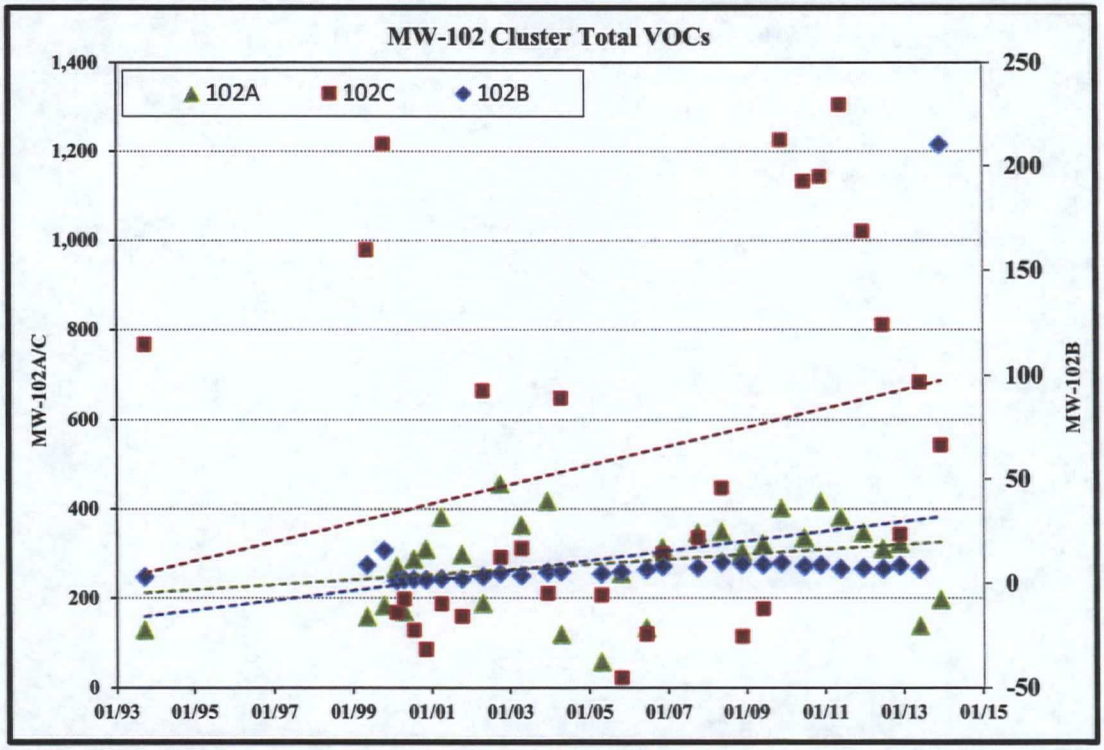

Y-axis = Total VOCs in micrograms per liter; X- axis = Sampling Date

Southeast Rockford Superfund Site
Monitoring Wells Near Area 7

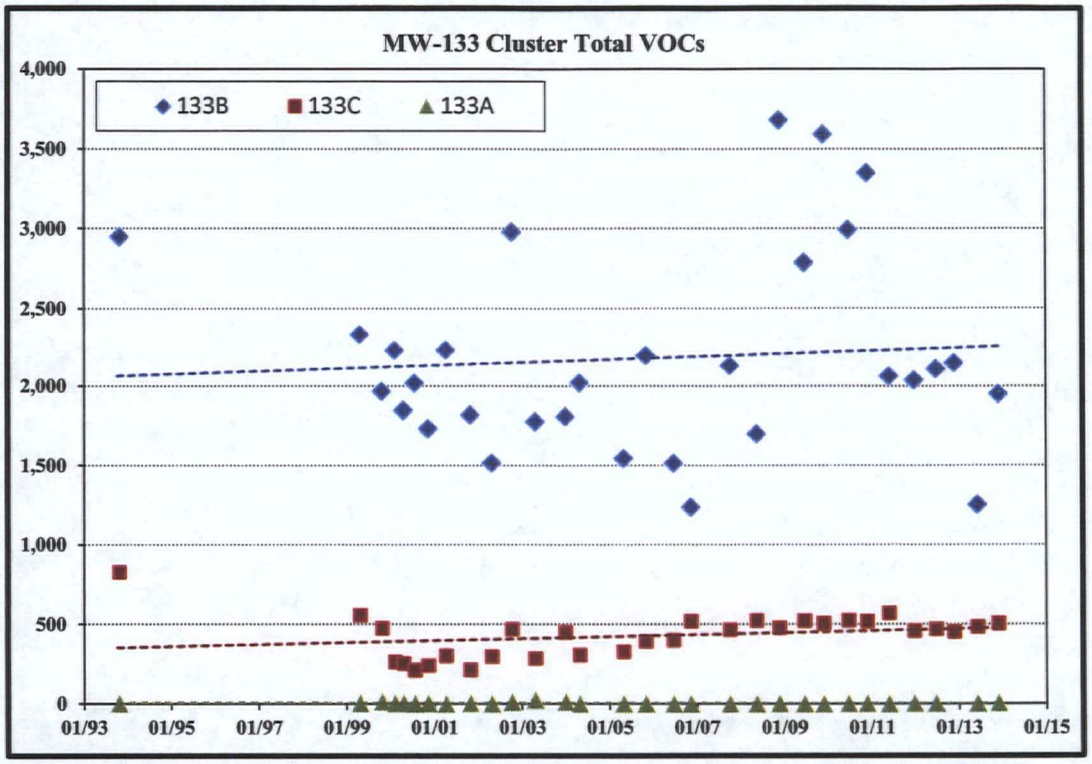

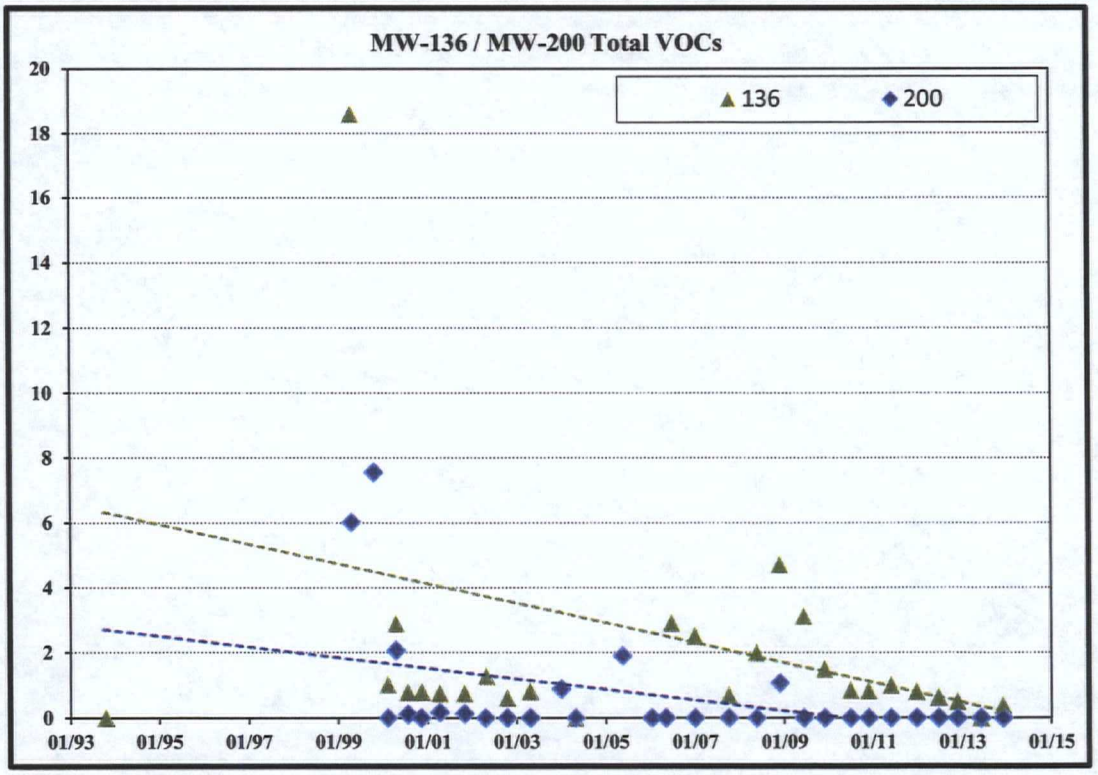

Y-axis = Total VOCs in micrograms per liter; X- axis = Sampling Date

Southeast Rockford Superfund Site
Monitoring Wells Near Areas 4, 9/10, 11

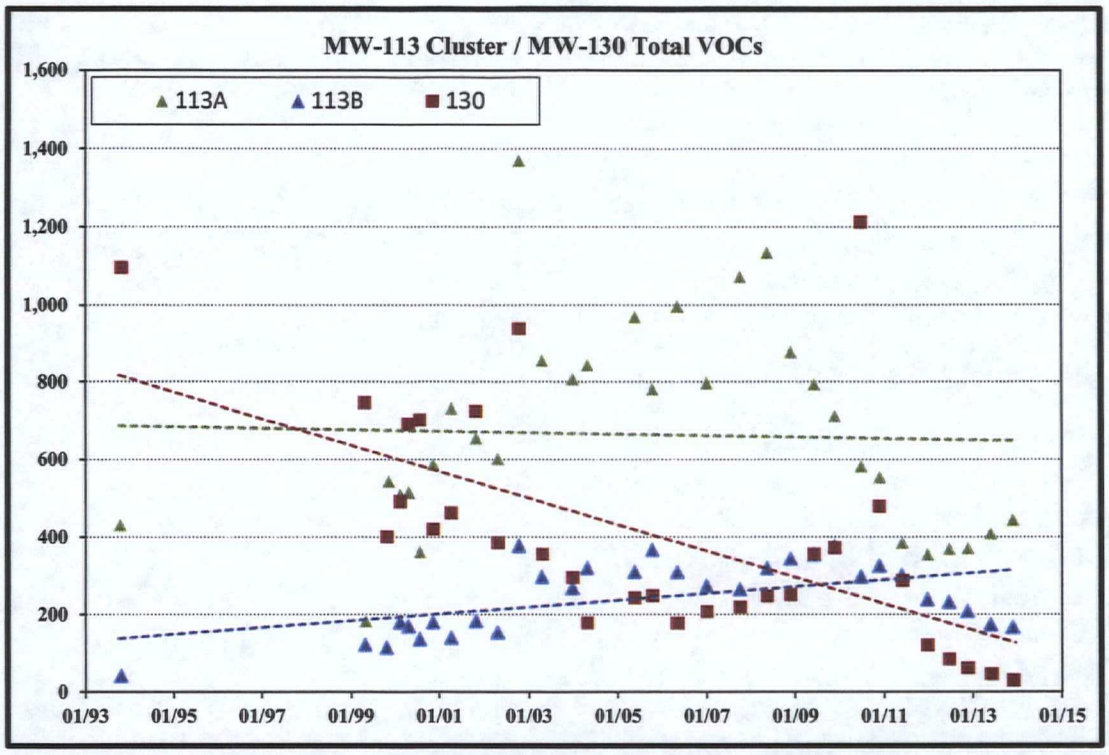

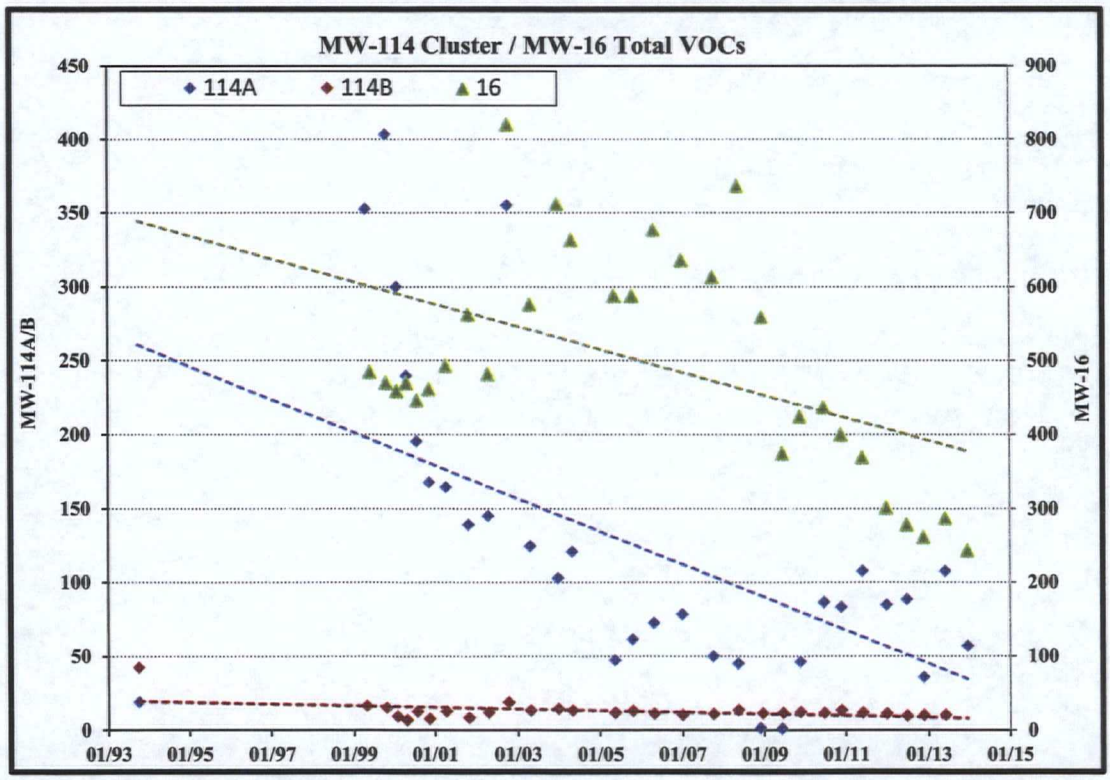

Y-axis = Total VOCs in micrograms per liter; X- axis = Sampling Date

Southeast Rockford Superfund Site
Monitoring Wells Near Areas 4, 9/10, 11

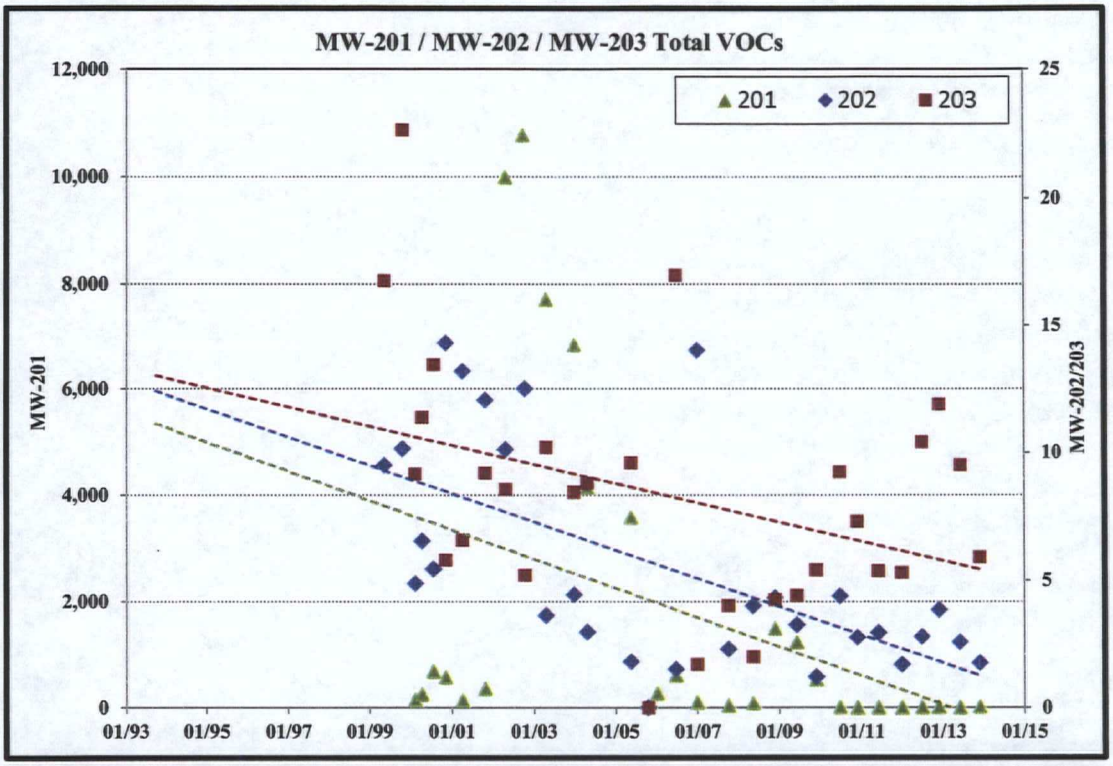

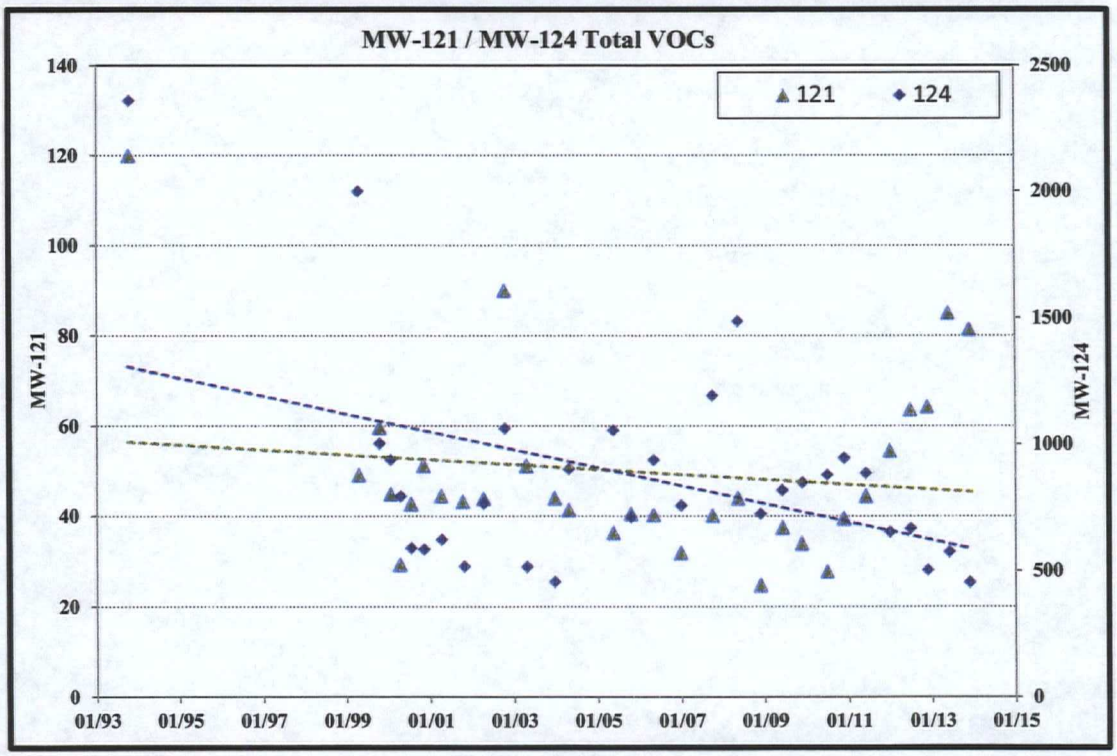

Y-axis = Total VOCs in micrograms per liter; X- axis = Sampling Date

Southeast Rockford Superfund Site
Monitoring Wells Near Rock River

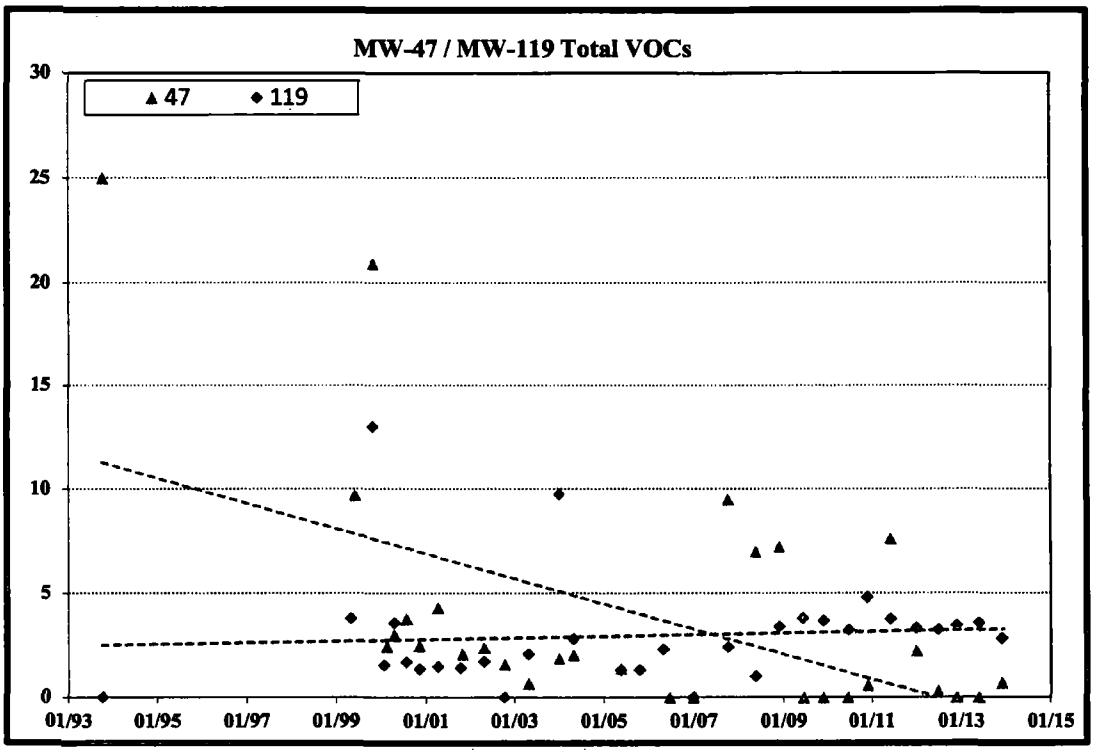

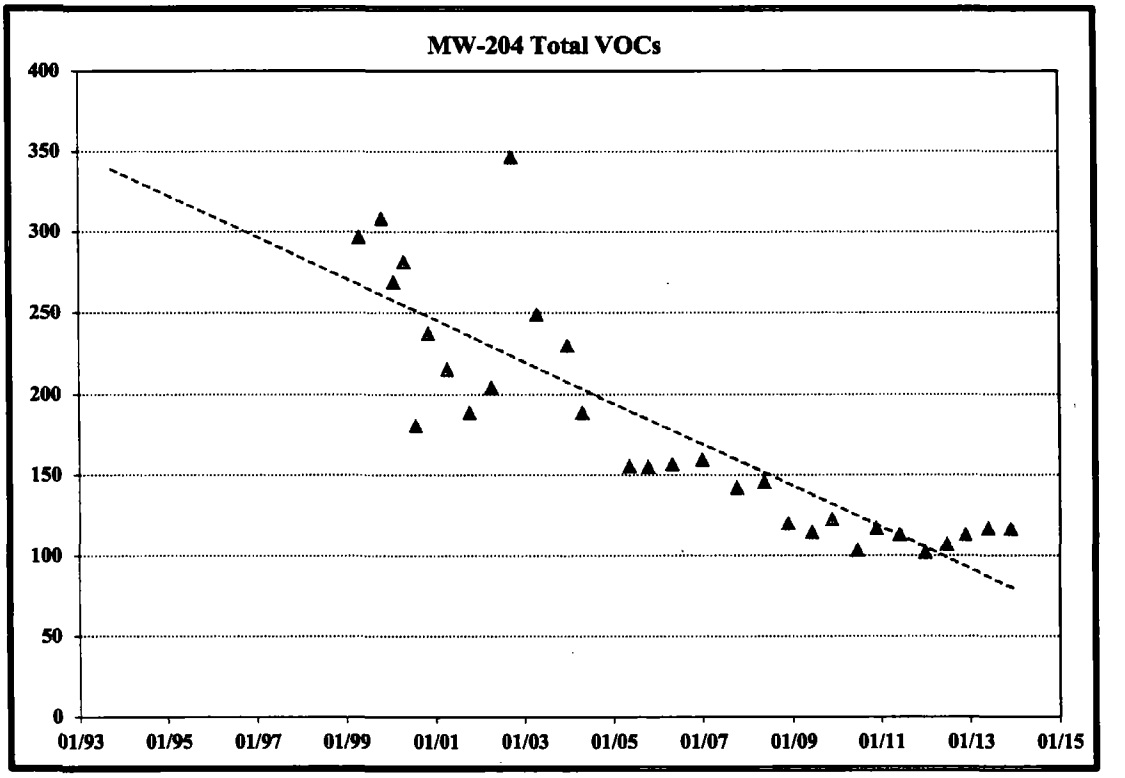

Y-axis = Total VOCs in micrograms per liter; X- axis = Sampling Date

Southeast Rockford Superfund Site
Monitoring Wells Near Rock River

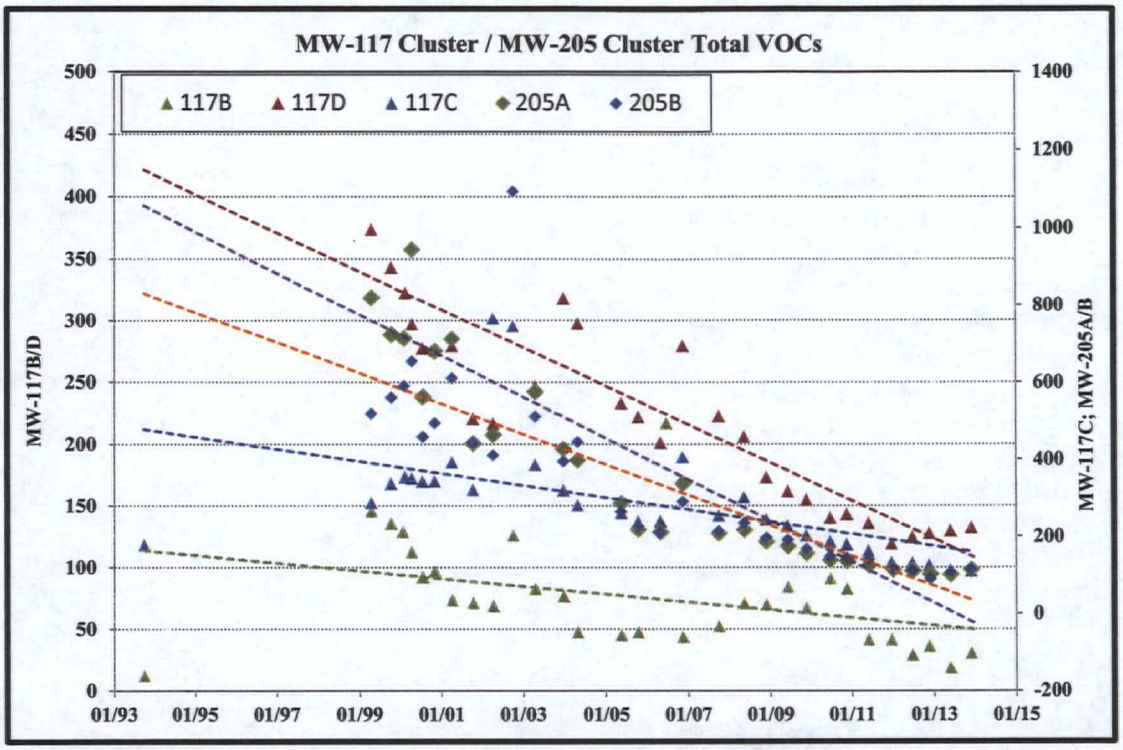

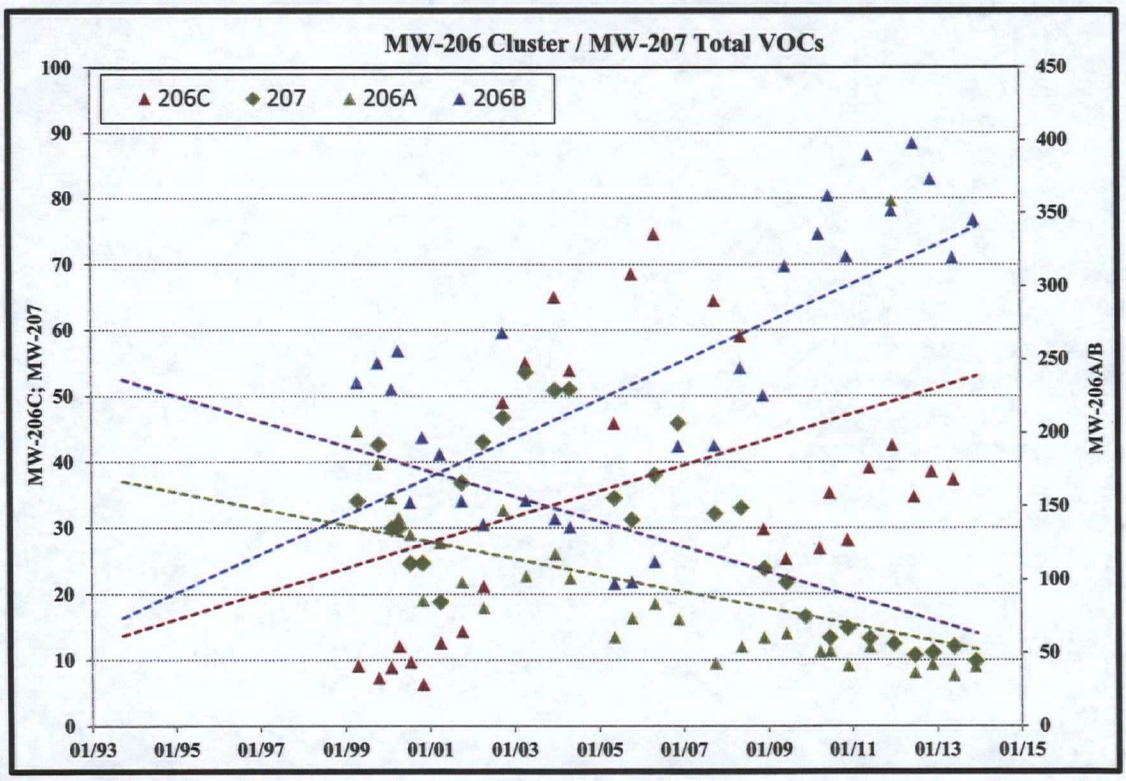

Y-axis = Total VOCs in micrograms per liter; X- axis = Sampling Date

Tables

Table 1: Southeast Rockford NPL Site
Summary of Groundwater Analytical Results
Sampling Event #30

Compound	MCL	MW-16 12/19/13	MW-47 12/01/13	MW-101A 11/30/13	MW-101B 11/30/13	MW-101C 11/30/13	MW-101D 11/30/13	MW-102A 12/18/13	MW-102B 12/18/13
Chloroform	N/A	0.8J	1.0U	3.0J	1.6J	5.0U	0.91J	1.0U	1.0U
1,1-Dichloroethane	N/A	73	0.35J	260	130	110	29	58	60
1,2-Dichloroethane	5	1.0U	1.0U	5.0U	5.0U	5.0U	1.0U	1.0U	1.0U
1,1-Dichloroethene	7	**17**	1.0U	**70**	**28**	**22**	**11**	0.77J	0.81J
cis-1,2-Dichloroethene	70	18	1.0U	**610**	32	30	20	**100**	**110**
trans-1,2-Dichloroethene	100	2.2	1.0U	14	4.1J	3.6J	1	4	4.2
Methylene Chloride	5	5.0U	5.0U	25UB	25UB	25UB	5.0U	5.0U	5.0U
Tetrachloroethene	5	**9**	1.0U	**67**	**28**	**21**	**11**	1.0U	1.0U
1,1,1-Trichloroethane	200	93	0.34J	**570**	**490**	**400**	110	27	28
Trichloroethene	5	**30**	1.0U	**160**	**27**	**19**	**16**	**7**	**7.4**
Vinyl chloride	2	1.0U	1.0U	5.0U	5.0U	5.0U	1.0U	1.0U	1.0U

Compound	MCL	MW-102C 12/19/13	MW-113A 11/30/13	MW-113B 11/30/13	MW-114A 12/19/13	MW-114B	MW-117B 11/29/13	MW-117C 11/29/13	MW-117D 11/29/13
Chloroform	N/A	0.75J	1.2	0.3J	1.0U	not sampled because of damage to the well casing	0.39J	1.0U	0.33J
1,1-Dichloroethane	N/A	120	140	53	3.1		8.4	34	51
1,2-Dichloroethane	5	1.1J	1.0U	0.36J	1.0U		1.0U	1.0U	1.0U
1,1-Dichloroethene	7	**31**	**33**	**12**	5.8		3.1	**13**	**12**
cis-1,2-Dichloroethene	70	**270**	37	56	2.7		0.9J	4.7	2.9
trans-1,2-Dichloroethene	100	4	4.4	1.4	1.0U		1.0U	1.0U	1.0U
Methylene Chloride	5	5.0UB	5.0UB	5.0U	5.0U		5.0U	5.0U	5.0UB
Tetrachloroethene	5	**7.3**	**13**	2.7	0.19J		**5.5**	**23**	**18**
1,1,1-Trichloroethane	200	78	160	11	43		7.4	23	33
Trichloroethene	5	**24**	**51**	**21**	2.3		4.9	**13**	**9.9**
Vinyl chloride	2	0.58J	1.0U	**9.6**	1.0U		1.0U	1.0U	1.0U

Table 1: Southeast Rockford NPL Site
Summary of Groundwater Analytical Results
Sampling Event #30

Compound	MCL	MW-119 12/18/13	MW-121 12/01/13	MW-124 12/01/13	MW-130 12/01/13	MW-133A 12/01/13	MW-133B 12/01/13	MW-133C 11/30/13	MW-136 11/30/13
Chloroform	N/A	1.0U	0.74J	2.5U	1.0U	1.0U	4.0J	5.2	0.38J
1,1-Dichloroethane	N/A	0.93J	29	280	8.4	1.0U	190	52	1.0U
1,2-Dichloroethane	5	1.0U	1.0U	2.5U	1.0U	1.0U	2.3J	1.3	1.0U
1,1-Dichloroethene	7	1.0U	6.6	**8.6**	1.2	1.0U	**86**	**46**	1.0U
cis-1,2-Dichloroethene	70	0.61J	5.9	**82**	2.2	0.27J	**960**	**140**	1.0U
trans-1,2-Dichloroethene	100	1.0U	0.57J	2.5U	1.0U	1.0U	21	1.4	1.0U
Methylene Chloride	5	5.0U	5.0U	12UB	5.0U	5.0UB	25UB	5.0UB	5.0U
Tetrachloroethene	5	1.0U	1.6	**7.4**	0.65J	1.0U	**74**	**7.5**	1.0U
1,1,1-Trichloroethane	200	0.94J	15	40	16	0.39J	**490**	160	1.0U
Trichloroethene	5	0.35J	**22**	4.1	1.6	1.0U	**98**	**83**	1.0U
Vinyl chloride	2	1.0U	1.0U	**20**	1.0U	1.0U	5.0U	1.0U	1.0U

Compound	MCL	MW-200 12/01/13	MW-201 12/01/13	MW-202 12/01/13	MW-203 12/01/13	MW-204 12/01/13	MW-205A 11/29/13	MW-205B 11/29/13	MW-206A 11/29/13
Chloroform	N/A	1.0U	1.0U	1.0U	1.0U	0.33J	0.27J	0.26J	0.32J
1,1-Dichloroethane	N/A	1.0U	4.8	1.0U	1.0U	6.2	27	27	9.1
1,2-Dichloroethane	5	1.0U	1.0U	1.0U	1.0U	0.75J	1.0U	1.0U	1.0U
1,1-Dichloroethene	7	1.0U	0.56J	1.0U	1.0U	**12**	**12**	**12**	3.9
cis-1,2-Dichloroethene	70	1.0U	1.7	1.0U	1.0U	37	4.4	5.4	1.8
trans-1,2-Dichloroethene	100	1.0U	1.0U	1.0U	1.0U	0.47J	1.0U	1.0U	1.0U
Methylene Chloride	5	5.0U	5.0U	5.0U	5.0U	5.0U	5.0UB	5.0UB	5.0UB
Tetrachloroethene	5	1.0U	2.9	1.1	**5.9**	1.6	**26**	**25**	**5.6**
1,1,1-Trichloroethane	200	1.0U	16	0.66J	1.0U	6.4	24	24	9.1
Trichloroethene	5	1.0U	1.8	1.0U	1.0U	**52**	**15**	**14**	**5.5**
Vinyl chloride	2	1.0U	1.0U	1.0U	1.0U	1.0U	1.0U	1.0U	0.22J

Table 1: Southeast Rockford NPL Site
Summary of Groundwater Analytical Results
Sampling Event #30

Compound	MCL	MW-206B 11/29/13	MW-206C	MW-207 12/01/13	MW-102C(d) 12/18/13	MW-206A(d) 11/29/13
Chloroform	N/A	0.7J		1.0U	0.65J	0.35J
1,1-Dichloroethane	N/A	51		1.3	160	9.1
1,2-Dichloroethane	5	1.4		1.0U	1.1J	1.0U
1,1-Dichloroethene	7	**69**		0.35J	37	4
cis-1,2-Dichloroethene	70	**130**	not sampled	1.2	300	1.8
trans-1,2-Dichloroethene	100	0.37J	because the well	1.0U	4.4	1.0U
Methylene Chloride	5	5.0U	was inaccessible	5.0U	7.1J	5.0UB
Tetrachloroethene	5	**15**		1.4	8.2	5.7
1,1,1-Trichloroethane	200	40		1.8	77	8.8
Trichloroethene	5	**35**		3.7	28	5.6
Vinyl chloride	2	**2.7**		1.0U	1.0J	0.21J

(d) Field duplicate
All units in micrograms per liter (µg/l) or parts per billion (ppb)
Bold value and outlined cell denotes analytical result > than MCL

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-16	06/01/99		3	76	1.2	24	140	1.8	2 U	5.4	170	64	1 U	**485**
MW-16	10/26/99		2.3 J	73	10 U	23	130	2.5 J	20 U	5.2 J	170	65	10 U	**471**
MW-16	01/31/00		2.3 J	75	10 U	2.2 J	120	16	20 U	5.9 J	170	68	10 U	**459**
MW-16	04/24/00		2.5 J	79	5 U	2 J	130 E	16	10 JB	5.7	170 E	65	5 U	**480**
MW-16	04/24/00	Dilution	50 DJB	75 D	50 U	50 U	130 D	17 DJ	100 DJB	5.3 DJ	160 D	62 D	2.8 DJ	**602**
MW-16	07/27/00		2.7	75	10 U	3.8	130	12	20 U	5.2	160	58	10 U	**447**
MW-16	11/13/00		2.2	87	10 U	20	150	2.8	20 U	5	140	55	10 U	**462**
MW-16	04/12/01		2.3	74	10 U	3.1	150	14	20 U	5.8	180	64	10 U	**493**
MW-16	10/31/01		2.5	88	10 U	10 U	160	22	20 U	7.1	210	72	10 U	**562**
MW-16	04/25/02		2.3	70	10 U	15	170	6.7	20 U	6.6	150	62	10 U	**483**
MW-16	10/15/02		20 U	130	20 U	98	240	22	40 U	20 U	240	91	1 U	**821**
MW-16	04/23/03		2.51	95.6 E	1.08	24.2	244 E	15.7	2 U	9.74	237 E	97.6 E	1 U	**727**
MW-16	04/23/03	Dilution	20 U	75.6	20 U	24.6	200	20 U	40 U	20 U	172	75.3	20 U	**548**
MW-16	12/26/03		2.48	93.9 E	1 U	32.2 E	209 E	13.9	1 U	9.45	208 E	77.8 E	1 U	**647**
MW-16	12/26/03	Dilution	10 U	93.9 D	10 U	31.7 D	247 D	10 U	10 U	9.14 JD	221 D	92.7 D	10 U	**695**
MW-16	12/26/03	Fld Dupe	2.55	82.7 D	1 U	30.5 D	230 E	10 U	1 U	7.88 JD	220 E	84.4 E	10 U	**658**
MW-16	04/28/04		20 U	100	20 U	30.1	254	20 U	40 U	20 U	202	77.3	20 U	**663**
MW-16	05/21/05		1.8	91	1 U	28	230	5.6	2 U	6.5	160	65	1 U	**588**
MW-16	10/20/05		1.8	91	1 U	28	230	5.6	2 U	6.5	160	65	1 U	**588**
MW-16	05/08/06		2	94	1 U	27	290	7.3	2 U	9.1	170	78	1 U	**677**
MW-16	01/04/07		5	94	5 U	24	280	5	10 U	5.3	160	63	5 U	**636**
MW-16	10/08/07		2	100	1	28	260	14	2 U	8	140	61	1 U	**614**
MW-16	05/17/08		20 U	130	20 U	39	320	20 U	40 U	20 U	170	78	20 U	**737**
MW-16	12/18/08	Dilution	1.3 J	100	1 J	2 U	240	35	0.7 J	4.6	120	56	2 U	**559**
MW-16	06/20/09	Dilution	1.6 J	110	2 U	2 U	39	6.8	2 U	5.5	170	42	2 U	**375**
MW-16	11/28/09	Dilution	1.6 J	110	2 U	7.9	56	6.9	0.88 J	6.1	180	55	2 U	**424**
MW-16	06/25/10		1.4	93	0.21 J	21	51	3.8	1 U	8.7	200	58	1 U	**437**
MW-16	11/27/10	Dilution	1.4 J	78	2 U	24	45	1.6 J	2 U	10	180	60	2 U	**400**
MW-16	06/01/11		1.2	81	1 U	19	40	3.2	1 U	11	160	54	1 U	**369**
MW-16	12/28/11		1.1	71	1 U	17	27	2.7	5 U	11	130	42	1 U	**302**
MW-16	06/28/12		1.1	72	1 U	5.2	25	3.3	5 U	11	120	41	1 U	**279**
MW-16	11/24/12		0.9 J	68	1 U	13	22	2.4	5 U	10	110	35	1 U	**261**
MW-16	06/07/13		0.89 J	75	1 U	19	21	2.5	5 U	12	120	37	1 U	**287**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-16	12/19/13		0.8 J	73	1 U	17	18	2.2	5 U	9	93	30	1 U	**243**
MW-47	10/06/93		1 U	5	1 U	2	3	1 U	2 U	1	9	5		**25**
MW-47	06/01/99		1 U	1.1	1 U	0.49	1.3	1 U	2 U	0.53	3.5	2.8	1 U	**10**
MW-47	10/27/99		1 U	1.1	1 U	0.87 J	4.5	0.05 J	2 U	2.2	6.5	5.7	1 U	**21**
MW-47	02/17/00		1 U	0.32 J	1 U	0.1 J	0.18 J	1 U	2 U	0.27 J	1	0.58 J	1 U	**2**
MW-47	04/18/00		1 U	0.53 J	1 U	0.18 J	0.36 J	1 U	2 U	0.27 J	1	0.66 J	1 U	**3**
MW-47	07/27/00		1 U	0.61	1 U	0.13	0.38	1 U	2 U	0.64	1.2	0.82	1 U	**4**
MW-47	11/08/00		0.17	0.55	1 U	0.1	0.25	1 U	2 U	0.45	0.58	0.37	1 U	**2**
MW-47	04/10/01		0.28	0.57	1 U	1	0.31	1 U	2 U	0.48	1.1	0.56	1 U	**4**
MW-47	10/31/01		0.92	0.21	1 U	1 U	1 U	1 U	2 U	0.38	0.34	0.25	1 U	**2**
MW-47	04/30/02		1.3	0.13	1 U	1 U	0.13	1 U	2 U	0.33	0.23	0.27	1 U	**2**
MW-47	10/17/02		1	1 U	1 U	1 U	1 U	1 U	0.6	1 U	1 U	1 U	1 U	**2**
MW-47	04/22/03		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.67 J	1 U	1 U	**1**
MW-47	12/28/03		1 U	1 U	1 U	0.51 J	1 U	1 U	1 U	0.77 J	0.59 J	1 U	1 U	**2**
MW-47	04/28/04		1 U	0.54	1 U	1 U	1 U	1 U	2 U	1 U	0.91	0.58	1 U	**2**
MW-47	05/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1.4	1 U	1 U	**1**
MW-47	06/28/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-47	01/05/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-47	10/08/07		1 U	2	1 U	0.9	2	1 U	2 U	0.6	3	1	1 U	**10**
MW-47	05/17/08		1 U	1	1 U	1 U	1	1 U	2 U	1 U	4	1	1 U	**7**
MW-47	11/29/08		1 U	1.6	1 U	1 U	0.93 J	1 U	1 U	0.62 J	2.91	1.17	1 U	**7**
MW-47	11/29/08	Fld Dupe	0.15 J	1.58	1 U	0.34 J	0.96 J	1 U	1 U	0.61 J	2.89	1.15	1 U	**8**
MW-47	06/20/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-47	11/28/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-47	06/24/10		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-47	11/29/10		1 U	0.27 J	1 U	1 U	1 U	1 U	1 U	1 U	0.3 J	1 U	1 U	**1**
MW-47	06/03/11		1 U	2	1 U	0.68 J	0.7 J	1 U	1 U	0.33 J	2.7	1.2	1 U	**8**
MW-47	12/29/11		1 U	0.35 J	1 U	1 U	1 U	1 U	5 U	0.4 J	0.85 J	0.64 J	1 U	**2**
MW-47	06/26/12		1 U	1 U	1 U	1 U	1 U	1 U	5 U	0.29 J	1 U	1 U	1 U	**0**
MW-47	11/25/12		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**0**
MW-47	05/31/13		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**0**
MW-47	12/01/13		1 U	0.35 J	1 U	1 U	1 U	1 U	5 U	1 U	0.34 J	1 U	1 U	**1**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-101A	10/04/93		4	150	17 U	43	190		17 U	17 U	650	180		**1217**
MW-101A	04/20/99		7.3	230	3.4	63	540	9.3	2 U	16	580	200	1 U	**1649**
MW-101A	10/25/99		5.6 J	240	50 U	64	620	7 J	100 U	14 J	610	220	50 U	**1781**
MW-101A	01/27/00		6.2 J	270	50 U	61	690	40 J	100 U	15 J	740	270	50 U	**2092**
MW-101A	04/25/00		7 JB	240	50 U	65	720	7.8 J	100 JB	50 U	690	220	50 U	**2050**
MW-101A	07/26/00		6.1	210	20 U	51	730	10	40 U	4.4	620	140	20 U	**1772**
MW-101A	11/16/00		6.3	310	50 U	77	830	8.3	100 U	15	740	250	50 U	**2237**
MW-101A	04/13/01		5.6	240	50 U	81	780	8.6	100 U	14	830	270	50 U	**2229**
MW-101A	10/30/01		6.3	300	50 U	79	990	12	100 U	15	1000	300	50 U	**2702**
MW-101A	04/22/02		6.8	250	50 U	82	1000	11	100 U	18	890	280	50 U	**2538**
MW-101A	10/10/02		100 U	370	100 U	440	1200	100 U	200 U	64	1200	340	1 U	**3614**
MW-101A	04/23/03		6.28	320 E	1 U	125 E	1080 E	19.4	2 U	26.8 E	919 E	427 E	1 U	**2923**
MW-101A	04/23/03	Dilution	100 U	266	100 U	81.8 J	1110	100 U	200 U	100 U	909	309	100 U	**2676**
MW-101A	12/26/03		8.18	313 E	3.83	128 E	1080 E	21.8	1 U	51.7 E	796 E	344 E	1 U	**2747**
MW-101A	12/26/03	Dilution	100 U	268 D	100 U	101 D	1260 D	100 U	100 U	100 U	950 D	278 D	100 U	**2857**
MW-101A	04/28/04		100 U	265	100 U	98.1	1230	100 U	200 U	56.4	1040	302	100 U	**2992**
MW-101A	05/21/05		10 U	260	10 U	89	1100	13	20 U	80	850	250	10 U	**2642**
MW-101A	01/12/06		4.5	220	5 U	37	990	44	10 U	61	800	220	5 U	**2377**
MW-101A	05/08/06		4.4	25 U	1 U	76	1100	17	2 U	93	970	270	1 U	**2530**
MW-101A	01/04/07		10 U	180	10 U	48	840	21	20 U	56	820	190	10 U	**2155**
MW-101A	10/07/07		4	220	2	38	790	72	2 U	67	590	200	1 U	**1983**
MW-101A	05/17/08		50 U	260	50 U	100	1000	50 U	100	64	740	240	50 U	**2504**
MW-101A	11/28/08	Dilution	4.1 J	233	2.15 J	57.5	908	38.4	1.8 J	56.2	691	214	5 U	**2206**
MW-101A	06/10/09	Dilution	4.3 J	230	2 J	50	870	30	5 U	56	550	190	5 U	**1982**
MW-101A	11/27/09	Dilution	5.2 J	280	10 U	70	990	36	10 U	47	550	220	10 U	**2198**
MW-101A	06/28/10	Dilution	2 U	54	2 U	15	210	6	2 U	6.8	90	38	2 U	**420**
MW-101A	06/28/10	Fld Dupe	2 U	51	2 U	14	200	5.3	2 U	6.3	86	37	2 U	**400**
MW-101A	11/26/10	Dilution	3.2 J	280	10 U	68	1100	18	10 U	36	550	230	10 U	**2285**
MW-101A	05/31/11	Dilution	4.5 J	310	10 U	46	1200	75	10 U	36	510	190	10 U	**2372**
MW-101A	12/28/11	Dilution	4.3 J	290	2.8 J	62	1200	49	50 U	52	540	180	10 U	**2380**
MW-101A	12/28/11	Fld Dupe	4.3 J	290	10 U	64	1200	52	50 U	52	540	180	10 U	**2382**
MW-101A	06/25/12	Dilution	5.2 J	320	10 U	72	1600	66	2.7 J	56	650	190	10 U	**2962**
MW-101A	11/24/12	Dilution	3.4 J	240	10 U	39	1200	57	50 U	55	500	160	10 U	**2254**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-101A	06/04/13	Fld Dupe	3.1 J	270	5 U	66	750	16	8.3 J	58	540	160	5 U	**1871**
MW-101A	06/04/13	Dilution	10 U	260	10 U	61	730	14	15 J	56	500	150	10 U	**1786**
MW-101A	11/30/13	Dilution	3 J	260	5 U	70	610	14	25 UB	67	570	160	5 U	**1754**
MW-101B	10/04/93		5	140	25 U	42	190		25 U	84	560	180		**1201**
MW-101B	04/20/99		3.6	150	10 U	36	520	10 U	20 U	45	690	140	10 U	**1585**
MW-101B	10/25/99		3.6 J	140	25 U	38	430	3.2 J	50 U	47	580	150	25 U	**1392**
MW-101B	01/27/00		50 U	140	50 U	33 J	490	50 U	100 U	42 J	570	150	50 U	**1425**
MW-101B	04/25/00		4.5 J	150	50 U	37 J	510	5.2 J	100 JB	33 J	590	140	50 U	**1570**
MW-101B	07/26/00		4.4	150	20 U	41	700	4	40 U	39	750	140	20 U	**1828**
MW-101B	11/16/00		3.3	170	25 U	35	550	3.9	50 U	18	450	120	25 U	**1350**
MW-101B	04/13/01		50 U	140	50 U	42	570	50 U	100 U	39	620	160	50 U	**1571**
MW-101B	10/30/01		3.5	150	25 U	33	580	4	50 U	21	440	140	25 U	**1372**
MW-101B	04/22/02		4.4	140	50 U	37	630	4.4	3.3	48	580	140	50 U	**1587**
MW-101B	10/10/02		50 U	230	50 U	290	850	50 U	100 U	80	840	180	1 U	**2470**
MW-101B	04/23/03		3.62	202 E	1 U	66 E	891 E	11.7	2 U	67.1 E	753 E	206 E	1 U	**2200**
MW-101B	04/23/03	Dilution	50 U	162	50 U	45 J	795	50 U	100 U	50.7	656	160	50 U	**1869**
MW-101B	12/26/03		4.11	222 E	1 U	70.1 E	893 E	13	1 U	68 E	671 E	180 E	1 U	**2121**
MW-101B	12/26/03	Dilution	100 U	188 D	100 U	100 U	963 D	100 U	100 U	100 U	696 D	148 D	100 U	**1995**
MW-101B	04/28/04		50 U	226	50 U	59.4	1140	50 U	100 U	61.8	843	174	50 U	**2504**
MW-101B	05/21/05		10 U	200	10 U	50	920	10 U	20 U	47	610	130	10 U	**1957**
MW-101B	01/12/06		5 U	200	5 U	42	890	6.3	10 U	41	570	120	5 U	**1869**
MW-101B	05/08/06		10 U	230	10 U	52	1100	10 U	20 U	50	660	130	1 U	**2222**
MW-101B	01/04/07		10 U	210	10 U	46	950	10 U	20 U	46	620	120	10 U	**1992**
MW-101B	10/07/07		2	200	2	47	790	12	2 U	44	460	110	1 U	**1667**
MW-101B	05/17/08		50 U	240	50 U	64	960	50 U	100	52	560	130	50 U	**2106**
MW-101B	11/28/08	Dilution	2.4 J	181	1.75 J	36.2	760	7.45	1.35 J	41.1	438	96.3	5 U	**1566**
MW-101B	06/10/09	Dilution	3.1 J	160	1.8 J	31	750	7.1	5 U	36	390	81	5 U	**1460**
MW-101B	11/27/09	Dilution	2.6 J	170	5 U	37	840	8.4	5 U	37	400	81	5 U	**1576**
MW-101B	06/28/10	Dilution	10 U	130	10 U	35	790	9 J	10 U	32	320	70	10 U	**1386**
MW-101B	11/26/10	Dilution	10 U	130	10 U	36	850	10 U	10 U	32	430	77	10 U	**1555**
MW-101B	05/31/11	Dilution	5 U	140	5 U	32	910	6.2	5 U	30	420	63	5 U	**1601**
MW-101B	12/28/11	Dilution	1.7 J	120	0.86 J	26	270	5.5	10 U	25	380	40	2 U	**869**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-101B	06/25/12	Dilution	1.9 J	120	5 U	25	47	4.3 J	25 U	24	430	27	5 U	**679**
MW-101B	11/24/12	Dilution	1.4 J	120	2.5 U	26	33	4.1	0.88 J	25	430	26	2.5 U	**666**
MW-101B	06/04/13	Dilution	1.4 J	140	5 U	27	37	4.8 J	7.4 J	24	520	27	5 U	**789**
MW-101B	11/30/13	Dilution	1.6 J	130	5 U	28	32	4.1 J	25 UB	28	490	27	5 U	**741**
MW-101C	10/06/93		100 U	140	100 U	59	210	100	100 U	72	650	190		**1421**
MW-101C	04/20/99		3.5	140	10 U	34	550	10 U	20 U	45	740	140	10 U	**1653**
MW-101C	10/25/99		3 J	110	25 U	31	380	2.5 J	50 U	42	480	130	25 U	**1179**
MW-101C	01/27/00		20 U	110	20 U	28	370	2.8 J	40 U	42	460	120	20 U	**1133**
MW-101C	04/25/00		3.9 J	120	50 U	28 J	420	3.5 J	100 JB	31 J	450	100	50 U	**1256**
MW-101C	07/26/00		3.6	110	20 U	25	390	2.7	40 U	21	390	82	20 U	**1024**
MW-101C	11/13/00		2.6	130	25 U	24	420	2.7	50 U	34	370	100	25 U	**1083**
MW-101C	04/12/01		2.5	100	25 U	27	420	3	50 U	37	450	110	25 U	**1150**
MW-101C	10/30/01		2.9	120	25 U	21	510	11	50 U	32	470	110	25 U	**1277**
MW-101C	04/22/02		3.2	120	25 U	31	570	4.2	50 U	41	490	120	25 U	**1379**
MW-101C	10/10/02		50 U	200	50 U	200	660	50 U	28	150	650	130	1 U	**2018**
MW-101C	04/23/03		3	157 E	1 U	44.3 E	750 E	12.1	2 U	42 E	602 E	152 E	1 U	**1762**
MW-101C	04/23/03	Dilution	50 U	125	50 U	35.8 J	626	50 U	100 U	36.7 J	489	121	50 U	**1434**
MW-101C	12/30/03		3.64	193 E	1 U	57.2 E	782 E	32.5 E	1 U	63.2 E	644 E	175 E	1 U	**1951**
MW-101C	12/30/03	Dilution	50 U	141 D	50 U	42.4 JD	775 D	50 U	50 U	44.7 JD	628 D	142 D	50 U	**1773**
MW-101C	11/26/08	Dilution	2.45 J	157	2.05 J	33.8	682	6.8	1.5 J	27.9	398	86.4	5 U	**1398**
MW-101C	06/10/09	Dilution	2.6 J	120	5 U	22	550	5.8	5 U	24	270	56	5 U	**1050**
MW-101C	11/27/09	Dilution	2.4 J	120	5 U	28	620	5.5	5 U	25	290	63	5 U	**1154**
MW-101C	06/28/10	Dilution	5 U	85	5 U	23	570	5.4	5 U	19	220	44	5 U	**966**
MW-101C	11/26/10	Dilution	1.9 J	98	1.8 J	24	640	5 U	5 U	20	310	48	5 U	**1144**
MW-101C	05/31/11	Dilution	5 U	110	5 U	25	780	5.4	5 U	21	340	47	5 U	**1328**
MW-101C	12/28/11	Dilution	1.4 J	92	2 U	20	260	4	10 U	18	290	29	2 U	**714**
MW-101C	06/25/12	Dilution	1.4 J	89	2.5 U	17	89	3.3	12 U	16	300	20	2.5 U	**536**
MW-101C	11/30/12	Dilution	1.3 J	99	2.5 U	20	40	3.6	12 U	18	360	20	2.5 U	**562**
MW-101C	11/30/12	Fld Dupe	1.4 J	99	5 U	20	40	3.6 J	25 U	18	360	20	5 U	**562**
MW-101C	06/04/13	Dilution	1.6 J	130	2.5 U	24	40	4.1	7.1 J	22	480	22	2.5 U	**731**
MW-101C	11/30/13	Dilution	5 U	110	5 U	22	30	3.6 J	25 UB	21	400	19	5 U	**606**
MW-101D	10/06/93		50 U	72	50 U	34	130	50	50 U	31	300	96		**713**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-101D	04/21/99		2.6	80	5 U	24	230	5 U	10 U	23	300	80	5 U	**740**
MW-101D	01/27/00		1.6 J	42	10 U	14	130	1.5 J	20	18	180	54	10 U	**461**
MW-101D	04/25/00		2.4 JB	70	20 U	23	250	1.9 J	40 JB	23	270	81	20 U	**761**
MW-101D	07/26/00		2.5	60	1.2	14	180	1.1	20 U	2.9	180	33	10 U	**475**
MW-101D	11/16/00		2.2	76	1.3	17	210	1.3	20 U	3.8	180	46	10 U	**538**
MW-101D	04/13/01		2.2	66	10 U	21	250	1.9	20 U	18	250	73	10 U	**682**
MW-101D	10/30/01		2.3	70	20 U	22	260	2	40 U	26	300	80	20 U	**762**
MW-101D	04/30/02		2.5	66	20 U	22	260	2	40 U	20	240	67	20 U	**680**
MW-101D	10/10/02		20 U	100	20 U	94	280	20 U	40 U	20 U	300	58	1 U	**832**
MW-101D	04/23/03	Dilution	20 U	64.7	20 U	23.9	291	20 U	40 U	23	254	73.7	20 U	**730**
MW-101D	04/23/03		2.17	72.1 E	1 U	28.2 E	323 E	5.34	2 U	24.8	297 E	82.6 E	1 U	**835**
MW-101D	04/23/03	Fld Dupe	3	155 E	1 U	44.3 E	744 E	50 U	2 U	40.7 E	500	122	1 U	**1609**
MW-101D	12/28/03	Dilution	10 U	41.8 D	10 U	17.6 D	179 D	10 U	10 U	16 D	168 D	51.6 D	10 U	**474**
MW-101D	12/28/03		1.87	47 E	0.88 J	19.8	184 E	8.27	1 U	19.2	202 E	58.3 E	1 U	**541**
MW-101D	04/28/04		25 U	68	25 U	22.2	323	25 U	50 U	20.7	249	62.3	25 U	**745**
MW-101D	05/21/05		2	74	1 U	28	330	1 U	2 U	22	230	61	1 U	**747**
MW-101D	01/12/06		2 U	53	2 U	5	85	2 U	4 U	14	190	20	2 U	**367**
MW-101D	06/23/06		10 U	77	10 U	24	410	10 U	20 U	20	220	56	10 U	**807**
MW-101D	01/04/07		5	56	5 U	16	200	5 U	10 U	15	180	46	5 U	**518**
MW-101D	10/07/07		10 U	55	10 U	22	240	10 U	10 U	18	180	50	10 U	**565**
MW-101D	05/17/08	Dilution	25 U	81 D	25 U	28 D	380 D	25 U	50 U	25 U	220 D	60 D	25 U	**769**
MW-101D	05/17/08		10 U	98	10 U	35	420 E	10 U	18 J	26	250 E	70	10 U	**917**
MW-101D	11/28/08	Dilution	1.46 J	41.6	0.58 J	15	199	1.94 J	0.62 J	16.4	137	39.3	2 U	**453**
MW-101D	06/10/09	Dilution	1.8 J	68	0.86 J	19	340	3.6	2 U	20	180	47	2 U	**680**
MW-101D	11/27/09	Dilution	1.5 J	64	2.5 U	18	290	4.1	2.5 U	16	150	39	2.5 U	**583**
MW-101D	06/28/10	Dilution	2.5 U	44	2.5 U	16	270	3.1	2.5 U	13	110	32	2.5 U	**488**
MW-101D	11/26/10	Dilution	1.4 J	51	1 J	18	320	0.62 J	2.5 U	17	160	38	2.5 U	**607**
MW-101D	05/31/11	Dilution	1.4 J	60	2 U	17	210	2.4	2 U	15	170	31	2 U	**507**
MW-101D	12/28/11		1	42	1 U	13	39	2.1	5 U	12	120	19	1 U	**248**
MW-101D	06/25/12		1.1	47	1 U	14	33	1.8	5 U	12	150	19	1 U	**278**
MW-101D	11/24/12		1	42	1 U	13	27	1.6	5 U	11	140	16	1 U	**252**
MW-101D	06/04/13		1.2	49	1 U	16	20	1.5	5 U	12	180	19	1 U	**299**
MW-101D	11/30/13		0.91 J	29	1 U	11	20	1	5 U	11	110	16	1 U	**199**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-102A	09/28/93		2 U	26	2 U	4	32	2	23	2	34	6		**129**
MW-102A	05/20/99		1 U	43	0.25	1.2	54	1.8	2 U	0.6	51	6.3	1 U	**158**
MW-102A	10/25/99		0.15 J	43	5 U	2.5 J	61	1.7 J	10 U	3.1 J	57	15	5 U	**183**
MW-102A	02/16/00		5 U	64	5 U	2.8 J	90	3 J	10 U	5 U	97	14	5 U	**271**
MW-102A	04/25/00		5 U	43	5 U	1.5 J	49	1.4 J	10 JB	5 U	57	7.6	5 U	**170**
MW-102A	04/25/00	Fld Dupe	0.14 J	43	5 U	1.4 J	49	1.3 J	10 JB	5 U	57	7.7	5 U	**170**
MW-102A	07/26/00		10 U	71	10 U	2.7	95	2.5	20 U	10 U	100	16	10 U	**287**
MW-102A	11/16/00		5 U	91	5 U	2.8	110	2.7	10 U	5 U	88	14	5 U	**309**
MW-102A	04/10/01		10 U	91	10 U	4.2	140	4.4	20 U	10 U	120	22	10 U	**382**
MW-102A	10/17/01		10 U	77	10 U	2.3	110	4.1	20 U	10 U	88	16	10 U	**297**
MW-102A	04/30/02		5 U	47	5 U	1.6	65	1.9	10 U	5 U	62	11	5 U	**189**
MW-102A	10/10/02		20 U	130	20 U	20 U	160	20 U	40 U	20 U	140	26	1 U	**456**
MW-102A	04/25/03	Dilution	10 U	92.9	10 U	10 U	137	10 U	20 U	10 U	102	22.2	10 U	**354**
MW-102A	04/25/03		1 U	101 E	1 U	4.17	153 E	5.08	2 U	1 U	123 E	25.7 E	1 U	**412**
MW-102A	12/26/03		1 U	108 E	1 U	4.14	145 E	5.89	1 U	1 U	111 E	20.1	1 U	**394**
MW-102A	12/26/03	Dilution	10 U	118 D	10 U	10 U	156 D	5.56 JD	10 U	10 U	114 D	22.4 D	10 U	**416**
MW-102A	04/28/04		2 U	39	2 U	2 U	34.2	1.45	4 U	2 U	37.3	6.93	2 U	**119**
MW-102A	05/02/05		1 U	19	1 U	1 U	16	0.84	2 U	1 U	19	3.5	1 U	**58**
MW-102A	05/02/05	Fld Dupe	1 U	24	1 U	1 J	21	1.1	2 U	1 U	21	4.3	1 U	**72**
MW-102A	11/02/05		1 U	71	1 U	1.9	110	5.1	2 U	1 U	57	11	1 U	**256**
MW-102A	06/22/06		1 U	39	1 U	0.98	54	1.9	2 U	1 U	31	6.6	1 U	**133**
MW-102A	11/16/06		1 U	73	1 U	1.8	120	3.3	2 U	1 U	100	15	1 U	**313**
MW-102A	10/08/07		10 U	64	10 U	4	150	5	9	10 U	95	20	10 U	**347**
MW-102A	05/19/08		10 U	68	10 U	10 U	150	10 U	20	10 U	93	18	10 U	**349**
MW-102A	11/26/08		0.18 J	58.1	0.32 J	2.81	137	4.14	1 U	1 U	82.6	17.6	1 U	**303**
MW-102A	06/11/09		0.19 J	66	0.26 J	2.6	150	4.1	1 U	1 U	82	16	1 U	**321**
MW-102A	11/27/09		1 U	96	1 U	3.5	190	5.3	1 U	1 U	89	18	1 U	**402**
MW-102A	06/28/10	Dilution	2 U	80	2 U	2.7	170	5.3	2 U	2 U	62	15	2 U	**335**
MW-102A	11/26/10	Dilution	2 U	99	2 U	3	200	5.3	2 U	2 U	90	20	2 U	**417**
MW-102A	11/26/10	Fld Dupe	2 U	95	2 U	2.7	200	4.9	2 U	2 U	87	19	2 U	**409**
MW-102A	06/01/11		1 U	94	1 U	2.2	190	6	1 U	1 U	74	16	1 U	**382**
MW-102A	12/28/11		1 U	90	1 U	1.9	170	6	5 U	1 U	63	15	1 U	**346**
MW-102A	06/27/12		1 U	79	1 U	1.4	160	5.1	5 U	1 U	52	13	1 U	**311**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-102A	11/30/12		1 U	82	1 U	1.6	160	5.7	5 U	1 U	59	14	1 U	**322**
MW-102A	06/10/13		1 U	40	1 U	0.63 J	70	2.6	5 U	0.57 J	19	5.9	1 U	**139**
MW-102A	12/18/13		1 U	58	1 U	0.77 J	100	4	5 U	1 U	27	7	1 U	**197**
MW-102B	09/28/93		1 U	1 U	1 U	1 U	1 U	1 U	3	1 U	1 U	1 U		**3**
MW-102B	05/20/99		1 U	0.99	0.63	0.32	2.1	1 U	2 U	1.1	1.4	2.1	1 U	**9**
MW-102B	10/25/99		1 U	0.93 J	0.66 J	0.4 J	2.7	1 U	2 U	2	5.1	3.7	0.14 J	**16**
MW-102B	02/16/00		1 U	0.32 J	0.47 J	1 U	0.28 J	1 U	2 U	1 U	1 U	1 U	1 U	**1**
MW-102B	04/25/00		1 U	0.36 J	0.49 J	1 U	0.48 J	1 U	2 U	1 U	0.2 J	0.09 J	1 U	**2**
MW-102B	07/26/00		1 U	0.62	0.54	1 U	0.54	1 U	2 U	1 U	1 U	1 U	0.19 J	**2**
MW-102B	11/16/00	Fld Dupe	1 U	0.74 J	0.6 J	1 U	0.59 J	1 U	2 U	1 U	1 U	1 U	0.16 J	**2**
MW-102B	11/16/00		1 U	0.76	1 U	1 U	0.62	1 U	2 U	1 U	1 U	1 U	0.17 J	**2**
MW-102B	04/10/01		1 U	0.71	0.61	1 U	0.71	1 U	2 U	1 U	1 U	1 U	0.11 J	**2**
MW-102B	10/17/01		1 U	0.83	1 U	1 U	1.2	1 U	2 U	1 U	1 U	1 U	0.13 J	**2**
MW-102B	04/30/02		1 U	1	0.58	1 U	1.4	0.13	2 U	1 U	1 U	1 U	0.089	**3**
MW-102B	10/10/02		1 U	2	1 U	1 U	2	1 U	0.6	1 U	1 U	1 U	1 U	**5**
MW-102B	04/25/03		1 U	1.35	1 U	1 U	2.27	1 U	2 U	1 U	1 U	1 U	1 U	**4**
MW-102B	12/26/03		1 U	1.64	0.64 J	1 U	2.9	1 U	1 U	1 U	1 U	1 U	1 U	**5**
MW-102B	04/28/04		1 U	1.73	0.62	1 U	3.2	1 U	2 U	1 U	1 U	1 U	1 U	**6**
MW-102B	05/02/05		1 U	1.6	0.48	1 U	2.4	1 U	2 U	1 U	1 U	1 U	1 U	**4**
MW-102B	11/02/05		1 U	1.9	1 U	1 U	3.5	1 U	2 U	1 U	1 U	1 U	1 U	**5**
MW-102B	06/22/06		1 U	2.3	1 U	1 U	4.3	1 U	2 U	1 U	1 U	1 U	1 U	**7**
MW-102B	11/16/06		1 U	3	1 U	1 U	5	1 U	2 U	1 U	1 U	1 U	1 U	**8**
MW-102B	10/08/07		1 U	3	0.5	1 U	4	1 U	2 U	1 U	1 U	1 U	1 U	**8**
MW-102B	05/19/08		1 U	4	1 U	1 U	6	1 U	2 U	1 U	1 U	1 U	1 U	**10**
MW-102B	11/26/08		1 U	2.8	0.66 J	1 U	5.11	0.28 J	1 U	1 U	1 U	1 U	0.18 J	**9**
MW-102B	06/11/09		1 U	3.2	0.65 J	1 U	5	1 U	1 U	1 U	1 U	1 U	1 U	**9**
MW-102B	11/27/09		1 U	3.5	0.56 J	1 U	5.6	1 U	1 U	1 U	1 U	1 U	1 U	**10**
MW-102B	06/28/10		1 U	3	0.69 J	1 U	4.4	1 U	1 U	1 U	1 U	1 U	1 U	**8**
MW-102B	11/26/10		1 U	2.9	0.67 J	1 U	5	1 U	1 U	1 U	1 U	1 U	1 U	**9**
MW-102B	06/01/11		1 U	2.8	1 U	1 U	4	1 U	1 U	1 U	1 U	1 U	1 U	**7**
MW-102B	12/28/11		1 U	2.8	1 U	1 U	4.1	1 U	5 U	1 U	1 U	1 U	0.32 J	**7**
MW-102B	06/27/12		1 U	2.7	1 U	1 U	3.8	1 U	5 U	1 U	1 U	1 U	0.32 J	**7**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-102B	06/27/12	Fld Dupe	1 U	2.7	1 U	1 U	3.9	1 U	5 U	1 U	1 U	1 U	0.31 J	**7**
MW-102B	11/30/12		1 U	2.8	0.52 J	1 U	4.6	1 U	5 U	1 U	1 U	1 U	0.43 J	**8**
MW-102B	06/05/13		1 U	2.7	1 U	1 U	3.5	1 U	5 U	1 U	1 U	1 U	0.52 J	**7**
MW-102B	12/18/13		1 U	60	1 U	0.81 J	110	4.2	5 U	1 U	28	7.4	1 U	**210**
MW-102C	09/28/93		12 U	160	12 U	68	140	12 U	55	44	160	140		**767**
MW-102C	05/20/99		2.5	180	4	59	390	10 U	20 U	33	170	140	10 U	**979**
MW-102C	10/25/99		3 J	210	25 U	78	460	25 U	50 U	46	250	170	25 U	**1217**
MW-102C	02/16/00		0.66 J	32	0.91 J	12	61 E	0.57 J	0.38 J	5.9	60 E	26	2 U	**199**
MW-102C	02/16/00	Dilution	0.52 DJ	24 D	5 U	9 D	44 D	5 U	10 U	4.4 DJ	44 D	20 D	5 U	**146**
MW-102C	04/25/00		0.91 J	44	5 U	5.2	65	0.96 J	10 JB	0.67 J	60	10	5 U	**197**
MW-102C	07/26/00		0.64	29	0.8	4.5	39	0.41	4 U	0.99	44	8.2	2 U	**128**
MW-102C	11/16/00		0.32	19	2 U	4.5	28	0.26	4 U	1.1	23	8.3	2 U	**84**
MW-102C	04/10/01		0.94	48	5 U	2.6	39	5 U	10 U	0.8	90	5.4	5 U	**187**
MW-102C	10/17/01		0.6	29	4 U	8.9	53	0.39	8 U	3.5	46	17	4 U	**158**
MW-102C	04/30/02		2.1	110	2.4	40	240	3.3	20 U	19	170	78	10 U	**665**
MW-102C	10/10/02		5 U	56	5 U	54	87	5 U	10 U	4 J	69	20	1 U	**290**
MW-102C	04/25/03		1.16	83.3 E	1.57	33 E	200 E	4	2 U	16.3	143 E	64.8 E	1 U	**547**
MW-102C	04/25/03	Dilution	10 U	48.4	10 U	18.6	112	10 U	20 U	7.94 J	73.2	34.9	10 U	**295**
MW-102C	12/26/03		0.6 J	40.4 E	0.76 J	9.18	69 E	1.04	1 U	1.6	60.2 E	16.3	1 U	**199**
MW-102C	12/26/03	Dilution	4 U	42.6 D	4 U	9.85 D	79.1 D	4 U	4 U	4 U	59 D	16.2 D	4 U	**207**
MW-102C	04/28/04		25 U	105	25 U	38.2	278	25 U	50 U	20.9	136	70.4	25 U	**649**
MW-102C	05/02/05		0.74	69	1.2	0.62	22	1 U	2 U	1.1	110	1.5	1 U	**206**
MW-102C	11/02/05		1 U	3.4	1 U	1.3	7.4	1 U	2 U	1 U	6.4	2.9	1 U	**21**
MW-102C	11/02/05	Fld Dupe	1 U	18	1 U	5.8	46	1 U	2 U	2.5 H	15	9.9	1 U	**97**
MW-102C	06/22/06		1 U	23	1 U	8.4	49	1 U	2 U	4.9	19	15	1 U	**119**
MW-102C	11/16/06		1 U	69	1.3	10	120	0.97 J	2 U	4	70	23	1 U	**298**
MW-102C	10/08/07		0.4	60	1	22	170	2	2 U	10	35	34	1 U	**334**
MW-102C	10/08/07	Fld Dupe	0.5 J	90 D	1	33 D	270 D	4	2 U	16	52 D	51 D	0.6 J	**518**
MW-102C	05/19/08		10 U	66	10 U	26	210	10 U	21	12	74	37	10 U	**446**
MW-102C	11/26/08		0.21 J	18.9	0.33 J	5.75	56.6	0.79 J	1 U	2.66	18.4	9.54	1 U	**113**
MW-102C	06/11/09		0.31 J	36	0.57 J	6.1	99	0.74 J	1 U	0.94 J	23	8.9	1 U	**176**
MW-102C	11/27/09	Dilution	10 U	210	10 U	59	760	6.7 J	10 U	22	94	74	10 U	**1226**
MW-102C	06/28/10	Dilution	5 U	160	5 U	53	740	6.8	5 U	18	89	65	5 U	**1132**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-102C	11/26/10	Dilution	10 U	170	3.2 J	51	720	10 U	10 U	21	110	68	10 U	**1143**
MW-102C	06/01/11	Dilution	5 U	200	5 U	50	870	7	5 U	25	90	63	5 U	**1305**
MW-102C	12/28/11	Dilution	0.95 J	160	5 U	40	670	5.6	25 U	17	80	47	5 U	**1021**
MW-102C	06/27/12	Dilution	1.2 J	130	5 U	33	550	4.4 J	25 U	7.3	55	30	5 U	**811**
MW-102C	11/30/12	Dilution	0.36 J	64	0.54 J	15	200	2	10 U	4.2	41	15	2 U	**342**
MW-102C	06/05/13	Dilution	0.7 J	150	2 U	36	360	4	6.2 J	10	84	33	0.8 J	**685**
MW-102C	12/18/13	Fld Dupe	0.65 J	160	1.1 J	37	300	4.4	7.1 J	8.2	77	28	1 J	**624**
MW-102C	12/18/13	Dilution	0.75 J	120	1.1 J	31	270	4	5 UB	7.3	78	24	0.58 J	**537**
MW-113A	10/08/93		7 U	92	7 U	33	110	7 U	14 U	7 U	140	56		**431**
MW-113A	05/03/99		0.9	34	0.4	10	52	1.2	2 U	1.9	59	24	1 U	**183**
MW-113A	11/10/99		2.3 J	100	10 U	27	160	2.4 J	20	3.2 J	160	69	10 U	**544**
MW-113A	02/15/00		2.1 J	91	10 U	16	160	5.7 J	20 U	2.9 J	160	71	10 U	**509**
MW-113A	04/24/00		2.1 JB	92	10 U	5.1 J	160	13	20 JB	2.4 J	160	61	10 U	**516**
MW-113A	07/27/00		2.3	86	10 U	4	110	7.5	20 U	10 U	130	22	1 U	**362**
MW-113A	11/16/00		2.3	130	10 U	9.4	200	12	20 U	2.1	170	62	10 U	**588**
MW-113A	04/12/01		2.4	10	10 U	210	210	15	20 U	3.7	200	81	10 U	**732**
MW-113A	10/31/01		2.8	110	10 U	3	240	22	20 U	3.3	200	75	10 U	**656**
MW-113A	04/29/02		2.5	100	10 U	1.5	200	23	20 U	4.5	200	70	10 U	**602**
MW-113A	10/18/02		20 U	190	20 U	240	430	20 U	40 U	20 U	370	140	1 U	**1370**
MW-113A	04/23/03		2.84	139 E	1 U	27.6 E	371 E	18.2	2 U	8.11	306 E	126 E	1 U	**999**
MW-113A	04/23/03	Dilution	25 U	121	25 U	33.9	325	25 U	50 U	25 U	245	101	25 U	**826**
MW-113A	12/28/03		2.93	140 E	1.38	38.3 E	345 E	10.4	1 U	9.72	309 E	124 E	1 U	**981**
MW-113A	12/28/03	Dilution	20 U	109 D	20 U	31.4 D	318 D	20 U	20 U	20 U	232 D	92.9 D	20 U	**783**
MW-113A	04/28/04		25 U	123	25 U	32.4	360	25 U	50 U	25 U	239	89.1	25 U	**844**
MW-113A	04/28/04	Fld Dupe	3.09	123	1.6	35.9	371	37.9 E	2 U	10.3	240	96.8	1 U	**920**
MW-113A	05/21/05		5 U	140	5 U	45	410	5.7	10 U	8.1	260	100	5 U	**969**
MW-113A	10/20/05		2.6	110	1 U	22	330	17	2 U	8	210	82	1 U	**782**
MW-113A	05/08/06		2.3	110	1 U	32	470	9.1	20 U	10	270	93	1 U	**996**
MW-113A	01/04/07		10 U	110	10 U	27	430	10 U	20 U	10	210	10	10 U	**797**
MW-113A	10/08/07		2	150	1	46	480	15	2 U	10	260	110	1 U	**1074**
MW-113A	05/17/08		20 U	160	20 U	54	510 E	20 U	41	20 U	280	130	20 U	**1175**
MW-113A	05/17/08	Dilution	40 U	140 D	40 U	48 D	470 D	40 U	80 U	40 U	250 D	110 D	40 U	**1018**
MW-113A	11/29/08	Dilution	2.2 J	135	1.5 J	7.25	369	40.6	1.7 J	10.5	210	98.6	5 U	**876**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-113A	06/11/09	Dilution	2.6 J	110	5 U	21	370	15	5 U	10	180	85	5 U	**794**
MW-113A	11/28/09	Dilution	1.5 J	110	2.5 U	1.7 J	290	44	2.5 U	12	170	84	2.5 U	**713**
MW-113A	06/29/10	Dilution	1.1 J	88	1 J	3.3	240	30	0.85 J	12	130	76	2.5 U	**582**
MW-113A	11/28/10	Dilution	0.95 J	85	0.7 J	17	250	11	2.5 U	12	110	67	2.5 U	**554**
MW-113A	06/01/11		0.96 J	88	1 U	2.4	90	14	1 U	13	120	57	1 U	**385**
MW-113A	12/29/11		1.1	95	1 U	16	50	4.3	5 U	13	130	46	1 U	**355**
MW-113A	06/25/12		1.1	100	1 U	14	48	5.3	5 U	13	140	48	1 U	**369**
MW-113A	11/24/12		1.2	110	1 U	14	43	4.4	5 U	13	140	45	1 U	**371**
MW-113A	06/04/13		1.2	120	1 U	26	40	3.9	5 U	13	160	45	1 U	**409**
MW-113A	11/30/13		1.2	140	1 U	33	37	4.4	5 UB	13	160	51	1 U	**440**
MW-113B	10/19/93		2 U	14	2 U	4	12	2 U	3 U	2 U	6	6		**42**
MW-113B	04/29/99		0.54	33	0.56	12	38	0.65	2 U	1.8	17	19	1 U	**123**
MW-113B	10/27/99		0.45 J	33	5 U	8.4	39	0.55 J	10 U	1.3 J	13	20	5 U	**116**
MW-113B	02/15/00		0.65 J	48	5 U	11	62	0.83 J	10 U	1.4 J	27	30	5 U	**181**
MW-113B	04/24/00		0.61 JB	43	5 U	11	56	0.98 J	10 JB	1.2 J	21	26	5 U	**170**
MW-113B	07/27/00		0.71	38	0.6	9.4	49	0.91	10 U	0.89	17	20	5 U	**137**
MW-113B	11/16/00		0.63	55	5 U	11	62	1.3	10 U	1.4	22	27	5 U	**180**
MW-113B	04/12/01		0.56	40	5 U	8.9	53	1	10 U	5 U	17	20	5 U	**140**
MW-113B	10/31/01		0.64	50	5 U	12	67	1.1	10 U	5 U	24	29	5 U	**184**
MW-113B	04/29/02		0.6	39	5 U	9.8	60	0.97	10 U	1.3	19	23	5 U	**154**
MW-113B	10/18/02		10 U	84	10 U	88	120	10 U	5	10 U	39	42	1 U	**378**
MW-113B	04/23/03		1.05	77.3 E	1 U	23.3	143 E	6.06	2 U	3.77	65.8 E	55.8 E	2.2	**378**
MW-113B	04/23/03	Dilution	10 U	58.6	10 U	17.4	115	10 U	20 U	10 U	45.6	41.9	10 U	**279**
MW-113B	12/28/03		0.97 J	71.3 E	1 U	21.4	134 E	4.01	1 U	3.72	53.4 E	52.1 E	1.24	**342**
MW-113B	12/28/03	Dilution	10 U	65.1 D	10 U	19.1 D	129 D	10 U	10 U	10 U	43.1 D	45.9 D	10 U	**302**
MW-113B	04/28/04		10 U	70	10 U	19.8	143	10 U	20 U	10 U	44.9	42.7	10 U	**320**
MW-113B	05/21/05		1 U	64	1 U	19	140	1.8	2 U	2.9	39	39	4.8	**311**
MW-113B	10/20/05		1 U	78	1 U	22	170	1.9	2 U	3.8	45	47	1 U	**368**
MW-113B	05/08/06		1 U	64	1 U	21	140	1.9	2 U	3.6	33	37	9.2	**310**
MW-113B	01/04/07		1 U	61	1 U	20	120	1.7	2 U	3	30	38	1.4	**275**
MW-113B	10/08/07		0.5	56	0.6	17	120	2	2 U	3	21	30	15	**265**
MW-113B	05/17/08		10 U	66	10 U	19	140	10 U	19 J	10 U	25	34	17	**320**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-113B	11/29/08		0.71 J	71.3	0.92 J	20.4	169	2.15	1 U	3.49	28.8	41.5	6.2	**344**
MW-113B	06/11/09		0.73 J	71	0.87 J	19	180	2.2	1 U	3.6	29	42	6.9	**355**
MW-113B	11/28/09		0.69 J	77	0.76 J	22	190	2.5	1 U	3.9	31	41	8	**377**
MW-113B	06/29/10	Dilution	2 U	63	2 U	19	150	2.7	2 U	3	19	33	9	**299**
MW-113B	11/28/10	Dilution	2 U	67	0.8 J	19	160	3	2 U	4.2	26	37	8.8	**326**
MW-113B	06/01/11		0.46 J	66	0.61 J	18	140	2.3	1 U	4.1	23	36	11	**301**
MW-113B	12/29/11		0.42 J	59	0.63 J	16	100	2	5 U	3.9	19	30	8.9	**240**
MW-113B	06/25/12		0.48 J	60	1 U	14	98	1.9	5 U	3.6	17	28	9.4	**232**
MW-113B	11/24/12		0.34 J	59	0.46 J	14	78	1.8	5 U	3.7	18	26	7.5	**209**
MW-113B	06/04/13		0.27 J	55	1 U	12	58	1.4	5 U	2.5	12	20	12	**173**
MW-113B	11/30/13		0.3 J	53	0.36 J	12	56	1.4	5 U	2.7	11	21	9.6	**167**
MW-114A	10/05/93		1 U	2	1 U	4	5	1 U	2 U	1 U	6	2		**19**
MW-114A	04/28/99		5 U	6.7	5 U	46	14	5 U	10 U	1.9 J	250	34	5 U	**353**
MW-114A	10/26/99		0.34 J	7.1 J	25 U	48	11 J	25 U	50 U	25 U	290	47	25 U	**403**
MW-114A	01/31/00		10 U	5 J	10 U	34	6.6 J	10 U	1.5 J	10 U	220	33	10 U	**300**
MW-114A	04/24/00		10 U	4.2 J	10 U	26	5.6 J	10 U	20 JB	10 U	160	24	10 U	**240**
MW-114A	07/27/00		10 U	3.9	10 U	24	5.4	10 U	20 U	10 U	140	22	10 U	**195**
MW-114A	11/13/00		10 U	4.2	10 U	20	4.7	10 U	20 U	10 U	120	19	10 U	**168**
MW-114A	04/12/01		5 U	2.7	5 U	18	3.9	5 U	10 U	5 U	120	20	5 U	**165**
MW-114A	10/31/01		5 U	2.5	5 U	15	3.6	5 U	10 U	5 U	100	18	5 U	**139**
MW-114A	04/25/02		5 U	3.1	5 U	16	4.1	5 U	10 U	5 U	100	22	5 U	**145**
MW-114A	04/25/02	Fld Dupe	5 U	3.1 J	5 U	16	4 J	5 U	10 U	5 U	100	22	5 U	**145**
MW-114A	10/15/02		10 U	10 U	10 U	140	7	10 U	20 U	10 U	170	38	1 U	**355**
MW-114A	04/23/03	Dilution	10 U	10 U	10 U	12.9	10 U	10 U	20 U	10 U	80.2	20.8	10 U	**114**
MW-114A	04/23/03		1 U	3.28	1 U	13.4	4.09	1 U	2 U	1 U	94.6 E	23.5	1 U	**139**
MW-114A	12/26/03	Dilution	4 U	2.86 JD	4 U	10.3 D	3.6 JD	4 U	4 U	4 U	70.1 D	15.9 D	4 U	**103**
MW-114A	12/26/03		1 U	2.86	1 U	9.96	3.62	1 U	1 U	1 U	73.9 E	16.3	1 U	**107**
MW-114A	04/28/04		5 U	3.69	5 U	12	4.25	5 U	10 U	5 U	79.9	20.8	5 U	**121**
MW-114A	05/21/05		1 U	2.5	1 U	5.7	3.3	1 U	2 U	1 U	28	7.9	1 U	**47**
MW-114A	10/20/05		1 U	2.6	1 U	7.2	2.9	1 U	2 U	1 U	39	9.8	1 U	**62**
MW-114A	05/06/06		1 U	3.4	1 U	9.4	3.7	1 U	2 U	1 U	44	12	1 U	**73**
MW-114A	01/04/07		1 U	3.5	1 U	11	3.3	1 U	2 U	1 U	51	9.6	1 U	**78**
MW-114A	10/08/07		1 U	2	1 U	7	2	1 U	2 U	2 U	34	5	1 U	**50**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-114A	05/17/08		2 U	2	2 U	5	3	2 U	3 J	2 U	28	4	2 U	**45**
MW-114A	11/29/08		1 U	0.28 J	1 U	1 U	1 U	1 U	1 U	1 U	1.09	1 U	1 U	**1**
MW-114A	06/11/09		0.16 J	1 U	1 U	1 U	1 U	1 U	1 U	1 U	0.9 J	1 U	1 U	**1**
MW-114A	11/28/09		0.46 J	1.9	1 U	3.9	1.3	1 U	1 U	1 U	36	2.7	1 U	**46**
MW-114A	06/25/10		1 U	3.2	1 U	6.6	2.2	1 U	1 U	1 U	70	4.4	1 U	**86**
MW-114A	11/27/10		1 U	2.8	1 U	8.5	2.1	1 U	1 U	1 U	65	4.7	1 U	**83**
MW-114A	06/01/11		1 U	4.2	1 U	10	2.9	1 U	1 U	1 U	85	5.5	1 U	**108**
MW-114A	12/28/11		1 U	3.6	1 U	9.1	2.6	1 U	5 U	0.18 J	65	4.1	1 U	**85**
MW-114A	06/27/12		0.21 J	4.3	1 U	5.6	3	1 U	5 U	1 U	71	4.2	1 U	**88**
MW-114A	11/24/12		1 U	2.9	1 U	1.6	2.4	0.22 J	5 U	1 U	27	1.8	1 U	**36**
MW-114A	06/07/13		1 U	5.5	1 U	11	4.3	1 U	5 U	1 U	82	4.7	1 U	**108**
MW-114A	12/19/13		1 U	3.1	1 U	5.8	2.7	1 U	5 U	0.19 J	43	2.3	1 U	**57**
MW-114B	10/04/93		2 U	14	2 U	4	12	2 U	3 U	2 U	6	6		**42**
MW-114B	04/28/99		1 U	0.89	1 U	0.6	3.3	1 U	2 U	1	4	6.2	1 U	**16**
MW-114B	10/26/99		1 U	1	1 U	0.46 J	3.3	1 U	2 U	0.66 J	1.2	8.2	1 U	**15**
MW-114B	01/31/00		1 U	0.81 J	1 U	0.18 J	2.3	1 U	2 U	1 U	1 U	5.7	1 U	**9**
MW-114B	04/24/00		1 U	0.68 J	1 U	0.11 J	1.7	1 U	2 JB	1 U	0.05 J	1.8	1 U	**6**
MW-114B	07/27/00	Fld Dupe	1 U	1	1 U	0.26 J	3	1 U	2 U	1 U	1 U	7.5	1 U	**12**
MW-114B	07/27/00		1 U	1	1 U	0.26	3	1 U	2 U	1 U	1 U	7.9	1 U	**12**
MW-114B	11/13/00		1 U	1.2	1 U	0.13	2.4	1 U	2 U	1 U	1 U	3.5	1 U	**7**
MW-114B	04/12/01		1 U	0.98	1 U	0.26	2.9	1 U	2 U	1 U	1 U	8.2	1 U	**12**
MW-114B	10/31/01		1 U	0.96	1 U	0.13	2.2	1 U	2 U	1 U	1 U	4.8	1 U	**8**
MW-114B	04/25/02		1 U	1.1	1 U	0.29	3	0.04	2 U	1 U	1 U	7.2	1 U	**12**
MW-114B	10/15/02		1 U	2	3	1	3	1 U	0.6	1 U	1 U	9	1 U	**19**
MW-114B	04/23/03		1 U	1.15	1 U	1 U	2.84	1 U	2 U	1 U	1 U	8.8	1 U	**13**
MW-114B	12/26/03		1 U	1.25	1 U	1.07	2.98	1 U	1 U	1 U	1 U	8.91	1 U	**14**
MW-114B	04/28/04		1 U	1.21	1 U	1 U	2.87	1 U	2 U	1 U	1 U	8.82	1 U	**13**
MW-114B	05/21/05		1 U	1.5	1 U	1 U	2.3	1 U	2 U	1 U	1 U	7.6	1 U	**11**
MW-114B	10/20/05		1 U	1.6	1 U	1 U	2.3	1 U	2 U	1 U	1 U	8.8	1 U	**13**
MW-114B	05/06/06		1 U	1 U	1 U	1 U	2.1	1 U	2 U	1 U	1 U	8.7	1 U	**11**
MW-114B	01/04/07		1 U	1.4	1 U	1 U	1.8	1 U	2 U	1 U	1 U	6.7	1 U	**10**
MW-114B	01/04/07	Fld Dupe	1 U	1.6	1 U	1 U	1.8	1 U	2 U	1 U	1 U	6.4	1 U	**10**
MW-114B	10/08/07		1 U	2	1 U	0.5	2	1 U	2 U	1 U	1 U	6	1 U	**11**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-114B	05/17/08		1 U	2	1 U	1 U	2	1 U	2 U	1 U	1 U	9	1 U	**13**
MW-114B	12/18/08		1 U	1.6	1 U	0.67 J	2	1 U	1 U	1 U	1 U	6.8	1 U	**11**
MW-114B	06/20/09		1 U	1.8	1 U	0.67 J	2.2	1 U	1 U	1 U	1 U	6.5	1 U	**11**
MW-114B	11/28/09		1 U	2.2	1 U	1	2	1 U	1 U	1 U	1 U	6.7	1 U	**12**
MW-114B	11/28/09	Fld Dupe	1 U	2.4	1 U	0.93 J	1.9	1 U	1 U	1 U	1 U	6.8	1 U	**12**
MW-114B	06/25/10	Fld Dupe	1 U	2	1 U	0.81 J	1.9	1 U	1 U	1 U	1 U	6.3	1 U	**11**
MW-114B	06/25/10		1 U	2.1	1 U	0.84 J	2	1 U	1 U	1 U	1 U	6.3	1 U	**11**
MW-114B	11/27/10		1 U	1.8	1 U	1	2.3	1 U	1 U	1 U	1 U	7.8	1 U	**13**
MW-114B	06/01/11		1 U	1.6	1 U	1 U	2.1	1 U	1 U	1 U	1 U	7.7	1 U	**11**
MW-114B	06/01/11	Fld Dupe	1 U	1.6	1 U	1 U	2.1	1 U	1 U	1 U	1 U	7.4	1 U	**11**
MW-114B	12/28/11		1 U	1.3	1 U	0.54 J	2.2	1 U	5 U	1 U	1 U	6.7	1 U	**11**
MW-114B	06/28/12		1 U	1.1	1 U	1 U	1.8	1 U	5 U	1 U	1 U	6.5	1 U	**9**
MW-114B	06/28/12	Fld Dupe	1 U	1.1	1 U	0.41 J	1.8	1 U	5 U	1 U	1 U	6.7	1 U	**10**
MW-114B	11/24/12		1 U	1.3	1 U	0.44 J	1.9	1 U	5 U	1 U	1 U	6.1	1 U	**10**
MW-114B	11/24/12	Fld Dupe	1 U	1.3	1 U	0.38 J	1.8	1 U	5 U	1 U	1 U	5.8	1 U	**9**
MW-114B	06/07/13		1 U	1.2	1 U	1 U	1.9	1 U	5 U	1 U	1 U	6.9	1 U	**10**
MW-117B	10/04/93		0.6	1 U	1 U	1 U	1	1 U	2 U	4	2	5		**13**
MW-117B	04/22/99		0.72	7.3	0.54	14	16	1 U	2 U	3.1	83	21	1 U	**146**
MW-117B	10/18/99		0.58 J	7.7	5 U	14	17	5 U	10	1.3 J	68	17	5 U	**136**
MW-117B	01/26/00		0.36 J	8	5 U	9.5	18	5 U	10	1.9 J	59	22	5 U	**129**
MW-117B	04/17/00		0.39 J	8.1	0.42 J	11	19	2 U	4 JB	1.6 J	49	19	0.07 J	**113**
MW-117B	07/24/00		0.49	6.6	2 U	9.6	15	2 U	4 U	1.7	42	17	2 U	**92**
MW-117B	11/07/00		0.42	10	2 U	11	18	2 U	4 U	1.7	37	19	2 U	**97**
MW-117B	04/09/01		0.37	5.8	2 U	7.3	13	0.25	4 U	1.8	28	17	2 U	**74**
MW-117B	10/15/01		0.35	7.1	2 U	7.5	16	2 U	4 U	1.3	23	16	2 U	**71**
MW-117B	04/16/02		0.3	5.9	0.22	7.3	15	0.2	2 U	1.7	22	16	1 U	**69**
MW-117B	10/07/02		5 U	8	5 U	54	20	5 U	10 U	3	25	16	1 U	**126**
MW-117B	04/22/03		1 U	7.55	1 U	10.4	20.1	0.61 J	2 U	2.31	23.1	18.4	1 U	**82**
MW-117B	12/22/03		0.99 J	5.96	1 U	9.38	18.7	0.53 J	1 U	2.25	21.8	16.9	1 U	**77**
MW-117B	04/28/04		0.73	3.77	1 U	4.76	11.5	1 U	2 U	2	13.5	11.5	1 U	**48**
MW-117B	05/21/05		1 U	4.5	1 U	5.7	13	1 U	2 U	1.6	11	9.4	1 U	**45**
MW-117B	10/19/05		1 U	4.7	1 U	5.6	14	1 U	2 U	1.8	12	9.3	1 U	**47**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-117B	06/28/06		1 U	21	1 U	23	70	1 U	2 U	24	56	23	1 U	**217**
MW-117B	11/21/06		1 U	3.6	1 U	4	11	1 U	2 U	2.1	12	11	1 U	**44**
MW-117B	10/06/07		0.4	6	1 U	8	8	1 U	2 U	2	16	12	1 U	**52**
MW-117B	05/17/08		1 U	8	1 U	11	11	1 U	2 U	3	25 E	16	1 U	**74**
MW-117B	05/17/08	Dilution	2 U	7 D	2 U	10 D	9 D	2 U	4 U	3 D	22 D	14 D	2 U	**65**
MW-117B	11/28/08		0.38 J	7.91	1 U	8.73	8.11	1 U	1 U	4.99	24	15.8	1 U	**70**
MW-117B	06/09/09		0.49 J	11	1 U	12	7.9	1 U	1 U	4.5	31	17	1 U	**84**
MW-117B	11/24/09		0.42 J	8.5	1 U	9	5.1	1 U	1 U	5.3	24	15	1 U	**67**
MW-117B	06/24/10		0.32 J	12	1 U	12	6	1 U	1 U	6.5	37	17	1 U	**91**
MW-117B	11/24/10		0.31 J	11	1 U	8.1	4.6	1 U	1 U	8.4	31	19	1 U	**82**
MW-117B	05/31/11		1 U	4.7	1 U	3.9	2.2	1 U	1 U	7.8	13	10	1 U	**42**
MW-117B	12/22/11		0.29 J	8.7	1 U	4.5	1.8	1 U	5 U	6.7	11	8.7	1 U	**42**
MW-117B	06/26/12		0.3 J	5.9	1 U	2.6	0.77 J	1 U	5 U	5.9	7.8	5.7	1 U	**29**
MW-117B	11/25/12		0.35 J	10	1 U	3	1.1	1 U	5 U	5.7	10	6	1 U	**36**
MW-117B	05/30/13		0.27 J	3	1 U	1.6	0.6 J	1 U	5 U	5.2	4.4	3.7	1 U	**19**
MW-117B	11/29/13		0.39 J	8.4	1 U	3.1	0.9 J	1 U	5 U	5.5	7.4	4.9	1 U	**31**
MW-117C	10/04/93		2 U	17	2 U	13	23	2 U	5 U	2 U	50	75		**178**
MW-117C	04/22/99		0.77	54	2.3	44	69	2 U	4 U	6	75	36	0.79 J	**288**
MW-117C	10/18/99		5 U	60	5 U	53	82	5 U	10 U	7.5	94	40	0.96 J	**337**
MW-117C	02/16/00		0.82 J	61	5 U	53	94	0.5 J	0.8 J	9.7	93	41	0.9 J	**355**
MW-117C	04/18/00		0.79 J	54	2.2 J	49	94	0.6 J	10 JB	10	91	39	0.82 J	**351**
MW-117C	07/24/00		1	55	2.4	48	99	1.1	10 U	8.7	89	38	0.63 J	**343**
MW-117C	11/07/00		0.79	69	2.4	50	100	5 U	10 U	8.8	78	34	0.74 J	**344**
MW-117C	04/09/01		0.84	57	2.3	59	120	0.82	10 U	12	99	42	0.72 J	**394**
MW-117C	10/15/01		0.81	48	5 U	45	110	0.44	10 U	11	74	32	0.67 J	**322**
MW-117C	04/16/02		0.75	41	1.6	469	120	0.74	0.3	16	82	34	0.42 J	**766**
MW-117C	10/07/02		20 U	59	20 U	330	150	20 U	32	22	110	42	0.6 J	**746**
MW-117C	04/22/03		0.85 J	43.6 E	1.35	63.6 E	134 E	1.71	2 U	27.1 E	113 E	48 E	0.67 J	**434**
MW-117C	04/22/03	Dilution	10 U	40	10 U	58.2	123	10 U	20 U	23.1	93	44.3	10 U	**382**
MW-117C	12/22/03		0.82 J	39.6 E	1.01	55.8 E	126 E	2.07	1 U	27.5 E	104 E	46.4 E	1 U	**403**
MW-117C	12/22/03	Dilution	10 U	33.1 D	10 U	43.3 D	107 D	10 U	10 U	19.9 D	78.2 D	34.8 D	10 U	**316**
MW-117C	04/28/04		10 U	30.5	10 U	37	97.3	10 U	20 U	20.3	66.4	30.1	10 U	**282**
MW-117C	05/21/05		1 U	28	1 U	34	91	1 U	2 U	22	59	27	1 U	**261**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-117C	10/19/05		1 U	25	1 U	29	84	1 U	2 U	20	54	26	1 U	**238**
MW-117C	05/06/06		1 U	25	1 U	26	91	1 U	2 U	21	50	26	1 U	**239**
MW-117C	11/21/06		1 U	41	1 U	46	140	1 U	2 U	36	100	44	1 U	**407**
MW-117C	10/06/07		0.5	24	0.3	30	88	0.9	2 U	24	60	26	1 U	**254**
MW-117C	05/17/08		5 U	28	5 U	33	99	5 U	10	30	72	30	5 U	**302**
MW-117C	11/28/08		0.55 J	24.1	0.26 J	25.6	85.9	0.31 J	1 U	26.5	57.1	23.1	1 U	**243**
MW-117C	06/09/09		0.51 J	24	0.23 J	25	70	0.33 J	1 U	26	58	23	1 U	**227**
MW-117C	11/24/09		0.48 J	23	1 U	24	57	1 U	1 U	26	51	21	1 U	**202**
MW-117C	06/24/10		0.42 J	24	1 U	23	40	0.24 J	1 U	28	51	20	1 U	**187**
MW-117C	11/24/10		0.38 J	22	1 U	22	34	1 U	1 U	27	53	21	1 U	**179**
MW-117C	05/31/11		0.45 J	25	1 U	21	24	1 U	1 U	27	47	19	1 U	**163**
MW-117C	12/22/11		0.38 J	23	1 U	17	13	1 U	5 U	25	37	17	1 U	**132**
MW-117C	06/26/12		0.4 J	25	1 U	17	14	1 U	5 U	23	37	15	1 U	**131**
MW-117C	11/25/12		0.35 J	29	1 U	17	7.4	1 U	5 U	22	36	14	1 U	**126**
MW-117C	05/30/13		1 U	33	1 U	14	12	1 U	5 U	16	27	10	1 U	**112**
MW-117C	11/29/13		1 U	34	1 U	13	4.7	1 U	5 U	23	23	13	1 U	**111**
MW-117D	04/22/99		0.74	46	2	50	110	2 U	4 U	17	110	38	2 U	**374**
MW-117D	10/18/99		10 U	39	10 U	44	110	10 U	1.5 J	17	97	35	10 U	**344**
MW-117D	02/17/00		0.8 J	34	1.4 J	41	100	5 U	10 U	19	91	35	0.45 J	**323**
MW-117D	04/18/00		0.63 J	29	1.1 J	35	90	5 U	10 JB	17	82	32	0.38 J	**297**
MW-117D	07/24/00		0.85	27	1.2	36	81	5 U	10 U	16	80	35	5 U	**277**
MW-117D	11/07/00		0.6	37	1	33	87	5 U	10 U	16	71	30	5 U	**276**
MW-117D	04/09/01		0.65	29	5 U	37	88	0.39	10 U	13	80	31	5 U	**279**
MW-117D	10/16/01		0.53	23	5 U	25	75	5 U	10 U	17	57	23	5 U	**221**
MW-117D	04/16/02		0.61	21	5 U	24	72	5 U	10 U	18	58	23	5 U	**217**
MW-117D	10/07/02		10 U	36	10 U	180	100	10 U	18	24	87	29	1 U	**474**
MW-117D	04/22/03		0.64 J	29.8 E	0.7 J	43.1 E	95.8 E	1 U	2 U	6.41	78.7 E	32.4 E	1 U	**288**
MW-117D	04/22/03	Dilution	5 U	28.3	5 U	36.7	83.1	5 U	10 U	4.62 J	64.5	26	5 U	**243**
MW-117D	12/22/03		0.61 J	28.1 E	1 U	30.4 E	102 E	1 U	1 U	30.1 E	84.2 E	31.2 E	1 U	**307**
MW-117D	12/22/03	Dilution	5 U	29 D	5 U	32.8 D	110 D	5 U	5 U	29.6 D	85.1 D	31.2 D	5 U	**318**
MW-117D	04/28/04		5 U	28.6	5 U	37.7	105	5 U	10 U	17.4	75.5	33.2	5 U	**297**
MW-117D	05/21/05		1 U	20	1 U	24	84	1 U	2 U	21	60	24	1 U	**233**
MW-117D	10/19/05		1 U	24	1 U	21	73	1 U	2 U	24	58	22	1 U	**222**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-117D	05/06/06		1 U	23	1 U	17	67	1 U	2 U	22	52	20	1 U	**201**
MW-117D	05/06/06	Fld Dupe	1 U	18	1 U	30	52	1 U	2 U	23	70	33	1 U	**226**
MW-117D	11/21/06		1 U	27	1 U	22	76	2.1	2 U	31	89	32	1 U	**279**
MW-117D	10/06/07		0.4	22	0.3	22	71	1	2 U	15	62	29	1 U	**223**
MW-117D	05/17/08		5 U	24	5 U	24	31	5 U	12	30	62	23	5 U	**206**
MW-117D	11/28/08		0.46 J	23.3	1 U	19.5	23.5	0.27 J	1 U	28.6	58	19.4	1 U	**173**
MW-117D	06/09/09		0.49 J	25	1 U	18	13	1 U	1 U	30	55	20	1 U	**161**
MW-117D	11/24/09		0.49 J	29	1 U	19	11	1 U	1 U	28	49	18	1 U	**154**
MW-117D	06/24/10		0.33 J	28	1 U	16	5.3	0.18 J	1 U	29	46	15	1 U	**140**
MW-117D	11/24/10		0.34 J	30	1 U	16	5.6	1 U	1 U	29	45	17	1 U	**143**
MW-117D	05/31/11		1 U	37	1 U	13	5.4	1 U	1 U	26	39	15	1 U	**135**
MW-117D	12/22/11		0.34 J	38	1 U	10	3.8	1 U	5 U	23	31	13	1 U	**119**
MW-117D	06/26/12		0.41 J	43	1 U	11	2.8	1 U	5 U	22	33	12	1 U	**124**
MW-117D	11/25/12		0.32 J	48	1 U	12	3	1 U	5 U	19	34	11	1 U	**127**
MW-117D	05/30/13		0.31 J	52	1 U	11	2.9	1 U	5 U	17	36	10	1 U	**129**
MW-117D	11/29/13		0.33 J	51	1 U	12	2.9	1 U	5 UB	18	33	9.9	1 U	**127**
MW-119	10/11/93		12 U	12 U	12 U	12 U	12 U	12 U	25 U	12 U	12 U	12 U		**0**
MW-119	05/03/99		1 U	1 U	1 U	1 U	0.36	1 U	2 U	0.63	1.8	1	5 U	**4**
MW-119	10/27/99		0.26 J	0.35 J	1 U	0.28 J	1.4	1 U	2 U	1.4	2.5	2	1 U	**8**
MW-119	01/26/00		0.19 J	0.21 J	1 U	1 U	1 U	1 U	2 U	0.18 J	0.75 J	0.2 J	1 U	**2**
MW-119	04/17/00		0.16 J	0.23 J	1 U	1 U	1 U	1 U	2 JB	0.19 J	0.79 J	0.2 J	1 U	**4**
MW-119	07/25/00		0.12	0.26	1 U	1 U	1 U	1 U	2 U	0.22	0.88	0.21	1 U	**2**
MW-119	11/08/00		1 U	0.27	1 U	1 U	1 U	1 U	2 U	0.18	0.72	0.18	1 U	**1**
MW-119	04/10/01		1 U	0.26	1 U	1 U	1 U	1 U	2 U	0.17	0.85	0.19	1 U	**1**
MW-119	10/16/01		0.1	0.29	1 U	1 U	1 U	1 U	2 U	0.15	0.71	0.16	1 U	**1**
MW-119	04/30/02		0.1	0.31	1 U	1 U	1 U	1 U	2 U	0.18	0.95	0.17	1 U	**2**
MW-119	10/17/02		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-119	04/22/03		1.07	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1	1 U	1 U	**2**
MW-119	12/30/03		7.22	0.67 J	1 U	0.54 J	0.59 J	1 U	1 U	1 U	0.72 J	1 U	1 U	**10**
MW-119	04/28/04		1.67	0.51	1 U	1 U	1 U	1 U	2 U	1 U	0.62	1 U	1 U	**3**
MW-119	05/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1.3	1 U	1 U	**1**
MW-119	10/20/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1.3	1 U	1 U	**1**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-119	05/06/06		1 U	1.2	1 U	1 U	1 U	1 U	2 U	1 U	1.1	1 U	1 U	**2**
MW-119	01/04/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-119	10/08/07		1 U	1	1 U	1 U	0.4	1 U	2 U	1 U	1	1 U	1 U	**2**
MW-119	05/18/08		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1	1 U	1 U	**1**
MW-119	11/29/08		0.3 J	0.98 J	1 U	1 U	0.54 J	1 U	1 U	1 U	1.29	0.27 J	1 U	**3**
MW-119	06/10/09		0.64 J	1	1 U	1 U	0.66 J	1 U	1 U	1 U	1.2	0.29 J	1 U	**4**
MW-119	11/29/09		0.45 J	1.4	1 U	1 U	0.61 J	1 U	1 U	1 U	1.2	1 U	1 U	**4**
MW-119	06/29/10		1 U	0.92 J	1 U	1 U	1.2	1 U	1 U	1 U	1.1	1 U	1 U	**3**
MW-119	11/27/10		0.46 J	1.1	1 U	1 U	1.1	1 U	1 U	1 U	1.7	0.42 J	1 U	**5**
MW-119	06/03/11		0.32 J	0.97 J	1 U	1 U	0.69 J	1 U	1 U	1 U	1.4	0.37 J	1 U	**4**
MW-119	12/29/11		0.29 J	1	1 U	1 U	0.69 J	1 U	5 U	1 U	1	0.34 J	1 U	**3**
MW-119	06/27/12		0.29 J	0.97 J	1 U	1 U	0.88 J	1 U	5 U	1 U	1.1	1 U	1 U	**3**
MW-119	11/25/12		0.13 J	0.99 J	1 U	1 U	0.8 J	1 U	5 U	1 U	1.2	0.32 J	1 U	**3**
MW-119	05/31/13		1 U	1.3	1 U	1 U	0.97 J	1 U	5 U	1 U	1.3	1 U	1 U	**4**
MW-119	12/01/13		1 U	0.93 J	1 U	1 U	0.61 J	1 U	5 U	1 U	0.94 J	0.35 J	1 U	**3**
MW-121	10/15/93		2 U	2 U	2 U	2 U	27	2 U	5 U	4	7	82		**120**
MW-121	04/28/99		5 U	3.4	5 U	6	7.2	5 U	10 U	2.7	3.8	26	5 U	**49**
MW-121	10/26/99		0.67 J	3.8	0.78 J	8	8.4	0.15 J	2 U	3.4	5.5	33 E	1 U	**64**
MW-121	10/26/99	Dilution	2 U	3.2 D	0.67 DJ	6.6 D	6.8 D	0.1 DJ	4 U	2.9 D	4.4 D	29 D	2 U	**54**
MW-121	01/31/00		0.65 J	2.9	2 U	5.5	6.3	0.2 J	0.41 J	2.5	3.4	23	2 U	**45**
MW-121	04/18/00		0.55 J	2.8	0.72 J	3	5.6	0.22 J	2 JB	0.64 J	2.8	11	1 U	**29**
MW-121	07/25/00		0.68	3.5	0.82	4.4	6.8	0.39	2 U	1.8	4.3	20	1 U	**43**
MW-121	11/08/00		0.77	4.6	0.89	8	7	0.22	2 U	2.6	5.1	22	1 U	**51**
MW-121	04/10/01		0.78	3.7	0.82	2	6.7	0.68	2 U	2.3	5.5	22	1 U	**44**
MW-121	10/16/01		0.82	3.8	0.81	3.6	6.5	0.42	2 U	2.4	5.9	19	1 U	**43**
MW-121	04/17/02		0.75	3.8	0.07	3	6.1	0.58	2 U	2.6	6.9	20	0.064 J	**44**
MW-121	10/17/02		5 U	5	5 U	42	7	5 U	2 U	3	9	24	1 U	**90**
MW-121	04/22/03		0.65 J	4.3	0.55 J	7.28	5.74	1 U	2 U	2.85	7.18	22.6	1 U	**51**
MW-121	12/28/03		1 U	4.76	1 U	5.11	4.61	1 U	1 U	2.74	5.79	20.3	0.68 J	**44**
MW-121	04/28/04		0.52	4.37	1 U	4.58	4.79	1 U	2 U	2.43	5.84	18.8	1 U	**41**
MW-121	05/21/05		1 U	2.2	1 U	3.9	5.2	1 U	2 U	1.9	5.1	18	1 U	**36**
MW-121	05/21/05	Fld Dupe	1 U	2.4	1 U	4.8	5.3	1 U	2 U	2.1	6	20	1 U	**41**
MW-121	10/20/05		1 U	2.9	1 U	3.9	5.9	1 U	2 U	2.1	5.7	20	1 U	**41**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-121	05/06/06		1 U	2.5	1 U	3.3	5.3	1 U	2 U	2.3	4.8	22	1 U	**40**
MW-121	01/03/07		1 U	1.4	1 U	1.7	3	1 U	2 U	1.9	3.9	20	1 U	**32**
MW-121	10/07/07		0.7	2	1 U	2	6	0.4	2 U	2	5	22	1 U	**40**
MW-121	05/18/08		1 U	2	1 U	2	7	1 U	2 U	2	6	26 E	1 U	**45**
MW-121	05/18/08	Dilution	2 U	2 D	2 U	3 D	6 D	2 U	3 DJ	2 D	5 D	25 D	2 U	**46**
MW-121	11/29/08		0.56 J	1.36	1 U	1 U	3.42	0.55 J	1 U	1.84	2.67	14.4	1 U	**25**
MW-121	06/11/09		0.65 J	1.9	1 U	1 U	4.8	0.76 J	1 U	2.3	4	23	1 U	**37**
MW-121	11/25/09		0.63 J	2.1	1 U	1.8	4.3	1 U	1 U	2	3.1	20	1 U	**34**
MW-121	06/29/10		1 U	2.9	1 U	1.7	3.7	1 U	1 U	1.5	2	16	1 U	**28**
MW-121	11/25/10		0.6 J	4.6	1 U	2.5	4.3	1 U	1 U	2.1	3.4	22	1 U	**40**
MW-121	06/03/11		0.63 J	9.6	1 U	4.1	4.7	0.42 J	1 U	1.8	4.2	19	1 U	**44**
MW-121	12/29/11		0.75 J	15	1 U	6.9	4.9	0.51 J	5 U	1.8	6.6	18	1 U	**54**
MW-121	06/27/12		0.86 J	21	1 U	5.5	5.1	0.62 J	5 U	1.6	10	19	1 U	**64**
MW-121	11/25/12		0.76 J	23	1 U	3	5.3	0.74 J	5 U	1.5	12	18	1 U	**64**
MW-121	05/31/13		0.84 J	29	1 U	9.9	6.2	0.54 J	5 U	1.6	15	22	1 U	**85**
MW-121	12/01/13		0.74 J	29	1 U	6.6	5.9	0.57 J	5 U	1.6	15	22	1 U	**81**
MW-124	10/18/93		120 U	150	120 U	410	210		120 U	50	1400	140		**2360**
MW-124	04/28/99		10 U	75	10 U	97	1200	10 U	20 U	47	540	36	3.4 J	**1998**
MW-124	04/28/99	Fld Dupe	10 U	75	10 U	97	1100 D	10 U	20 JBU	47	540 D	36	3.4 J	**1898**
MW-124	10/27/99		50 U	50	50 U	41 J	560	50 U	8.2 J	28 J	280	28 J	6.9 J	**1002**
MW-124	01/31/00		25 U	95	25 U	36	540	25 U	50 U	12 J	190	20 J	44	**937**
MW-124	04/24/00		0.72 J	92	25 U	24 J	440	3.9 J	50 JB	3.8 J	100	14 J	63	**791**
MW-124	07/25/00		20 U	89	20 U	20	330	20 U	40 U	20 U	79	10	60	**588**
MW-124	11/13/00		20 U	110	20 U	20	300	20 U	40 U	2.7	75	12	63	**583**
MW-124	04/12/01		20 U	47	20 U	35	240	2.1	40 U	30	230	24	13 J	**621**
MW-124	10/29/01		10 U	98	10 U	19	190	1.4	20 U	6.2	110	16	76	**517**
MW-124	04/17/02		20 U	64	20 U	35	370	12	40 U	30	210	26	16 J	**763**
MW-124	04/17/02	Fld Dupe	20 U	65	20 U	41	370	5.7 J	40 U	30	200	20 U	18 J	**730**
MW-124	10/17/02		20 U	92	20 U	230	360	20 U	40 U	35	290	33	21	**1061**
MW-124	04/25/03		1 U	83.4 E	1.32	30 E	226 E	8.35	2 U	13.8	136 E	20.9	62.7 E	**582**
MW-124	04/25/03	Dilution	10 U	71.4	10 U	26.4	213	10 U	20 U	13.5	119	18.9	39.2	**501**
MW-124	12/28/03	Dilution	10 U	83.2 D	10 U	20.1 D	176 D	10 U	10 U	10.6 D	94.7 D	15.6 D	40 D	**440**
MW-124	12/28/03		1 U	109 E	1.34	22.8	174 E	6.96	1 U	11.2	116 E	19.2	67.2 E	**528**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-124	04/28/04		40 U	197	40 U	43.6	389	40 U	80 U	34.6	185	26.7	24 J	**900**
MW-124	05/21/05		5 U	340	5 U	37	420	5 U	10 U	8.4	120	18	110	**1053**
MW-124	10/20/05		1 U	250	1 U	25	260	1.5	2 U	6.6	76	15	75 H	**709**
MW-124	05/06/06		1 U	320	1.2	29	370	1.5	2 U	15	120	18	61	**936**
MW-124	01/04/07		10 U	370	10 U	15	250	10 U	20 U	10 U	110	10	10 U	**755**
MW-124	10/07/07		1 U	620	0.7	28	300	4	2 U	8	100	12	120	**1193**
MW-124	05/18/08		40 U	870	40 U	42	320	40 U	80 U	40 U	190	40 U	64	**1486**
MW-124	11/29/08	Dilution	5 U	415	5 U	16.1	144	1.4 J	1.45 J	11.8	90	10.4	32.1	**722**
MW-124	06/10/09	Dilution	1 J	500	5 U	18	150	5 U	5 U	14	100	10	23	**816**
MW-124	11/29/09	Dilution	5 U	510	5 U	22	170	5 U	5 U	16	98	9.4	21	**846**
MW-124	06/29/10	Dilution	5 U	500	5 U	20	220	5 U	1.9 J	14	82	8.6	30	**877**
MW-124	11/27/10	Dilution	5 U	490	5 U	25	280	5 U	5 U	14	95	9.2	30	**943**
MW-124	06/03/11	Dilution	5 U	450	5 U	28	240	5 U	2.4 J	13	120	7.4	23	**884**
MW-124	12/29/11	Dilution	5 U	370	5 U	20	130	5 U	25 U	12	96	5.9	17	**651**
MW-124	06/27/12	Dilution	5 U	420	5 U	17	100	5 U	25 U	9.5	90	5.2	23	**665**
MW-124	11/25/12	Dilution	2 U	330	2 U	9.6	70	0.9 J	1 J	5.2	50	4.3	30	**501**
MW-124	06/04/13	Dilution	2.5 U	350	2.5 U	13	92	2.5 U	5.8 J	10	84	4.9	14	**574**
MW-124	12/01/13	Dilution	2.5 U	280	2.5 U	8.6	82	2.5 U	12 UB	7.4	40	4.1	20	**442**
MW-130	10/19/93		67 U	26	67 U	10	25		8	67 U	1000	28		**1097**
MW-130	04/28/99		0.19	19	1 U	11	24	1 U	2 U	5.3	670	17	1 U	**746**
MW-130	04/28/99	Fld Dupe	0.17 J	18	1 U	10	23 DJ	1 U	2 U	5.3	670 D	17	1 U	**743**
MW-130	10/28/99		25 U	10 J	25 U	4.9 J	7.8 J	25 U	50 U	25 U	370	8.2 J	25 U	**401**
MW-130	02/16/00		25 U	11 J	25 U	3.6 J	7.5 J	25 U	50 U	25 U	460	8.5 J	25 U	**491**
MW-130	04/24/00		50 JB	12 J	50 U	3.1 J	7.7 J	50 U	100 JB	50 U	510	8.3 J	50 U	**691**
MW-130	07/27/00		20 U	13	20 U	3.3	7.7	20 U	40 U	20 U	670	8.5	20 U	**703**
MW-130	11/14/00		25 U	12	25 U	4.3	7.2	25 U	50 U	25 U	390	7	25 U	**421**
MW-130	04/12/01		20 U	10	20 U	20 U	5.7	20 U	40 U	20 U	440	6.2	20 U	**462**
MW-130	10/30/01		50 U	14	50	50 U	50 U	50 U	100 U	50 U	660	50 U	50 U	**724**
MW-130	10/30/01	Fld Dupe	50 U	15 J	50 U	50 U	6.5 J	50 U	100 U	50 U	610	8.1 J	50 U	**640**
MW-130	04/30/02		25 U	11	25 U	1.6	5.7	25 U	50 U	0.97	360	5.4	25 U	**385**
MW-130	10/17/02		50 U	50 U	50 U	54	50 U	50 U	43	50 U	840	50 U	1 U	**937**
MW-130	04/25/03		0.1 J	13	1 U	5.33	7.5	0.48 J	2 U	1.37	424 E	5.94	1 U	**458**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-130	04/25/03	Dilution	20 U	11.6 J	20 U	20 U	20 U	20 U	40 U	20 U	322	20 U	20 U	**334**
MW-130	04/25/03	Fld Dupe	20 U	11.3 J	1 U	5.68	7.84	20 U	40 U	20 U	437 E	6.15	20 U	**468**
MW-130	12/28/03		1 U	12.1	1 U	5.65	8.09	1 U	1 U	1.11	320 E	5.46	1 U	**352**
MW-130	12/28/03	Dilution	20 U	10.3 JD	20 U	20 U	20 U	20 U	20 U	20 U	263 D	20 U	20 U	**273**
MW-130	04/28/04		10 U	11	10 U	10 U	10.6	10 U	20 U	10 U	157	10 U	10 U	**179**
MW-130	05/21/05		1 U	14	1 U	4	11	1 U	2 U	1 U	210	3.5	1 U	**243**
MW-130	10/20/05		1 U	16	1 U	4.2	14	1 U	2 U	1 U	210	3.6	1 U	**248**
MW-130	05/08/06		1 U	16	1 U	4.1	14	1 U	2 U	1 U	140	3.6	1 U	**178**
MW-130	01/04/07		1 U	20	1 U	4.6	18	1 U	2 U	1 U	160	4.3	1 U	**207**
MW-130	10/07/07		1 U	17	1 U	5	21	0.6	2 U	0.6	170	4	1 U	**218**
MW-130	05/17/08		10 U	22	10 U	10 U	25	10 U	20 U	10 U	200	10 U	10 U	**247**
MW-130	11/29/08	Dilution	2 U	21.9	2 U	4.18	21	0.4 J	0.56 J	0.56 J	198	4.26	2 U	**251**
MW-130	06/11/09	Dilution	0.48 J	26	2 U	4.3	20	2 U	2 U	0.9 J	300	4.3	2 U	**356**
MW-130	11/29/09	Dilution	2 U	31	2 U	5.5	12	2 U	2 U	2 U	320	3.3	2 U	**372**
MW-130	06/29/10	Dilution	10 U	70	10 U	15	17	10 U	2.9 J	10 U	1100	7.6 J	10 U	**1213**
MW-130	11/27/10	Dilution	5 U	29	5 U	8.4	8.3	5 U	5 U	5 U	430	3.6 J	5 U	**479**
MW-130	06/03/11	Dilution	2.5 U	20	2.5 U	5.4	6.5	2.5 U	1 J	2.5 U	250	3.8	2.5 U	**287**
MW-130	12/28/11		1 U	9.7	1 U	2.7	4.1	1 U	5 U	0.68 J	100	2.7	1 U	**120**
MW-130	06/25/12		0.26 J	7.7	1 U	1.9	3	1 U	5 U	0.65 J	68	2.1	1 U	**84**
MW-130	11/24/12		1 U	7.5	1 U	1.7	2.5	1 U	5 U	0.64 J	47	1.9	1 U	**61**
MW-130	06/07/13		1 U	7.6	1 U	1.5	2.2	1 U	5 U	0.7 J	32	1.8	1 U	**46**
MW-130	12/01/13		1 U	8.4	1 U	1.2	2.2	1 U	5 U	0.65 J	16	1.6	1 U	**30**
MW-133A	10/20/93		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.8	1 U		**1**
MW-133A	04/26/99		1 U	1 U	1 U	1 U	0.27	1 U	2 U	0.37	0.95	1.1	1 U	**3**
MW-133A	10/26/99		0.03 J	0.52 J	1 U	0.66 J	1.8	1 U	2 U	1	4.6	4.8	1 U	**13**
MW-133A	02/15/00		1 U	0.08 J	1 U	1 U	0.16 J	1 U	2 U	1 U	0.38 J	1 U	1 U	**1**
MW-133A	04/25/00		1 U	1 U	1 U	1 U	1 U	1 U	2 JB	1 U	0.35 J	1 U	1 U	**2**
MW-133A	07/27/00		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	10 U	**0**
MW-133A	11/16/00		1 U	1 U	1 U	1 U	0.49	1 U	2 U	1 U	0.81	0.11	1 U	**1**
MW-133A	04/10/01		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	10/31/01		1 U	0.41	1 U	0.1	1.2	1 U	2 U	1 U	1	0.19	1 U	**3**
MW-133A	04/29/02		1 U	1 U	1 U	1 U	0.04	1 U	2 U	1 U	0.06	1 U	1 U	**0**
MW-133A	10/16/02		1 U	1	1 U	1 U	4	1 U	0.6	1 U	3	1 U	1 U	**9**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-133A	04/25/03		1 U	2.96	1 U	1.05	11.7	1 U	2 U	1 U	5.2	0.98 J	1 U	**22**
MW-133A	12/30/03		1 U	1.92	1 U	0.53 J	6.34	1 U	1 U	1 U	2.51	1 U	1 U	**11**
MW-133A	04/28/04		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	05/02/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	11/02/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	06/22/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	11/16/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	10/07/07		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-133A	05/17/08		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-133A	11/26/08		1 U	1 U	1 U	1 U	0.26 J	1 U	1 U	1 U	0.32 J	1 U	1 U	**1**
MW-133A	06/20/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-133A	06/20/09	Fld Dupe	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-133A	11/28/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-133A	06/25/10		1 U	1 U	1 U	1 U	0.23 J	1 U	1 U	1 U	0.26 J	1 U	1 U	**0**
MW-133A	11/27/10		1 U	0.21 J	1 U	1 U	0.91 J	1 U	1 U	1 U	0.86 J	1 U	1 U	**2**
MW-133A	11/27/10	Fld Dupe	1 U	1 U	1 U	1 U	0.79 J	1 U	1 U	1 U	0.82 J	1 U	1 U	**2**
MW-133A	06/02/11		1 U	1 U	1 U	1 U	1 U	1 U	0.28 J	1 U	1 U	1 U	1 U	**0**
MW-133A	12/28/11		1 U	1 U	1 U	1 U	0.67 J	1 U	5 U	1 U	0.67 J	1 U	1 U	**1**
MW-133A	06/28/12		1 U	1 U	1 U	1 U	0.4 J	1 U	5 U	1 U	0.3 J	1 U	1 U	**1**
MW-133A	06/07/13		1 U	0.44 J	1 U	1 U	1 U	1 U	5 U	1 U	0.33 J	1 U	1 U	**1**
MW-133A	11/30/13		1 U	1 U	1 U	1 U	0.27 J	1 U	5 UB	1 U	0.39 J	1 U	1 U	**1**
MW-133B	10/20/93		100 U	270	100 U	130	810		100 U	160	1200	380		**2950**
MW-133B	04/26/99		10	200	4.6	110	780	7	4 U	110	840	270	2 U	**2332**
MW-133B	10/26/99		7.9 J	170	50 U	67	810	7.1 J	6.8 J	77	630	190	50 U	**1966**
MW-133B	02/15/00		9.3 J	180	50 U	100	840	50 U	100 U	120	730	250	50 U	**2229**
MW-133B	04/25/00		12 J	170	50 U	78	600	50 U	100 JB	76	620	190	50 U	**1846**
MW-133B	07/27/00		12	160	4.1	88	670	10	40 U	94	760	220	20 U	**2018**
MW-133B	11/16/00		11	200	25 U	88	530	9.5	50 U	94	570	230	25 U	**1733**
MW-133B	04/10/01		13	200	50 U	46	660	43	100 U	140	830	300	50 U	**2232**
MW-133B	10/31/01		12	180	50 U	7	510	49	100 U	110	700	250	50 U	**1818**
MW-133B	04/29/02		9.1	150	3.7	25 U	460	54	50 U	99	570	170	25 U	**1516**
MW-133B	10/16/02		50 U	250	50 U	650	820	50 U	31	140	800	290	1 U	**2981**
MW-133B	04/25/03		10.7	183 E	3.97	110 E	728 E	24.5	2 U	151 E	699 E	325 E	1 U	**2235**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-133B	04/25/03	Dilution	40 U	158	40 U	40.4	571	41.4	80 U	112	617	237	40 U	**1777**
MW-133B	12/30/03		9.91	162 E	1 U	93 E	562 E	16.3	1 U	122 E	510 E	250 E	1 U	**1725**
MW-133B	12/30/03	Dilution	50 U	151 D	50 U	81.6 D	623 D	50 U	50 U	109 D	577 D	240 D	50 U	**1782**
MW-133B	04/28/04		10 U	161	10 U	106	803	10 U	20 U	111	622	216	100 U	**2019**
MW-133B	05/02/05		5.6	120	5 U	70	630	17	10 U	81	460	160	5 U	**1544**
MW-133B	05/02/05	Fld Dupe	5.7	120	5 U	74	580	13	10 U	87	420	150	5 U	**1450**
MW-133B	11/02/05		8.2	180	5 U	98	930	28	10 U	110	620	220	5 U	**2194**
MW-133B	06/22/06		10 U	110	10 U	54	720	11	20 U	68	430	120	10 U	**1513**
MW-133B	06/22/06	Fld Dupe	10 U	120	10 U	53	710	17	20 U	80	450	140	10 U	**1570**
MW-133B	11/16/06		10 U	160	10 U	10 U	740	78	50 U	85	10 U	170	10 U	**1233**
MW-133B	10/07/07		6	160	3	84	930	38	2 U	110	600	200	1 U	**2131**
MW-133B	05/17/08		40 U	130	40 U	60	900	40 U	80 U	59	440	110	40 U	**1699**
MW-133B	11/26/08		8 J	308	5.4 J	12	1860	193	3.2 J	126	955	208	10 U	**3679**
MW-133B	06/20/09	Dilution	7.3 J	230	4.3 J	19	1400	140	10 U	110	710	170	10 U	**2791**
MW-133B	11/28/09	Dilution	7.8 J	280	20 U	100	2000	84	20 U	110	820	190	20 U	**3592**
MW-133B	06/25/10	Dilution	5.4 J	230	4 J	81	1700	47	20 U	96	680	150	20 U	**2993**
MW-133B	11/27/10	Dilution	20 U	240	20 U	120	1900	11 J	20 U	110	790	180	20 U	**3351**
MW-133B	06/02/11	Dilution	3.8 J	150	2.9 J	56	1200	29	11	70	420	120	10 U	**2063**
MW-133B	12/28/11	Dilution	4.9 J	180	3.9 J	5.3 J	1100	100	50 U	73	470	100	10 U	**2037**
MW-133B	06/28/12	Dilution	5.2 J	180	10 U	25	1200	60	11 J	65	470	92	10 U	**2108**
MW-133B	11/24/12	Dilution	6 J	160	3.3 J	49	1300	49	50 U	64	420	96	10 U	**2147**
MW-133B	06/07/13	Dilution	2.8 J	130	5 U	45	530	19	4.8 J	61	390	68	5 U	**1251**
MW-133B	11/30/13	Dilution	4 J	190	2.3 J	86	960	21	25 UB	74	490	98	5 U	**1925**
MW-133C	10/20/93		20 U	76	20 U	75	120		20 U	44	340	170		**825**
MW-133C	04/26/99		8.5	57	2.8	47	100	5 U	10 U	28	200	110	5 U	**553**
MW-133C	10/26/99		7.2 J	49	10 U	40	91	1.1 J	20 U	22	170	93	10 U	**473**
MW-133C	02/15/00		5.4	31	2.3 J	23	32	0.42 J	10 U	2.5 J	110	55	5 U	**262**
MW-133C	04/25/00		4.7 JB	28	10 U	21	28	0.34 J	20 JB	1.2 J	100	48	10 U	**251**
MW-133C	07/27/00	Fld Dupe	5.4	31	2.4 J	21	32	0.55 J	10 U	1 J	100	44	5 U	**237**
MW-133C	07/27/00		4.9	28	2.2	18	30	5 U	10 U	0.82	91	34	5 U	**209**
MW-133C	11/16/00		5.2	35	2.2	22	31	5 U	10 U	1.2	95	47	5 U	**239**
MW-133C	04/10/01		6.2	36	10 U	28	36	10 U	20 U	1.6	130	62	10 U	**300**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-133C	10/31/01		5.1	31	5 U	14	31	5 U	10 U	5 U	100	31	5 U	**212**
MW-133C	10/31/01	Fld Dupe	5.3	32	2 J	18	33	5 U	10 U	5 U	100	40	5 U	**230**
MW-133C	04/29/02		5.4	33	1.8	26	45	0.73	0.49	4.5	120	58	5 U	**295**
MW-133C	10/16/02		6	49	10 U	150	51	10 U	6	10 U	140	66	1 U	**468**
MW-133C	10/16/02	Fld Dupe	7	49 D	2 U	180 D	53 D	5	0.9 J	2	150 D	74 D	1 U	**521**
MW-133C	04/25/03	Dilution	5.04 J	31.6	10 U	26.5	39.2	10 U	20 U	10 U	113	60.7	10 U	**276**
MW-133C	04/25/03		5.34	33.5 E	1.86	29.9 E	42.1 E	1.04	2 U	2.41	137 E	72.2 E	1 U	**325**
MW-133C	12/30/03		6.43	40.7 E	2.01	36.8 E	55.5 E	0.8 J	1 U	3.02	166 E	83 E	1 U	**394**
MW-133C	12/30/03	Dilution	5.64 JD	143 D	10 U	32.5 D	49.5 D	10 U	10 U	10 U	136 D	74.4 D	10 U	**441**
MW-133C	04/28/04		5.42	34.7	10 U	29.2	47.2	10 U	20 U	10 U	124	63.7	10 U	**304**
MW-133C	05/02/05		5.7	37	1.8	31	53	0.59	2 U	2.6	130	63	1 U	**325**
MW-133C	11/02/05		6.5	46	5 U	43	70	5 U	10 U	5 U	150	75	5 U	**391**
MW-133C	06/22/06		7.3	44	1 U	42	71	1.3	2 U	4.3	150	78	1 U	**398**
MW-133C	11/16/06		7.7	61	1.9	23	86	3.5	2 U	5.1	220	110	1 U	**518**
MW-133C	10/07/07		7	50	2	51	88	2	2 U	5	170	88	1 U	**463**
MW-133C	05/17/08		8 U	60	8 U	62	120	8 U	16 U	8 U	200 E	100	8 U	**542**
MW-133C	05/17/08	Fld Dupe	7	55 E	2	65 D	110 E	20 U	20 DJ	20 U	200 E	100 E	20 U	**559**
MW-133C	05/17/08	Dilution	10 U	57 D	10 U	58 D	110 D	10 U	20 U	10 U	180 D	94 D	10 U	**499**
MW-133C	11/26/08		7.82	53.6	1.92	24.6	96.9	6.93	0.23 J	6.06	182	94.8	1 U	**475**
MW-133C	06/20/09		7.4	59	2	36	110	9.7	1 U	6	190	100	1 U	**520**
MW-133C	11/28/09		7.1	58	1.8	53	110	1.2	1 U	6.2	170	94	1 U	**501**
MW-133C	06/25/10		6.9	54	1.8	50	130	1.3	1 U	8.6	180	89	1 U	**522**
MW-133C	11/27/10		6.1	47	1.8	46	130	0.3 J	1 U	10	180	94	1 U	**515**
MW-133C	06/02/11		6.3	56	1.8	51	180	1.5	0.47 J	16	160	95	1 U	**568**
MW-133C	12/28/11		5.8	50	1.8	41	130	2	5 U	9.7	140	76	1 U	**456**
MW-133C	06/28/12		5.7	51	1.6	40	130	1.7	5 U	6.6	150	81	1 U	**468**
MW-133C	11/24/12		5.3	49	1.6	41	130	1.5	5 U	6.6	140	75	1 U	**450**
MW-133C	06/07/13		5.3	52	1.3	47	130	1.6	5 U	7.5	160	77	1 U	**482**
MW-133C	11/30/13		5.2	52	1.3	46	140	1.4	5 UB	7.5	160	83	1 U	**496**
MW-136	10/19/93		5 U	5 U	5 U	5 U	5 U	5 U	10 U	5 U	5 U	5 U		**0**
MW-136	04/29/99		0.37	0.35	1 U	0.88	3.5	1 U	2 U	1.7	8	3.8	1 U	**19**
MW-136	10/28/99		1.5	0.34 J	1 U	0.37 J	1.1	0.03 J	2 U	1.4	16	2.4	1 U	**23**
MW-136	02/15/00		0.74 J	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.28 J	1 U	1 U	**1**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-136	04/25/00		0.57 JB	1 U	1 U	1 U	1 U	1 U	2 JB	1 U	0.31 J	1 U	1 U	**3**
MW-136	07/27/00		0.48	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.3	1 U	1 U	**1**
MW-136	11/17/00		0.5	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.29	1 U	1 U	**1**
MW-136	04/10/01		0.45	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.3	1 U	1 U	**1**
MW-136	10/31/01		0.45	1 U	1 U	1 U	1 U	1 U	2 U	1 U	0.3	1 U	1 U	**1**
MW-136	04/29/02		0.45	1 U	1 U	1 U	1 U	1 U	2 U	0.53	0.3	1 U	1 U	**1**
MW-136	10/18/02		0.6	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**1**
MW-136	04/23/03		0.8 J	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**1**
MW-136	04/28/04		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-136	06/23/06		1.1	1 U	1 U	1 U	1 U	1 U	1.8	1 U	1 U	1 U	1 U	**3**
MW-136	01/05/07		2.5	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**3**
MW-136	10/07/07		1 U	1 U	1 U	1 U	1 U	1 U	0.7	1 U	1 U	1 U	1 U	**1**
MW-136	05/18/08		2	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**2**
MW-136	11/29/08		4.5	1 U	1 U	1 U	0.2 J	1 U	1 U	1 U	1 U	1 U	1 U	**5**
MW-136	06/11/09		3.1	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**3**
MW-136	11/28/09		1.5	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**2**
MW-136	06/29/10		0.84 J	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**1**
MW-136	11/28/10		0.82 J	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**1**
MW-136	06/01/11		1	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**1**
MW-136	12/29/11		0.79 J	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**1**
MW-136	06/25/12		0.62 J	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**1**
MW-136	11/24/12		0.5 J	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**1**
MW-136	06/04/13		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**0**
MW-136	11/30/13		0.38 J	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**0**
MW-200	04/26/99		1 U	1 U	1 U	0.34	0.66	1 U	2 U	0.61	2.2	2.2	1 U	**6**
MW-200	10/27/99		1 U	1 U	1 U	0.26 J	1.3	1 U	2 U	1.1	1.9	1.8	1 U	**6**
MW-200	02/15/00		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	04/25/00		1 U	1 U	1 U	1 U	1 U	1 U	2 JB	1 U	0.07 J	1 U	1 U	**2**
MW-200	07/27/00		1 U	1 U	1 U	1 U	0.1	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	11/14/00		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	04/10/01		1 U	1 U	1 U	1 U	0.17	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	10/29/01		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	0.12	1 U	**0**
MW-200	04/22/02		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-200	10/18/02		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	04/25/03		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	12/30/03		1 U	1 U	1 U	0.89 J	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**1**
MW-200	04/28/04	Fld Dupe	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-200	04/28/04		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	05/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1.9	1 U	1 U	**2**
MW-200	01/12/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	05/08/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	01/04/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	10/08/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	05/18/08		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-200	11/29/08		1 U	1 U	1 U	1 U	0.69 J	1 U	1 U	1 U	0.21 J	0.17 J	1 U	**1**
MW-200	06/11/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-200	11/28/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-200	06/29/10		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-200	11/28/10		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-200	05/31/11		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	**0**
MW-200	12/29/11		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**0**
MW-200	06/25/12		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**0**
MW-200	11/24/12		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**0**
MW-200	06/04/13		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**0**
MW-200	12/01/13		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1 U	1 U	1 U	1 U	**0**
MW-201	02/16/00		5 U	48	5 U	1.1 J	85	5 U	10 U	5 U	4.5 J	8.3	5.6	**153**
MW-201	04/18/00	Fld Dupe	0.29 J	130	10 U	2.3 J	93	0.74 J	20 JB	10 U	5.8 J	12	5.8 J	**270**
MW-201	04/18/00		10 U	120	10 U	1.9 J	87	0.78 J	20 JB	10 U	4.9 J	15	7.2 J	**257**
MW-201	07/25/00		20 U	330	20 U	6.8	220	20 U	40 U	20 U	110	4.5	22	**693**
MW-201	11/13/00		20 U	340	20 U	5.2	180	20 U	40 U	20 U	39	4.9	7.1 J	**576**
MW-201	04/12/01		5 U	43	5 U	1.6	60	0.64	10 U	5 U	12	19	5.8	**142**
MW-201	04/12/01	Fld Dupe	5 U	43	5 U	1.6 J	60	0.64 J	10 U	5 U	12	18	5.5	**141**
MW-201	10/29/01		10 U	150	10 U	3.6	120	10 U	20 U	10 U	55	25	4.8 J	**358**
MW-201	04/30/02		5	5500	250 U	130	2600	250 U	500 U	250 U	1700	13	50 J	**9998**
MW-201	10/03/02		500 U	7100	500 U	480	2200	500 U	1000 U	500 U	970	500 U	28 E	**0778**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-201	10/03/02	Fld Dupe	1 U	7700	1 U	420 J	2200	7	2 U	1 U	1000	26 E	50 E	**1403**
MW-201	04/25/03	Dilution	500 U	6350	500 U	500 U	863	500 U	1000 U	500 U	294 J	500 U	500 U	**7507**
MW-201	04/25/03		0.05 J	1410 E	1 U	52.8 E	989 E	20.3	2 U	0.29 J	452 E	28.9 E	108 E	**3061**
MW-201	12/30/03		1 U	1580 E	1 U	15	123 E	1 U	1 U	1 U	175 E	2.99	39.4 E	**1935**
MW-201	12/30/03	Dilution	400 U	6480 D	400 U	400 U	400 U	400 U	400 U	400 U	400 U	400 U	400 U	**6480**
MW-201	12/30/03	Fld Dupe	1 U	1430 E	400 U	13.4	400 U	400 U	400 U	400 U	400 U	2.12	400 U	**1446**
MW-201	04/28/04		500 U	4150	500 U	500 U	500 U	500 U	1000 U	500 U	500 U	500 U	500 U	**4150**
MW-201	05/21/05		25 U	3500	25 U	25 U	58	25 U	50 U	25 U	26	25 U	25 U	**3584**
MW-201	01/12/06		1 U	230	1 U	1.2	23	1 U	2 U	1 U	8.8	14	1 U	**277**
MW-201	06/28/06		10 U	550	10 U	10 U	16	10 U	20 U	10 U	32	14	10 U	**612**
MW-201	01/05/07		1 U	80	1 U	1 U	5.1	1 U	2 U	1 U	20	2.8	1 U	**108**
MW-201	10/08/07		1 U	20	1 U	2	2	1 U	2 U	6	7	9	1	**47**
MW-201	05/18/08		1 U	64 E	1 U	2	11	1 U	2 U	1 U	7	10	8	**102**
MW-201	05/18/08	Dilution	4 U	55 D	4 U	4 U	9 D	4 U	8 U	4 U	6 D	9 D	6 D	**85**
MW-201	11/29/08	Dilution	2 J	1460	10 U	10 U	7.1 J	10 U	4.4 J	10 U	14.2	7.7 J	6.2 J	**1502**
MW-201	11/29/08	Fld Dupe	10 U	1580	10 U	10 U	5.5 J	10 U	3.1 J	10 U	12.5	7.1 J	5.6 J	**1614**
MW-201	06/10/09	Fld Dupe	10 U	1200	10 U	10 U	9.8 J	10 U	10 U	10 U	7.4 J	5.7 J	10 U	**1223**
MW-201	06/10/09	Dilution	2 J	1200	10 U	10 U	16	10 U	10 U	10 U	10	7.7 J	10 U	**1236**
MW-201	11/29/09	Dilution	10 U	480	10 U	10 U	6.4 J	10 U	10 U	10 U	37	10 U	10	**533**
MW-201	11/29/09	Fld Dupe	10 U	500	10 U	10 U	5.7 J	10 U	10 U	10 U	36	10 U	9.3 J	**551**
MW-201	06/29/10		1 U	12	1 U	1 U	5	1 U	1 U	0.53 J	4.4	1.1	0.91 J	**24**
MW-201	11/28/10		1 U	2.7	1 U	0.43 J	0.75 J	1 U	1 U	0.93 J	3.4	1.2	1 U	**9**
MW-201	06/03/11		1 U	2.2	1 U	1 U	0.69 J	1 U	1 U	1.3	3.4	0.85 J	1 U	**8**
MW-201	06/03/11	Fld Dupe	1 U	2.2	1 U	1 U	0.63 J	1 U	0.26 J	1.2	3.4	0.87 J	1 U	**9**
MW-201	12/29/11		1 U	3.7	1 U	1 U	3.3	1 U	5 U	1.7	2.4	0.73 J	1 U	**12**
MW-201	12/29/11	Fld Dupe	1 U	3.6	1 U	1 U	3.3	1 U	5 U	1.8	2.4	0.77 J	1 U	**12**
MW-201	06/27/12		1 U	8	1 U	1 U	0.75 J	1 U	5 U	1.9	5.8	0.44 J	1 U	**17**
MW-201	11/25/12		1 U	5	1 U	1 U	1	1 U	5 U	0.85 J	15	0.31 J	1 U	**22**
MW-201	06/05/13		1 U	1.5	1 U	1 U	0.42 J	1 U	5 U	0.73 J	5.6	0.36 J	1 U	**9**
MW-201	12/01/13		1 U	4.8	1 U	0.56 J	1.7	1 U	5 U	2.9	16	1.8	1 U	**28**
MW-202	05/20/99		1 U	1 U	1 U	1 U	0.81	1 U	2 U	4.6	2	2.1	1 U	**10**
MW-202	10/28/99		1 U	1 U	1 U	0.18 J	0.68 J	1 U	2 U	5	2.2	2.1	1 U	**10**
MW-202	02/16/00		1 U	1 U	1 U	1 U	1 U	1 U	2 U	3.6	0.77 J	0.5 J	1 U	**5**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-202	04/18/00		0.25 J	1 U	1 U	1 U	1 U	1 U	2 JB	3.1	0.65 J	0.55 J	1 U	**7**
MW-202	07/27/00		0.48	1 U	1 U	1 U	1 U	1 U	2 U	3.5	0.72	0.75	1 U	**5**
MW-202	11/13/00		1 U	1 U	1 U	1 U	1 U	1 U	2 U	14	0.11	0.19	1 U	**14**
MW-202	04/12/01		1 U	1 U	1 U	1 U	1 U	1 U	2 U	13	0.08	0.11	1 U	**13**
MW-202	10/29/01		1 U	1 U	1 U	1 U	1 U	1 U	2 U	12	0.06	1 U	1 U	**12**
MW-202	04/30/02		1 U	1 U	1 U	1 U	1 U	1 U	2 U	10	1 U	0.12	1 U	**10**
MW-202	10/17/02		1 U	1 U	1 U	1 U	1 U	1 U	0.5	12	1 U	1 U	1 U	**13**
MW-202	04/24/03		1 U	1 U	1 U	1 U	1 U	1 U	2 U	2.82	1 U	0.8 J	1 U	**4**
MW-202	12/30/03		1 U	1 U	1 U	0.54 J	1 U	1 U	1 U	2.78	1 U	1.11	1 U	**4**
MW-202	04/28/04		1 U	1 U	1 U	1 U	1 U	1 U	2 U	2.3	1 U	0.68	1 U	**3**
MW-202	05/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1.8	1 U	1 U	1 U	**2**
MW-202	10/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-202	06/28/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1.5	1 U	1 U	1 U	**2**
MW-202	01/05/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	14	1 U	1 U	1 U	**14**
MW-202	10/08/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1	1	0.3	1 U	**2**
MW-202	05/19/08		1 U	1 U	1 U	1 U	1 U	1 U	2 U	4	1 U	1 U	1 U	**4**
MW-202	11/29/08		0.3 J	0.95 J	1 U	1 U	1 U	1 U	1 U	1.26	1.15	0.65 J	1 U	**4**
MW-202	06/11/09		1 U	0.46 J	1 U	1 U	1 U	1 U	1 U	1.2	1	0.6 J	1 U	**3**
MW-202	11/29/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	1.2	1 U	1 U	1 U	**1**
MW-202	06/29/10		1 U	0.7 J	1 U	1 U	1 U	1 U	1 U	1.6	1.3	0.79 J	1 U	**4**
MW-202	11/28/10		1 U	1 U	1 U	1 U	1 U	1 U	1 U	2.1	0.67 J	1 U	1 U	**3**
MW-202	06/03/11		1 U	0.35 J	1 U	1 U	1 U	1 U	0.26 J	1.5	0.45 J	0.39 J	1 U	**3**
MW-202	12/29/11		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1.2	0.22 J	0.28 J	1 U	**2**
MW-202	06/27/12		1 U	0.46 J	1 U	1 U	1 U	1 U	5 U	1.4	0.94 J	1 U	1 U	**3**
MW-202	11/30/12		1 U	0.45 J	1 U	1 U	1 U	1 U	5 U	2.1	1	0.3 J	1 U	**4**
MW-202	06/05/13		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1.7	0.51 J	0.37 J	1 U	**3**
MW-202	12/01/13		1 U	1 U	1 U	1 U	1 U	1 U	5 U	1.1	0.66 J	1 U	1 U	**2**
MW-203	05/20/99		1 U	1 U	1 U	1 U	0.67	1 U	2 U	14	0.92	1.2	1 U	**17**
MW-203	10/28/99		0.08 J	0.28 J	1 U	0.42 J	1.5	0.06 J	2 U	15	2.7	2.6	1 U	**23**
MW-203	02/15/00		1 U	1 U	1 U	1 U	0.13 J	1 U	2 U	8.6	0.26 J	0.16 J	1 U	**9**
MW-203	04/18/00		1 U	1 U	1 U	1 U	0.07 J	1 U	2 U	11	0.14 J	0.17 J	1 U	**11**
MW-203	07/27/00		1 U	1 U	1 U	1 U	1 U	1 U	2 U	13	0.2	0.24	1 U	**13**
MW-203	11/13/00		0.82	1 U	1 U	1 U	1 U	1 U	2 U	3.5	0.66	0.81	1 U	**6**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-203	04/12/01		1.8	1 U	1 U	1 U	1 U	1 U	2 U	3.2	0.81	0.76	1 U	**7**
MW-203	10/29/01		4.3	0.19	1 U	1 U	1 U	1 U	2 U	3.1	0.76	0.84	1 U	**9**
MW-203	04/30/02		4.1	0.12	1 U	1 U	1 U	1 U	2 U	3	0.69	0.63	1 U	**9**
MW-203	10/17/02		1	1 U	1 U	1 U	1 U	1 U	0.5	3	1 U	0.7	1 U	**5**
MW-203	04/24/03		1 U	1 U	1 U	1 U	1 U	1 U	2 U	10.2	1 U	1 U	1 U	**10**
MW-203	12/30/03		1 U	1 U	1 U	1 U	1 U	1 U	1 U	8.43	1 U	1 U	1 U	**8**
MW-203	04/28/04		1 U	1 U	1 U	1 U	1 U	1 U	2 U	8.79	1 U	1 U	1 U	**9**
MW-203	05/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	9.6	1 U	1 U	1 U	**10**
MW-203	10/21/05		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1 U	1 U	1 U	1 U	**0**
MW-203	06/28/06		1 U	1 U	1 U	1 U	1 U	1 U	2 U	17	1 U	1 U	1 U	**17**
MW-203	01/05/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1.7	1 U	1 U	1 U	**2**
MW-203	10/08/07		1 U	1 U	1 U	1 U	1 U	1 U	2 U	4	1 U	1 U	1 U	**4**
MW-203	05/18/08		1 U	1 U	1 U	1 U	1 U	1 U	2 U	1	1	1 U	1 U	**2**
MW-203	05/18/08	Fld Dupe	1 U	1 U	1 U	1 U	1 U	1 U	2 U	1	1	1 U	1 U	**2**
MW-203	11/29/08		0.15 J	0.45 J	1 U	1 U	1 U	1 U	1 U	3.11	0.19 J	0.33 J	1 U	**4**
MW-203	06/11/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	4.4	1 U	1 U	1 U	**4**
MW-203	11/29/09		1 U	1 U	1 U	1 U	1 U	1 U	1 U	5.4	1 U	1 U	1 U	**5**
MW-203	06/29/10		1 U	1 U	1 U	1 U	1 U	1 U	0.32 J	8.9	1 U	1 U	1 U	**9**
MW-203	11/28/10		1 U	1 U	1 U	1 U	1 U	1 U	1 U	7.3	1 U	1 U	1 U	**7**
MW-203	06/03/11		1 U	1 U	1 U	1 U	1 U	1 U	0.27 J	5.1	1 U	1 U	1 U	**5**
MW-203	12/29/11		1 U	1 U	1 U	1 U	1 U	1 U	5 U	5.1	1 U	0.19 J	1 U	**5**
MW-203	06/28/12		1 U	1 U	1 U	1 U	1 U	1 U	5 U	10	1 U	0.41 J	1 U	**10**
MW-203	11/30/12		1 U	0.19 J	1 U	1 U	1 U	1 U	5 U	11	0.36 J	0.34 J	1 U	**12**
MW-203	06/10/13		1 U	1 U	1 U	1 U	1 U	1 U	5 U	9.5	1 U	1 U	1 U	**10**
MW-203	12/01/13		1 U	1 U	1 U	1 U	1 U	1 U	5 U	5.9	1 U	1 U	1 U	**6**
MW-204	04/23/99		20 U	20 U	20 U	6.2	56	20 U	40 U	20 U	4.7	230	20 U	**297**
MW-204	10/26/99		10 U	5.2 J	4.5 J	8.6 J	51	0.55 J	20 U	2.4 J	5.4 J	230	1.1 J	**309**
MW-204	01/31/00		0.67 J	5 J	5.3 J	8.2 J	41	10 U	2 J	2.4 J	4.2 J	200	0.85 J	**270**
MW-204	04/24/00		0.92 J	4.9 J	5.7 J	9.2 J	44	10 U	20 JB	2 J	4 J	190	1.2 J	**282**
MW-204	07/25/00		1.1	4.4	5.7	6.9	38	10 U	20 U	1.3	3.4	120	10 U	**181**
MW-204	11/08/00		10 U	6.5	6.8	11	37	10 U	20 U	2.4	4	170	10 U	**238**
MW-204	04/12/01		10 U	5	6	11	27	10 U	20 U	2.4	4.5	160	10 U	**216**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-204	10/16/01		10 U	5.4	10 U	13	23	10 U	20 U	2.8	4.9	140	10 U	**189**
MW-204	04/17/02		0.77	6.9	10	18	20	10 U	20 U	2.9	6	140	0.041 J	**205**
MW-204	10/03/02		20 U	14	20 U	140	23	20 U	40 U	20 U	20 U	170	1 U	**347**
MW-204	04/22/03	Dilution	10 U	7.58 J	9.49 J	23.9	26.8	10 U	20 U	10 U	9.28 J	165	10 U	**242**
MW-204	04/22/03		0.59 J	8.21	9.93	28.4 E	28.6 E	0.61 J	2 U	3.9	9.93	192 E	0.76 J	**283**
MW-204	12/28/03		0.58 J	8.14	9.41	26.3 E	28.8 E	1 U	1 U	3.83	11.3	163 E	0.8 J	**252**
MW-204	12/28/03	Dilution	10 U	7.65 JD	8.32 JD	21.8 D	23.7 D	10 U	10 U	10 U	9.1 JD	151 D	10 U	**222**
MW-204	04/28/04		10 U	6.41	8.07	21	20.7	10 U	20 U	10 U	8.96	124	10 U	**189**
MW-204	05/21/05		1 U	6	5.9	22	13	1 U	2 U	2.8	10	96	1 U	**156**
MW-204	10/19/05		1 U	6.2	5.7	20	15	1 U	2 U	2.3	9.1	97	1 U	**155**
MW-204	05/06/06		1 U	5.7	4.4	21	13	1 U	2 U	2.9	10	100	1 U	**157**
MW-204	01/03/07		1 U	6	3.5	22	15	1 U	2 U	3.2	10	100	1 U	**160**
MW-204	10/07/07		0.5	6	3	19	15	0.5	2 U	3	10	85	0.4 J	**142**
MW-204	10/07/07	Fld Dupe	0.5 J	5	3	18	15	0.4 J	2 U	3	9	82 D	1 U	**136**
MW-204	05/18/08		4 U	6	4 U	20	20	4 U	8 U	4 U	9	91	4 U	**146**
MW-204	11/29/08		0.65 J	4.9	2.07	13.6	14.4	0.29 J	1 U	2.64	7.61	74	0.32 J	**120**
MW-204	06/11/09		0.67 J	4.3	1.4	11	14	0.4 J	1 U	2.6	7.2	73	0.31 J	**115**
MW-204	11/25/09		0.65 J	5.8	1.8	14	20	1 U	1 U	2.6	6.2	71	0.56 J	**123**
MW-204	06/29/10		1 U	5.2	1.3	12	18	1 U	1 U	2	4.3	61	1 U	**104**
MW-204	11/25/10		0.54 J	5.3	1.5	11	24	1 U	1 U	2.5	6.4	66	1 U	**117**
MW-204	06/02/11		0.5 J	5.9	1.3	11	26	0.4 J	1 U	2.1	5.9	60	0.25 J	**113**
MW-204	12/29/11		0.55 J	5.3	1.3	10	26	0.52 J	5 U	2	5.6	51	1 U	**102**
MW-204	06/27/12		0.63 J	5.5	1.2	7.1	30	1.3	5 U	1.7	5.8	54	1 U	**107**
MW-204	11/25/12		0.45 J	6	1.2	12	33	0.64 J	5 U	1.8	7.3	51	1 U	**113**
MW-204	05/31/13		0.46 J	6.5	1	12	36	0.5 J	5 U	1.7	7.9	51	1 U	**117**
MW-204	05/31/13	Fld Dupe	0.45 J	6.4	0.97 J	12	36	0.41 J	5 U	1.7	7.8	51	1 U	**117**
MW-204	12/01/13		0.33 J	6.2	0.75 J	12	37	0.47 J	5 U	1.6	6.4	52	1 U	**117**
MW-205A	04/22/99		0.88	23	4.4	100	49	5 U	10 U	3.9	570	69	5 U	**820**
MW-205A	10/21/99		1.1 J	23 J	25 U	110	57	25 U	50 U	3.4 J	460	68	25 U	**723**
MW-205A	02/07/00		25 U	22 J	3.5 J	110	56	25 U	50 U	3.6 J	450	68	25 U	**713**
MW-205A	04/18/00		50 U	23 J	50 U	140	61	50 U	100 JB	50 U	540	80	50 U	**944**
MW-205A	07/25/00		20 U	19	3.5	92	50	20 U	40 U	20 U	350	47	20 U	**562**
MW-205A	11/07/00		25 U	27	25 U	120	56	25 U	50 U	25 U	410	66	25 U	**679**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-205A	04/09/01		20 U	23	20 U	130	56	20 U	40 U	4.3	430	68	20 U	**711**
MW-205A	10/16/01		1.1	18	20 U	87	44	20 U	40 U	2.1	240	49	20 U	**441**
MW-205A	04/16/02		1.1	17	20 U	79	43	20 U	40 U	6.7	270	47	20 U	**464**
MW-205A	10/07/02		50 U	50 U	50 U	690	53	50 U	84	110	310	49	1 U	**1296**
MW-205A	04/22/03	Dilution	25 U	19.8 J	25 U	111	46.6	25 U	50 U	25 U	322	64.3	25 U	**564**
MW-205A	04/22/03		0.78 J	21	2.39	122 E	51.2 E	1 U	2 U	7.15	397 E	72.8 E	1 U	**674**
MW-205A	12/22/03	Dilution	20 U	15.4 JD	20 U	71.9 D	38.5 D	20 U	20 U	20 U	237 D	47.1 D	20 U	**410**
MW-205A	12/22/03		0.69 J	19.7	1.48	95.6 E	52.7 E	1 U	1 U	11.3	308 E	64.3 E	1 U	**554**
MW-205A	04/28/04		20 U	15.8	20 U	68.7	39.9	20 U	40 U	20 U	229	43.9	20 U	**397**
MW-205A	05/21/05		1 U	15	1 U	51	43	1 U	2 U	11	130	36	1 U	**286**
MW-205A	10/19/05		1 U	13	1 U	35	38	1 U	2 U	11	89	32	1 U	**218**
MW-205A	05/06/06		1 U	14	1 U	29	37	1 U	2 U	18	81	32	1 U	**211**
MW-205A	11/21/06		1 U	13	1 U	49	47	1 U	2 U	17	160	51	1 U	**337**
MW-205A	10/06/07		0.5	12	0.4	31	39	1 U	2 U	16	75	34	1 U	**208**
MW-205A	05/18/08		4 U	13	4 U	27	48	4 U	8 U	20	73	35	4 U	**216**
MW-205A	11/28/08		0.49 J	11.9	0.29 J	21.3	41.5	1 U	1 U	20.2	59.5	30.8	1 U	**186**
MW-205A	06/09/09		0.45 J	10	0.27 J	19	36	1 U	1 U	19	60	30	1 U	**175**
MW-205A	11/25/09		0.48 J	11	1 U	19	32	1 U	1 U	20	46	27	1 U	**155**
MW-205A	06/24/10		0.35 J	11	1 U	16	25	1 U	1 U	22	41	23	1 U	**138**
MW-205A	11/25/10		0.38 J	13	1 U	16	18	1 U	1 U	23	41	24	1 U	**135**
MW-205A	06/02/11		0.34 J	15	1 U	15	13	1 U	1 U	23	36	22	1 U	**124**
MW-205A	01/08/12		0.31 J	20	1 U	14	7.4	1 U	5 U	24	31	16	1 U	**113**
MW-205A	06/28/12		0.4 J	21	1 U	13	5.7	1 U	5 U	24	30	16	1 U	**110**
MW-205A	12/02/12		0.26 J	20	1 U	11	4.6	1 U	5 U	24	27	15	1 U	**102**
MW-205A	05/31/13		0.26 J	20	1 U	11	5.3	1 U	5 U	23	25	16	1 U	**101**
MW-205A	11/29/13		0.27 J	27	1 U	12	4.4	1 U	5 UB	26	24	15	1 U	**109**
MW-205B	04/22/99		0.73	23	3.4	74	47	5 U	10 U	3.5	310	57	5 U	**519**
MW-205B	10/21/99		25 U	23 J	25 U	82	54	25 U	50 U	3.4 J	340	58	25 U	**560**
MW-205B	02/07/00		25 U	24 J	25 U	86	57	25 U	50 U	3.8 J	360	60	25 U	**591**
MW-205B	04/18/00		20 U	26	20 U	90	59	20 U	40 JB	3.8 J	370	65	20 U	**654**
MW-205B	07/25/00		20 U	23	20 U	70	52	20 U	40 U	20 U	270	44	20 U	**459**
MW-205B	11/07/00		20 U	31	2.9	79	55	20 U	40 U	3.6	270	53	20 U	**495**
MW-205B	04/09/01		20 U	31	20 U	110	68	20 U	40 U	4.5	330	67	20 U	**611**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-205B	10/16/01		20 U	21	20 U	73	50	20 U	40 U	5.1	250	45	20 U	**444**
MW-205B	04/16/02		0.82	22	10 U	59	53	1.4	0.7	5.8	220	48	10 U	**411**
MW-205B	10/07/02		50 U	50 U	50 U	470	65	50 U	90	110	310	49	1 U	**1094**
MW-205B	04/22/03		0.75 J	24.2	1.79	92.4 E	59.6 E	1 U	2 U	11.4	303 E	63.8 E	1 U	**557**
MW-205B	04/22/03	Dilution	20 U	23.7	20 U	93.1	57.3	20 U	40 U	10 J	262	60.4	20 U	**507**
MW-205B	12/22/03		0.7 J	21.6	1.36	70.5 E	53.8 E	0.55 J	1 U	13	239 E	52.1 E	1 U	**453**
MW-205B	12/22/03	Dilution	20 U	18.7 JD	20 U	64.9 D	47.1 D	20 U	20 U	10.5 JD	201 D	44.6 D	20 U	**387**
MW-205B	04/28/04		20 U	22.4	20 U	75.5	54.4	20 U	40 U	11.4	233	49.3	20 U	**446**
MW-205B	05/21/05		1 U	17	1 U	43	47	1 U	2 U	13	110	34	1 U	**264**
MW-205B	10/19/05		1 U	17	1 U	32	43	1 U	2 U	14	89	31	1 U	**226**
MW-205B	05/06/06		1 U	18	1 U	26	52	1 U	2 U	23	59	31	1 U	**209**
MW-205B	11/21/06		1 U	18	1 U	39	71	1 U	2 U	23	95	44	1 U	**290**
MW-205B	10/06/07		0.4	15	0.4	30	52	1 U	2 U	18	66	31	1 U	**213**
MW-205B	05/18/08		4 U	16	4 U	30	63	4 U	8 U	22	69	34	4 U	**234**
MW-205B	11/28/08		0.49 J	15	0.38 J	19.9	43.1	1 U	1 U	12.8	79.4	24.6	1 U	**196**
MW-205B	06/09/09		0.49 J	15	0.25 J	21	44	1 U	1 U	18	63	29	1 U	**191**
MW-205B	11/25/09		0.55 J	14	1 U	21	37	1 U	1 U	21	47	27	1 U	**168**
MW-205B	06/24/10		0.38 J	14	0.16 J	17	29	1 U	1 U	22	43	23	1 U	**149**
MW-205B	11/25/10		0.41 J	15	1 U	17	23	1 U	1 U	23	42	24	1 U	**144**
MW-205B	06/02/11		0.38 J	17	1 U	18	21	1 U	1 U	23	39	22	1 U	**140**
MW-205B	01/08/12		0.32 J	20	1 U	14	11	1 U	5 U	23	31	16	1 U	**115**
MW-205B	06/28/12		0.43 J	21	1 U	13	8.2	1 U	5 U	23	30	15	1 U	**111**
MW-205B	12/02/12		0.32 J	20	1 U	10	6	1 U	5 U	16	25	12	1 U	**89**
MW-205B	05/31/13		0.32 J	23	1 U	12	7	1 U	5 U	23	27	15	1 U	**107**
MW-205B	11/29/13		0.26 J	27	1 U	12	5.4	1 U	5 UB	25	24	14	1 U	**108**
MW-206A	04/23/99		0.64	8.5	0.75	22	23	2 U	4 U	9.3	100	37	2 U	**201**
MW-206A	10/20/99		10 U	9.8 J	10 U	21	21	10 U	20 U	6.6 J	87	33	10 U	**178**
MW-206A	02/07/00		0.55 J	10	5 U	14	20	5 U	10 U	7	79	25	5 U	**156**
MW-206A	04/18/00		0.55 J	9.6	5 U	12	20	0.36 J	10 JB	5.2	62	22	5 U	**142**
MW-206A	07/25/00		0.72	9.4	5 U	14	21	5 U	10 U	3.1	66	16	5 U	**130**
MW-206A	11/07/00		5 U	12	5 U	5.9	13	5 U	10 U	0.84	46	7.6	5 U	**85**
MW-206A	04/09/01		0.66	9.7	5 U	13	20	5 U	10 U	4.5	55	22	5 U	**125**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-206A	10/16/01		0.49	8.8	2 U	9.9	18	2 U	0.34	3.5	39	18	2 U	**98**
MW-206A	04/16/02		0.39	7.1	2 U	7.1	15	0.39	4 U	3.4	31	16	2 U	**80**
MW-206A	10/08/02		5 U	11	5 U	57	23	5 U	10 U	3	35	18	1 U	**147**
MW-206A	04/21/03	Dilution	2 U	11	2 U	11.1	28.4	2 U	4 U	3.17	26.9	17	2 U	**98**
MW-206A	04/21/03		0.87 J	11.8	1 U	11.7	30.3 E	1.05	2 U	3.48	31.1 E	18.1	1 U	**108**
MW-206A	12/22/03		1.04	14.5	1 U	13.9	38.4 E	1.4	1 U	3.99	35.8 E	19	1 U	**128**
MW-206A	12/22/03	Dilution	2 U	12.4 D	2 U	11.4 D	33.6 D	1.11 JD	2 U	3.36 D	29.8 D	16.5 D	2 U	**108**
MW-206A	04/28/04		1.28	10.7	2 U	11.1	31.6	2 U	4 U	3.65	27.4	15.1	2 U	**101**
MW-206A	05/21/05		1.1	5.6	1 U	6.7	16	1 U	2 U	2.9	17	11	1 U	**60**
MW-206A	10/19/05		1 U	8.1	1 U	8.8	23	1 U	2 U	3.1	19	11	1 U	**73**
MW-206A	05/06/06		1 U	9.2	1 U	9.1	25	1 U	2 U	3.8	23	13	1 U	**83**
MW-206A	11/27/06		1.1	9	1 U	8.2	14	1 U	2 U	4.2	22	14	1 U	**73**
MW-206A	10/06/07		0.6	5	1 U	5	6	1 U	2 U	3	14	9	1 U	**43**
MW-206A	05/18/08		1 U	6	1 U	8	7	1 U	2 U	4	18	11	1 U	**54**
MW-206A	11/28/08		0.28 J	13	0.19 J	7.54	9.43	0.21 J	1 U	1.95	17.9	7.85	1.59	**60**
MW-206A	06/10/09		0.41 J	11	1 U	7.5	7.3	1 U	1 U	2.8	23	9.9	0.97 J	**63**
MW-206A	04/01/10		0.27 J	7.6	1 U	6.8	4.2	1 U	1 U	3.7	18	10	1 U	**51**
MW-206A	06/25/10		0.28 J	8.3	1 U	7.1	4.2	1 U	1 U	3.8	18	9.3	1 U	**51**
MW-206A	11/29/10		0.16 J	13	1 U	4.4	4.5	1 U	1 U	1.5	9.7	4.3	3.6	**41**
MW-206A	06/02/11		0.27 J	12	1 U	6.8	3.8	1 U	0.27 J	3.4	17	9.6	0.55 J	**54**
MW-206A	12/22/11		0.93 J	75	2.2	76	100	1 U	5 U	7.3	52	44	0.92 J	**358**
MW-206A	06/26/12		0.6 J	7.8	1 U	3.7	1.8	1 U	5 U	4.4	11	6.9	1 U	**36**
MW-206A	11/23/12		0.42 J	12	1 U	3.8	2	1 U	5 U	5.5	12	6.2	1 U	**42**
MW-206A	05/30/13		0.38 J	9.9	1 U	3.4	1.7	1 U	5 U	4.9	8.6	5.4	1 U	**34**
MW-206A	11/29/13	Fld Dupe	0.35 J	9.1	1 U	4	1.8	1 U	5 UB	5.7	8.8	5.6	0.21 J	**36**
MW-206A	11/29/13		0.32 J	9.1	1 U	3.9	1.8	1 U	5 UB	5.6	9.1	5.5	0.22 J	**36**
MW-206B	04/23/99		10 U	5.1	10 U	2.5	59	10 U	20 U	13	4.6	150	10 U	**234**
MW-206B	10/20/99		10 U	9.1 J	10 U	4.9 J	54	10 U	1.3 J	9.6 J	8.4 J	160	10 U	**247**
MW-206B	02/17/00		10 U	13	10 U	8.8 J	36	10 U	20 U	5.8 J	16	150	10 U	**230**
MW-206B	04/18/00		0.62 J	14	10 U	9 J	40	0.28 J	20 JB	5.6 J	16	150	10 U	**256**
MW-206B	07/25/00		0.6	12	5 U	6	36	5 U	10 U	0.98	11	86	5 U	**153**
MW-206B	11/07/00		5 U	17	5 U	8.4	34	5 U	10 U	3.3	14	120	5 U	**197**
MW-206B	04/09/01		0.51	14	5 U	9.1	33	5 U	10 U	2.5	16	110	5 U	**185**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-206B	10/16/01		0.62	14	5 U	11	26	5 U	10 U	1.7	20	80	5 U	**153**
MW-206B	04/16/02		0.69	12	5 U	10	23	5 U	10 U	1.5	20	70	5 U	**137**
MW-206B	10/08/02		5 U	22	5 U	76	31	5 U	4	5 U	35	100	1 U	**268**
MW-206B	04/22/03		0.83 J	16.2	0.7 J	16.8	22.1	1 U	2 U	1.35	32.5 E	75.7 E	1 U	**166**
MW-206B	04/22/03	Dilution	5 U	15.1	5 U	15.7	20.5	5 U	10 U	5 U	27.2	68.7	5 U	**147**
MW-206B	12/22/03		0.88 J	17.3	0.71 J	18.2	21.5	1 U	1 U	1.34	34 E	68.8 E	1 U	**163**
MW-206B	12/22/03	Dilution	4 U	14.8 D	4 U	14 D	17.4 D	4 U	4 U	4 U	26.5 D	54.5 D	4 U	**127**
MW-206B	04/28/04		4 U	16	4 U	14.2	19.5	4 U	8 U	4 U	26.3	59.2	4 U	**135**
MW-206B	05/21/05		1 U	16	1 U	13	13	1 U	2 U	1 U	22	33	1 U	**97**
MW-206B	10/19/05		1 U	16	1 U	12	13	1 U	2 U	1 U	22	35	1 U	**98**
MW-206B	05/06/06		1 U	24	1 U	17	15	1 U	2 U	1 U	24	32	1 U	**112**
MW-206B	11/27/06		1 U	47	1.4	31	21	1 U	2 U	1.2	44	45	1 U	**191**
MW-206B	11/27/06	Fld Dupe	1 U	7.1	1 U	5	18	1 U	2 U	1 U	1 U	71	1 U	**101**
MW-206B	10/06/07		0.8	50	1	39	32	1 U	2 U	1	39	28	0.5 J	**191**
MW-206B	05/18/08		4 U	56	4 U	46	50	4 U	8 U	4 U	44	48	4 U	**244**
MW-206B	11/28/08		0.92 J	57.7	1.74	40.9	45.8	0.2 J	1 U	1.71	39.9	35.6	0.72 J	**225**
MW-206B	06/10/09		1	79	2.3	63	70	0.33 J	1 U	3.3	57	37	0.86 J	**314**
MW-206B	04/01/10		0.97 J	77	2.3	77	76	0.57 J	1 U	4.4	58	38	1.2	**335**
MW-206B	06/25/10		1	84	2.4	77	90	0.39 J	1 U	4.9	64	37	1.1	**362**
MW-206B	11/29/10		0.92 J	78	2.3	71	72	0.53 J	1 U	5.5	55	34	1.1	**320**
MW-206B	06/02/11		1.1	91	2.7	83	98	0.39 J	0.27 J	7.2	61	44	1.1	**390**
MW-206B	12/22/11		0.93 J	72	2.2	75	100	1 U	5 U	7.3	50	43	0.96 J	**351**
MW-206B	06/26/12		1	69	2.4	80	130	0.44 J	5 U	10	58	46	0.86 J	**398**
MW-206B	11/23/12		0.86 J	55	2.1	74	130	0.4 J	5 U	14	55	41	0.8 J	**373**
MW-206B	05/30/13		0.79 J	58	2	64	100	1 U	5 U	10	48	36	0.74 J	**320**
MW-206B	11/29/13		0.7 J	51	1.4	69	130	0.37 J	5 U	15	40	35	2.7	**345**
MW-206C	04/23/99		1 U	1 U	1 U	0.31	2.7	1 U	2 U	0.41	1.5	4.1	1 U	**9**
MW-206C	10/20/99		1 U	0.18 J	1 U	0.15 J	2.3	1 U	2 U	1 U	0.26 J	4.3	1 U	**7**
MW-206C	02/07/00		1 U	1 U	1 U	1 U	3.5	1 U	2 U	1 U	1 U	5.3	1 U	**9**
MW-206C	04/18/00		1 U	1 U	1 U	1 U	4	1 U	2 JB	1 U	1 U	6	1 U	**12**
MW-206C	07/25/00		1 U	1 U	1 U	1.3	4.8	1 U	2 U	1 U	1 U	3.5	1 U	**10**
MW-206C	11/07/00		1 U	0.14	1 U	0.12	2.3	1 U	2 U	1 U	0.29	3.4	1 U	**6**
MW-206C	11/07/00	Fld Dupe	1 U	0.14 J	1 U	0.12 J	2.3	1 U	2 U	1 U	0.28 J	3.3	1 U	**6**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-206C	04/09/01		1 U	0.36	1 U	0.28	4.3	1 U	2 U	0.25	0.7	6.6	1 U	**12**
MW-206C	04/09/01	Fld Dupe	1 U	0.33 J	1 U	0.26 J	4.2	1 U	2 U	0.26 J	0.48 J	6.3	1 U	**12**
MW-206C	10/16/01		1 U	0.24	1 U	0.11	5.9	1 U	2 U	0.2	0.18	7.6	1 U	**14**
MW-206C	04/16/02		1 U	1 U	1 U	0.17	6.9	1 U	2 U	0.06	1 U	14	1 U	**21**
MW-206C	10/08/02		5 U	5 U	5 U	5 U	15	5 U	4	5 U	5 U	30	1 U	**49**
MW-206C	04/22/03		1 U	0.86 J	1 U	0.55 J	14.4	1 U	2 U	1 U	1 U	43 E	1 U	**59**
MW-206C	04/22/03	Dilution	2.5 U	2.5 U	2.5 U	2.5 U	13.2	2.5 U	5 U	2.5 U	2.5 U	39.1	2.5 U	**52**
MW-206C	12/22/03		1 U	1.37	1 U	1.68	16.6	0.61 J	1 U	1 U	1 U	53 E	1 U	**73**
MW-206C	12/22/03	Dilution	4 U	4 U	4 U	4 U	14 D	4 U	4 U	4 U	4 U	44.7 D	4 U	**59**
MW-206C	04/28/04		2 U	1.21	2 U	2 U	14.9	2 U	4 U	2 U	2 U	37.7	2 U	**54**
MW-206C	05/21/05		1 U	1.5	1 U	1.1	9.2	1 U	2 U	1 U	1 U	34	1 U	**46**
MW-206C	10/19/05		1 U	3.8	1 U	2.6	15	1 U	0.1	1 U	1 U	47	1 U	**69**
MW-206C	05/06/06		1 U	5	1 U	3.5	14	1 U	2 U	1 U	1 U	52	1 U	**75**
MW-206C	11/27/06		1 U	6.5	1 U	4.4	17	1 U	2 U	1 U	1 U	85	1 U	**113**
MW-206C	10/06/07		1 U	5	1 U	4	11	1 U	2 U	0.4	1 U	44	1 U	**64**
MW-206C	05/18/08		2 U	5	2 U	4	12	2 U	4 U	2 U	2 U	38	2 U	**59**
MW-206C	11/28/08		1 U	3.11	1 U	2.01	5.23	1 U	1 U	1 U	1 U	19.4	1 U	**30**
MW-206C	06/10/09		1 U	2.7	1 U	1.8	4.8	1 U	1 U	1 U	1 U	16	1 U	**25**
MW-206C	04/01/10		1 U	3.4	1 U	2.7	4.8	1 U	1 U	1 U	1 U	16	1 U	**27**
MW-206C	06/25/10		1 U	5.2	1 U	3.6	6.5	1 U	1 U	1 U	1 U	20	1 U	**35**
MW-206C	11/29/10		1 U	3.9	1 U	3.1	5.1	1 U	1 U	1 U	1 U	16	1 U	**28**
MW-206C	06/02/11		1 U	6	1 U	3.9	6.9	1 U	0.26 J	1 U	1 U	22	1 U	**39**
MW-206C	12/22/11		1 U	6.3	1 U	4.4	7.5	1 U	5 U	0.3 J	1 U	24	1 U	**43**
MW-206C	06/26/12		1 U	5.8	1 U	3.8	6.1	1 U	5 U	1 U	1 U	19	1 U	**35**
MW-206C	11/23/12		1 U	7.1	1 U	5.1	7.1	1 U	5 U	0.24 J	1 U	19	1 U	**39**
MW-206C	05/30/13		1 U	7.5	1 U	4.9	6.9	1 U	5 U	1 U	1 U	18	1 U	**37**
MW-207	04/23/99		0.39	0.76	2 U	2 U	1.6	2 U	4 U	2.6	2.7	26	2 U	**34**
MW-207	10/27/99		0.59 J	1.3	1 U	0.74 J	5.1	0.06 J	2 U	3.9	5.9	25	1 U	**43**
MW-207	02/17/00		0.54 J	1.1	1 U	0.22 J	1.2	1 U	2 U	2.8	2	22	1 U	**30**
MW-207	04/18/00		0.62 J	1.2	1 U	0.1 J	1.2	0.1 J	2 JB	2.7	2	20	1 U	**30**
MW-207	07/25/00		0.63	1.3	1 U	1 U	1.4	0.16	2 U	2.1	2	17	1 U	**25**
MW-207	11/08/00		0.71	2.1	1 U	0.24	1.4	1 U	2 U	2.3	1.9	16	1 U	**25**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Well ID	Date	Sample Type	CFM	1,1-DCA	1,2-DCA	1,1-DCE	c1,2-DCE	t1,2-DCE	MC	PCE	1,1,1-TCA	TCE	VC	Total VOCs
		MCL	NA	NA	5	7	70	100	5	5	200	5	2	
MW-207	04/10/01		0.6	1.5	1 U	1 U	3.2	0.44	2 U	0.51	1.5	11	1 U	**19**
MW-207	10/16/01		0.44	5.3	1 U	0.13	3.4	0.33	2 U	1	4.2	22	1 U	**37**
MW-207	04/17/02		0.36	6.2	2 U	0.26	3.7	0.39	4 U	1.4	5.7	25	1 U	**43**
MW-207	10/08/02		1 U	8	1 U	6	5	1 U	0.8	0.9	5	21	1 U	**47**
MW-207	04/22/03		0.54 J	7.42	1 U	1.8	5.09	1 U	2 U	2.5	8.37	29.3 E	1 U	**55**
MW-207	04/22/03	Dilution	2 U	7.05	2 U	2.13	4.88	2 U	4 U	2.3	7.6	27.8	2 U	**52**
MW-207	12/28/03	Dilution	2 U	5.68 D	2 U	2.18 D	3.78 D	2 U	2 U	2.21 D	7.19 D	25.8 D	2 U	**47**
MW-207	12/28/03		0.53 J	6.12	1 U	2.64	4.5	1 U	1 U	2.58	8.64	29.4 E	1 U	**54**
MW-207	04/28/04		2 U	5.87	2 U	1.85	4.26	2 U	4 U	2.67	8.24	28.1	2 U	**51**
MW-207	05/21/05		1 U	4.3	1 U	1.7	3	1 U	2 U	2.1	5.4	18	1 U	**35**
MW-207	05/21/05	Fld Dupe	1 U	4.4	1 U	1.6	3	1 U	2 U	2	5.3	18	1 U	**34**
MW-207	10/19/05		1 U	4.5	1 U	1 U	2.7	1 U	2 U	1.3	5.7	17	1 U	**31**
MW-207	05/06/06		1 U	5.2	1 U	1.8	3.3	1 U	2 U	2	6.7	19	1 U	**38**
MW-207	11/27/06		1 U	5.7	1 U	1.1	3.1	1 U	2 U	2.6	9.3	24	1 U	**46**
MW-207	10/07/07		0.4	4	1 U	0.7	3	1 U	1 U	2	7	15	1 U	**32**
MW-207	05/18/08		1 U	4	1 U	2	3	1 U	2 U	2	7	15	1 U	**33**
MW-207	11/29/08		0.36 J	2.97	1 U	1 U	1.89	0.27 J	1 U	1.98	5.58	10.8	1 U	**24**
MW-207	06/10/09		0.31 J	2.4	1 U	0.65 J	1.8	1 U	1 U	2.1	4.6	9.9	1 U	**22**
MW-207	11/25/09		1 U	1.6	1 U	0.6 J	1.2	1 U	1 U	2.2	3.5	7.4	1 U	**17**
MW-207	06/24/10		0.18 J	1.3	1 U	0.52 J	1	1 U	1 U	1.9	2.8	5.6	1 U	**13**
MW-207	11/25/10		0.22 J	1.3	1 U	0.72 J	1.3	1 U	1 U	2.2	3	6	1 U	**15**
MW-207	06/02/11		1 U	1.5	1 U	0.6 J	1.2	1 U	0.3 J	1.6	2.8	5.2	1 U	**13**
MW-207	12/29/11		0.19 J	1.5	1 U	0.57 J	1.4	1 U	5 U	1.7	2.6	4.4	1 U	**12**
MW-207	06/26/12		0.27 J	1.4	1 U	0.4 J	1.2	1 U	5 U	1.3	2.2	3.9	1 U	**11**
MW-207	11/30/12		0.22 J	1.4	1 U	0.53 J	1.2	1 U	5 U	1.4	2.3	4	1 U	**11**
MW-207	05/31/13		1 U	1.8	1 U	0.5 J	1.4	1 U	5 U	1.4	2.4	4.5	1 U	**12**
MW-207	12/01/13		1 U	1.3	1 U	0.35 J	1.2	1 U	5 U	1.4	1.8	3.7	1 U	**10**

Table 2: Southeast Rockford NPL Site
Cumulative Ground Water Analytical Results

Results reported in micrograms per liter (µg/l)

Highlighted results equal or exceed the Maximum Contaminant Level (MCL), where applicable

CFM	Chloroform
1,1-DCA	1,1-Dichloroethane
1,2-DCA	1,2-Dichloroethane
1,1-DCE	1,1-Dichloroethene
c1,2-DCE	cis- 1,2-Dichloroethene
t1,2-DCE	trans-1,2-Dichloroethene
MC	Methylene Chloride
PCE	Tetrachloroethene
1,1,1-TCA	1,1,1-Trichloroethane
TCE	Trichloroethene
VC	Vinyl Chloride
Total VOCs	Sum of Total Volatile Organic Compound Concentrations

B	Concentration is less than the reporting limit but greater than the instrument detection limit.
D	Reported concentration is based on an analysis requiring a secondary detection limit.
E	The associated value exceeds the calibration range.
J	The reported concentration is estimated.
U	Analyte was not detected at or above the reporting limit.

Sample Type reported as undiluted, investigative sample unless stated otherwise

Fld Dupe	Field Duplicate

Table 3: Southeast Rockford NPL Site
Ground Water Elevations

Station Identification	Measurement Date	Water Level (ft TOC)	Groundwater Elevation (ft amsl)	Total Depth (ft TOC)	Comments
MW-16	12/18/13	0.00	728.04	62.36	**** well damaged - stickup broken off - level not available
MW-47	12/01/13	42.18	693.48	54.49	
MW-101A	11/30/13	44.47	721.15	90.35	
MW-101B	11/30/13	45.28	721.34	153.74	
MW-101C	11/30/13	45.15	721.33	174.89	
MW-101D	11/30/13	46.82	718.14	212.72	
MW-102A	12/18/13	13.18	775.25	37.69	
MW-102B	12/18/13	35.17	753.44	100.50	
MW-102C	12/18/13	38.08	751.79	187.42	Field duplicate (FD-2) collected.
MW-113A	11/30/13	57.09	709.45	104.50	
MW-113B	11/30/13	57.35	709.30	155.26	
MW-114A	12/19/13	29.13	697.76	97.48	
MW-114B	01/01/04	0.00	727.42	222.58	Well Damaged - not sampled this period
MW-117B	11/29/13	3.45	692.81	89.50	
MW-117C	11/29/13	3.51	692.60	158.31	1 bolt hole stripped
MW-117D	11/29/13	3.15	692.95	200.20	
MW-119	12/01/13	26.57	692.40	62.41	
MW-121	12/01/13	23.25	693.73	67.55	
MW-124	12/01/13	35.84	695.46	102.76	
MW-130	12/01/13	24.77	703.18	38.17	
MW-133A	11/30/13	33.25	746.93	37.85	
MW-133B	11/30/13	27.92	752.41	61.49	
MW-133C	11/30/13	23.75	756.54	98.49	
MW-136	11/30/13	35.24	799.53	44.33	
MW-200	12/01/13	51.50	708.66	89.93	
MW-201	12/01/13	30.56	698.47	50.15	
MW-202	12/01/13	29.65	699.97	50.01	
MW-203	12/01/13	29.19	699.90	49.35	well pump was removed by unknown. Pumped utilizing a QED sample pro portable pump with teflon liner & tubing.
MW-204	12/01/13	27.86	689.35	88.96	
MW-205A	11/29/13	2.21	691.12	110.27	
MW-205B	11/29/13	2.03	691.19	150.05	
MW-206A	11/29/13	3.43	690.27	90.24	Field Duplicate Collected (FD-1)
MW-206B	11/29/13	1.98	691.28	129.94	
MW-206C		0.00	693.06	251.31	Inaccessible well - couldn't sample
MW-207	12/01/13	35.54	688.63	90.81	

ft amsl Feet above mean sea level
ft TOC Feet from Top of Casing

Appendix A

Data Quality Control Criteria Review Summary

SDG Number: 1312016 **Project Number:** 1016-2

Site: SE Rockford, 30th Event

Contractor Lab: TriMatrix (Grand Rapids, MI)

Validator: Brian LaFlamme **Validation Date:** 16 Jan 14

Sample Matrix: Water **Sample Date:** 11/29/13 - 12/01/13

Analytical Methods: EPA SW-846 Method 8260B

Sample Designations:

MW-47	MW-117B	MW-133A	MW-203
MW-101A	MW-117C	MW-133B	MW-204
MW-101B	MW-117D	MW-133C	MW-205A
MW-101C	MW-119	MW-136	MW-205B
MW-101D	MW-121	MW-200	MW-206A
MW-113A	MW-124	MW-201	MW-206B
MW-113B	MW-130	MW-202	MW-207
			FD1 (field duplicate of MW-206A)
			Trip Blank TML2607

The analytical data were reviewed in accordance with the analytical methods, SW-846 validation guidelines, and the Environmental Protections Agency (EPA) Contract Laboratory Program (CLP) National Functional Guidelines. The review included comparing quality control (QC) values provided on the laboratory QC forms to method QC criteria. Review of the raw data was not performed.

Quality Control Summary

QC Review Item	VOA
Completeness	X
Case Narrative	X
Chain of Custody (COC) Forms	X
Sample Preservation	X
Holding Times	X
Laboratory Blank Results	1
System Monitoring Compounds (Surrogate) Results	X
Matrix Spike/Matrix Duplicate (MS/MSD) Results	X
Laboratory Control Sample (LCS) Results	X
Method Specific Quality Control (QC) Results *	X
System Performance	X
Field Quality Control Results #	2
Other	X

X Acceptable, no qualification necessary NR Not required
See validation summary comment NA Not applicable
*) The reviewer has indicated in the comments, if necessary, the method specific QC results included in the data package that were reviewed.
#) Field QC may include field duplicates, trip blanks, rinse blanks, field blanks, and equipment blank samples as required by project specific criteria.

Data for the above samples are:

- ☐ Acceptable for use
- ☒ Acceptable for use as qualified
- ☐ Unacceptable for use

Is action required by the Project Manager?

Yes ☐ No ☒

Data Validation Summary Comments:

1. **Laboratory Blank Result** – Acetone (2.8 J µg/l), 1,4-dichlorobenzene (0.13 J µg/l), and methylene chloride (0.26 J µg/l) were detected in the method blank for QC batch 1313063 and analytical batch 3L05022. 1,4-Dichlorobenzene was not detected in the investigative samples. The affected samples and the data validation qualifier results are shown in the following table.

Sample Identification	Parameter	Reported Result	Data Validation Result
FD 1	Acetone	1.7 J	20 UB
MW 117C		2.5 J	20 UB
MW 101A		24	100 UB
MW 101B		21 J	100 UB
MW 101C		18 J	100 UB
MW 205B		2.1 J	20 UB
FD 1	Methylene Chloride	0.36 J	5 UB
MW 117D		0.27 J	5 UB
MW 101A		3.0 J	25 UB
MW 101B		3.2 J	25 UB
MW 101C		3.1 J	25 UB
MW 113A		0.29 J	5 UB
MW 205A		0.38 J	5 UB
MW 205B		0.41 J	5 UB
MW 206A		0.33 J	5 UB

Acetone (2.3 J µg/l), bromomethane (0.45 J µg/l), and 1,4-dichlorobenzene (0.13 J µg/l) were detected in the method blank for QC batch 1313071 and analytical batch 3L05026. Bromomethane and 1,4-Dichlorobenzene were not detected in the investigative samples. The affected samples and the data validation qualifier results are shown in the following table.

Sample Identification	Parameter	Reported Result	Data Validation Result
MW-124	Acetone	9.9 J	50 UB
MW 133B		18 J	100 UB
MW 133C		2.0 J	20 UB
Trip Blank TML2607		5.46 J	20 UB

Acetone (1.7 J µg/l), 1,4-dichlorobenzene (0.14 J µg/l), and methylene chloride (0.26 J µg/l) were detected in the method blank for QC batch 131103 and analytical batch 3L06010. 1,4-Dichlorobenzene was not detected in the investigative samples. The affected samples and the data validation qualifier results are shown in the following table.

Sample Identification	Parameter	Reported Result	Data Validation Result
MW-133A	Acetone	3.8 J	20 UB
MW-133A	Methylene Chloride	0.28 J	5 UB

2. **Field Quality Control Samples** – Acetone (5.6 J µg/l) and methylene chloride (0.29 J µg/l) were detected in the trip blank. The affected samples, not qualified because of method blank contamination, and the data validation qualifier results are shown in the following table.

Sample Identification	Parameter	Reported Result	Data Validation Result
MW-133B	Methylene Chloride	2.8 J	25 UB
MW-133C		0.30 J	5 UB
MW-124		1.7 J	12 UB

The relative percent difference (RPD) is not necessarily calculated if both the primary and duplicate results are not five times greater than the reporting limit. However, the RPD between the investigative and duplicate samples was less than 10% when comparing detected concentrations. Qualification is not necessary.

OVERALL ASSESSMENT OF DATA

The TriMatrix Work Order Report # 1312016 is 100 percent complete. The data usability is based on EPA's guidance documents. No problems were identified with reported data and analytical performance was within specified limits. The data are acceptable and meet the project's data quality objectives.

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, II Site	Description:	Laboratory Services		
Client Sample ID:	**MW 47**	Sampled:	12/1/13 13:03		
Lab Sample ID:	**1312016-22**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 3:12	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**0.35J**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 47**	Sampled:	12/1/13 13:03		
Lab Sample ID:	**1312016-22**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 3:12	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	1.0U	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**0.34J**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	1.0U	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*97*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By _____

Date 1/16/15 14 JSF

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, II Site	Description:	Laboratory Services		
Client Sample ID:	**MW 101A**	Sampled:	11/30/13 12:57		
Lab Sample ID:	**1312016-10**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	5	Analyzed:	12/4/13 15:19	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	~~243~~ 100UB	100	8.6
71-43-2	Benzene	5.0U	5.0	1.6
74-97-5	Bromochloromethane	5.0U	5.0	1.5
75-27-4	Bromodichloromethane	5.0U	5.0	0.61
75-25-2	Bromoform	5.0U	5.0	1.2
74-83-9	Bromomethane	5.0U	5.0	1.2
75-15-0	Carbon Disulfide	25U	25	1.4
56-23-5	Carbon Tetrachloride	5.0U	5.0	1.1
108-90-7	Chlorobenzene	5.0U	5.0	1.1
75-00-3	Chloroethane	5.0U	5.0	1.1
67-66-3	Chloroform	**3.0J**	5.0	1.3
74-87-3	Chloromethane	5.0U	5.0	1.0
96-12-8	1,2-Dibromo-3-chloropropane	5.0U	5.0	3.2
124-48-1	Dibromochloromethane	5.0U	5.0	0.70
106-93-4	1,2-Dibromoethane	5.0U	5.0	1.2
95-50-1	1,2-Dichlorobenzene	5.0U	5.0	0.59
541-73-1	1,3-Dichlorobenzene	5.0U	5.0	0.84
106-46-7	1,4-Dichlorobenzene	5.0U	5.0	0.56
75-34-3	1,1-Dichloroethane	**260**	5.0	1.4
107-06-2	1,2-Dichloroethane	5.0U	5.0	0.74
75-35-4	1,1-Dichloroethene	**70**	5.0	1.0
156-59-2	cis-1,2-Dichloroethene	**610**	5.0	1.0
156-60-5	trans-1,2-Dichloroethene	**14**	5.0	1.1
78-87-5	1,2-Dichloropropane	5.0U	5.0	0.88
10061-01-5	cis-1,3-Dichloropropene	5.0U	5.0	1.4
10061-02-6	trans-1,3-Dichloropropene	5.0U	5.0	0.72
100-41-4	Ethylbenzene	5.0U	5.0	1.4
591-78-6	2-Hexanone	25U	25	7.6
*75-09-2	Methylene Chloride	~~3.0J~~ 25UB	25	1.2
78-93-3	2-Butanone (MEK)	**23J**	25	8.1
108-10-1	4-Methyl-2-pentanone (MIBK)	25U	25	7.2

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 101A**	Sampled:	11/30/13 12:57		
Lab Sample ID:	**1312016-10**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	5	Analyzed:	12/4/13 15:19	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	5.0U	5.0	0.62
79-34-5	1,1,2,2-Tetrachloroethane	5.0U	5.0	1.1
127-18-4	Tetrachloroethene	**67**	5.0	0.80
108-88-3	Toluene	5.0U	5.0	1.4
71-55-6	1,1,1-Trichloroethane	**570**	5.0	1.5
79-00-5	1,1,2-Trichloroethane	5.0U	5.0	1.1
79-01-6	Trichloroethene	**160**	5.0	1.2
75-01-4	Vinyl Chloride	5.0U	5.0	0.68
1330-20-7	Xylene (Total)	15U	15	2.2

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*106*	*85-118*
1,2-Dichloroethane-d4	*100*	*87-122*
Toluene-d8	*101*	*85-113*
4-Bromofluorobenzene	*96*	*82-110*

VALIDATED

Reviewed By [signature]

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 101B**	Sampled:	11/30/13 12:23		
Lab Sample ID:	**1312016-09**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	5	Analyzed:	12/4/13 14:49	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	~~21J~~ 100 UB	100	8.6
71-43-2	Benzene	5.0U	5.0	1.6
74-97-5	Bromochloromethane	5.0U	5.0	1.5
75-27-4	Bromodichloromethane	5.0U	5.0	0.61
75-25-2	Bromoform	5.0U	5.0	1.2
74-83-9	Bromomethane	5.0U	5.0	1.2
75-15-0	Carbon Disulfide	25U	25	1.4
56-23-5	Carbon Tetrachloride	5.0U	5.0	1.1
108-90-7	Chlorobenzene	5.0U	5.0	1.1
75-00-3	Chloroethane	5.0U	5.0	1.1
67-66-3	Chloroform	**1.6J**	5.0	1.3
74-87-3	Chloromethane	5.0U	5.0	1.0
96-12-8	1,2-Dibromo-3-chloropropane	5.0U	5.0	3.2
124-48-1	Dibromochloromethane	5.0U	5.0	0.70
106-93-4	1,2-Dibromoethane	5.0U	5.0	1.2
95-50-1	1,2-Dichlorobenzene	5.0U	5.0	0.59
541-73-1	1,3-Dichlorobenzene	5.0U	5.0	0.84
106-46-7	1,4-Dichlorobenzene	5.0U	5.0	0.56
75-34-3	1,1-Dichloroethane	**130**	5.0	1.4
107-06-2	1,2-Dichloroethane	5.0U	5.0	0.74
75-35-4	1,1-Dichloroethene	**28**	5.0	1.0
156-59-2	cis-1,2-Dichloroethene	**32**	5.0	1.0
156-60-5	trans-1,2-Dichloroethene	**4.1J**	5.0	1.1
78-87-5	1,2-Dichloropropane	5.0U	5.0	0.88
10061-01-5	cis-1,3-Dichloropropene	5.0U	5.0	1.4
10061-02-6	trans-1,3-Dichloropropene	5.0U	5.0	0.72
100-41-4	Ethylbenzene	5.0U	5.0	1.4
591-78-6	2-Hexanone	25U	25	7.6
*75-09-2	Methylene Chloride	**3.2J**	25	1.2
78-93-3	2-Butanone (MEK)	~~19J~~ 25 UB	25	8.1
108-10-1	4-Methyl-2-pentanone (MIBK)	25U	25	7.2

VALIDATED

Reviewed By

Date 1/16/14

Continued on next page

*See Statement of Data Qualifications

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 101B**	Sampled:	11/30/13 12:23		
Lab Sample ID:	**1312016-09**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	5	Analyzed:	12/4/13 14:49	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	5.0U	5.0	0.62
79-34-5	1,1,2,2-Tetrachloroethane	5.0U	5.0	1.1
127-18-4	Tetrachloroethene	**28**	5.0	0.80
108-88-3	Toluene	5.0U	5.0	1.4
71-55-6	1,1,1-Trichloroethane	**490**	5.0	1.5
79-00-5	1,1,2-Trichloroethane	5.0U	5.0	1.1
79-01-6	Trichloroethene	**27**	5.0	1.2
75-01-4	Vinyl Chloride	5.0U	5.0	0.68
1330-20-7	Xylene (Total)	15U	15	2.2

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*104*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*96*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4900 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, II Site	Description:	Laboratory Services		
Client Sample ID:	**MW 101C**	Sampled:	11/30/13 13:54		
Lab Sample ID:	**1312016-11**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	5	Analyzed:	12/4/13 15:48	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	~~18J~~ 100 UB	100	8.6
71-43-2	Benzene	5.0U	5.0	1.6
74-97-5	Bromochloromethane	5.0U	5.0	1.5
75-27-4	Bromodichloromethane	5.0U	5.0	0.61
75-25-2	Bromoform	5.0U	5.0	1.2
74-83-9	Bromomethane	5.0U	5.0	1.2
75-15-0	Carbon Disulfide	25U	25	1.4
56-23-5	Carbon Tetrachloride	5.0U	5.0	1.1
108-90-7	Chlorobenzene	5.0U	5.0	1.1
75-00-3	Chloroethane	5.0U	5.0	1.1
67-66-3	Chloroform	5.0U	5.0	1.3
74-87-3	Chloromethane	5.0U	5.0	1.0
96-12-8	1,2-Dibromo-3-chloropropane	5.0U	5.0	3.2
124-48-1	Dibromochloromethane	5.0U	5.0	0.70
106-93-4	1,2-Dibromoethane	5.0U	5.0	1.2
95-50-1	1,2-Dichlorobenzene	5.0U	5.0	0.59
541-73-1	1,3-Dichlorobenzene	5.0U	5.0	0.84
106-46-7	1,4-Dichlorobenzene	5.0U	5.0	0.56
75-34-3	1,1-Dichloroethane	**110**	5.0	1.4
107-06-2	1,2-Dichloroethane	5.0U	5.0	0.74
75-35-4	1,1-Dichloroethene	**22**	5.0	1.0
156-59-2	cis-1,2-Dichloroethene	**30**	5.0	1.0
156-60-5	trans-1,2-Dichloroethene	**3.6J**	5.0	1.1
78-87-5	1,2-Dichloropropane	5.0U	5.0	0.88
10061-01-5	cis-1,3-Dichloropropene	5.0U	5.0	1.4
10061-02-6	trans-1,3-Dichloropropene	5.0U	5.0	0.72
100-41-4	Ethylbenzene	5.0U	5.0	1.4
591-78-6	2-Hexanone	25U	25	7.6
*75-09-2	Methylene Chloride	~~3.1J~~ 25 UB	25	1.2
78-93-3	2-Butanone (MEK)	**17J**	25	8.1
108-10-1	4-Methyl-2-pentanone (MIBK)	25U	25	7.2

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 101C**	Sampled:	11/30/13 13:54		
Lab Sample ID:	**1312016-11**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	5	Analyzed:	12/4/13 15:48	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	5.0U	5.0	0.62
79-34-5	1,1,2,2-Tetrachloroethane	5.0U	5.0	1.1
127-18-4	Tetrachloroethene	**21**	5.0	0.80
108-88-3	Toluene	5.0U	5.0	1.4
71-55-6	1,1,1-Trichloroethane	**400**	5.0	1.5
79-00-5	1,1,2-Trichloroethane	5.0U	5.0	1.1
79-01-6	Trichloroethene	**19**	5.0	1.2
75-01-4	Vinyl Chloride	5.0U	5.0	0.68
1330-20-7	Xylene (Total)	15U	15	2.2

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*104*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*101*	*85-113*
4-Bromofluorobenzene	*96*	*82-110*

VALIDATED

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 101D**	Sampled:	11/30/13 13:22		
Lab Sample ID:	**1312016-13**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 16:47	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.913**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**29**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**11**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**20**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	**1.0**	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE • Grand Rapids, MI 49512 • 616.975.4500 • Fax 616.942.7163 • www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 101D**	Sampled:	11/30/13 13:22		
Lab Sample ID:	**1312016-13**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 16:47	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**11**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**110**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**16**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*103*	*85-118*
1,2-Dichloroethane-d4	*99*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 113A**	Sampled:	11/30/13 15:08		
Lab Sample ID:	**1312016-14**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 17:17	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**1.2**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**140**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**33**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**37**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	**4.4**	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
*75-09-2	Methylene Chloride	~~0.29J~~ 5UB	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 113A**	Sampled:	11/30/13 15:08		
Lab Sample ID:	**1312016-14**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 17:17	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**13**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**160**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	**0.77J**	1.0	0.22
79-01-6	Trichloroethene	**51**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*106*	*85-118*
1,2-Dichloroethane-d4	*100*	*87-122*
Toluene-d8	*102*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 113B**	Sampled:	11/30/13 14:30		
Lab Sample ID:	**1312016-12**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 16:18	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.30J**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**53**	1.0	0.28
107-06-2	1,2-Dichloroethane	**0.36J**	1.0	0.15
75-35-4	1,1-Dichloroethene	**12**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**56**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	**1.4**	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By [signature]

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the samples tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.943.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 113B**	Sampled:	11/30/13 14:30		
Lab Sample ID:	**1312016-12**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 16:18	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**2.7**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**11**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**21**	1.0	0.24
75-01-4	Vinyl Chloride	**9.6**	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*100*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By [signature]

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

3560 Corporate Exchange Court SE • Grand Rapids, MI 49512 • 616.975.4500 • Fax 616.942.7463 • www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 117B**	Sampled:	11/29/13 10:11		
Lab Sample ID:	**1312016-01**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 10:51	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.39J**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**8.4**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**3.1**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**0.90J**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 117B**	Sampled:	11/29/13 10:11		
Lab Sample ID:	**1312016-01**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 10:51	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**5.5**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**7.4**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**4.9**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*100*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*101*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 117C**	Sampled:	11/29/13 10:50		
Lab Sample ID:	**1312016-02**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 11:20	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	~~2.5J~~ 20UB	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**34**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**13**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**4.7**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By _____

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 117C**	Sampled:	11/29/13 10:50		
Lab Sample ID:	**1312016-02**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 11:20	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**23**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**23**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**13**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

The report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 117D**	Sampled:	11/29/13 11:54		
Lab Sample ID:	**1312016-03**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 11:50	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.33J**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**51**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**12**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**2.9**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
*75-09-2	Methylene Chloride	~~**0.27J**~~ 5UB	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By _____

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 117D**	Sampled:	11/29/13 11:54		
Lab Sample ID:	**1312016-03**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 11:50	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**18**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**33**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**9.9**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*101*	*85-118*
1,2-Dichloroethane-d4	*100*	*87-122*
Toluene-d8	*99*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By _____

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 119**	Sampled:	12/1/13 14:05		
Lab Sample ID:	**1312016-24**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 4:11	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**0.93J**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**0.61J**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By _____

Date 1/16/14

This report shall not be reproduced, except in full, without written approval of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 119**	Sampled:	12/1/13 14:05		
Lab Sample ID:	**1312016-24**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 4:11	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	1.0U	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**0.94J**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**0.35J**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*98*	*85-118*
1,2-Dichloroethane-d4	*100*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 121**	Sampled:	12/1/13 16:10		
Lab Sample ID:	**1312016-28**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 6:10	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.74J**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**29**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**6.6**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**5.9**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	**0.57J**	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By [signature]

Date 1/16/14

This report shall not be reproduced, except in full, without written approval of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ 616.975.4500 ◆ Fax 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 121**	Sampled:	12/1/13 16:10		
Lab Sample ID:	**1312016-28**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 6:10	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**1.6**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**15**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**22**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*100*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*101*	*85-113*
4-Bromofluorobenzene	*94*	*82-110*

VALIDATED

Reviewed By [signature]

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 124**	Sampled:	12/1/13 14:30		
Lab Sample ID:	**1312016-25**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	2.5	Analyzed:	12/5/13 4:41	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	~~9.9J~~ 50UB	50	4.3
71-43-2	Benzene	2.5U	2.5	0.80
74-97-5	Bromochloromethane	2.5U	2.5	0.75
75-27-4	Bromodichloromethane	2.5U	2.5	0.30
75-25-2	Bromoform	2.5U	2.5	0.61
74-83-9	Bromomethane	2.5U	2.5	0.58
75-15-0	Carbon Disulfide	12U	12	0.70
56-23-5	Carbon Tetrachloride	2.5U	2.5	0.57
108-90-7	Chlorobenzene	2.5U	2.5	0.54
75-00-3	Chloroethane	**13**	2.5	0.56
67-66-3	Chloroform	2.5U	2.5	0.64
74-87-3	Chloromethane	2.5U	2.5	0.50
96-12-8	1,2-Dibromo-3-chloropropane	2.5U	2.5	1.6
124-48-1	Dibromochloromethane	2.5U	2.5	0.35
106-93-4	1,2-Dibromoethane	2.5U	2.5	0.58
95-50-1	1,2-Dichlorobenzene	2.5U	2.5	0.30
541-73-1	1,3-Dichlorobenzene	2.5U	2.5	0.42
106-46-7	1,4-Dichlorobenzene	2.5U	2.5	0.28
75-34-3	1,1-Dichloroethane	**280**	2.5	0.70
107-06-2	1,2-Dichloroethane	2.5U	2.5	0.37
75-35-4	1,1-Dichloroethene	**8.6**	2.5	0.52
156-59-2	cis-1,2-Dichloroethene	**82**	2.5	0.50
156-60-5	trans-1,2-Dichloroethene	2.5U	2.5	0.54
78-87-5	1,2-Dichloropropane	2.5U	2.5	0.44
10061-01-5	cis-1,3-Dichloropropene	2.5U	2.5	0.70
10061-02-6	trans-1,3-Dichloropropene	2.5U	2.5	0.36
100-41-4	Ethylbenzene	2.5U	2.5	0.68
591-78-6	2-Hexanone	12U	12	3.8
75-09-2	Methylene Chloride	~~1.7J~~ 12UB	12	0.61
78-93-3	2-Butanone (MEK)	**11J**	12	4.0
108-10-1	4-Methyl-2-pentanone (MIBK)	12U	12	3.6

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By _____

Date 1/16/13

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 124**	Sampled:	12/1/13 14:30		
Lab Sample ID:	**1312016-25**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	2.5	Analyzed:	12/5/13 4:41	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	2.5U	2.5	0.31
79-34-5	1,1,2,2-Tetrachloroethane	2.5U	2.5	0.54
127-18-4	Tetrachloroethene	**7.4**	2.5	0.40
108-88-3	Toluene	2.5U	2.5	0.71
71-55-6	1,1,1-Trichloroethane	**40**	2.5	0.74
79-00-5	1,1,2-Trichloroethane	2.5U	2.5	0.56
79-01-6	Trichloroethene	**4.1**	2.5	0.61
75-01-4	Vinyl Chloride	**20**	2.5	0.34
1330-20-7	Xylene (Total)	7.5U	7.5	1.1

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*101*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*96*	*82-110*

VALIDATED

Reviewed By: [illegible]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 130**	Sampled:	12/1/13 15:03		
Lab Sample ID:	**1312016-26**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 5:11	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**8.4**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**1.2**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**2.2**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616 975-4500 ♦ Fax 616 942 7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 130**	Sampled:	12/1/13 15:03		
Lab Sample ID:	**1312016-26**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 5:11	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**0.65J**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**16**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**1.6**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*101*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By [signature]

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 133A**	Sampled:	11/30/13 15:50		
Lab Sample ID:	**1312016-15**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/5/13 10:00	By:	LEW
Dilution Factor:	1	Analyzed:	12/5/13 19:39	By:	LEW
QC Batch:	1313103	Analytical Batch:	3L06010		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	~~3.83~~ 20UB	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**0.27J**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
*75-09-2	Methylene Chloride	~~0.28J~~ 5UB	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 133A**	Sampled:	11/30/13 15:50		
Lab Sample ID:	**1312016-15**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/5/13 10:00	By:	LEW
Dilution Factor:	1	Analyzed:	12/5/13 19:39	By:	LEW
QC Batch:	1313103	Analytical Batch:	3L06010		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	1.0U	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**0.39J**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	1.0U	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*105*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*91*	*82-110*

VALIDATED

Reviewed By

Date 6/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE • Grand Rapids, MI 49512 • 616.975.4500 • Fax 616.942.7463 • www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 133B**	Sampled:	11/30/13 16:22		
Lab Sample ID:	**1312016-16**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	5	Analyzed:	12/5/13 0:13	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	~~18J~~ 100UB	100	8.6
71-43-2	Benzene	5.0U	5.0	1.6
74-97-5	Bromochloromethane	5.0U	5.0	1.5
75-27-4	Bromodichloromethane	5.0U	5.0	0.61
75-25-2	Bromoform	5.0U	5.0	1.2
74-83-9	Bromomethane	5.0U	5.0	1.2
75-15-0	Carbon Disulfide	25U	25	1.4
56-23-5	Carbon Tetrachloride	5.0U	5.0	1.1
108-90-7	Chlorobenzene	5.0U	5.0	1.1
75-00-3	Chloroethane	5.0U	5.0	1.1
67-66-3	Chloroform	**4.0J**	5.0	1.3
74-87-3	Chloromethane	5.0U	5.0	1.0
96-12-8	1,2-Dibromo-3-chloropropane	5.0U	5.0	3.2
124-48-1	Dibromochloromethane	5.0U	5.0	0.70
106-93-4	1,2-Dibromoethane	5.0U	5.0	1.2
95-50-1	1,2-Dichlorobenzene	5.0U	5.0	0.59
541-73-1	1,3-Dichlorobenzene	5.0U	5.0	0.84
106-46-7	1,4-Dichlorobenzene	5.0U	5.0	0.56
75-34-3	1,1-Dichloroethane	**190**	5.0	1.4
107-06-2	1,2-Dichloroethane	**2.3J**	5.0	0.74
75-35-4	1,1-Dichloroethene	**86**	5.0	1.0
156-59-2	cis-1,2-Dichloroethene	**960**	5.0	1.0
156-60-5	trans-1,2-Dichloroethene	**21**	5.0	1.1
78-87-5	1,2-Dichloropropane	5.0U	5.0	0.88
10061-01-5	cis-1,3-Dichloropropene	5.0U	5.0	1.4
10061-02-6	trans-1,3-Dichloropropene	5.0U	5.0	0.72
100-41-4	Ethylbenzene	5.0U	5.0	1.4
591-78-6	2-Hexanone	25U	25	7.6
75-09-2	Methylene Chloride	~~2.8J~~ 25UB	25	1.2
78-93-3	2-Butanone (MEK)	**14J**	25	8.1
108-10-1	4-Methyl-2-pentanone (MIBK)	25U	25	7.2

VALIDATED

Reviewed By [signature]

Date 1/16/14

Continued on next page

*See Statement of Data Qualifications

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 133B**	Sampled:	11/30/13 16:22		
Lab Sample ID:	**1312016-16**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	5	Analyzed:	12/5/13 0:13	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	5.0U	5.0	0.62
79-34-5	1,1,2,2-Tetrachloroethane	5.0U	5.0	1.1
127-18-4	Tetrachloroethene	**74**	5.0	0.80
108-88-3	Toluene	5.0U	5.0	1.4
71-55-6	1,1,1-Trichloroethane	**490**	5.0	1.5
79-00-5	1,1,2-Trichloroethane	**2.4J**	5.0	1.1
79-01-6	Trichloroethene	**98**	5.0	1.2
75-01-4	Vinyl Chloride	5.0U	5.0	0.68
1330-20-7	Xylene (Total)	15U	15	2.2

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*105*	*85-118*
1,2-Dichloroethane-d4	*100*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*96*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 133C**	Sampled:	11/30/13 16:51		
Lab Sample ID:	**1312016-17**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 0:43	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	~~2.0J~~ 20UB	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**5.2**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**52**	1.0	0.28
107-06-2	1,2-Dichloroethane	**1.3**	1.0	0.15
75-35-4	1,1-Dichloroethene	**46**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**140**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	**1.4**	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	~~0.30J~~ 5UB	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 133C**	Sampled:	11/30/13 16:51		
Lab Sample ID:	**1312016-17**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 0:43	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**7.5**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**160**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	**1.0**	1.0	0.22
79-01-6	Trichloroethene	**83**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*105*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*101*	*85-113*
4-Bromofluorobenzene	*96*	*82-110*

VALIDATED

Reviewed By _____

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 136**	Sampled:	11/30/13 17:27		
Lab Sample ID:	**1312016-18**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/5/13 10:00	By:	LEW
Dilution Factor:	1	Analyzed:	12/5/13 20:06	By:	LEW
QC Batch:	1313103	Analytical Batch:	3L06010		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.38J**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written approval of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 136**	Sampled:	11/30/13 17:27		
Lab Sample ID:	**1312016-18**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/5/13 10:00	By:	LEW
Dilution Factor:	1	Analyzed:	12/5/13 20:06	By:	LEW
QC Batch:	1313103	Analytical Batch:	3L06010		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	1.0U	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	1.0U	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*106*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*97*	*85-113*
4-Bromofluorobenzene	*93*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 200**	Sampled:	12/1/13 15:35		
Lab Sample ID:	**1312016-27**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 5:40	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, II Site	Description:	Laboratory Services		
Client Sample ID:	**MW 200**	Sampled:	12/1/13 15:35		
Lab Sample ID:	**1312016-27**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 5:40	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	1.0U	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	1.0U	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*98*	*85-118*
1,2-Dichloroethane-d4	*103*	*87-122*
Toluene-d8	*101*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By [signature]

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 201**	Sampled:	12/1/13 12:17		
Lab Sample ID:	**1312016-21**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 2:42	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**4.8**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**0.56J**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**1.7**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 201**	Sampled:	12/1/13 12:17		
Lab Sample ID:	**1312016-21**	Sampled By:	Patrick Egan		
Matrix	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 2:42	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**2.9**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**16**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**1.8**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*100*	*85-118*
1,2-Dichloroethane-d4	*100*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*94*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 202**	Sampled:	12/1/13 11:43		
Lab Sample ID:	**1312016-20**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 2:12	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 202**	Sampled:	12/1/13 11:43		
Lab Sample ID:	**1312016-20**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 2:12	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**1.1**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**0.66J**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	1.0U	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*98*	*85-118*
1,2-Dichloroethane-d4	*100*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*94*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, II Site	Description:	Laboratory Services		
Client Sample ID:	**MW 203**	Sampled:	12/1/13 11:18		
Lab Sample ID:	**1312016-19**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 1:42	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By [illegible]

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 203**	Sampled:	12/1/13 11:18		
Lab Sample ID:	**1312016-19**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 1:42	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**5.9**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	1.0U	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*98*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 204**	Sampled:	12/1/13 16:43		
Lab Sample ID:	**1312016-29**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 6:39	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.33J**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**6.2**	1.0	0.28
107-06-2	1,2-Dichloroethane	**0.75J**	1.0	0.15
75-35-4	1,1-Dichloroethene	**12**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**37**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	**0.47J**	1.0	0.22
78-87-5	1,2-Dichloropropane	**0.42J**	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ 616.975.4500 ◆ Fax 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 204**	Sampled:	12/1/13 16:43		
Lab Sample ID:	**1312016-29**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 6:39	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**1.6**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**6.4**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**52**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*100*	*85-118*
1,2-Dichloroethane-d4	*100*	*87-122*
Toluene-d8	*101*	*85-113*
4-Bromofluorobenzene	*96*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 205A**	Sampled:	11/29/13 12:52		
Lab Sample ID:	**1312016-05**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 12:49	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.27J**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**27**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**12**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**4.4**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
*75-09-2	Methylene Chloride	~~0.38J~~ 5UB	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 205A**	Sampled:	11/29/13 12:52		
Lab Sample ID:	**1312016-05**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 12:49	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**26**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**24**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**15**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*101*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By _____

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 205B**	Sampled:	11/29/13 12:28		
Lab Sample ID:	**1312016-04**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 12:19	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	~~2.1J~~ 20UB	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.26J**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**27**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**12**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**5.4**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
*75-09-2	Methylene Chloride	~~0.41J~~ 5UB	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 205B**	Sampled:	11/29/13 12:28		
Lab Sample ID:	**1312016-04**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 12:19	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**25**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**24**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**14**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*101*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE • Grand Rapids, MI 49512 • 616.975.4500 • Fax 616.942.7463 • www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 206A**	Sampled:	11/29/13 13:36		
Lab Sample ID:	**1312016-06**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 13:19	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.32J**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**9.1**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**3.9**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**1.8**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
*75-09-2	Methylene Chloride	~~0.33J~~ 5UB	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Reviewed By

Date 1/16/14

Continued on next page

*See Statement of Data Qualifications

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 206A**	Sampled:	11/29/13 13:36		
Lab Sample ID:	**1312016-06**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 13:19	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**5.6**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**9.1**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**5.5**	1.0	0.24
75-01-4	Vinyl Chloride	**0.22J**	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*94*	*82-110*

VALIDATED

Reviewed By [signature]

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**FD 1** MW-206A field duplicate	Sampled:	11/29/13 13:40		
Lab Sample ID:	**1312016-07**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 13:49	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	~~1.7J~~ 20UB	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.35J**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**9.1**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**4.0**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**1.8**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
*75-09-2	Methylene Chloride	~~0.36J~~ 5UB	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By _____

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**FD 1** MW-206A Field duplicate	Sampled:	11/29/13 13:40		
Lab Sample ID:	**1312016-07**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 13:49	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**5.7**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**8.8**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**5.6**	1.0	0.24
75-01-4	Vinyl Chloride	**0.21J**	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*100*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 206B**	Sampled:	11/29/13 14:09		
Lab Sample ID:	**1312016-08**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 14:19	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.70J**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**51**	1.0	0.28
107-06-2	1,2-Dichloroethane	**1.4**	1.0	0.15
75-35-4	1,1-Dichloroethene	**69**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**130**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	**0.37J**	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By: [illegible]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 206B**	Sampled:	11/29/13 14:09		
Lab Sample ID:	**1312016-08**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 8:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 14:19	By:	DLV
QC Batch:	1313063	Analytical Batch:	3L05022		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**15**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**40**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	**3.4**	1.0	0.22
79-01-6	Trichloroethene	**35**	1.0	0.24
75-01-4	Vinyl Chloride	**2.7**	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*96*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 207**	Sampled:	12/1/13 13:36		
Lab Sample ID:	**1312016-23**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 3:41	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**1.3**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**0.35J**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**1.2**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE • Grand Rapids, MI 49512 • 616.975.4500 • Fax 616.942.7463 • www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW 207**	Sampled:	12/1/13 13:36		
Lab Sample ID:	**1312016-23**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/5/13 3:41	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**1.4**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**1.8**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**3.7**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*99*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*101*	*85-113*
4-Bromofluorobenzene	*96*	*82-110*

VALIDATED

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**Trip Blank TML2607**	Sampled:	12/1/13 0:00		
Lab Sample ID:	**1312016-30**	Sampled By:	TML		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 23:43	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	~~5.6J~~ 20UB	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	**0.29J**	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

VALIDATED

Continued on next page

*See Statement of Data Qualifications

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312016**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**Trip Blank TML2607**	Sampled:	12/1/13 0:00		
Lab Sample ID:	**1312016-30**	Sampled By:	TML		
Matrix:	Water	Received:	12/3/13 8:30		
Unit:	ug/L	Prepared:	12/4/13 21:00	By:	DLV
Dilution Factor:	1	Analyzed:	12/4/13 23:43	By:	DLV
QC Batch:	1313071	Analytical Batch:	3L05026		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	1.0U	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	1.0U	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*98*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*101*	*85-113*
4-Bromofluorobenzene	*95*	*82-110*

VALIDATED

Reviewed By [signature]

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

5560 Corporate Exchange Court SE
Grand Rapids, MI 49512
Phone (616) 975-4500 Fax (616) 942-7463
www.trimatrixlabs.com

Chain of Custody Record

COC No. 146121

Pg. 1 of 3

For Lab Use Only
Cart:
VOA Rack/Tray: BOX #55940
Receipt Log No.: 41-12
Project Chemist:
Work Order No.: 1312016

Client Name: Nationwide Env Svcs
Address: 14818 N 6th Ave Ste 5A
City, State Zip: Golden CO 80401
Phone/Fax:
Email: 303 232 2134

Project Name: SE Rock
Client Project No. / P.O. No.:
Invoice To: ☐ Client ☐ Other (comments)
Contact/Report To: B. Lafamme

Analyses Requested: Vap per Cust

PRESERVATIVES
A NONE pH~7
B HNO_3 pH<2
C H_2SO_4 pH<2
D 1+1 HCl pH<2
E NaOH pH>12
F ZnAc/NaOH pH>9
G MeOH
H Other (note below)

Container Type (corresponds to Container Packing List)
Number of Containers Submitted

Schedule	Matrix Code	Sample Number	Field Sample ID	Cooler ID	Sample Date	Sample Time	COMP	GRAB	Matrix								Total	Sample Comments
		01	1 MW 117B	2607	11/29	1011		X	GW	3							3	
		02	2 MW 117C		11/29	1050		X	GW	3							3	
		03	3 MW 117D		11/29	1154		X	GW	3							3	
		04	4 MW 205B		11/29	1228		X	GW	3							3	
		05	5 MW 205A		11/29	1252		X	GW	3							3	
		06	6 MW 206A		11/29	1336		X	GW	3							3	
		07	7 FD 1		11/29	1340		X	GW	3							3	
		08	8 MW 206B		11/29	1409		X	GW	3							3	
		09	9 MW 101B		11/30	1223		X	GW	3							3	
		10	10 MW 101A		11/30	1257		X	GW	3							3	

Sampled By (print): Patrick Egan
Sampler's Signature: [signature]
Company: ARE
How Shipped? Hand ___ Carrier Fedex
Tracking No.: 7972 9163 8620
Comments: all Samples kept in Secure Location @4°C

1. Relinquished By: [signature] Date 12/2/13 Time 1930
2. Relinquished By: Date Time
3. Relinquished By: Date Time
1. Received By: Date Time
2. Received By: Date Time
3. Received for Lab By: [signature] Date 12/3/13 Time 0830

WHITE COPY - REPORT YELLOW COPY - LABORATORY PINK COPY - FIELD

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.
5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ 616.975.4500 ◆ Fax 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

TRIMATRIX LABORATORIES

5560 Corporate Exchange Court SE
Grand Rapids, MI 49512
Phone (616) 975-4500 Fax (616) 942-7463
www.trimatrixlabs.com

Chain of Custody Record

COC No. 146122

Pg. 2 of 3

For Lab Use Only
Cart
VOA Rack/Tray
Receipt Log No. 41-12
Project Chemist
Work Order No. 1312016

Client Name: Nationwide Env Svcs
Address: 14818 N 6th Ave Ste 5A
City, State Zip: Golden CO 80401
Phone/Fax: 3032322134
Email:
Project Name: SE Rock
Client Project No. / P.O. No.
Invoice To: ☐ Client ☐ Other (comments)
Contact/Report To: B LaFlamme

Analyses Requested: VOC by 8260

PRESERVATIVES
A NONE pH~7
B HNO_3 pH<2
C H_2SO_4 pH<2
D 1+1 HCl pH<2
E NaOH pH>12
F ZnAc/NaOH pH>9
G MeOH
H Other (note below)

Container Type (corresponds to Container Packing List)
Number of Containers Submitted

Schedule	Matrix Code	Sample Number	Field Sample ID	Cooler ID	Sample Date	Sample Time	COMP	GRAB	Matrix							Total	Sample Comments
		11	1 MW101C	2607	11/30	1354		X	GW	3						3	
		12	2 MW 113B		11/30	1430		X	GW	3						3	
		13	3 MW 101D		11/30	1322		X	GW	3						3	
		14	4 MW 113A		11/30	1508		X	GW	3						3	
		15	5 MW 133A		11/30	1550		X	GW	3						3	
		16	6 MW 133B		11/30	1622		X	GW	3						3	
		17	7 MW 133C		11/30	1651		X	GW	3						3	
		18	8 MW 136		11/30	1727		X	GW	3						3	
		19	9 MW 203		12/01	1118		X	GW	3						3	
		20	10 MW 202		12/01	1143		X	GW	3						3	

Sampled By (print): Patrick Egan
Sampler's Signature: [signature]
Company: ACE

How Shipped? Hand ___ Carrier Fedex
Tracking No. 7972 9163 8620

Comments: All Samples kept in Secure Location @ 4°C

1. Relinquished By	Date	Time	2. Relinquished By	Date	Time	3. Relinquished By	Date	Time
[signature]	12/02/13	1930						

1. Received By	Date	Time	2. Received By	Date	Time	3. Received For Lab By	Date	Time
						[signature]	12/3/13	0830

WHITE COPY - REPORT YELLOW COPY - LABORATORY PINK COPY - FIELD

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

TRIMATRIX LABORATORIES

TRIMATRIX LABORATORIES

5560 Corporate Exchange Court SE
Grand Rapids, MI 49512
Phone (616) 975-4500 Fax (616) 942-7463
www.trimatrixlabs.com

Chain of Custody Record

COC No. 146123

Pg. 3 of 3

For Lab Use Only
Cart
VOA Rack/Tray
Receipt Log No. 2/1-12
Project Chemist
Work Order No. 1312016

Client Name: Nationwide Env. Svcs
Address: 14818 N 6th Ave STE A
City, State Zip: Golden CO 80401
Phone/Fax
Email: 3032322134

Project Name: SE Rock
Client Project No. / P.O. No.
Invoice To: ☐ Client ☐ Other (comments)
Contact/Report To: B. Catlamme

Analyses Requested: VOC per list

Container Type (corresponds to Container Packing List)
Number of Containers Submitted

PRESERVATIVES
A NONE pH~7
B HNO_3 pH<2
C H_2SO_4 pH<2
D 1+1 HCl pH<2
E NaOH pH>12
F ZnAc/NaOH pH>9
G MeOH
H Other (note below)

Schedule	Matrix Code	Sample Number	Field Sample ID	Cooler ID	Sample Date	Sample Time	COMP	GRAB	Matrix							Total	Sample Comments
		21	1 MW 201	2607	12/01	1217		X	GW	3						3	
		22	2 MW47		12/01	1303		X	GW	3						3	
		23	3 MW207		12/01	1336		X	GW	3						3	
		24	4 MW119		12/01	1405		X	GW	3						3	
		25	5 MW124		12/01	1430		X	GW	3						3	
		26	6 MW130		12/01	1503		X	GW	3						3	
		27	7 MW200		12/01	1535		X	GW	3						3	
		28	8 MW121		12/01	1610		X	GW	3						3	
		29	9 MW204		12/01	1643		X	GW	3						3	
		30	10 Trip Blank		—	—		—		1						1	

Sampled By (print): Patrick Egan
Sampler's Signature: Patrick Egan
Company: ATC

How Shipped? Hand ___ Carrier: Fedex
Tracking No. 7972 9163 8620

Comments: all samples kept in secure location @ 4°C

1. Relinquished By: Patrick Egan Date 12/02/13 Time 1930
2. Relinquished By Date Time
3. Relinquished By Date Time
1. Received By Date Time
2. Received By Date Time
3. Received For Lab By: [signature] Date 12/3/13 Time 0830

WHITE COPY - REPORT YELLOW COPY - LABORATORY PINK COPY - FIELD

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

TRIMATRIX LABORATORIES

Data Quality Control Criteria Review Summary

SDG Number: 1312332 **Project Number:** 1016-2

Site: SE Rockford, 30th Event

Contractor Lab: TriMatrix (Grand Rapids, MI)

Validator: Brian LaFlamme **Validation Date:** 16 Jan 14

Sample Matrix: Water **Sample Date:** 12/18/13 & 12/19/13

Analytical Methods: EPA SW-846 Method 8260B

Sample Designations:

MW-16	**MW-102C**	**FD2 (field duplicate of MW-102C)**
MW-102A	**MW-114A**	**Trip Blank**
MW-102B		

The analytical data were reviewed in accordance with the analytical methods, SW-846 validation guidelines, and the Environmental Protections Agency (EPA) Contract Laboratory Program (CLP) National Functional Guidelines. The review included comparing quality control (QC) values provided on the laboratory QC forms to method QC criteria. Review of the raw data was not performed.

Quality Control Summary

QC Review Item	VOA
Completeness	X
Case Narrative	X
Chain of Custody (COC) Forms	X
Sample Preservation	X
Holding Times	X
Laboratory Blank Results	1
System Monitoring Compounds (Surrogate) Results	X
Matrix Spike/Matrix Duplicate (MS/MSD) Results	X
Laboratory Control Sample (LCS) Results	2
Method Specific Quality Control (QC) Results *	3
System Performance	X
Field Quality Control Results #	4
Other	X

X Acceptable, no qualification necessary NR Not required
See validation summary comment NA Not applicable
*) The reviewer has indicated in the comments, if necessary, the method specific QC results included in the data package that were reviewed.
#) Field QC may include field duplicates, trip blanks, rinse blanks, field blanks, and equipment blank samples as required by project specific criteria.

Data for the above samples are:

- ☐ Acceptable for use
- ☒ Acceptable for use as qualified
- ☐ Unacceptable for use

Is action required by the Project Manager?

Yes ☐ No ☒

Data Validation Summary Comments:

1. **Laboratory Blank Result** – Acetone (4.0 J µg/l) and 1,4-dichlorobenzene (0.12 J µg/l) were detected in the method blank for QC batch 1313801 and analytical batch 3L30035. 1,4-Dichlorobenzene was not detected in the investigative samples. The affected samples and the data validation qualifier results are shown in the following table.

Sample Identification	Parameter	Reported Result	Data Validation Result
MW-102C	Acetone	4.6 J	50 UB

Acetone (2.0 J µg/l) was detected in the method blank for QC batch 1313852 and analytical batch 3L31024. The affected samples and the data validation qualifier results are shown in the following table.

Sample Identification	Parameter	Reported Result	Data Validation Result
FD2	Acetone	5.1 J	50 UB

2. **Laboratory Control Sample (LCS) Results** – The LCS recovery for carbon disulfide exceeded the upper control limit in QC batch 1313852 and analytical batch 3L31024. There were no detections of carbon disulfide; therefore, qualification is not necessary.

3. **Method Specific Quality Control (QC) Results** – The corresponding CCV for carbon disulfide in QC batch 1313852 and analytical batch 3L31024 had a recovery exceeding the upper control limit. There were no detections of carbon disulfide; therefore, qualification is not necessary.

4. **Field Quality Control Samples** – The relative percent difference (RPD) is not necessarily calculated if both the primary and duplicate results are not five times greater than the reporting limit. However, the RPD between the investigative and duplicate samples was less than 53% when comparing detected concentrations. Qualification is not necessary.

OVERALL ASSESSMENT OF DATA

The TriMatrix Work Order Report # 1312332 is 100 percent complete. The data usability is based on EPA's guidance documents. No problems were identified with reported data and analytical performance was within specified limits. The data are acceptable and meet the project's data quality objectives.

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW16**	Sampled:	12/19/13 9:12		
Lab Sample ID:	**1312332-06**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/28/13 0:00	By:	BAG
Dilution Factor:	1	Analyzed:	12/28/13 5:32	By:	BAG
QC Batch:	1313801	Analytical Batch:	3L30035		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	**0.80J**	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**73**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**17**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**18**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	**2.2**	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By _____

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Trimatrix sample results relate only to the sample tested

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW16**	Sampled:	12/19/13 9:12		
Lab Sample ID:	**1312332-06**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/28/13 0:00	By:	BAG
Dilution Factor:	1	Analyzed:	12/28/13 5:32	By:	BAG
QC Batch:	1313801	Analytical Batch:	3L30035		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**9.0**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**93**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	**0.45J**	1.0	0.22
79-01-6	Trichloroethene	**30**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*103*	*87-122*
Toluene-d8	*99*	*85-113*
4-Bromofluorobenzene	*101*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE • Grand Rapids, MI 49512 • 616.975.4500 • Fax 616.942.7463 • www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW102A**	Sampled:	12/18/13 16:08		
Lab Sample ID:	**1312332-03**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/28/13 0:00	By:	BAG
Dilution Factor:	1	Analyzed:	12/28/13 4:12	By:	BAG
QC Batch:	1313801	Analytical Batch:	3L30035		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**58**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**0.77J**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**100**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	**4.0**	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW102A**	Sampled:	12/18/13 16:08		
Lab Sample ID:	**1312332-03**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/28/13 0:00	By:	BAG
Dilution Factor:	1	Analyzed:	12/28/13 4:12	By:	BAG
QC Batch:	1313801	Analytical Batch:	3L30035		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	1.0U	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**27**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**7.0**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*101*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*101*	*82-110*

VALIDATED

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW102B**	Sampled:	12/18/13 16:46		
Lab Sample ID:	**1312332-04**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/28/13 0:00	By:	BAG
Dilution Factor:	1	Analyzed:	12/28/13 4:39	By:	BAG
QC Batch:	1313801	Analytical Batch:	3L30035		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**60**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**0.81J**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**110**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	**4.2**	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW102B**	Sampled:	12/18/13 16:46		
Lab Sample ID:	**1312332-04**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/28/13 0:00	By:	BAG
Dilution Factor:	1	Analyzed:	12/28/13 4:39	By:	BAG
QC Batch:	1313801	Analytical Batch:	3L30035		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	1.0U	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**28**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**7.4**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*101*	*85-118*
1,2-Dichloroethane-d4	*103*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*101*	*82-110*

VALIDATED

Reviewed By [signature]

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW102C**	Sampled:	12/18/13 15:33		
Lab Sample ID:	**1312332-01**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/28/13 0:00	By:	BAG
Dilution Factor:	2.5	Analyzed:	12/28/13 3:19	By:	BAG
QC Batch:	1313801	Analytical Batch:	3L30035		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	~~4.6J~~ 50UB	50	4.3
71-43-2	Benzene	2.5U	2.5	0.80
74-97-5	Bromochloromethane	2.5U	2.5	0.75
75-27-4	Bromodichloromethane	2.5U	2.5	0.30
75-25-2	Bromoform	2.5U	2.5	0.61
74-83-9	Bromomethane	2.5U	2.5	0.58
75-15-0	Carbon Disulfide	12U	12	0.70
56-23-5	Carbon Tetrachloride	2.5U	2.5	0.57
108-90-7	Chlorobenzene	2.5U	2.5	0.54
75-00-3	Chloroethane	2.5U	2.5	0.56
67-66-3	Chloroform	**0.75J**	2.5	0.64
74-87-3	Chloromethane	2.5U	2.5	0.50
96-12-8	1,2-Dibromo-3-chloropropane	2.5U	2.5	1.6
124-48-1	Dibromochloromethane	2.5U	2.5	0.35
106-93-4	1,2-Dibromoethane	2.5U	2.5	0.58
95-50-1	1,2-Dichlorobenzene	2.5U	2.5	0.30
541-73-1	1,3-Dichlorobenzene	2.5U	2.5	0.42
106-46-7	1,4-Dichlorobenzene	2.5U	2.5	0.28
75-34-3	1,1-Dichloroethane	**120**	2.5	0.70
107-06-2	1,2-Dichloroethane	**1.1J**	2.5	0.37
75-35-4	1,1-Dichloroethene	**31**	2.5	0.52
156-59-2	cis-1,2-Dichloroethene	**270**	2.5	0.50
156-60-5	trans-1,2-Dichloroethene	**4.0**	2.5	0.54
78-87-5	1,2-Dichloropropane	2.5U	2.5	0.44
10061-01-5	cis-1,3-Dichloropropene	2.5U	2.5	0.70
10061-02-6	trans-1,3-Dichloropropene	2.5U	2.5	0.36
100-41-4	Ethylbenzene	2.5U	2.5	0.68
591-78-6	2-Hexanone	12U	12	3.8
75-09-2	Methylene Chloride	**4.7J**	12	0.61
78-93-3	2-Butanone (MEK)	12U	12	4.0
108-10-1	4-Methyl-2-pentanone (MIBK)	12U	12	3.6

VALIDATED

Reviewed By

Date 1/10/14

Continued on next page

*See Statement of Data Qualifications

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW102C**	Sampled:	12/18/13 15:33		
Lab Sample ID:	**1312332-01**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/28/13 0:00	By:	BAG
Dilution Factor:	2.5	Analyzed:	12/28/13 3:19	By:	BAG
QC Batch:	1313801	Analytical Batch:	3L30035		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	2.5U	2.5	0.31
79-34-5	1,1,2,2-Tetrachloroethane	2.5U	2.5	0.54
127-18-4	Tetrachloroethene	**7.3**	2.5	0.40
108-88-3	Toluene	2.5U	2.5	0.71
71-55-6	1,1,1-Trichloroethane	**78**	2.5	0.74
79-00-5	1,1,2-Trichloroethane	2.5U	2.5	0.56
79-01-6	Trichloroethene	**24**	2.5	0.61
75-01-4	Vinyl Chloride	**0.58J**	2.5	0.34
1330-20-7	Xylene (Total)	7.5U	7.5	1.1

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*100*	*85-118*
1,2-Dichloroethane-d4	*101*	*87-122*
Toluene-d8	*99*	*85-113*
4-Bromofluorobenzene	*99*	*82-110*

VALIDATED

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**FD2** MW-102C Field duplicate	Sampled:	12/18/13 15:37		
Lab Sample ID:	**1312332-02**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/30/13 17:00	By:	BAG
Dilution Factor:	2.5	Analyzed:	12/30/13 22:48	By:	BAG
QC Batch:	1313852	Analytical Batch:	3L31024		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
*67-64-1	Acetone	**5.1J**	50	4.3
71-43-2	Benzene	**1.0J**	2.5	0.80
74-97-5	Bromochloromethane	2.5U	2.5	0.75
75-27-4	Bromodichloromethane	2.5U	2.5	0.30
75-25-2	Bromoform	2.5U	2.5	0.61
74-83-9	Bromomethane	2.5U	2.5	0.58
*75-15-0	Carbon Disulfide	12U	12	0.70
56-23-5	Carbon Tetrachloride	2.5U	2.5	0.57
108-90-7	Chlorobenzene	2.5U	2.5	0.54
75-00-3	Chloroethane	2.5U	2.5	0.56
67-66-3	Chloroform	**0.65J**	2.5	0.64
74-87-3	Chloromethane	2.5U	2.5	0.50
96-12-8	1,2-Dibromo-3-chloropropane	2.5U	2.5	1.6
124-48-1	Dibromochloromethane	2.5U	2.5	0.35
106-93-4	1,2-Dibromoethane	2.5U	2.5	0.58
95-50-1	1,2-Dichlorobenzene	2.5U	2.5	0.30
541-73-1	1,3-Dichlorobenzene	2.5U	2.5	0.42
106-46-7	1,4-Dichlorobenzene	2.5U	2.5	0.28
75-34-3	1,1-Dichloroethane	**160**	2.5	0.70
107-06-2	1,2-Dichloroethane	**1.1J**	2.5	0.37
75-35-4	1,1-Dichloroethene	**37**	2.5	0.52
156-59-2	cis-1,2-Dichloroethene	**300**	2.5	0.50
156-60-5	trans-1,2-Dichloroethene	**4.4**	2.5	0.54
78-87-5	1,2-Dichloropropane	2.5U	2.5	0.44
10061-01-5	cis-1,3-Dichloropropene	2.5U	2.5	0.70
10061-02-6	trans-1,3-Dichloropropene	2.5U	2.5	0.36
100-41-4	Ethylbenzene	2.5U	2.5	0.68
591-78-6	2-Hexanone	12U	12	3.8
75-09-2	Methylene Chloride	**7.1J**	12	0.61
78-93-3	2-Butanone (MEK)	12U	12	4.0
108-10-1	4-Methyl-2-pentanone (MIBK)	12U	12	3.6

VALIDATED

Reviewed By: [signature]

Date: 1/16/14

Continued on next page

*See Statement of Data Qualifications

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**FD2** MW-102C Field dupliicate	Sampled:	12/18/13 15:37		
Lab Sample ID:	**1312332-02**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/30/13 17:00	By:	BAG
Dilution Factor:	2.5	Analyzed:	12/30/13 22:48	By:	BAG
QC Batch:	1313852	Analytical Batch:	3L31024		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	2.5U	2.5	0.31
79-34-5	1,1,2,2-Tetrachloroethane	2.5U	2.5	0.54
127-18-4	Tetrachloroethene	**8.2**	2.5	0.40
108-88-3	Toluene	2.5U	2.5	0.71
71-55-6	1,1,1-Trichloroethane	**77**	2.5	0.74
79-00-5	1,1,2-Trichloroethane	2.5U	2.5	0.56
79-01-6	Trichloroethene	**28**	2.5	0.61
75-01-4	Vinyl Chloride	**1.0J**	2.5	0.34
1330-20-7	Xylene (Total)	7.5U	7.5	1.1

Surrogates:	***% Recovery***	***Control Limits***
Dibromofluoromethane	*93*	*85-118*
1,2-Dichloroethane-d4	*97*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*103*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW114A**	Sampled:	12/19/13 8:32		
Lab Sample ID:	**1312332-05**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/28/13 0:00	By:	BAG
Dilution Factor:	1	Analyzed:	12/28/13 5:05	By:	BAG
QC Batch:	1313801	Analytical Batch:	3L30035		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	**3.1**	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	**5.8**	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	**2.7**	1.0	0.20
156-60-5	trans-1,2-Dichloroethene	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE • Grand Rapids, MI 49512 • 616.975.4500 • Fax 616.942.7463 • www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**MW114A**	Sampled:	12/19/13 8:32		
Lab Sample ID:	**1312332-05**	Sampled By:	Patrick Egan		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/28/13 0:00	By:	BAG
Dilution Factor:	1	Analyzed:	12/28/13 5:05	By:	BAG
QC Batch:	1313801	Analytical Batch:	3L30035		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	**0.19J**	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	**43**	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	**2.3**	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*102*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*101*	*82-110*

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**Trip Blank**	Sampled:	12/19/13 0:00		
Lab Sample ID:	**1312332-07**	Sampled By:	TML		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/28/13 0:00	By:	BAG
Dilution Factor:	1	Analyzed:	12/28/13 2:52	By:	BAG
QC Batch:	1313801	Analytical Batch:	3L30035		

Volatile Organic Compounds by EPA Method 8260B

CAS Number	Analyte	Analytical Result	RL	MDL
67-64-1	Acetone	20U	20	1.7
71-43-2	Benzene	1.0U	1.0	0.32
74-97-5	Bromochloromethane	1.0U	1.0	0.30
75-27-4	Bromodichloromethane	1.0U	1.0	0.12
75-25-2	Bromoform	1.0U	1.0	0.24
74-83-9	Bromomethane	1.0U	1.0	0.23
75-15-0	Carbon Disulfide	5.0U	5.0	0.28
56-23-5	Carbon Tetrachloride	1.0U	1.0	0.23
108-90-7	Chlorobenzene	1.0U	1.0	0.21
75-00-3	Chloroethane	1.0U	1.0	0.22
67-66-3	Chloroform	1.0U	1.0	0.26
74-87-3	Chloromethane	1.0U	1.0	0.20
96-12-8	1,2-Dibromo-3-chloropropane	1.0U	1.0	0.64
124-48-1	Dibromochloromethane	1.0U	1.0	0.14
106-93-4	1,2-Dibromoethane	1.0U	1.0	0.23
95-50-1	1,2-Dichlorobenzene	1.0U	1.0	0.12
541-73-1	1,3-Dichlorobenzene	1.0U	1.0	0.17
106-46-7	1,4-Dichlorobenzene	1.0U	1.0	0.11
75-34-3	1,1-Dichloroethane	1.0U	1.0	0.28
107-06-2	1,2-Dichloroethane	1.0U	1.0	0.15
75-35-4	1,1-Dichloroethene	1.0U	1.0	0.21
156-59-2	cis-1,2-Dichloroethene	1.0U	1.0	0.20
156-60-5	trans-1,2-Dichloroethane	1.0U	1.0	0.22
78-87-5	1,2-Dichloropropane	1.0U	1.0	0.18
10061-01-5	cis-1,3-Dichloropropene	1.0U	1.0	0.28
10061-02-6	trans-1,3-Dichloropropene	1.0U	1.0	0.14
100-41-4	Ethylbenzene	1.0U	1.0	0.27
591-78-6	2-Hexanone	5.0U	5.0	1.5
75-09-2	Methylene Chloride	5.0U	5.0	0.24
78-93-3	2-Butanone (MEK)	5.0U	5.0	1.6
108-10-1	4-Methyl-2-pentanone (MIBK)	5.0U	5.0	1.4

Continued on next page

VALIDATED

Reviewed By

Date 1/16/14

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5560 Corporate Exchange Court SE • Grand Rapids, MI 49512 • 616.975.4500 • Fax 616.942.7463 • www.trimatrixlabs.com

TRIMATRIX LABORATORIES

ANALYTICAL REPORT

Client:	**Nationwide Environmental Services, Inc.**	Work Order:	**1312332**		
Project:	SE Rockford, Il Site	Description:	Laboratory Services		
Client Sample ID:	**Trip Blank**	Sampled:	12/19/13 0:00		
Lab Sample ID:	**1312332-07**	Sampled By:	TML		
Matrix:	Water	Received:	12/20/13 11:30		
Unit:	ug/L	Prepared:	12/28/13 0:00	By:	BAG
Dilution Factor:	1	Analyzed:	12/28/13 2:52	By:	BAG
QC Batch:	1313801	Analytical Batch:	3L30035		

Volatile Organic Compounds by EPA Method 8260B (Continued)

CAS Number	Analyte	Analytical Result	RL	MDL
100-42-5	Styrene	1.0U	1.0	0.12
79-34-5	1,1,2,2-Tetrachloroethane	1.0U	1.0	0.22
127-18-4	Tetrachloroethene	1.0U	1.0	0.16
108-88-3	Toluene	1.0U	1.0	0.28
71-55-6	1,1,1-Trichloroethane	1.0U	1.0	0.30
79-00-5	1,1,2-Trichloroethane	1.0U	1.0	0.22
79-01-6	Trichloroethene	1.0U	1.0	0.24
75-01-4	Vinyl Chloride	1.0U	1.0	0.14
1330-20-7	Xylene (Total)	3.0U	3.0	0.44

Surrogates:	*% Recovery*	*Control Limits*
Dibromofluoromethane	*99*	*85-118*
1,2-Dichloroethane-d4	*102*	*87-122*
Toluene-d8	*100*	*85-113*
4-Bromofluorobenzene	*101*	*82-110*

VALIDATED

Reviewed By: [signature]

Date: 1/16/14

This report shall not be reproduced, except in full, without written authorization of Trimatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.

5561 Corporate Exchange Court SE ♦ Grand Rapids, MI 49512 ♦ 616.975.4500 ♦ Fax 616.942.7463 ♦ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

5560 Corporate Exchange Court SE
Grand Rapids, MI 49512
Phone (616) 975-4500 Fax (616) 942-7463
www.trimatrixlabs.com

Chain of Custody Record

COC No. 145556

Pg. 1 of 1

For Lab Use Only
Cart
VOA Rack/Tray: 307 Green
Receipt Log No.: 21-5
Project Chemist
Work Order No.: 1312332

Client Name: Nationwide Env. Svcs
Address: 14818 N 6th Ave Ste 5A
City, State Zip: Golden CO 8040
Phone/Fax
Email: 3032322134

Project Name: SE Rock
Client Project No. / P.O. No.
Invoice To: ☐ Client ☐ Other (comments)
Contact/Report To: B Catanuse

Analyses Requested: VOC 8260 Full List

PRESERVATIVES
A NONE pH~7
B HNO_3 pH<2
C H_2SO_4 pH<2
D 1+1 HCl pH<2
E NaOH pH>12
F ZnAc/NaOH pH>9
G MeOH
H Other (note below)

Container Type (corresponds to Container Packing List): 1

Schedule	Matrix Code	Sample Number	Field Sample ID	Cooler ID	Sample Date	Sample Time	COMP	GRAB	Matrix	Number of Containers Submitted	Total	Sample Comments
		01	MW102C	N/A	12/18/13	1533		X	GW	3	3	
		02	FD2	See Red	12/18	1537		X	GW	3	3	
		03	MW102A		12/18	1608		X	GW	3	3	
		04	MW102B		12/18	1646		X	GW	3	3	
		05	MW114A		12/19	832		X	GW	3	3	
		06	MW16		12/19	912		X	GW	3	3	
		07	Trip Blank		—	—				1	1	
		8										
		9										
		10										

Sampled By (print): Patrick Egan
Sampler's Signature
Company: AEE

How Shipped? Hand ___ Carrier Fedex
Tracking No.

Comments: all Samples kept in Secure location at 4°C

1. Relinquished By	Date	Time	2. Relinquished By	Date	Time	3. Relinquished By	Date	Time
	12/18/13	1930						
1. Received By	Date	Time	2. Received By	Date	Time	3. Received For Lab By	Date	Time
							12/20/13	1130

WHITE COPY - REPORT YELLOW COPY - LABORATORY PINK COPY - FIELD

This report shall not be reproduced, except in full, without written authorization of TriMatrix Laboratories, Inc.
Individual sample results relate only to the sample tested.
5560 Corporate Exchange Court SE ◆ Grand Rapids, MI 49512 ◆ 616.975.4500 ◆ Fax 616.942.7463 ◆ www.trimatrixlabs.com

TRIMATRIX LABORATORIES

Appendix B

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	60	Lab Analysis	VOC per Target Compound List	Well ID:	MW16
Casing Stickup (Ft.)	2.36	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	18-Dec-13
Total Well Depth (Ft.) TOC	62.36	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	0	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	62.36	Field Analysis Equip	YSI 556 MSP	Sampling Period	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp ºC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
8:40							0	0	Static
8:48	6.29	5.45	9.27	99.3	1.36		410		Start Time
8:52	6.39	5.53	9.65	89.9	1.29		410		redish brown
8:56	6.68	5.78	9.87	69.6	1.25		410		clear
8:59	6.71	6.04	10.2	64.7	1.21		410		clear
9:02	6.75	6.26	10.2	59.6	1.19		410		clear
9:05	6.77	6.44	10.4	56.5	1.18		410		clear
9:09	6.80	6.54	10.5	51.8	1.17		410		clear
9:12	6.83	6.71	10.6	51.5	1.17	18	410		sample
MINUTES							TOTAL LITERS		
24.0	0.06	4.02%	2.35%	-5.00	-0.94%		9.84		

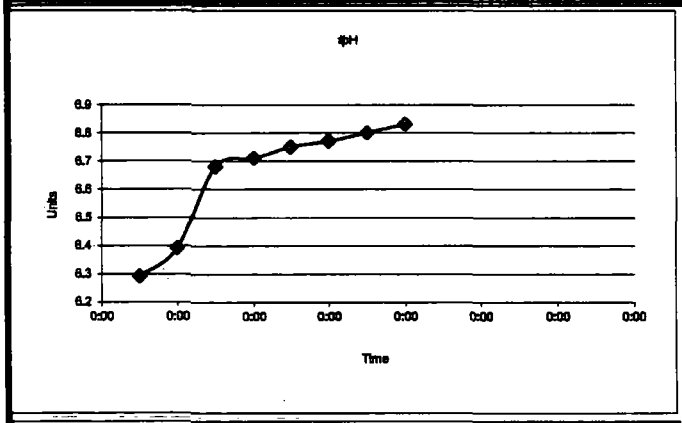

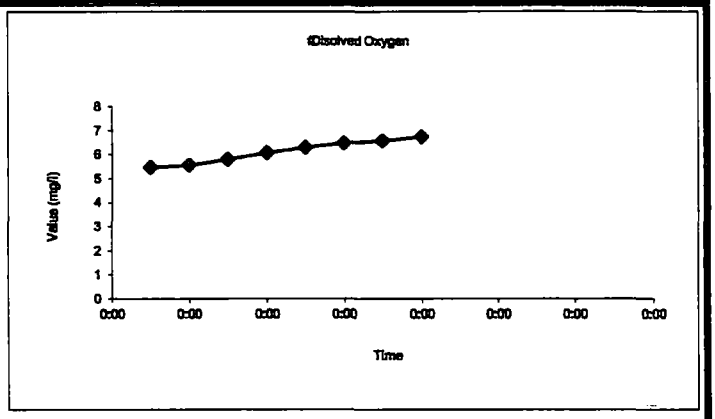

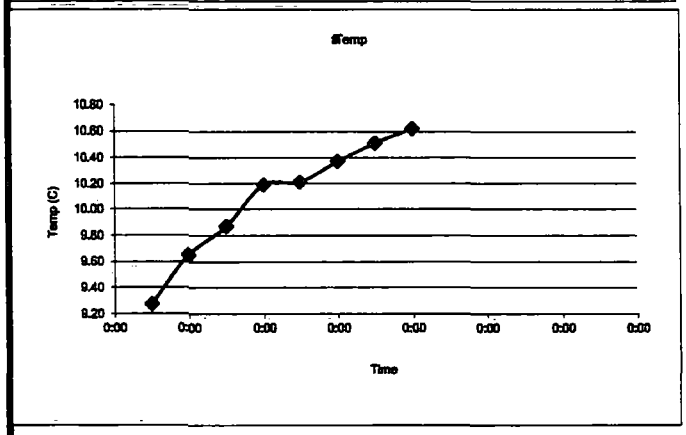

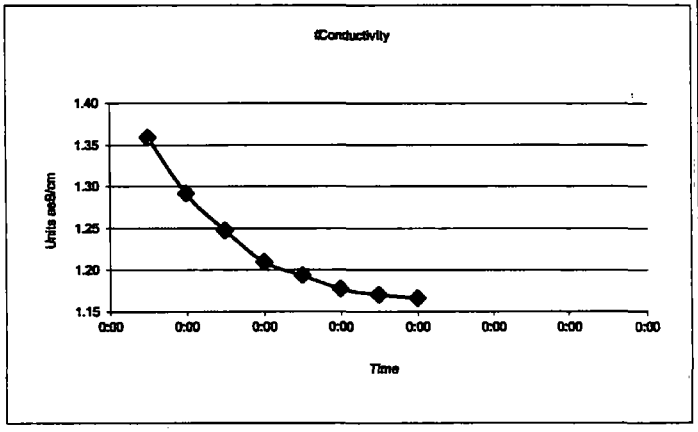

Remarks: (well condition, maintenance, etc...)

**** well damaged - stickup broken off - level not available

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	52	**Lab Analysis**	VOC per Target Compound List	**Well ID:**	**MW 47**
Casing Stickup (Ft.)	-0.63	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	**Sample Date**	1-Dec-13
Total Well Depth (Ft.) TOC	54.49	**Purge Equip**	QED Air Diaphragm	**Sample Type**	Grab (Groundwater)	**Sampled by:**	Patrick Egan
Static Water Level (Ft.) TOC	42.18	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	**Site Visitors:**	None
Water Thickness (Ft.)	12.31	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
12:35							0	42.18	Start Time
12:45	7.29	3.23	12.2	94.3	0.756		400	42.20	brown
12:48	7.22	3.22	12.1	86.1	0.756		400		brown
12:51	7.31	3.25	12.0	79.8	0.757		400		clear
12:55	7.26	3.24	12.1	76.7	0.755		400	42.20	clear
12:58	7.29	3.22	12.2	65.5	0.755		400		clear
13:02	7.23	3.20	12.2	66.3	0.755	48	400		clear
MINUTES							**TOTAL LITERS**		
17.0	-0.03	-1.25%	0.41%	-10.40	0.00%		**6.80**		

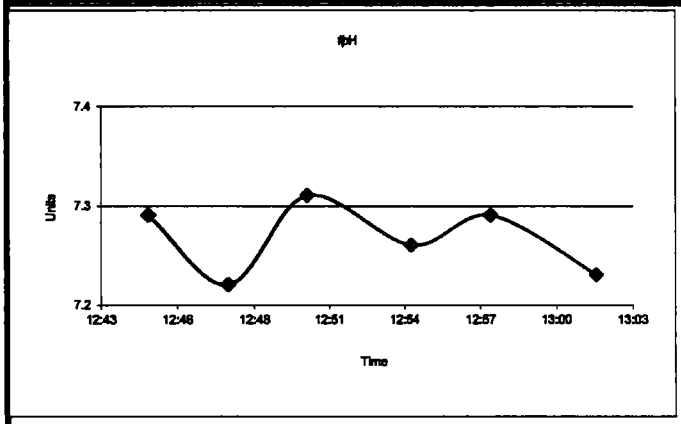

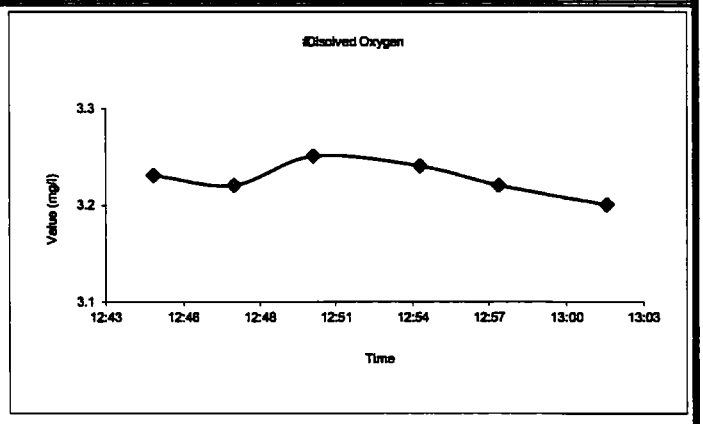

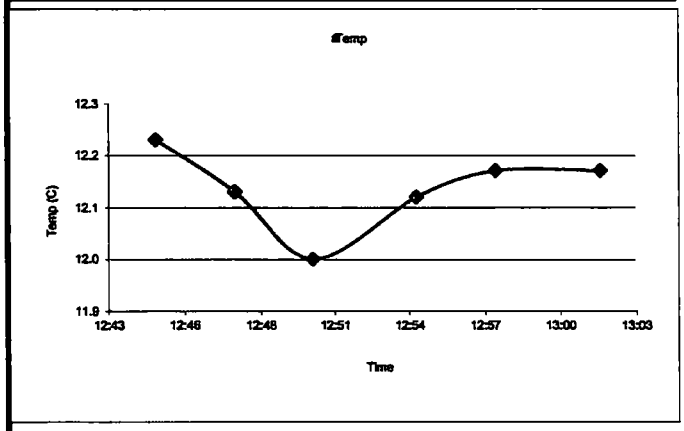

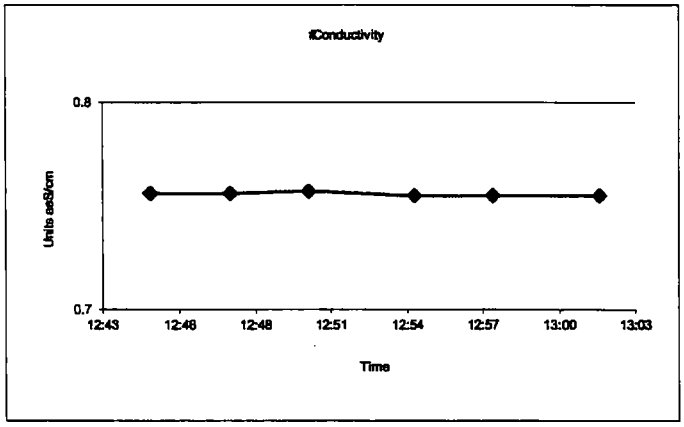

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	88	Lab Analysis	VOC per Target Compound List	Well ID:	MW 101A
Casing Stickup (Ft.)	1.45	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	30-Nov-13
Total Well Depth (Ft.) TOC	90.35	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	44.47	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	45.88	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
12:32							0	44.47	Static
12:38	6.61	0.650	10.8	140	0.970		460		Start Time
12:41	6.63	0.630	10.8	138	0.970		460	44.51	clear
12:44	6.65	0.630	10.8	135	0.970		460		clear
12:47	6.67	0.620	10.8	133	0.970		460		clear
12:50	6.69	0.600	10.9	127	0.969		460	44.51	clear
12:54	6.70	0.600	10.9	125	0.968		460		clear
12:57	6.71	0.570	10.9	123	0.968	55	460		clear
MINUTES							TOTAL LITERS		
19.0	0.02	-5.26%	0.00%	-3.50	-0.10%		8.74		

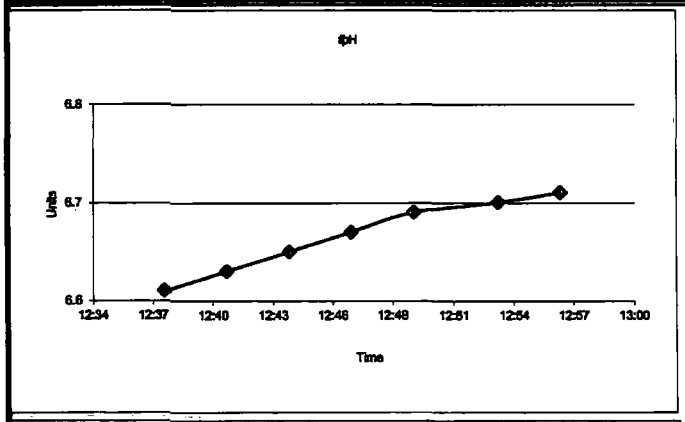

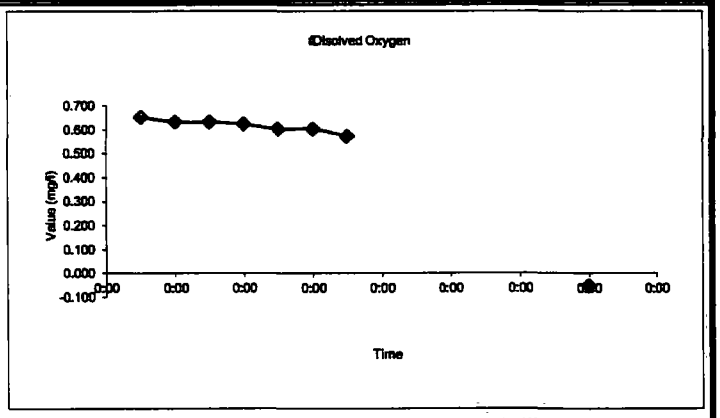

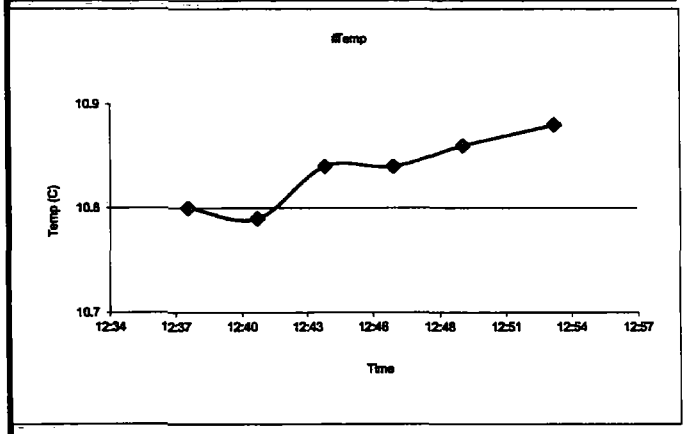

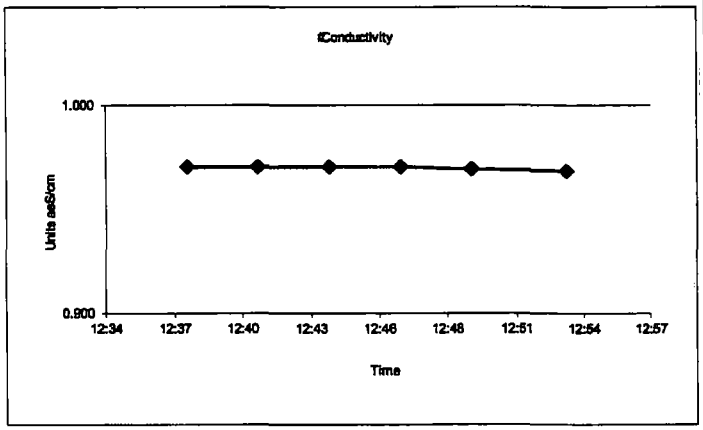

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (Inch)	2	Pump Inlet (Ft.) TOC	151	Lab Analysis	VOC per Target Compound List	Well ID:	MW 101B
Casing Stickup (Ft.)	2.16	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	30-Nov-13
Total Well Depth (Ft.) TOC	153.74	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	45.28	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	108.46	Field Analysis Equip	YSI 556 MSP	Sampling Period	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
12:00							0	45.28	Static
12:07	6.30	1.65	11.0	240	0.898		410		clear
12:10	6.34	1.57	11.0	234	0.900		410		clear
12:13	6.37	1.48	10.9	230	0.900		410	45.29	clear
12:17	6.40	1.42	10.9	226	0.902		410		clear
12:20	6.44	1.39	10.9	222	0.904		410	45.29	clear
12:23	6.47	1.37	10.9	218	0.903	27	410		clear
MINUTES							TOTAL LITERS		
16.0	0.07	-3.65%	-0.09%	-8.00	0.11%		6.56		

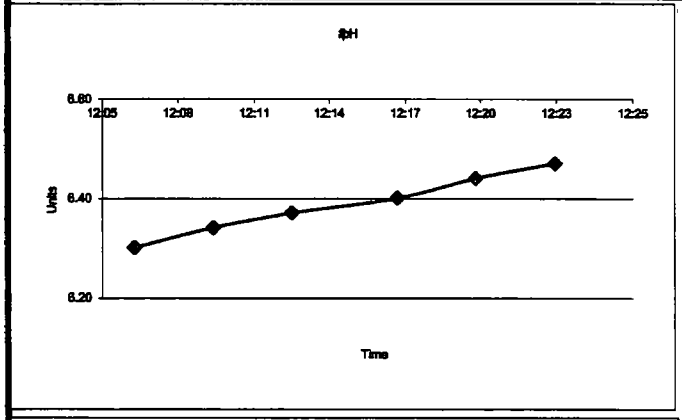

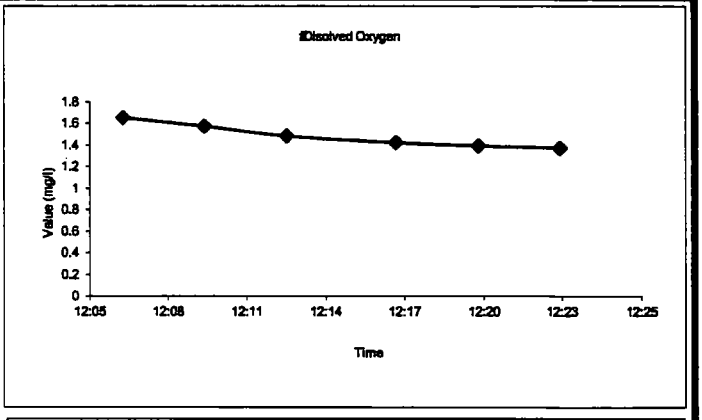

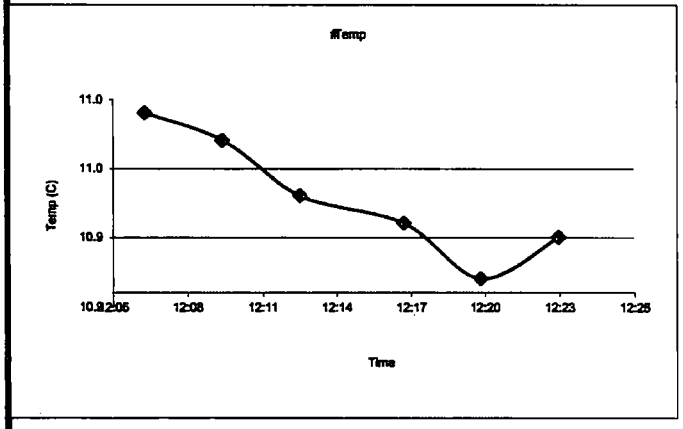

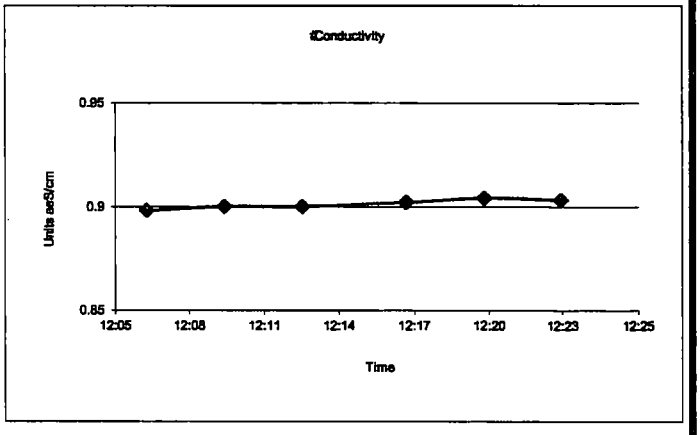

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft) TOC	172	Lab Analysis	VOC per Target Compound List	Well ID:	MW 101C
Casing Stickup (Ft)	1.12	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	30-Nov-13
Total Well Depth (Ft) TOC	174.89	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft) TOC	45.15	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft)	129.74	Field Analysis Equip	YSI 556 MSP	Sampling Period	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft) TOC	Annotation
13:33							0	45.15	Static
13:38	6.95	1.87	10.8	62.9	0.903		400		Start Time
13:41	6.95	1.80	10.9	61.7	0.903		400	45.15	clear
13:44	6.94	1.77	10.8	62.5	0.901		400		clear
13:48	6.96	1.79	10.7	62.1	0.904		400		clear
13:51	6.95	1.76	10.8	63.3	0.901		400	45.15	clear
13:54	6.95	1.75	10.8	62.7	0.901	40	400		clear
MINUTES							TOTAL LITERS		
16.0	-0.01	-2.29%	1.02%	0.60	-0.33%		6.40		

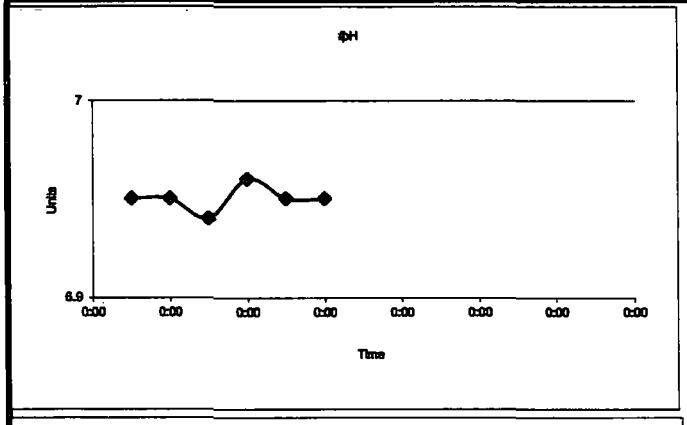

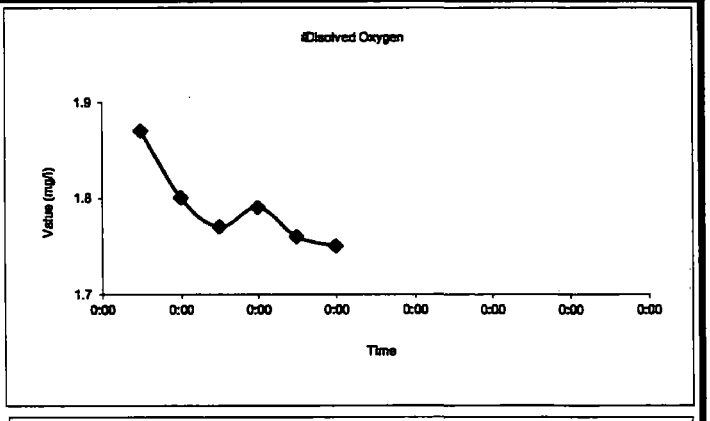

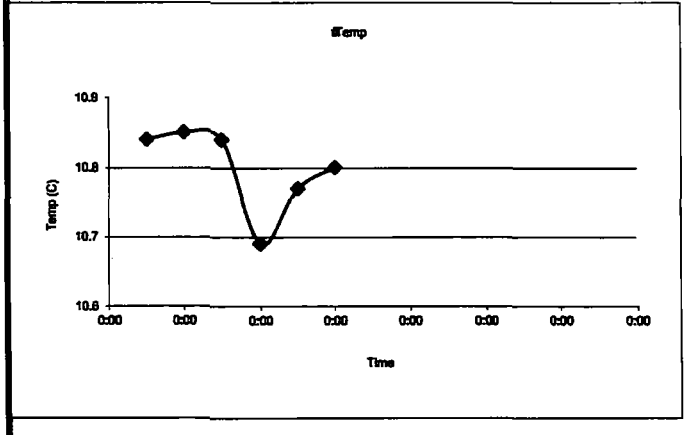

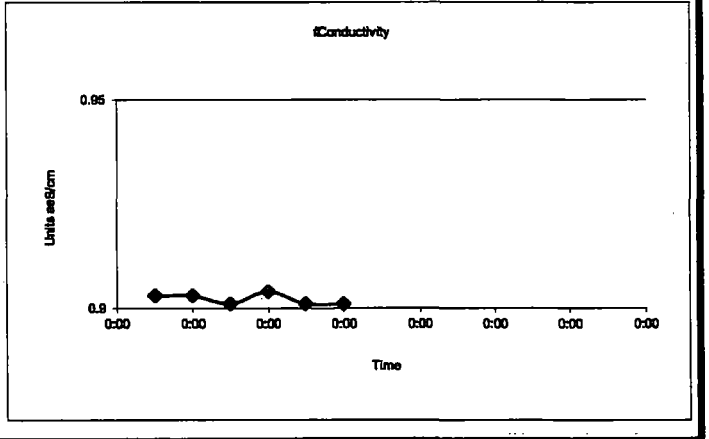

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	172	Lab Analysis	VOC per Target Compound List	Well ID:	MW 101D
Casing Stickup (Ft.)	0.89	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	30-Nov-13
Total Well Depth (Ft.) TOC	212.72	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	46.82	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	165.9	Field Analysis Equip	YSI 556 MSP	Sampling Period	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
13:00							0	46.82	Static
13:02	6.62	1.84	10.8	-24.1	1.027		490		Start Time
13:05	6.64	1.90	10.9	-22.1	1.024		490		cloudy
13:09	6.66	1.93	10.9	-20.7	1.024		490	46.82	clear
13:14	6.67	1.97	10.9	-19.1	1.021		490		clear
13:19	6.68	2.04	10.9	-16.6	1.022		490	46.82	clear
13:22	6.70	2.04	10.8	-15.3	1.022	18	490		clear
MINUTES							TOTAL LITERS		
20.0	0.03	3.43%	-1.02%	3.80	0.10%		9.80		

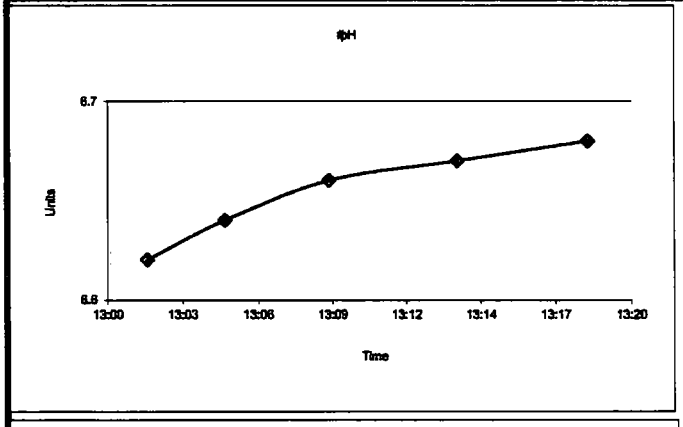

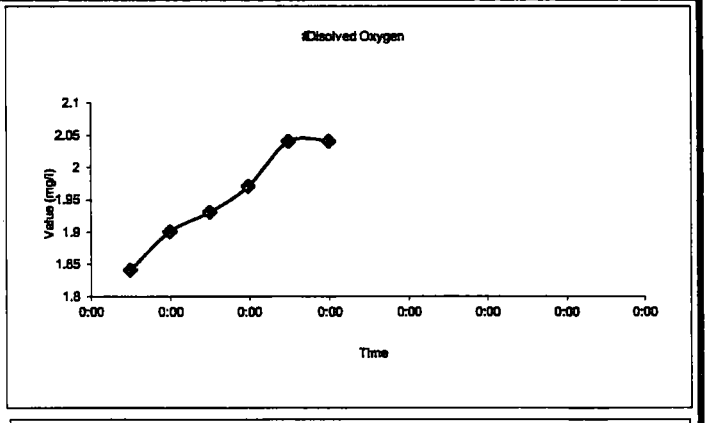

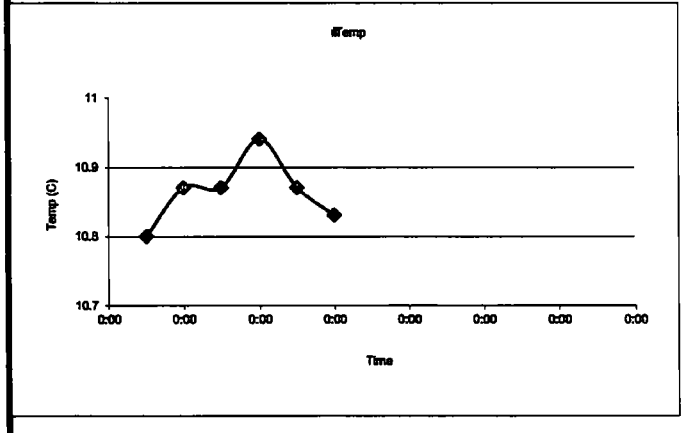

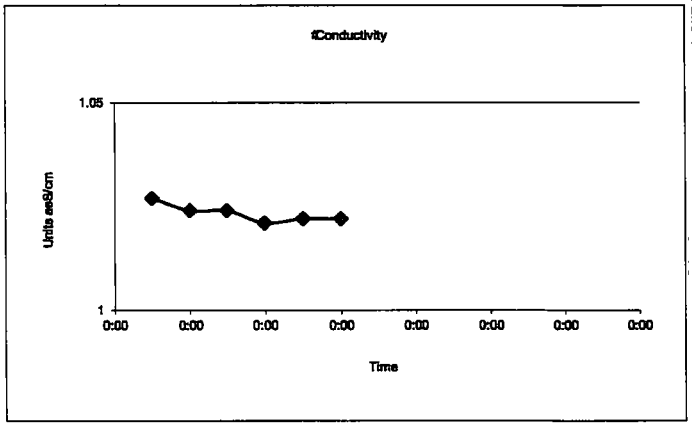

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	35	Lab Analysis	VOC per Target Compound List	Well ID:	MW 102A
Casing Stickup (Ft.)	-0.47	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	18-Dec-13
Total Well Depth (Ft.) TOC	37.69	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	13.18	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	24.51	Field Analysis Equip	YSI 556 MSP	Sampling Period	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
15:45							0	13.18	Static
15:49	6.41	9.22	5.13	54.0	3.86		420		Start Time
15:52	6.49	3.76	6.35	44.0	2.07		420	13.22	brown cloudy
15:55	6.94	2.97	6.95	16.7	2.13		420		brown cloudy
16:00	7.06	2.65	7.23	-20.5	2.12		420	13.22	cloudy
16:04	7.07	2.57	7.34	-23.6	2.09		420		cloudy
16:08	7.07	2.56	7.15	-28.8	2.07	61	420		clear
MINUTES							TOTAL LITERS		
19.0	0.01	-3.52%	-1.12%	-8.30	-2.32%		7.98		

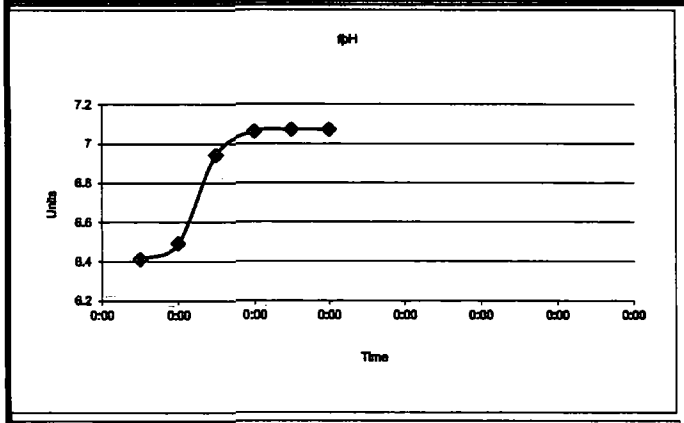

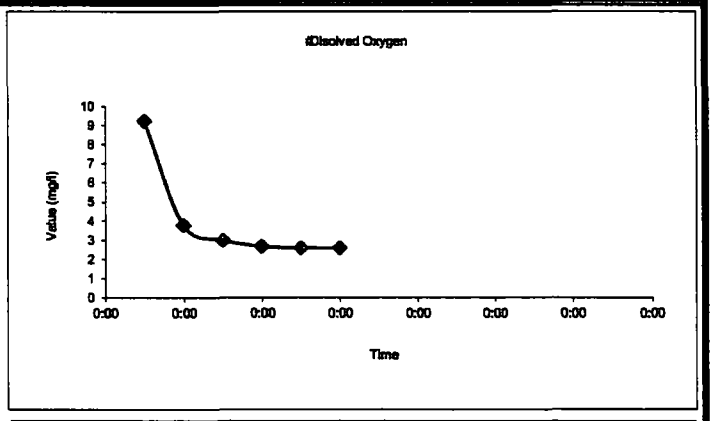

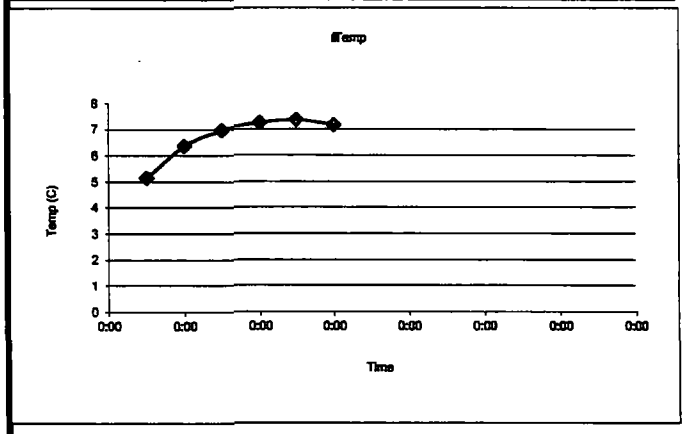

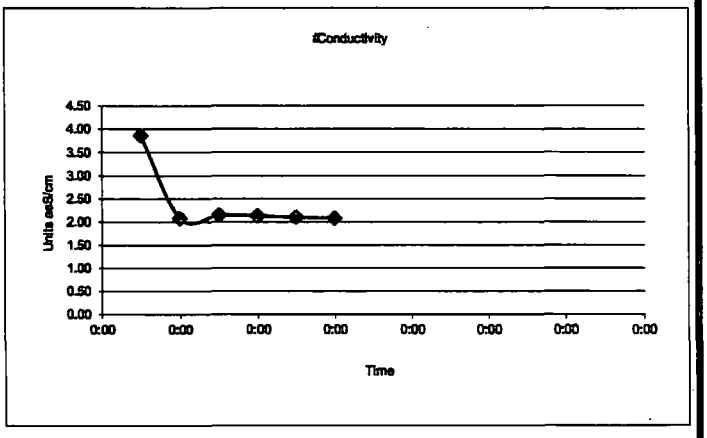

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	98	**Lab Analysis**	VOC per Target Compound List	Well ID:	**MW 102B**
Casing Stickup (Ft.)	-0.68	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	18-Dec-13
Total Well Depth (Ft.) TOC	100.5	**Purge Equip**	QED Air Diaphragm	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	35.17	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	65.33	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Fall 2013		

FIELD PURGE MONITORING

Time	pH	DO	Temp	ORP	SpCond	TURB	Flow Rate	Well Level	Annotation
HHMMSS	Units	mg/l	øC	mV	mS/cm	FTU	mL/min	(Ft.) TOC	
16:20							0	35.17	Static
16:31	6.61	2.57	7.12	-23.5	3.06		450		redish brown color
16:35	6.73	2.63	7.23	-31.1	3.00		450	35.19	redish brown color
16:40	6.75	2.75	7.26	-31.0	2.99		450		redish brown color
16:43	6.78	2.78	7.19	-31.6	2.96		450	35.21	clear
16:46	6.78	2.84	7.19	-28.2	3.00	38	450		clear
MINUTES							**TOTAL LITERS**		
15.0	0.03	3.17%	-0.97%	2.80	0.47%		**6.75**		

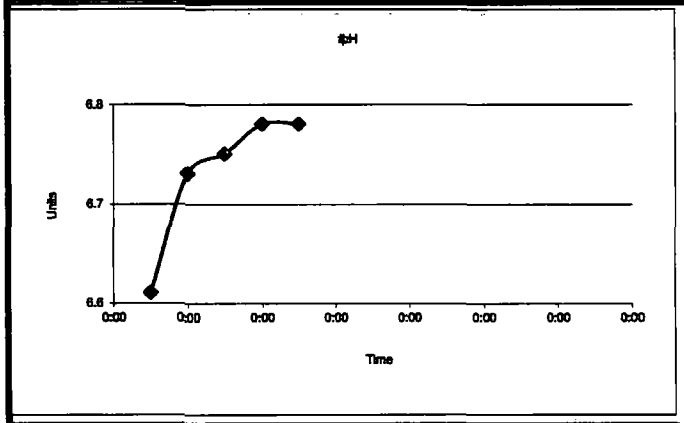

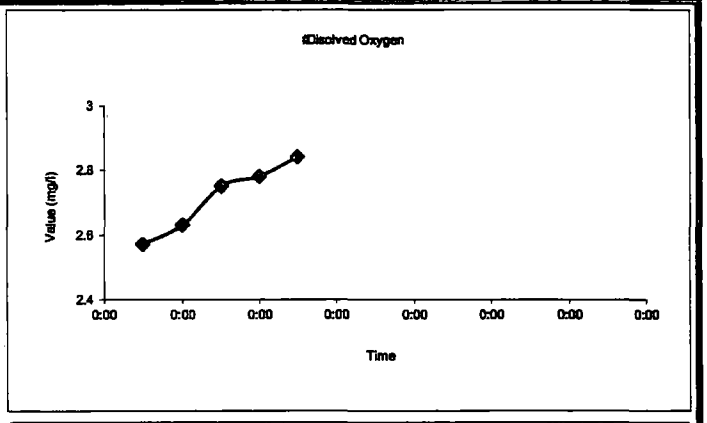

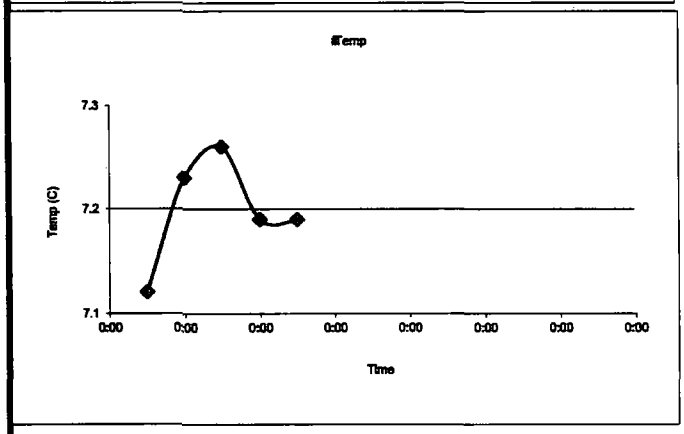

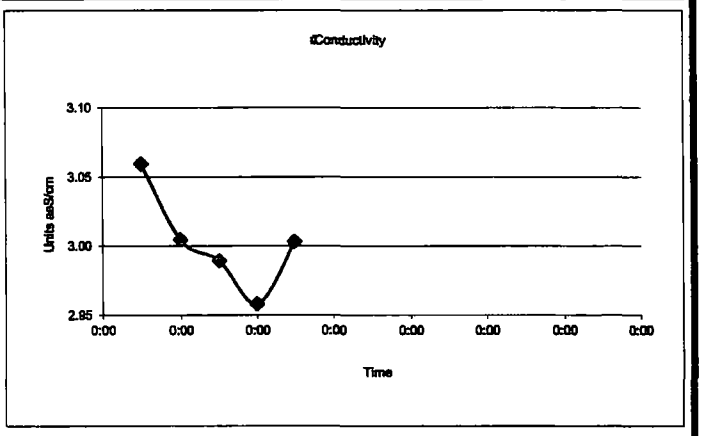

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft) TOC	185	Lab Analysis	VOC per Target Compound List	Well ID:	MW 102C
Casing Stickup (Ft)	-0.43	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	18-Dec-13
Total Well Depth (Ft) TOC	187.42	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft) TOC	38.08	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft)	149.34	Field Analysis Equip	YSI 556 MSP	Sampling Period	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft) TOC	Annotation
15:14							0	38.08	Static
15:17	6.24	3.59	10.2	-100	1.44		450		Start Time
15:20	6.33	3.57	10.1	-110	1.42		450	38.10	black silty
15:23	6.38	3.66	10.2	-115	1.35		450		black silty
15:27	6.41	3.49	10.2	-116	1.28		450	38.10	black silty
15:30	6.43	3.46	10.2	-117	1.26		450		black silty
15:33	6.44	3.45	10.1	-120	1.26	92	450		black silty
MINUTES							TOTAL LITERS		
16.0	0.03	-1.16%	-0.40%	-3.70	-1.43%		7.20		

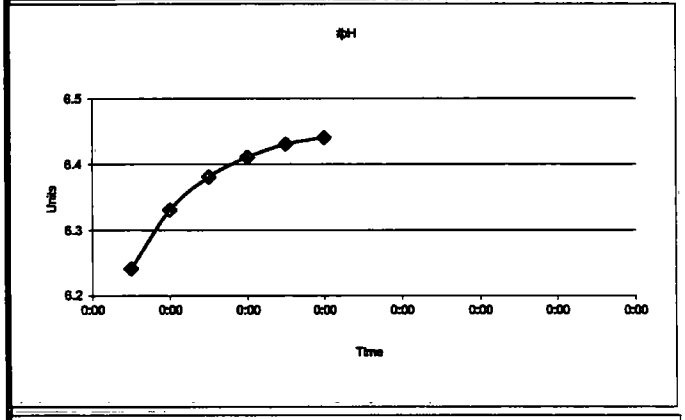

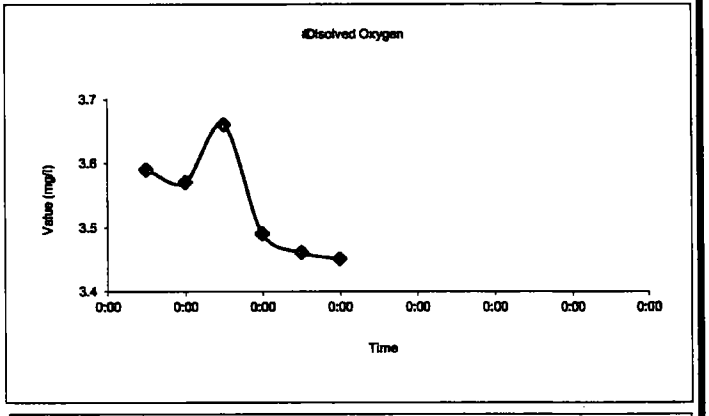

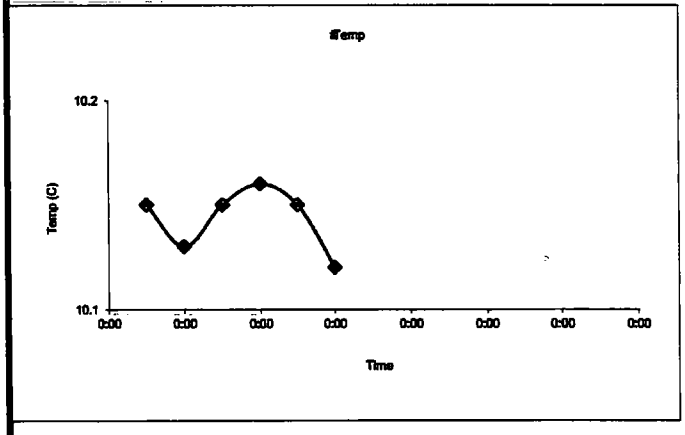

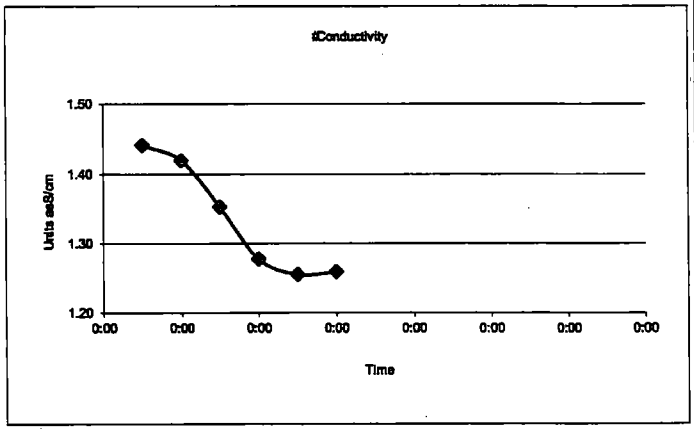

Remarks: (well condition, maintenance, etc...)

Field duplicate (FD-2) collected.

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	102	Lab Analysis	VOC per Target Compound List	Well ID:	MW 113A
Casing Stickup (Ft.)	-1.06	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	30-Nov-13
Total Well Depth (Ft.) TOC	104.5	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	57.09	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	47.41	Field Analysis Equip	YSI 556 MSP	Sampling Period	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
14:35							0	57.09	Static
14:50	7.11	0.990	11.1	10.3	1.00		460		Start Time
14:53	7.12	0.950	11.1	9.90	1.00		460	57.11	brown & cloudy
14:57	7.12	0.930	11.1	9.50	1.00		460		cloudy
15:01	7.12	0.920	11.1	9.30	1.00		460		cloudy
15:05	7.12	0.910	11.1	8.80	1.00		460	57.11	cloudy
15:08	7.12	0.910	11.1	9.40	1.00	94	460		clear
MINUTES							TOTAL LITERS		
18.0	0.00	-1.10%	-0.18%	0.10	0.00%		8.28		

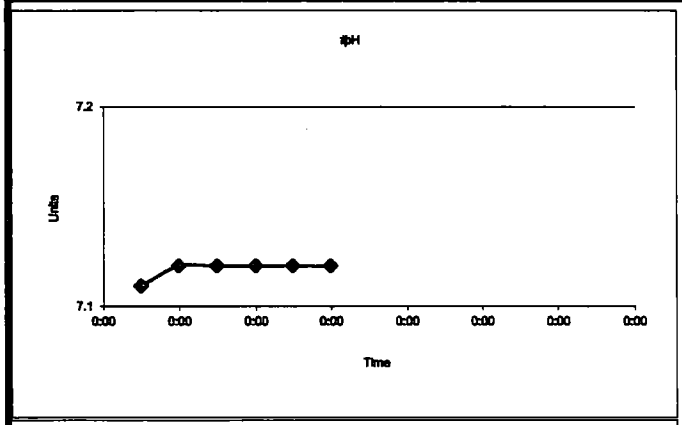

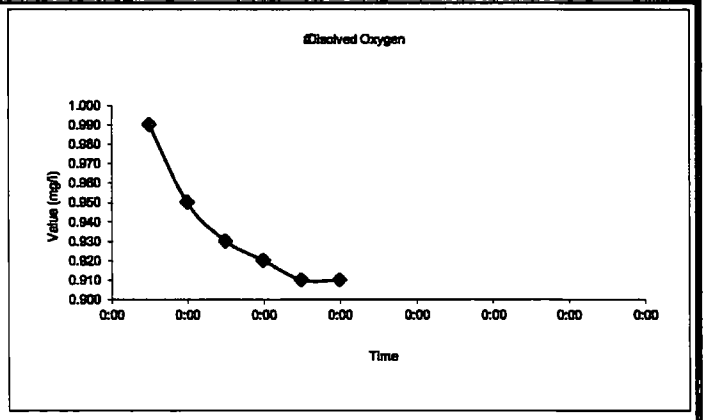

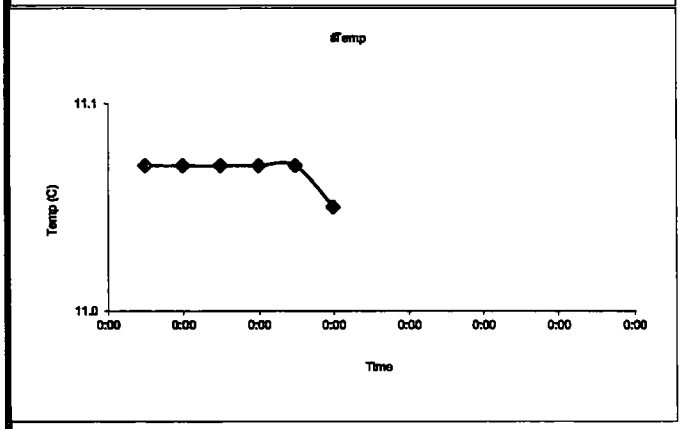

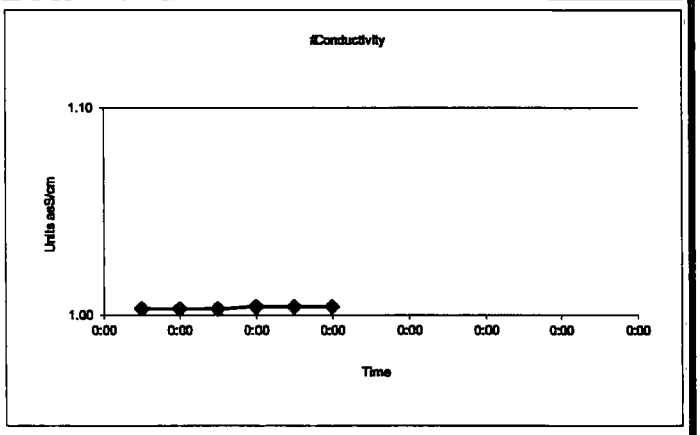

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	153	Lab Analysis	VOC per Target Compound List	Well ID:	MW 113B
Casing Stickup (Ft.)	-0.43	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	30-Nov-13
Total Well Depth (Ft.) TOC	155.26	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	57.35	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	97.91	Field Analysis Equip	YSI 556 MSP	Sampling Period	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
14:03							0	57.35	Static
14:11	7.25	0.360	11.1	-126	0.816		450	57.40	Start Time
14:15	7.25	0.350	11.1	-127	0.815		450		cloudy white
14:18	7.25	0.360	11.1	-127	0.814		450		cloudy
14:21	7.25	0.330	11.1	-126	0.814		450	57.40	clear
14:24	7.25	0.330	11.1	-124	0.814		450		clear
14:27	7.25	0.360	11.1	-125	0.814		450		clear
14:30	7.25	0.360	11.1	-125	0.814	84	450		clear
MINUTES							TOTAL LITERS		
19.0	0.00	8.33%	-0.18%	-1.00	0.00%		8.55		

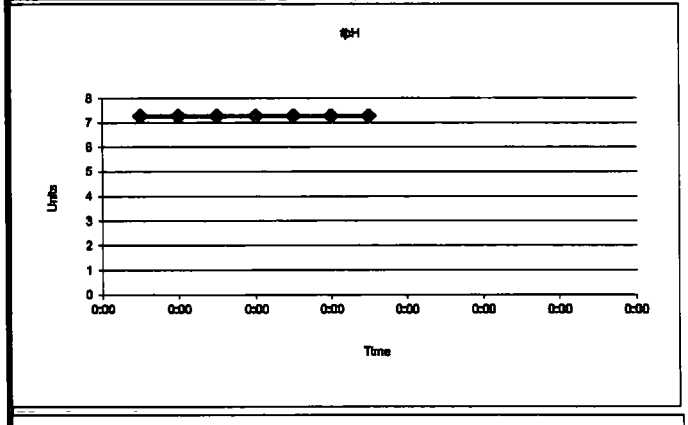

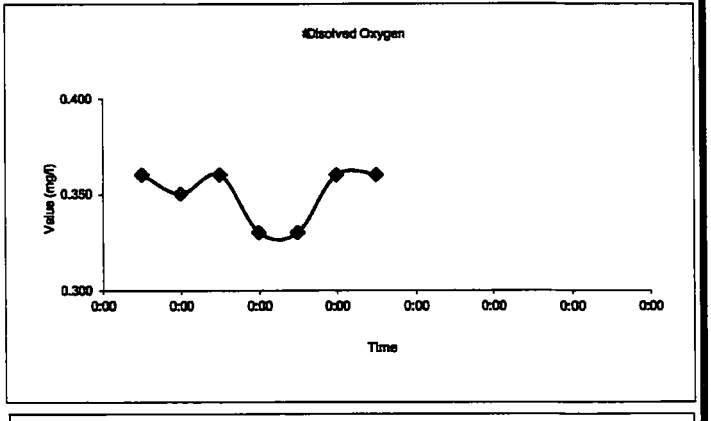

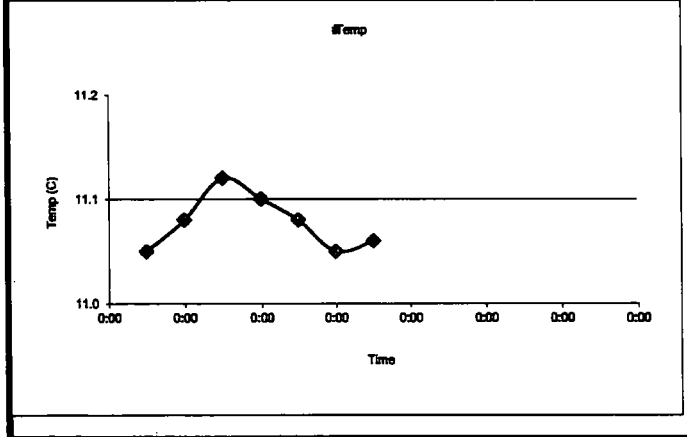

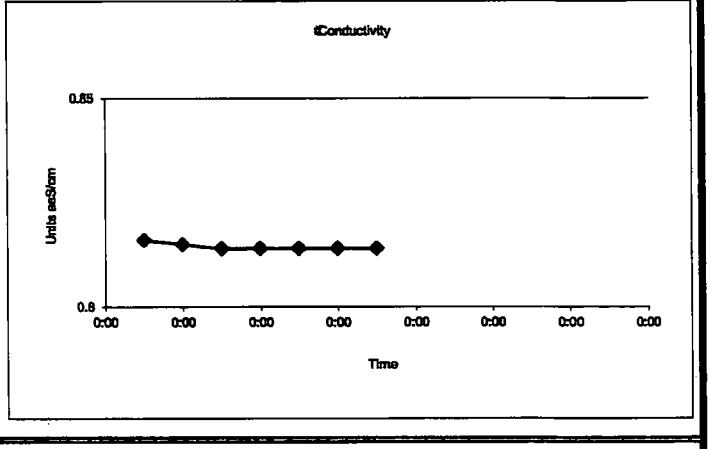

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	95	Lab Analysis	VOC per Target Compound List	Well ID:	MW 114A
Casing Stickup (Ft.)	2.45	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	19-Dec-13
Total Well Depth (Ft.) TOC	97.48	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	29.13	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	68.35	Field Analysis Equip	YSI 556 MSP	Sampling Period	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp ºC	ORP mV	SpCond mS/cm	TURB NTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
8:04							0	29.13	Static
8:13	6.79	5.98	11.7	53.4	1.27		400		Start Time
8:16	6.81	5.78	11.7	54.4	1.26		400		clear
8:20	6.83	5.86	11.7	54.1	1.25		400	29.28	clear
8:23	6.84	5.42	11.7	56.3	1.24		400		clear
8:26	6.85	5.28	11.7	57.8	1.24		400	29.28	clear
8:29	6.87	5.27	11.7	58.6	1.23		400		clear
8:32	6.91	5.31	11.6	59.3	1.24	30	400		clear
MINUTES							TOTAL LITERS		
19.0	0.06	0.56%	-0.09%	1.50	0.08%		7.60		

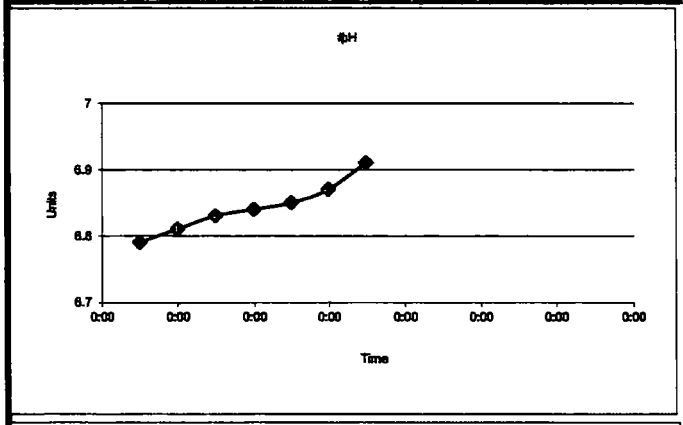

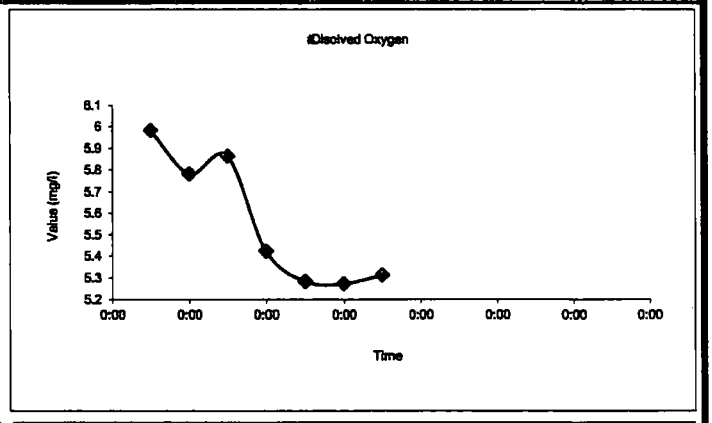

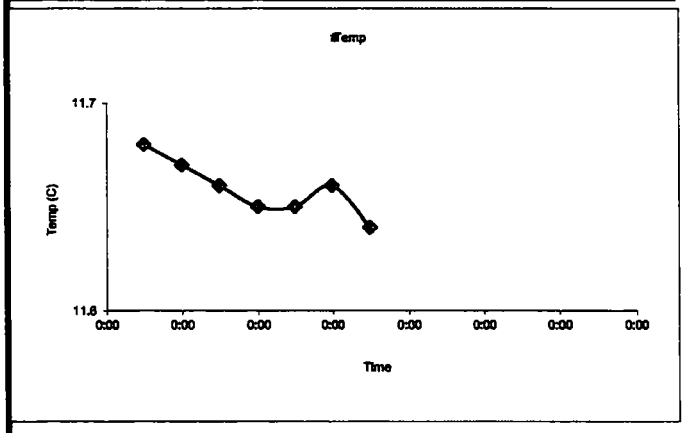

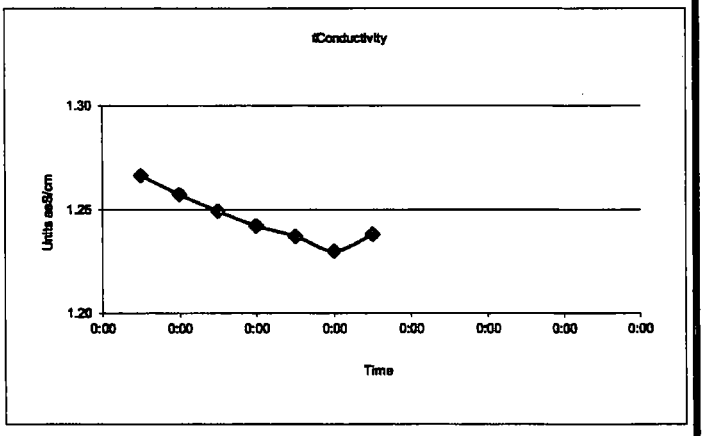

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (Inch)	2	**Pump Inlet** (Ft.) TOC	220	**Lab Analysis**	VOC per Target Compound List	Well ID:	**MW 114B**
Casing Stickup (Ft.)		**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	
Total Well Depth (Ft.) TOC	222.58	**Purge Equip**	QED Air Diaphragm	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC		**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	222.58	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
MINUTES						**TOTAL LITERS**			
0.0	0.00	0.00%	0.00%	0.00	0.00%		**0.00**		

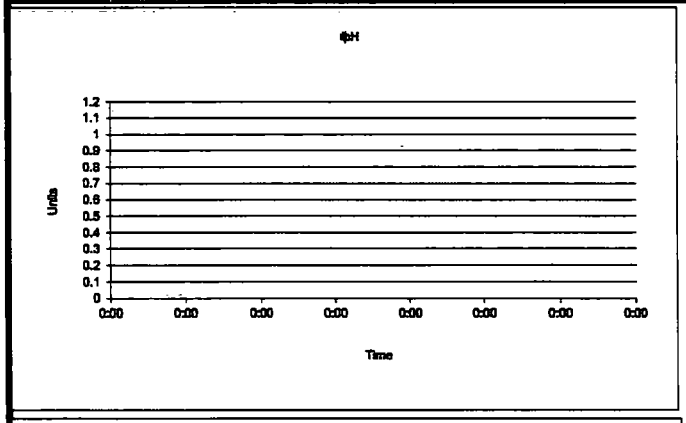

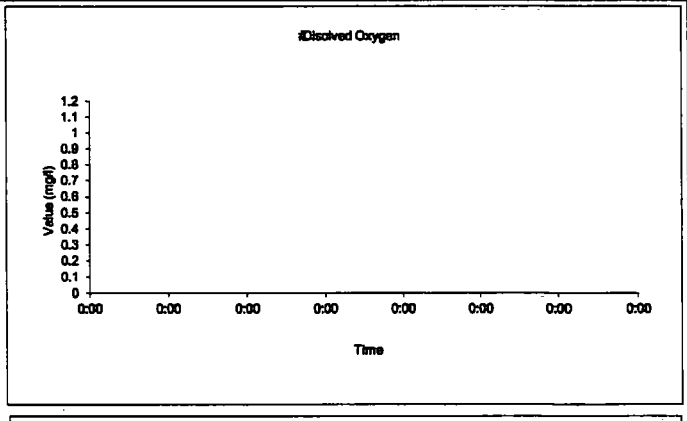

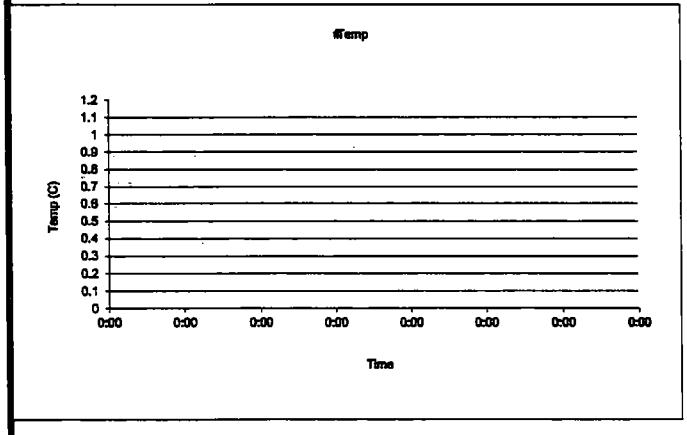

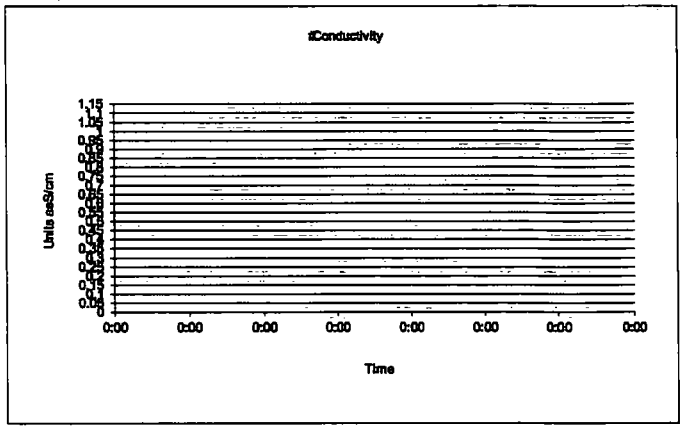

Remarks: (well condition, maintenance, etc...)

Well Damaged - not sampled this period

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (Inch)	2	Pump Inlet (Ft.) TOC	87	Lab Analysis	VOC per Target Compound List	Well ID:	MW 117B
Casing Stickup (Ft.)	-0.45	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	29-Nov-13
Total Well Depth (Ft.) TOC	89.5	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	3.45	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	86.05	Field Analysis Equip	YSI 556 MPS	Sampling Period	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
9:46							0	3.45	Static
9:55	7.06	1.71	11.9	172	0.895		470		Start Time
9:58	7.07	1.68	11.9	168	0.895		470		clear
10:02	7.07	1.67	11.9	165	0.894		470	3.45	clear
10:05	7.08	1.67	11.9	162	0.894		470		clear
10:08	7.03	1.67	11.8	162	0.894		470	3.45	clear
10:11	7.03	1.67	11.8	165	0.894	26	470		clear
MINUTES							TOTAL LITERS		
16.0	-0.05	0.00%	-0.25%	2.60	0.00%		7.52		

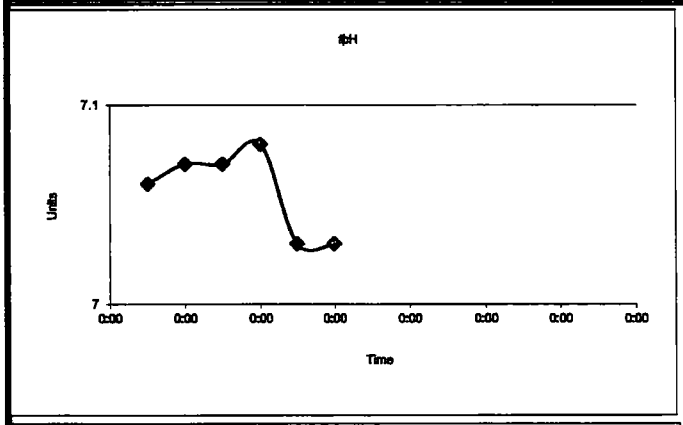

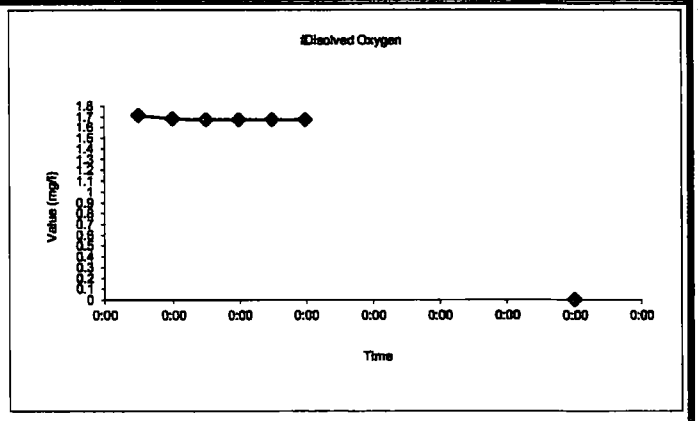

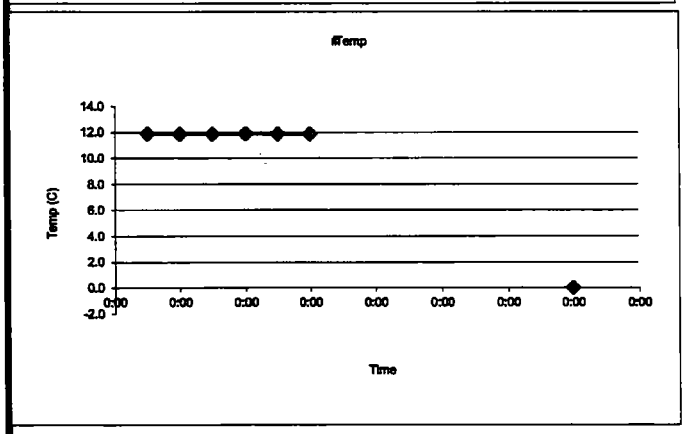

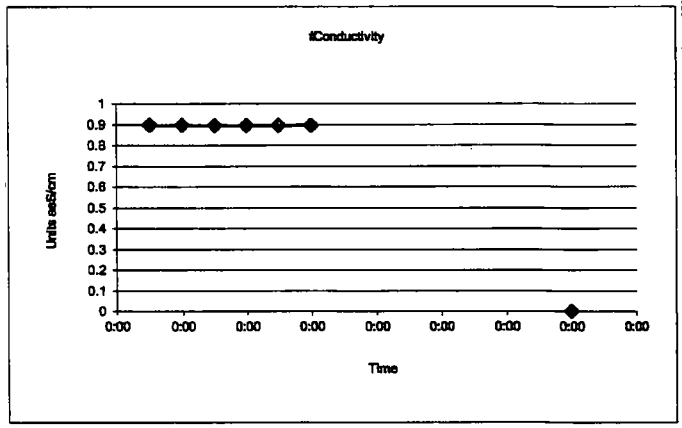

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	156	Lab Analysis	VOC per Target Compound List	Well ID:	MW 117C
Casing Stickup (Ft.)	-0.63	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	29-Nov-13
Total Well Depth (Ft.) TOC	158.31	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	3.51	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	154.8	Field Analysis Equip	YSI556 MPS	Sampling Period	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
10:22							0	3.51	Static
10:34	7.03	0.500	11.8	138	1.09		450		Start Time
10:37	7.02	0.470	11.8	129	1.09		450		clear
10:41	7.02	0.480	11.8	122	1.09		450	3.51	clear
10:44	7.01	0.520	11.8	113	1.09		450		clear
10:47	7.02	0.510	11.8	112	1.09		450	3.51	clear
10:50	7.01	0.520	11.8	112	1.08	12	450		clear
MINUTES							TOTAL LITERS		
16.0	0.00	0.00%	0.17%	-1.00	-0.28%		7.20		

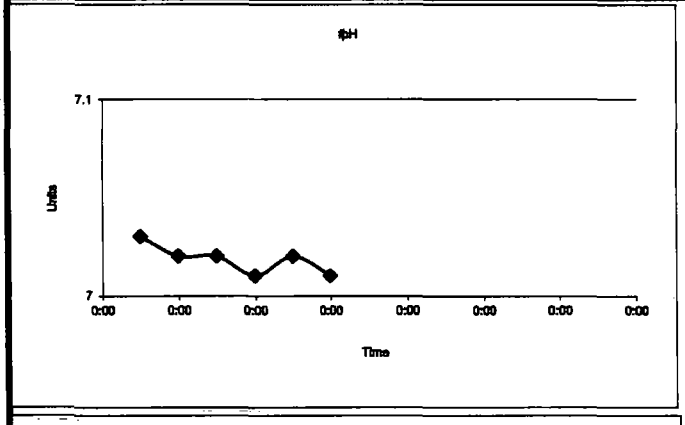

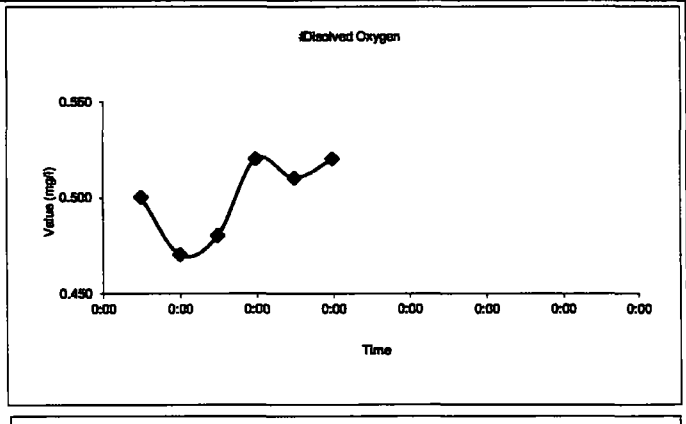

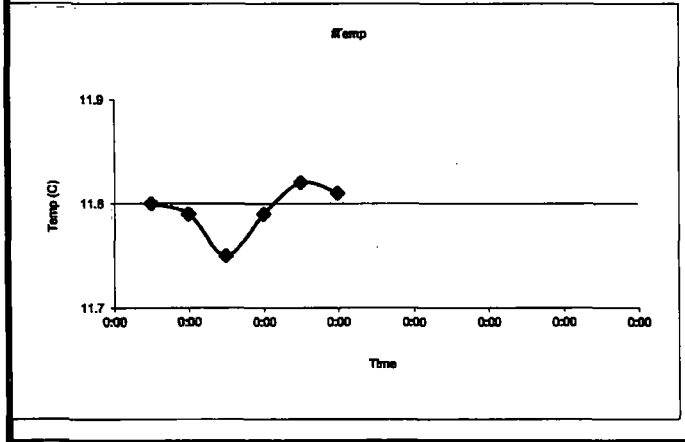

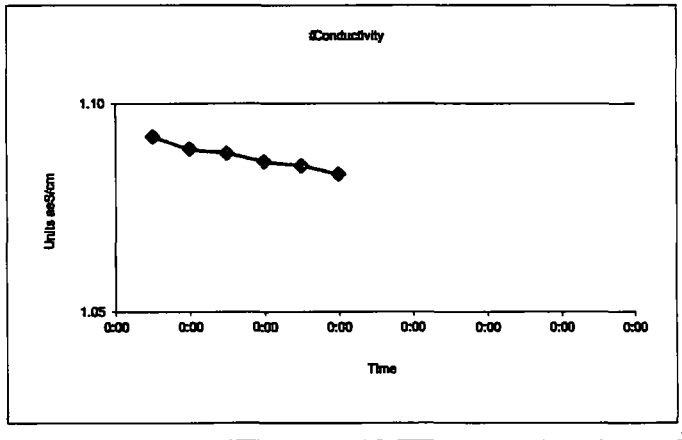

Remarks: (well condition, maintenance, etc...)

1 bolt hole stripped

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	198	**Lab Analysis**	VOC per Target Compound List	Well ID:	**MW 117D**
Casing Stickup (Ft.)	-0.3	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	29-Nov-13
Total Well Depth (Ft.) TOC	200.2	**Purge Equip**	QED Air Diaphragm	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	3.15	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	197.05	**Field Analysis Equip**	YSI556 MPS	**Sampling Period**	Fall 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
11:20							0	3.15	Static
11:38	7.00	0.480	11.9	73.5	1.15		500		Start Time
11:41	7.00	0.480	11.9	74.0	1.15		500	3.15	clear
11:44	7.01	0.480	11.9	72.4	1.15		500		clear
11:47	7.02	0.470	11.9	70.0	1.15		500	3.15	clear
11:50	7.03	0.520	11.9	69.9	1.15		500		clear
11:54	7.04	0.500	11.9	68.5	1.15	22	500		clear
MINUTES							**TOTAL LITERS**		
16.0	0.02	6.00%	0.08%	-1.50	0.00%		**8.00**		

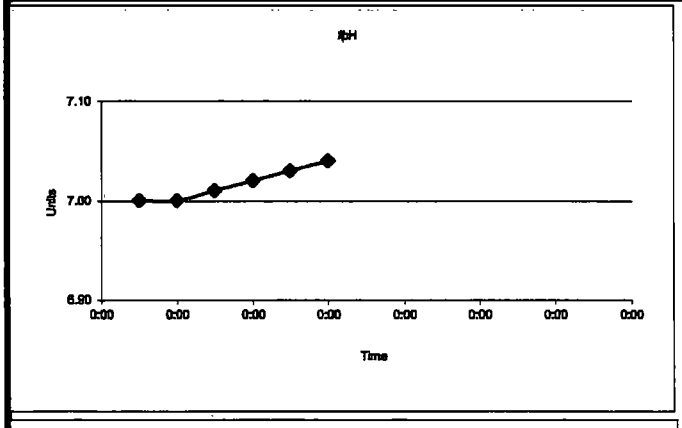

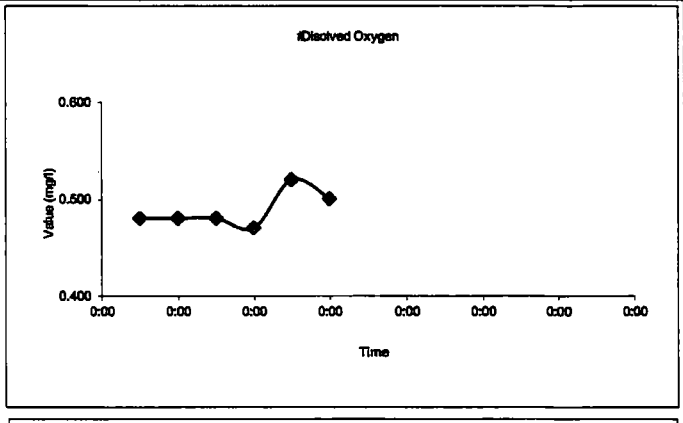

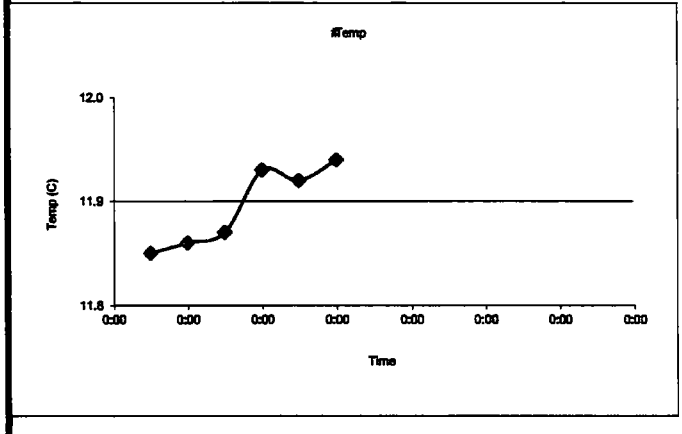

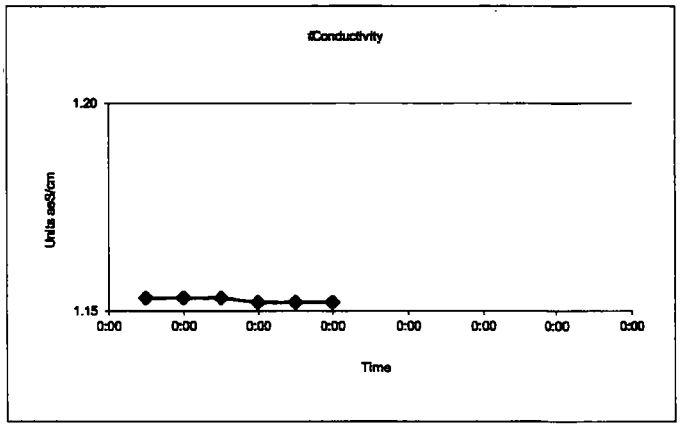

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (Inch)	2	Pump Inlet (Ft.) TOC	60	Lab Analysis	VOC per Target Compound List	Well ID:	MW 119
Casing Stickup (Ft.)	3.25	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	1-Dec-13
Total Well Depth (Ft.) TOC	62.41	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	26.57	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	35.84	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
13:45							0	26.57	Static
13:49	7.24	1.39	11.7	80.3	1.01		400	26.60	Start Time
13:52	7.24	1.27	11.7	69.5	1.00		400		clear
13:55	7.24	1.19	11.7	61.2	0.997		400		clear
13:58	7.24	1.16	11.7	56.8	0.995		400	26.62	clear
14:02	7.23	1.11	11.7	54.5	0.993		400		clear
14:05	7.23	1.10	11.7	55.5	0.992	43	400		clear
MINUTES							TOTAL LITERS		
16.0	-0.01	-5.45%	-0.09%	-1.30	-0.30%		6.40		

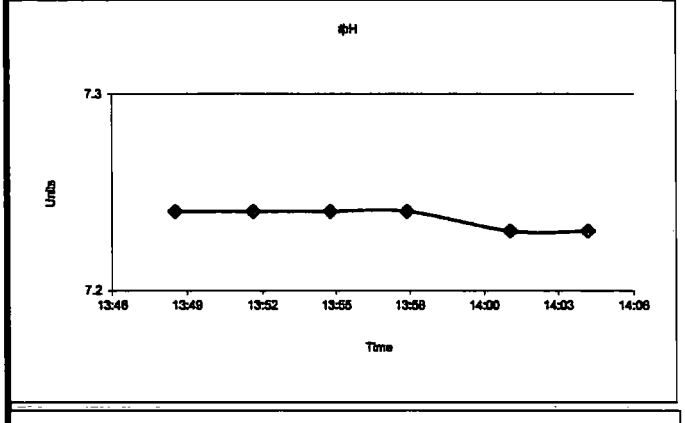

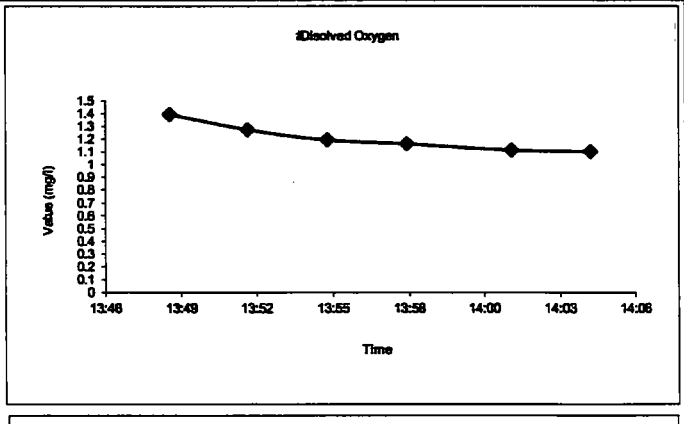

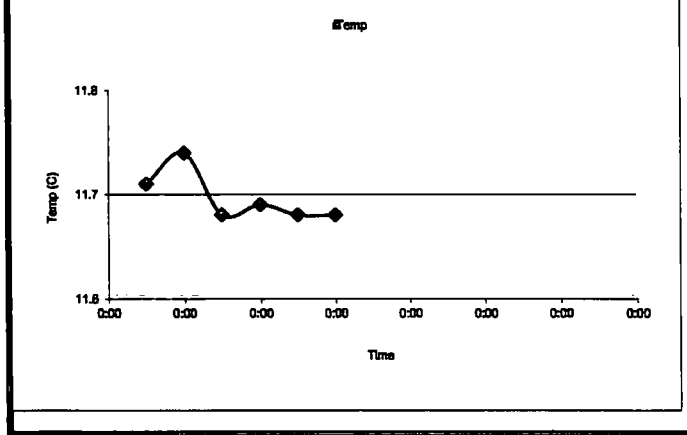

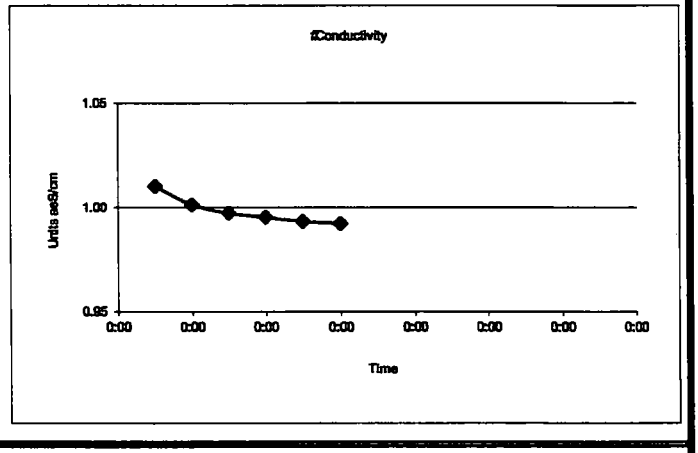

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	65	Lab Analysis	VOC per Target Compound List	Well ID:	MW 121
Casing Stickup (Ft.)	2.53	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	1-Dec-13
Total Well Depth (Ft.) TOC	67.55	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	23.25	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	44.3	Field Analysis Equip	YSI556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
15:39							0	23.25	Start Time
15:55	7.13	2.43	12.6	23.3	1.22		400		cloudy
15:58	7.14	2.49	12.6	23.9	1.22		400	23.35	clear
16:01	7.14	2.47	12.6	24.7	1.22		400		clear
16:04	7.13	2.41	12.6	25.7	1.22		400		clear
16:07	7.13	2.42	12.5	26.2	1.22		400	23.38	clear
16:10	7.14	2.45	12.5	26.7	1.22	65	400		clear
MINUTES							TOTAL LITERS		
15.0	0.01	1.63%	-0.32%	1.00	0.00%		6.00		

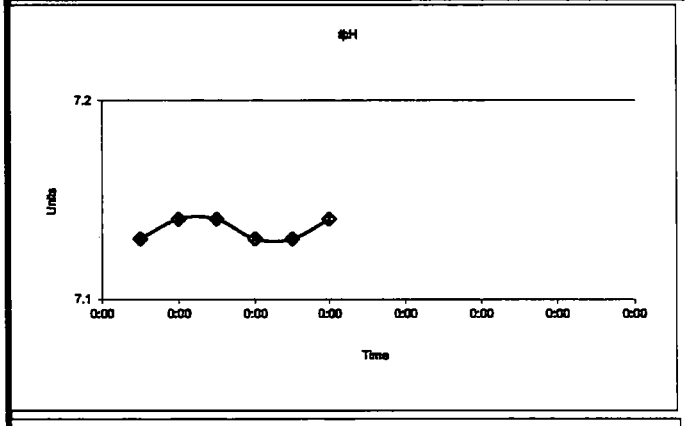

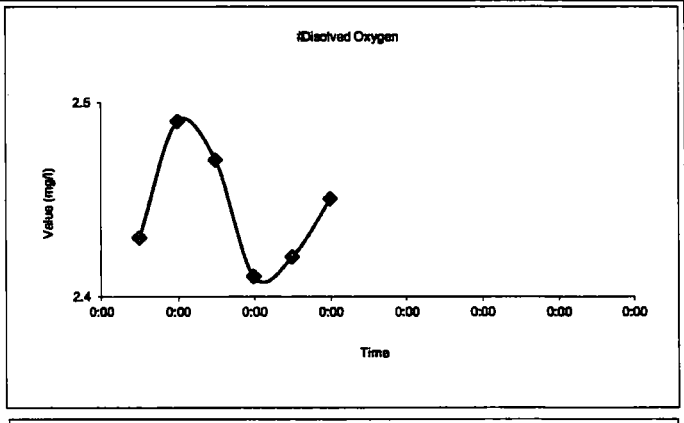

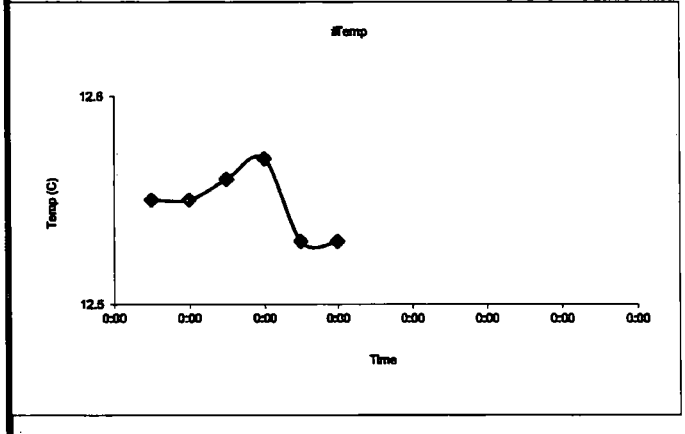

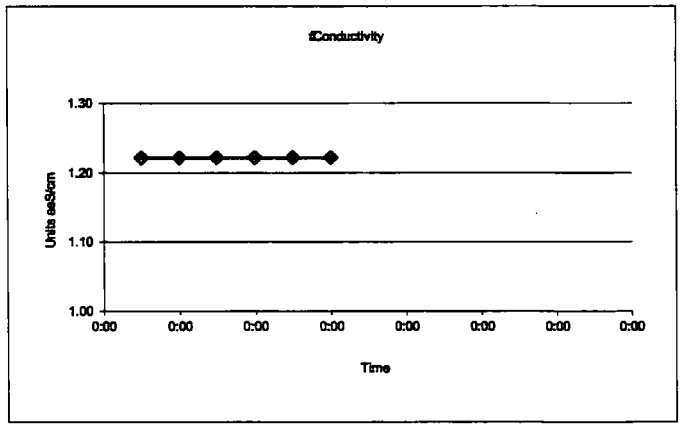

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	100	Lab Analysis	VOC per Target Compound List	Well ID:	MW 124
Casing Stickup (Ft.)	2.17	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	1-Dec-13
Total Well Depth (Ft.) TOC	102.76	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	35.84	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	66.92	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
17:32							0	35.84	Start Time
17:48	7.25	1.00	12.6	-92	1.20		430	35.96	cloudy
17:52	7.13	0.600	12.5	-126	1.21		430		cloudy
17:55	7.15	0.440	12.5	-151	1.16		430		clear
17:58	7.22	0.360	12.6	-163	1.11		430	35.96	clear
18:02	7.21	0.340	12.6	-167	1.09		430		clear
18:05	7.23	0.340	12.5	-163	1.09	33	430		clear
MINUTES						TOTAL LITERS			
17.0	0.01	-5.88%	-0.32%	-0.10	-1.74%		7.31		

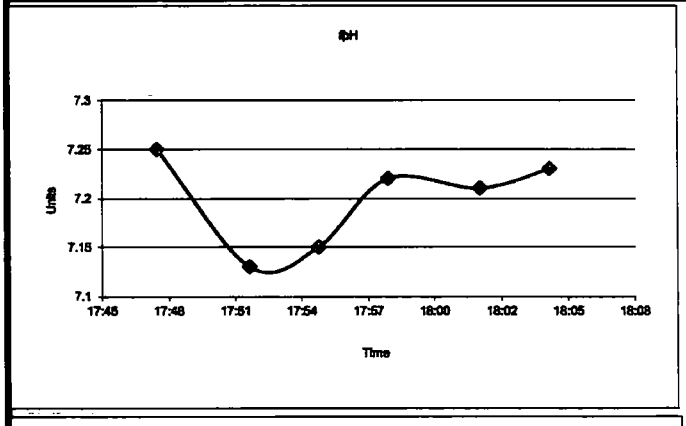

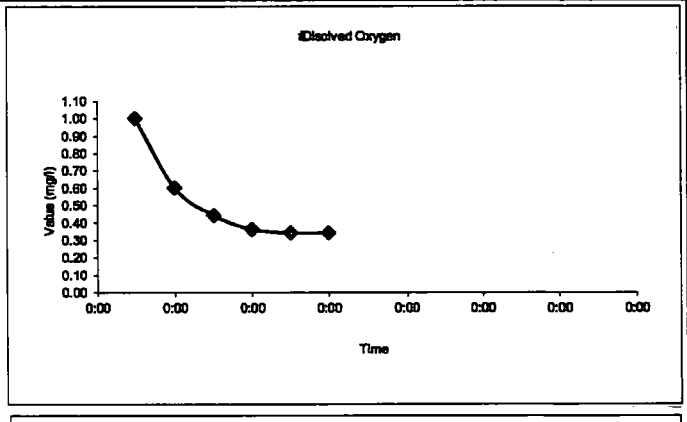

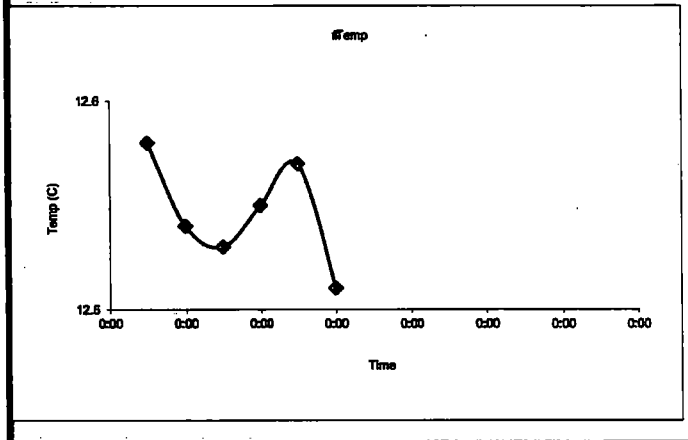

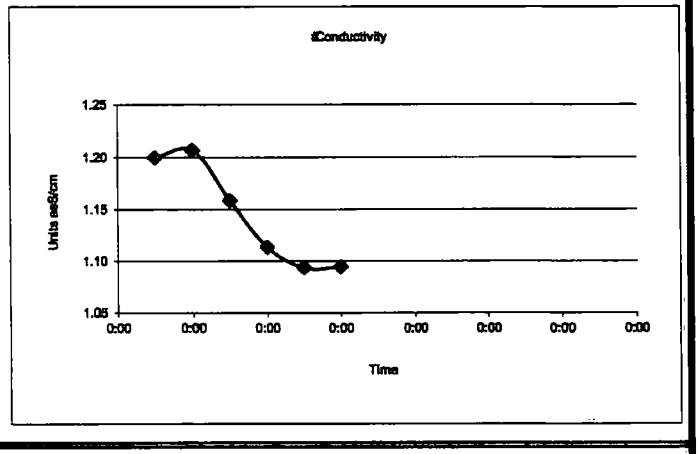

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	**Pump Inlet** (Ft.) TOC	36	**Lab Analysis**	VOC per Target Compound List	Well ID:	**MW 130**
Casing Stickup (Ft.)	-0.3	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	1-Dec-13
Total Well Depth (Ft.) TOC	38.17	**Purge Equip**	QED Air Diaphragm	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	24.77	**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	13.4	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp oC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
14:35							0	24.77	Start Time
14:48	6.74	1.92	12.1	-10.30	1.17		410		cloudy
14:51	6.75	2.14	12.1	-8.20	1.17		410	24.90	clear
14:54	6.76	2.31	12.1	-6.20	1.18		410		clear
14:57	6.77	2.48	12.1	-3.90	1.18		410	24.91	clear
15:00	6.79	2.53	12.0	-1.90	1.18		410		clear
15:03	6.79	2.53	12.0	-0.10	1.18	19	410		clear
MINUTES							**TOTAL LITERS**		
15.0	0.02	1.98%	-0.33%	3.80	0.34%		**6.15**		

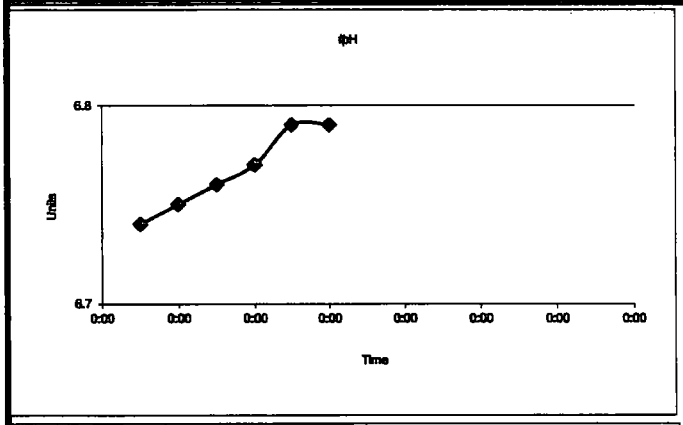

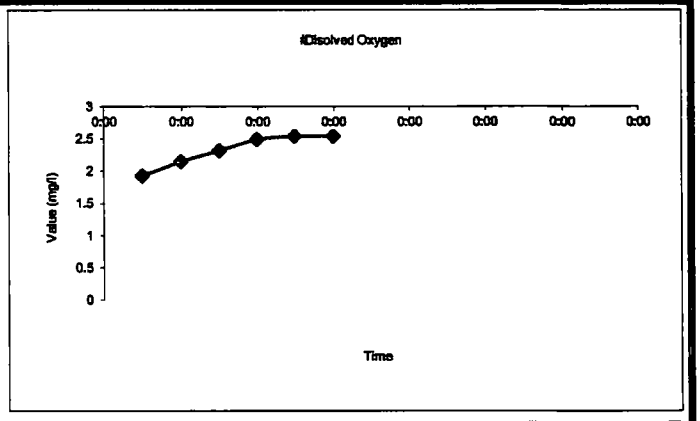

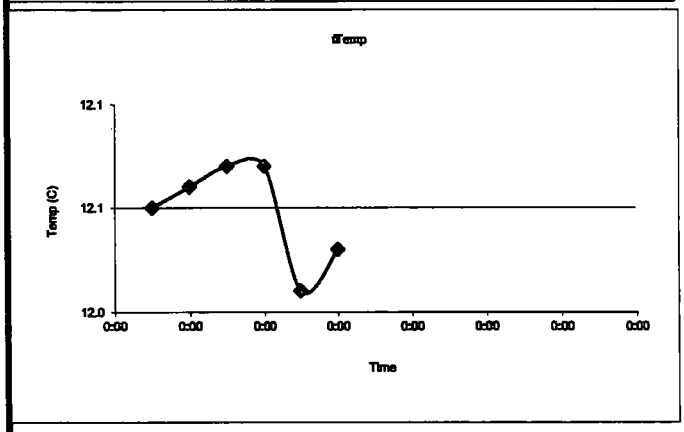

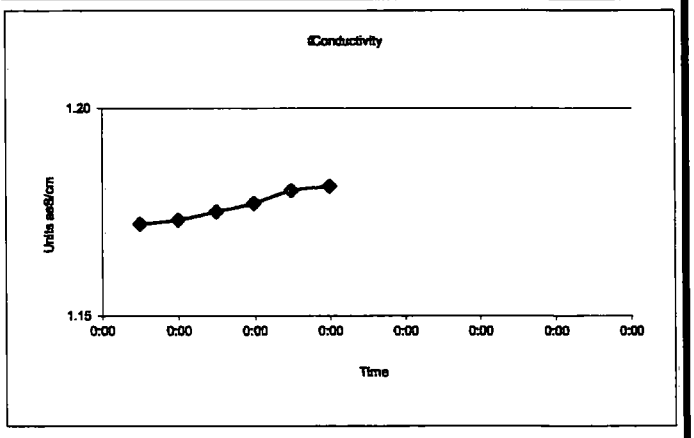

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	35	Lab Analysis	VOC per Target Compound List	Well ID:	MW 133A
Casing Stickup (Ft.)	2.3	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	30-Nov-13
Total Well Depth (Ft.) TOC	37.85	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	33.25	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	4.6	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
13:33							0	33.25	Static
13:36	6.82	0.920	10.6	-91.0	0.657		410		Start Time
13:39	6.82	0.690	10.5	-92.8	0.656		410		brown cloudy
13:42	6.80	0.510	10.5	-92.1	0.656		410	33.25	cloudy
13:45	6.80	0.510	10.5	-92.2	0.656		410		clear
13:48	6.78	0.520	10.5	-91.5	0.656	26	410	33.25	clear
MINUTES							TOTAL LITERS		
12.0	-0.02	1.92%	-0.29%	0.60	0.00%		4.92		

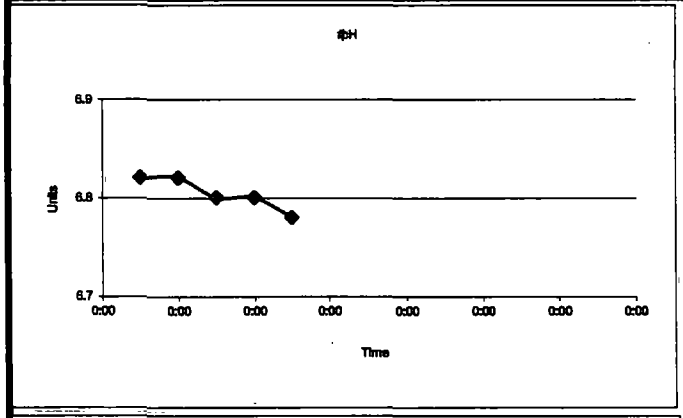

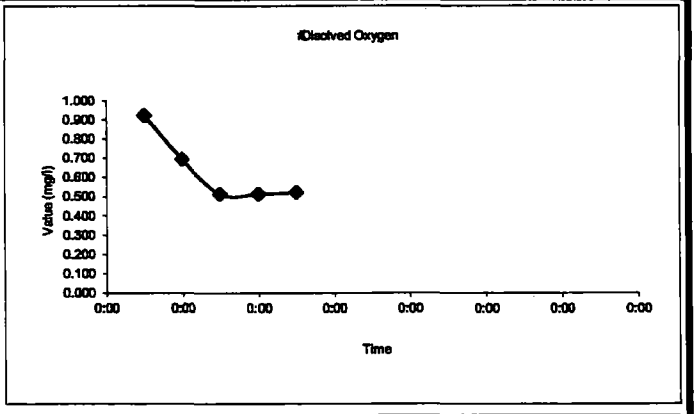

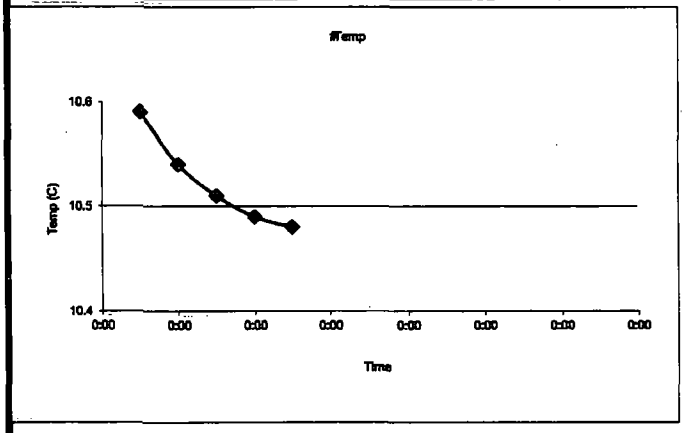

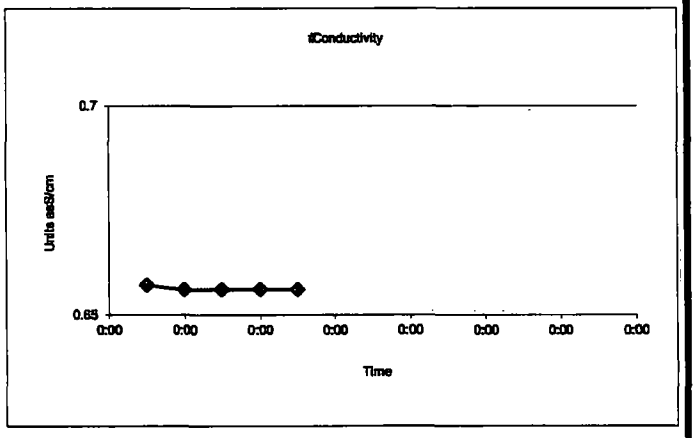

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	59	Lab Analysis	VOC per Target Compound List	Well ID:	MW 133B
Casing Stickup (Ft.)	2.51	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	30-Nov-13
Total Well Depth (Ft.) TOC	61.49	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	27.92	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	33.57	Field Analysis Equip	YAI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB NTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
15:53							0	27.92	Static
16:10	7.03	3.64	10.3	0.900	1.01		450		slightly cloudy
16:13	7.03	3.54	10.3	5.60	1.02		450	27.98	slightly cloudy
16:16	7.03	3.46	10.3	9.60	1.02		450		slightly cloudy
16:19	7.03	3.38	10.3	12.9	1.03		450	28.04	clear
16:22	7.03	3.34	10.3	15.2	1.03	59	450		clear
MINUTES						TOTAL LITERS			
12.0	0.00	-3.59%	-0.19%	5.60	0.97%		5.40		

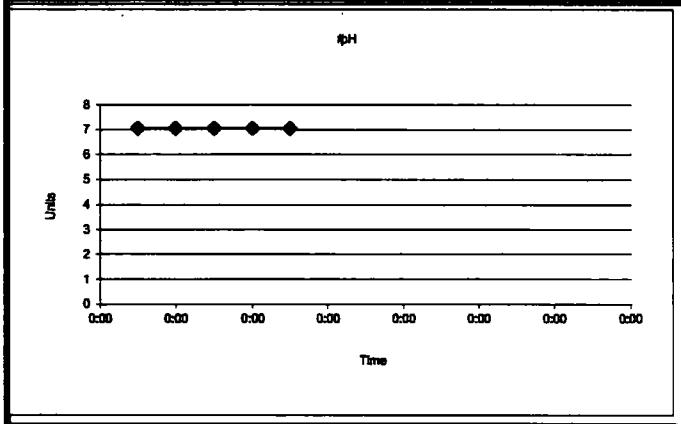

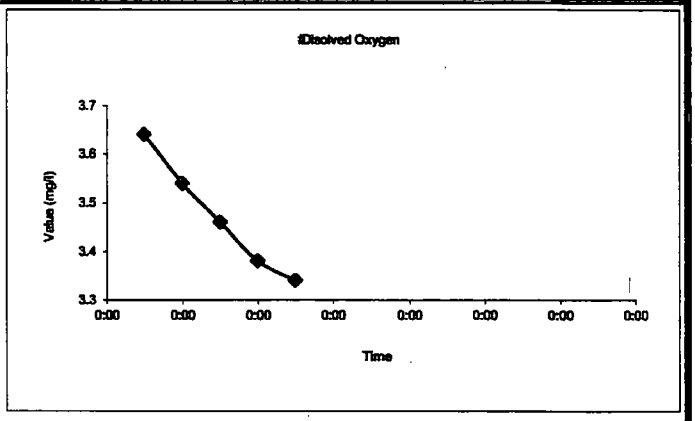

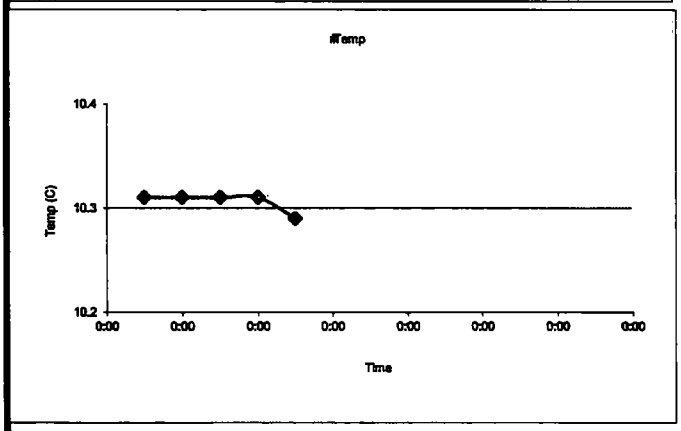

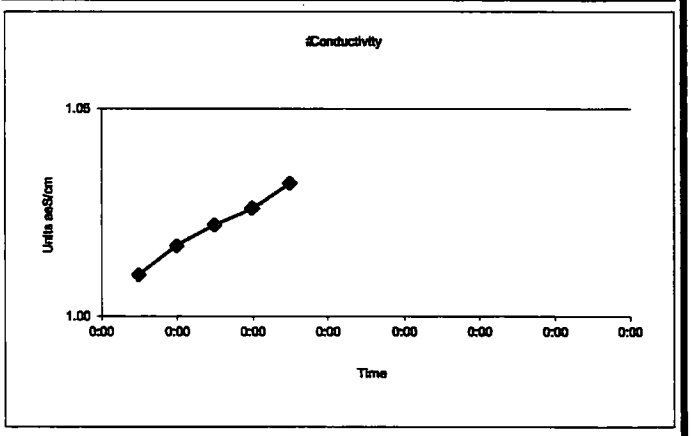

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	96	Lab Analysis	VOC per Target Compound List	Well ID:	MW 133C
Casing Stickup (Ft.)	2.37	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	30-Nov-13
Total Well Depth (Ft.) TOC	98.49	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	23.75	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	74.74	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
16:25							0	23.75	Static
16:36	7.22	0.850	10.4	31.5	0.673		480		Start Time
16:39	7.23	0.600	10.5	29.4	0.667		480	23.83	clear
16:42	7.23	0.770	10.5	28.3	0.665		480		clear
16:45	7.22	0.570	10.5	27.2	0.664		480		clear
16:48	7.22	0.560	10.4	33.1	0.663		480	23.85	clear
16:51	7.21	0.530	10.4	36.7	0.662	42	480		clear
MINUTES							TOTAL LITERS		
15.0	-0.01	-7.55%	-0.19%	9.50	-0.30%		7.20		

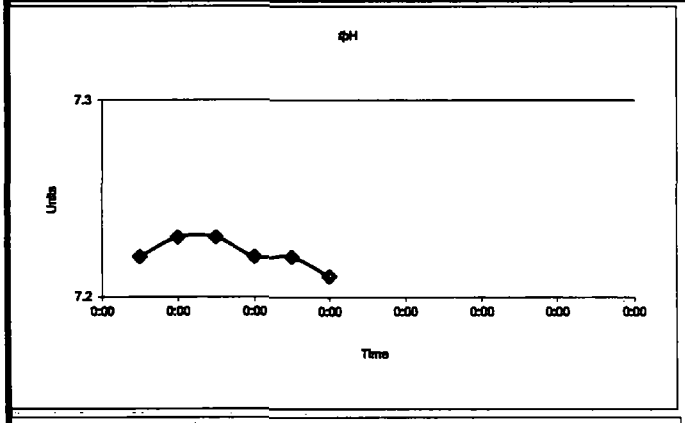

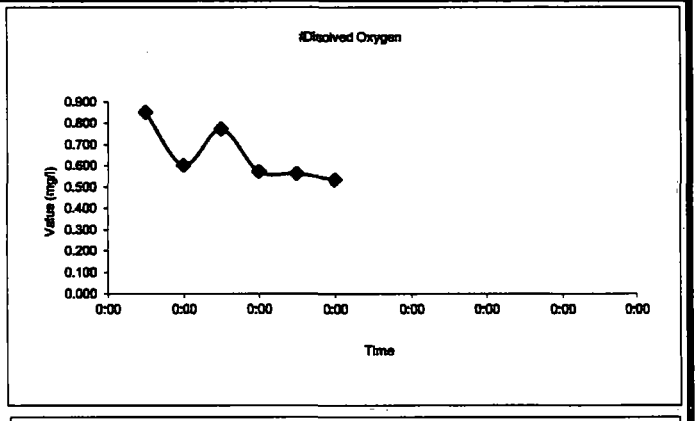

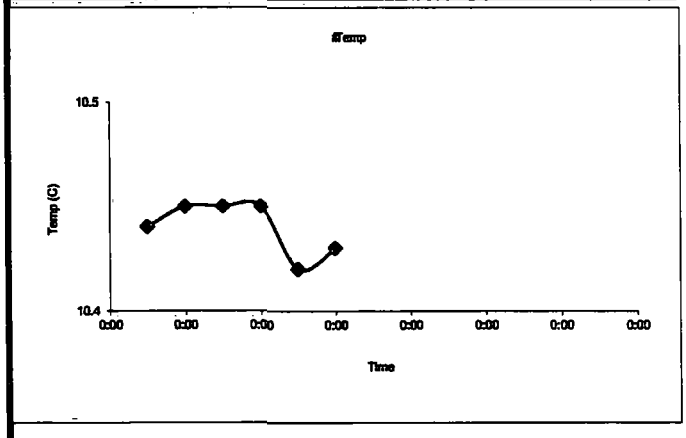

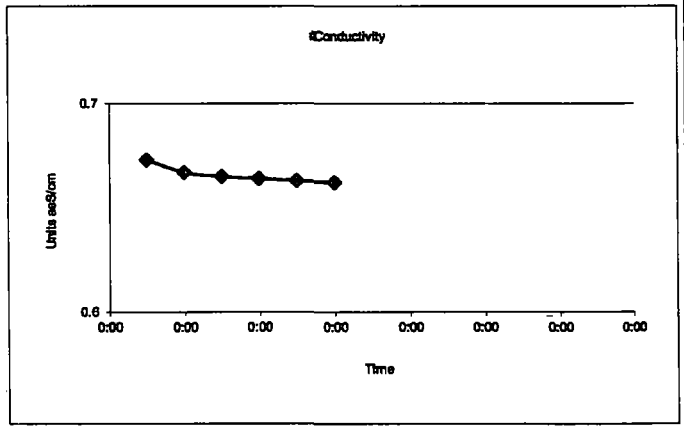

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	42	Lab Analysis	VOC per Target Compound List	Well ID:	MW 136
Casing Stickup (Ft.)	-0.42	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	30-Nov-13
Total Well Depth (Ft.) TOC	44.33	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	35.24	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	9.09	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
16:56							0	35.24	Static
17:12	7.20	1.89	11.4	58.0	1.24		300		Start Time
17:15	7.18	1.91	11.4	56.5	1.25		300	35.36	clear
17:18	7.15	2.14	11.4	56.3	1.26		300		clear
17:21	7.12	2.32	11.3	56.2	1.26		300		clear
17:24	7.08	2.33	11.3	58.8	1.27		300	35.39	clear
17:27	7.07	2.32	11.3	58.3	1.27	62	300		clear
MINUTES						TOTAL LITERS			
15.0	-0.05	0.00%	-0.09%	2.10	0.63%		4.50		

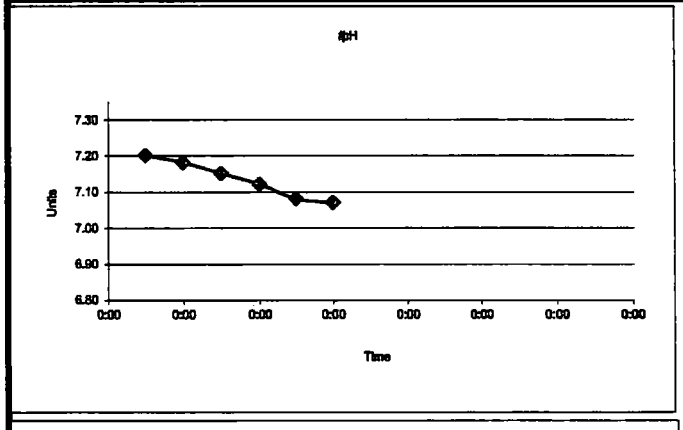

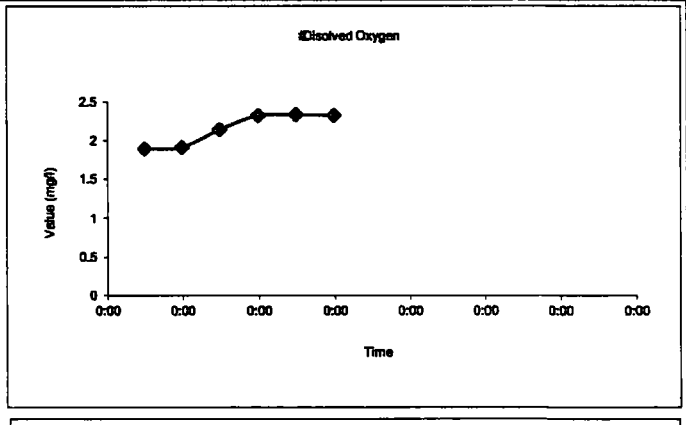

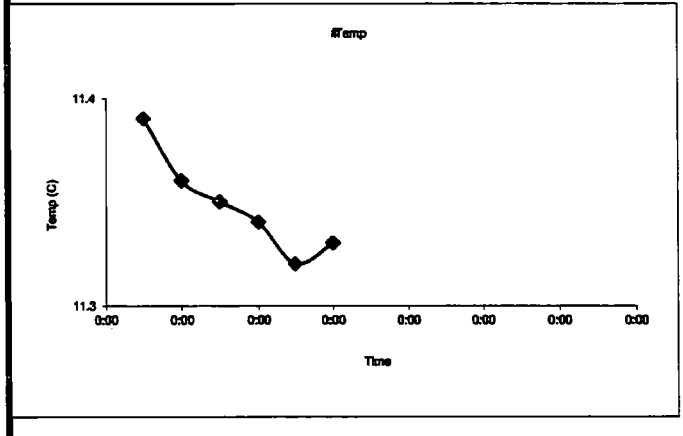

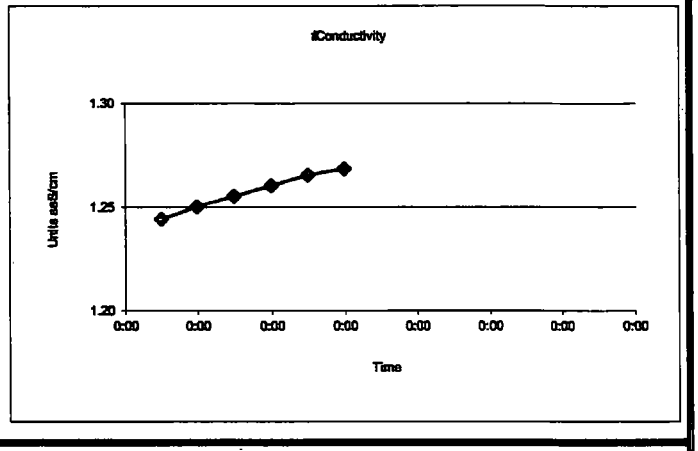

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (Inch)	2	Pump Inlet (Ft.) TOC	87	Lab Analysis	VOC per Target Compound List	Well ID:	MW 200
Casing Stickup (Ft.)	1.15	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	1-Dec-13
Total Well Depth (Ft.) TOC	89.93	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	51.5	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	38.43	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
15:09							0	51.50	Static
15:20	6.87	3.78	11.5	-30.5	1.11		400		Start Time
15:23	6.90	3.88	11.5	-31.8	1.10		400	51.64	cloudy
15:26	6.87	4.03	11.5	-26.3	1.10		400		cloudy
15:29	6.90	4.21	11.5	-26.3	1.09		400	51.65	cloudy
15:32	6.96	4.36	11.5	-27.2	1.08		400		slightly cloudy
15:35	6.99	4.37	11.5	-28.1	1.08	92	400		slightly cloudy
MINUTES							TOTAL LITERS		
15.0	0.09	3.66%	-0.35%	0.20	-1.21%		6.00		

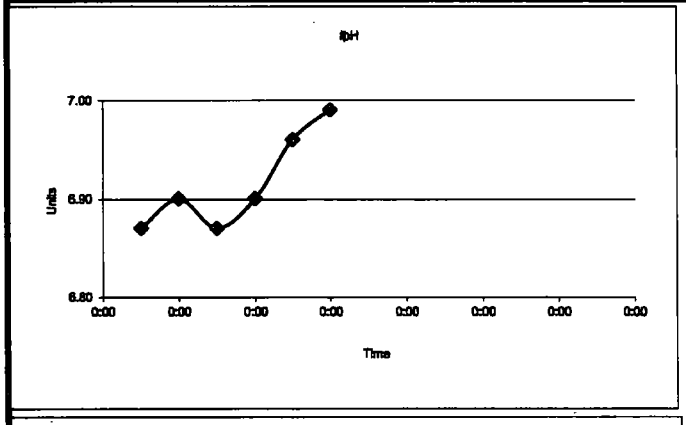

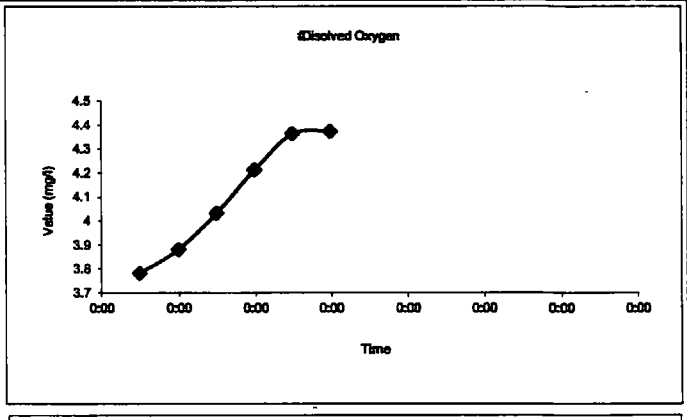

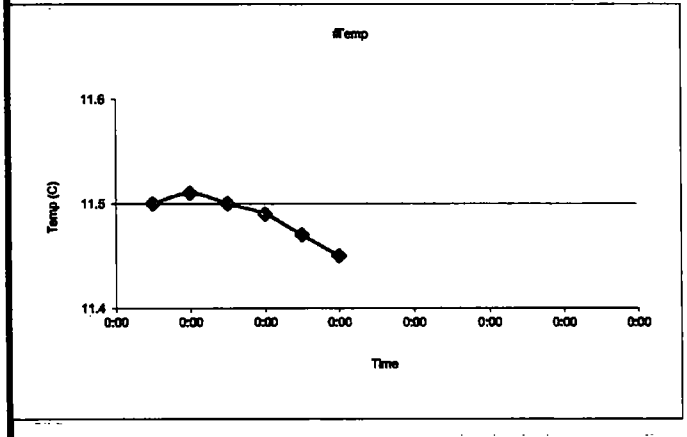

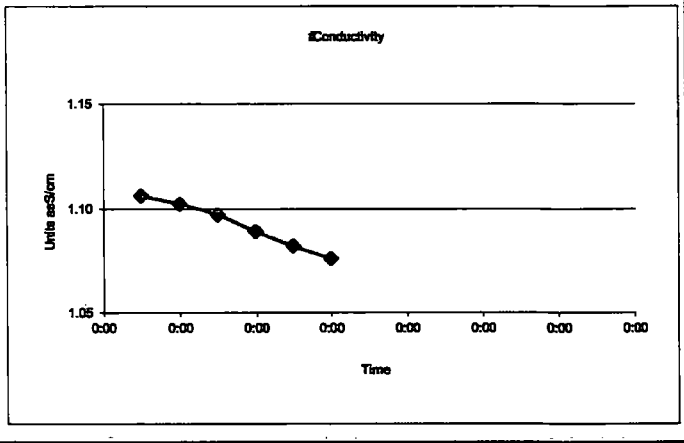

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	48	Lab Analysis	VOC per Target Compound List	Well ID:	MW 201
Casing Stickup (Ft.)	-0.32	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	1-Dec-13
Total Well Depth (Ft.) TOC	50.15	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	30.56	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	19.59	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
11:50							0	30.56	Start Time
12:02	7.31	11.6	14.1	147	1.09		410	30.60	cloudy
12:05	7.32	11.5	14.1	148	1.09		410		clear
12:08	7.33	11.4	14.1	148	1.09		410		clear
12:11	7.32	11.4	14.0	148	1.09		410	30.60	clear
12:14	7.31	11.3	14.0	150	1.09		410		clear
12:17	7.32	11.3	14.1	151	1.09	22	410		clear
MINUTES							TOTAL LITERS		
15.0	0.00	-0.35%	0.50%	3.50	-0.18%		6.15		

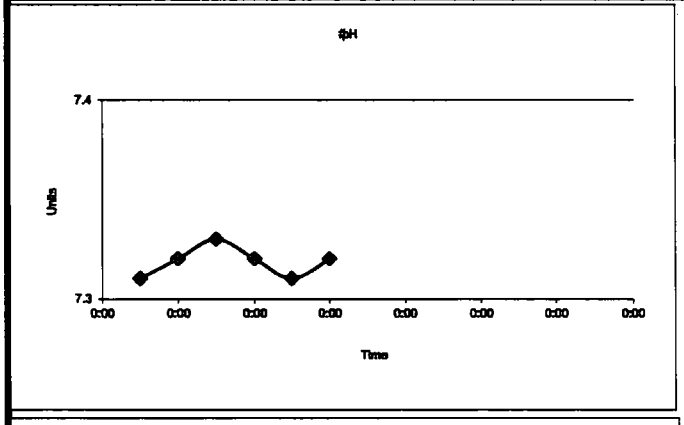

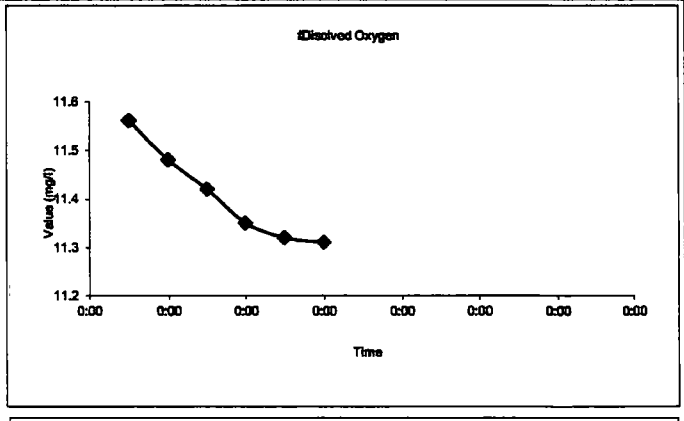

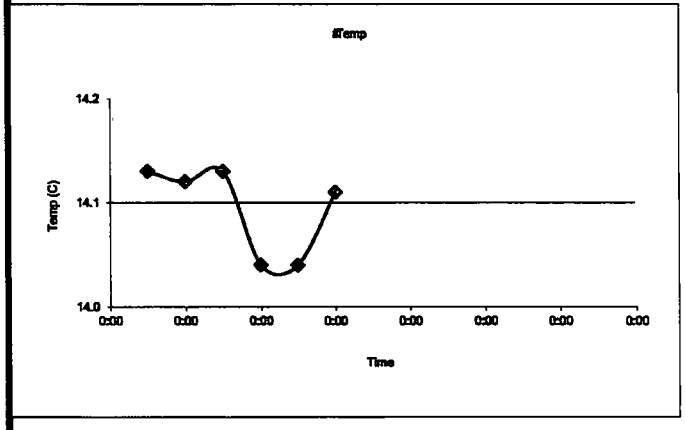

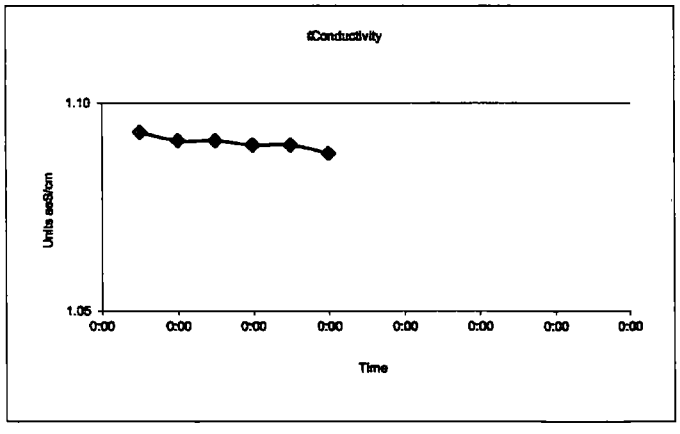

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	48	Lab Analysis	VOC per Target Compound List	Well ID:	MW 202
Casing Stickup (Ft.)	-0.32	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	1-Dec-13
Total Well Depth (Ft.) TOC	50.01	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	29.65	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	20.36	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
11:20							0	29.65	Start Time
11:31	7.00	2.07	13.6	92.0	1.20		300	29.72	cloudy
11:34	6.99	1.90	13.7	91.3	1.20		300		clear
11:37	6.97	1.80	13.8	106	1.19		300	29.72	clear
11:40	7.00	1.77	13.8	97.0	1.19		300		clear
11:43	7.01	1.77	13.8	94.5	1.19	66	300		clear
MINUTES							TOTAL LITERS		
12.0	0.04	-1.69%	0.51%	-11.00	-0.51%		3.60		

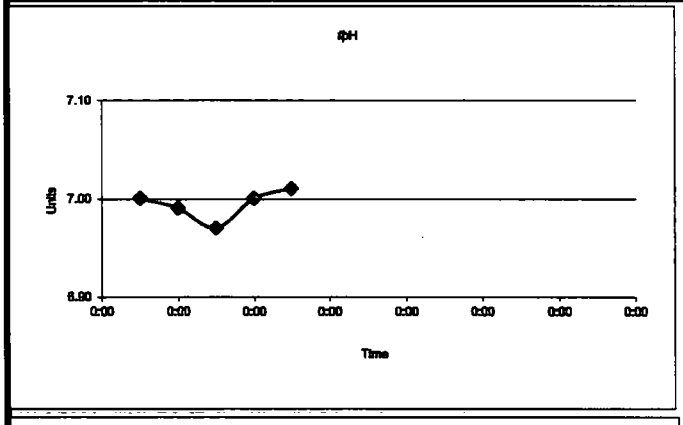

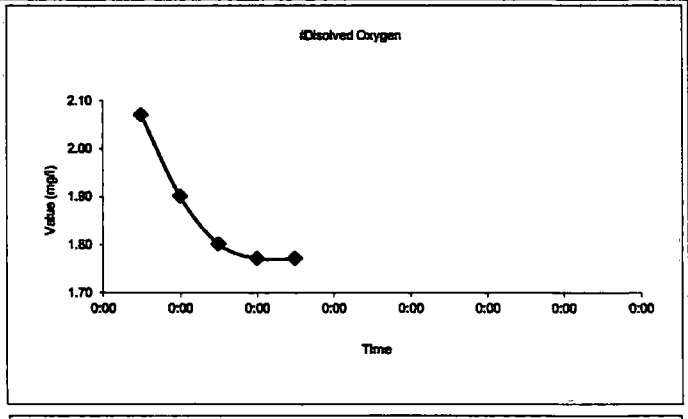

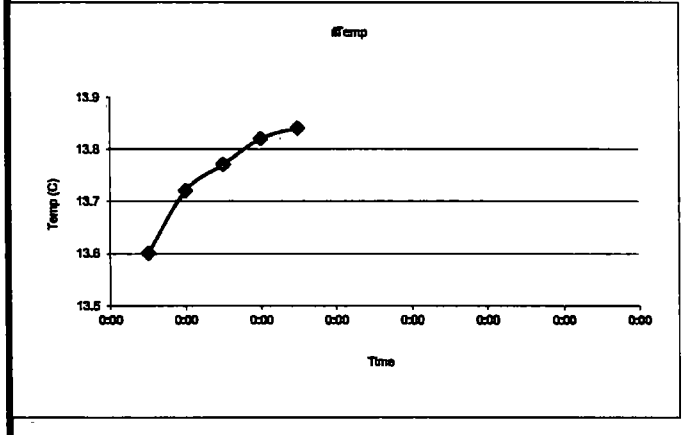

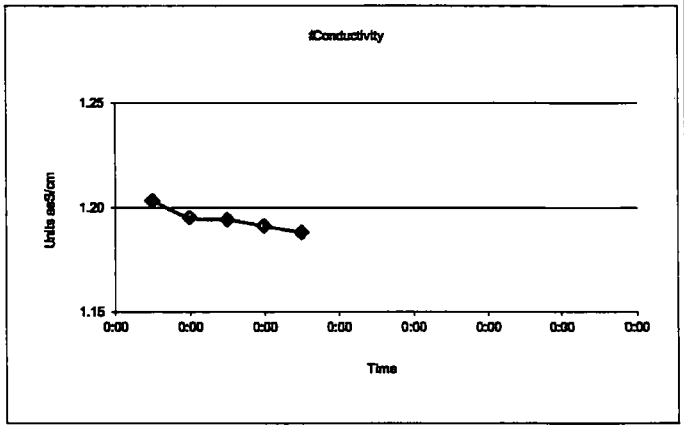

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	47	Lab Analysis	VOC per Target Compound List	Well ID:	MW 203
Casing Stickup (Ft.)	-0.58	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	1-Dec-13
Total Well Depth (Ft.) TOC	49.35	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	29.19	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	20.16	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
10:35							0	29.19	Start Time
11:03	6.35	1.76	10.4	80.7	1.23		250		cloudy
11:06	6.39	1.75	10.3	78.0	1.23		250	29.23	cloudy
11:09	6.42	1.74	10.4	76.5	1.23		250		clear
11:12	6.44	1.70	10.5	75.9	1.22		250	29.26	clear
11:15	6.49	1.69	10.5	73.9	1.22		250		clear
11:18	6.51	1.66	10.5	72.7	1.22	43	250		clear
MINUTES							TOTAL LITERS		
15.0	0.07	-2.41%	0.00%	-3.20	-0.18%		3.75		

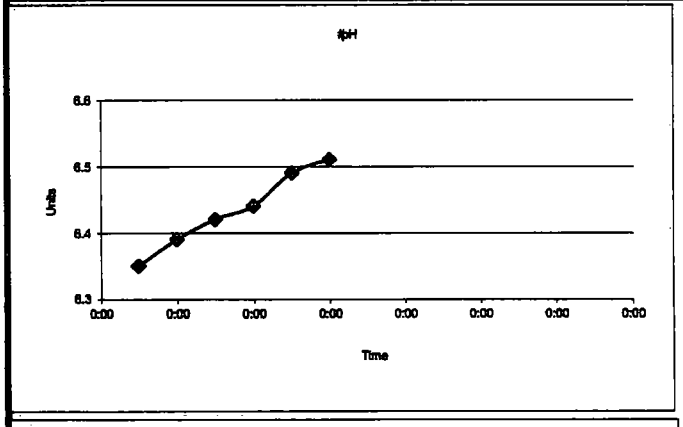

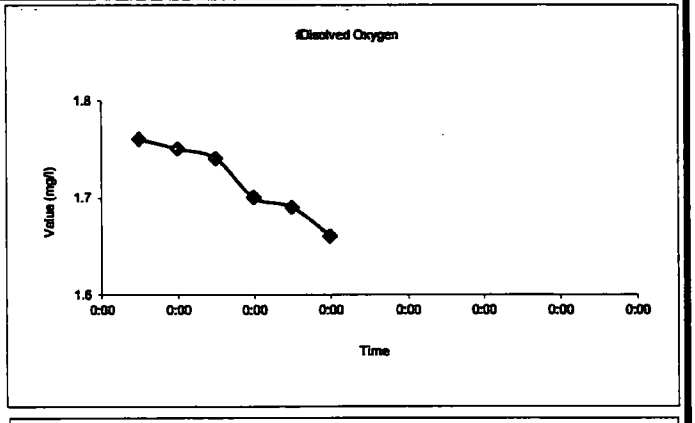

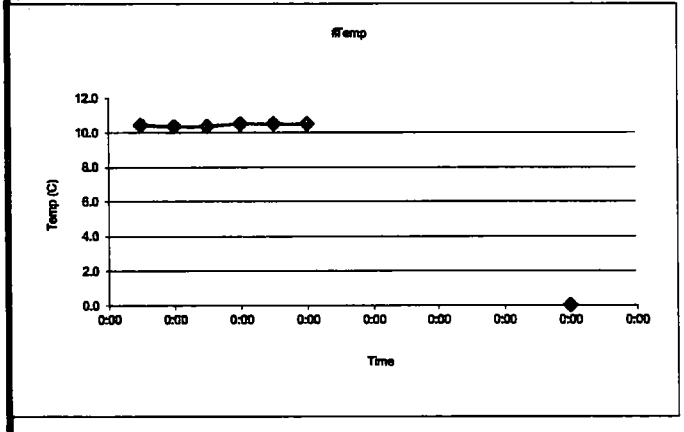

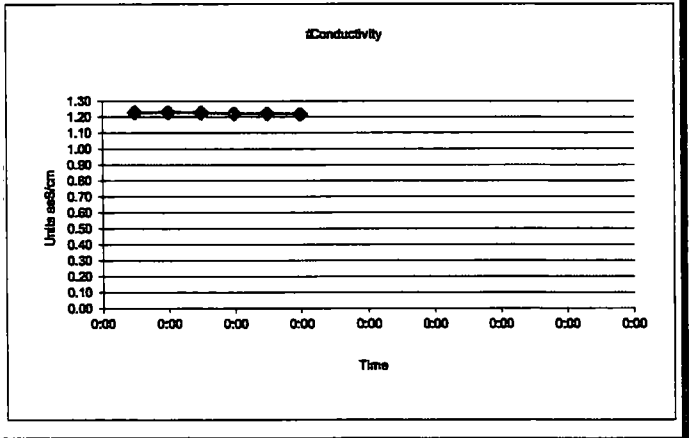

Remarks: (well condition, maintenance, etc...)

well pump was removed by unknown. Pumped utilizing a QED sample pro portable pump with teflon liner & tubing.

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	86	Lab Analysis	VOC per Target Compound List	Well ID:	MW 204
Casing Stickup (Ft.)	-0.39	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	1-Dec-13
Total Well Depth (Ft.) TOC	88.96	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	27.86	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	61.1	Field Analysis Equip	YSI 556 MPS	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
16:21							0	27.86	Static
16:27	7.17	0.360	12.4	32.1	0.984		350		slightly cloudy
16:30	7.17	0.330	12.4	32.5	0.985		350	27.91	slightly cloudy
16:33	7.18	0.330	12.1	33.3	0.986		350		slightly cloudy
16:36	7.15	0.380	12.3	34.8	0.984		350	27.93	slightly cloudy
16:40	7.16	0.350	12.4	35.4	0.984		350		clear
16:43	7.16	0.350	12.4	35.7	0.984	94	350		clear
MINUTES							TOTAL LITERS		
16.0	0.01	-8.57%	0.48%	0.90	0.00%		5.60		

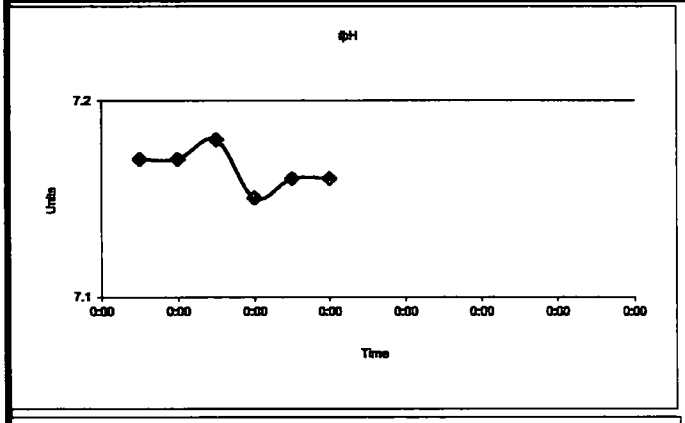

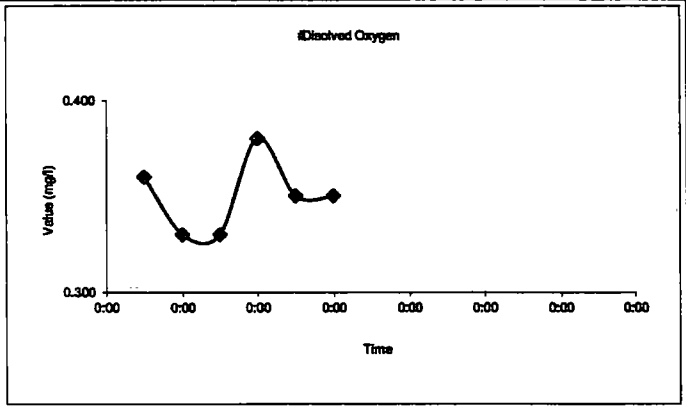

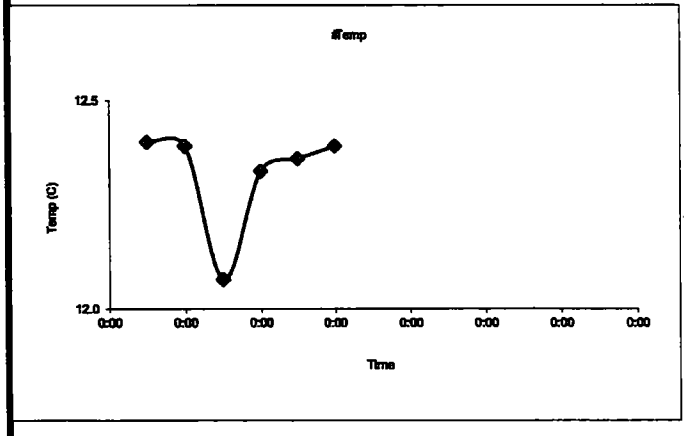

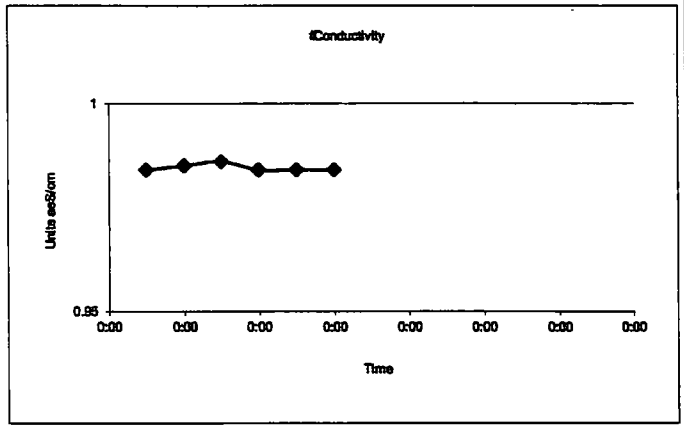

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	108	Lab Analysis	VOC per Target Compound List	Well ID:	MW 205A
Casing Stickup (Ft.)	-0.34	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	29-Nov-13
Total Well Depth (Ft.) TOC	110.27	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	2.21	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	108.06	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
12:32							0	2.21	Static
12:40	7.05	0.240	12.5	99.7	1.10		500		clear
12:43	7.04	0.240	12.5	102	1.11		500	2.22	clear
12:46	7.05	0.240	12.5	102	1.10		500		clear
12:49	7.05	0.230	12.5	103	1.10		500	2.22	clear
12:52	7.07	0.250	12.4	102	1.10	15	500		clear
MINUTES							TOTAL LITERS		
12.0	0.02	4.00%	-0.32%	0.00	0.09%		6.00		

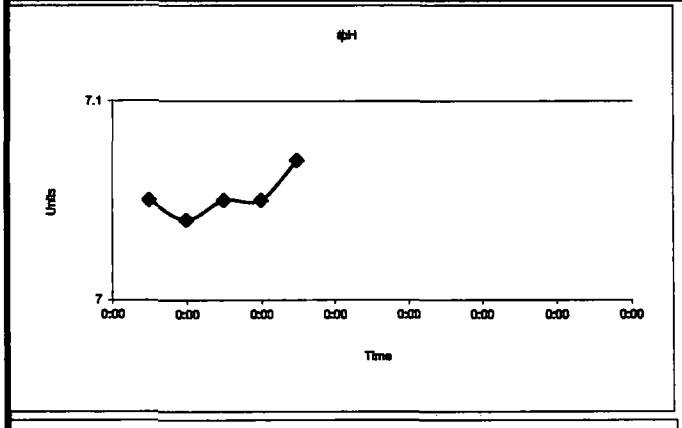

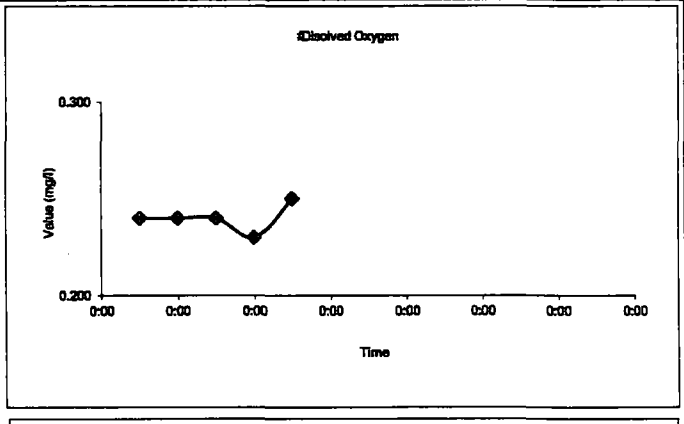

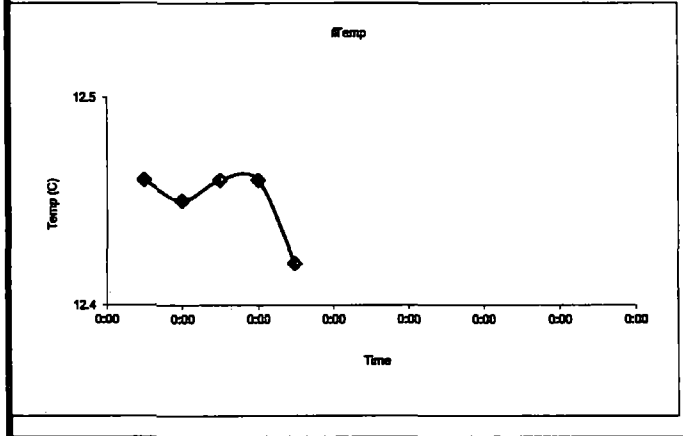

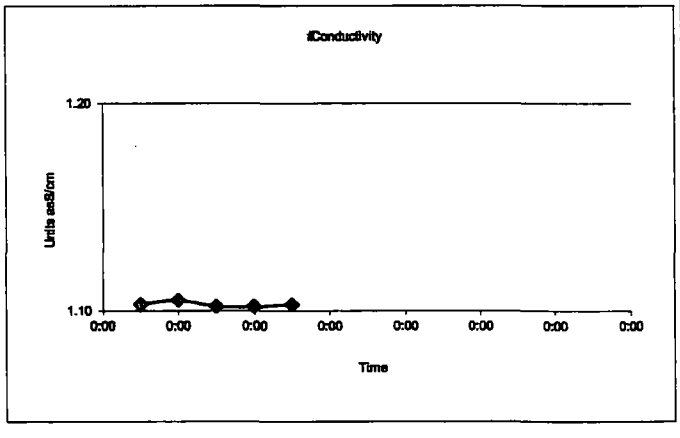

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	148	Lab Analysis	VOC per Target Compound List	Well ID:	MW 205B
Casing Stickup (Ft.)	-0.48	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	29-Nov-13
Total Well Depth (Ft.) TOC	150.05	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	2.03	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	148.02	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
12:05							0	2.03	Static
12:16	7.02	0.330	12.5	103	1.10		500	2.03	clear
12:19	7.04	0.310	12.4	102	1.10		500		clear
12:22	7.03	0.300	12.5	100	1.10		500	2.03	clear
12:25	7.04	0.290	12.4	100	1.10		500		clear
12:28	7.04	0.290	12.5	99.0	1.10	15	500		clear
MINUTES							TOTAL LITERS		
12.0	0.01	-3.45%	-0.16%	-1.20	-0.09%		6.00		

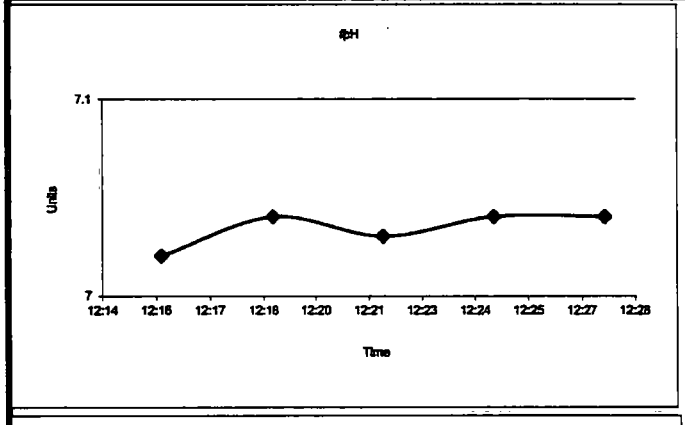

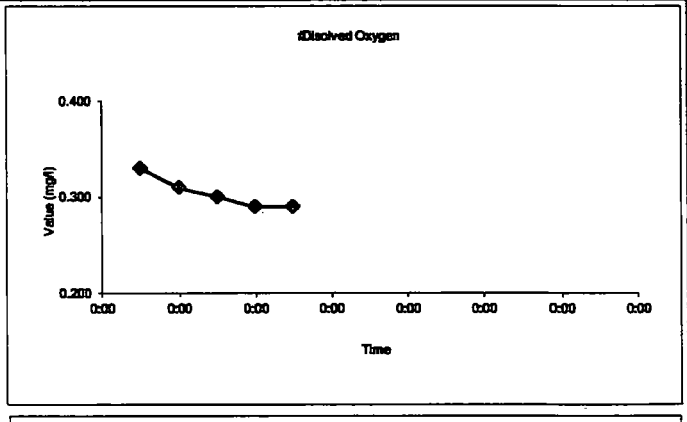

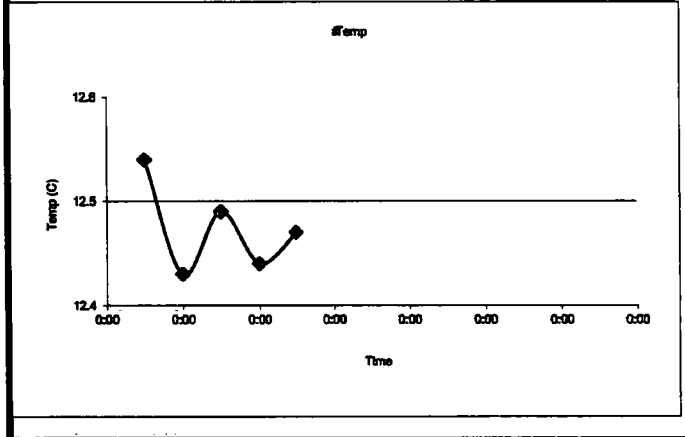

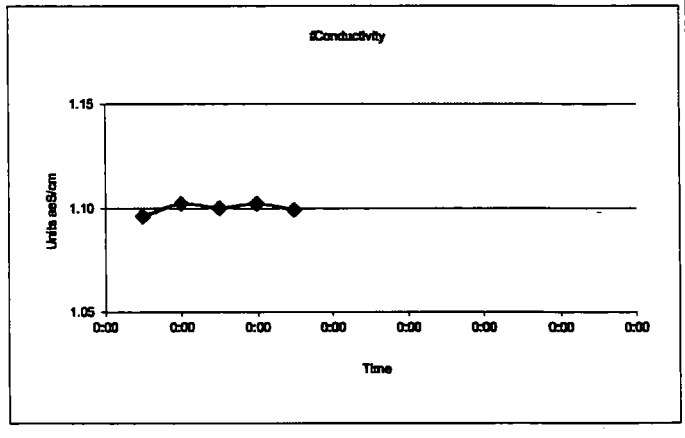

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	88	Lab Analysis	VOC per Target Compound List	Well ID:	MW 206A
Casing Stickup (Ft.)	-0.36	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	29-Nov-13
Total Well Depth (Ft.) TOC	90.24	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	3.43	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	86.81	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
13:10							0	3.43	Static
13:24	7.22	1.51	12.0	63.1	0.838		400		Start Time
13:27	7.21	1.45	12.0	63.1	0.838		400	3.43	clear
13:30	7.21	1.45	11.9	63.1	0.839		400		clear
13:33	7.21	1.46	11.9	63.3	0.838		400	3.43	clear
13:36	7.22	1.46	11.9	62.2	0.839	54	400		clear
MINUTES							TOTAL LITERS		
12.0	0.01	0.68%	0.25%	-0.90	0.00%		4.80		

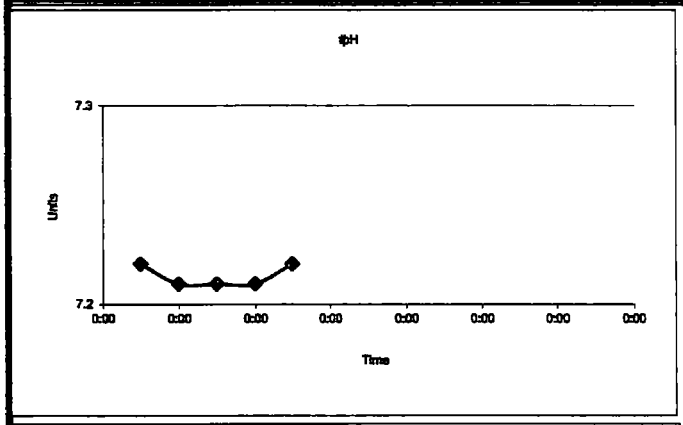

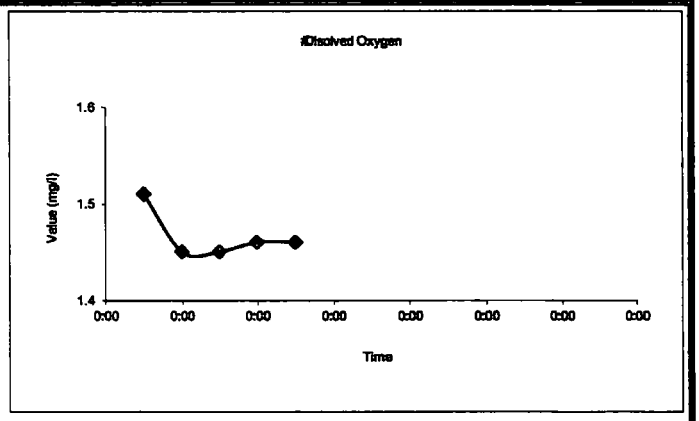

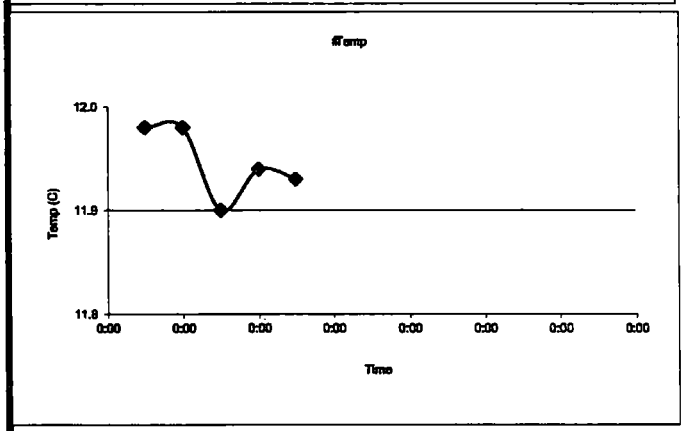

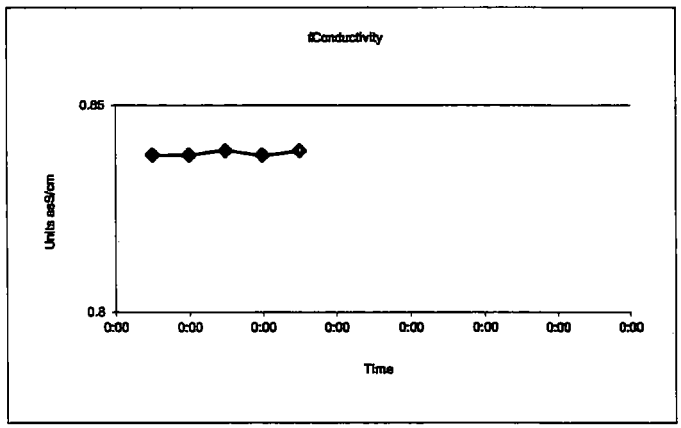

Remarks: (well condition, maintenance, etc...)

Field Duplicate Collected (FD-1)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (Inch)	2	Pump Inlet (Ft) TOC	127	Lab Analysis	VOC per Target Compound List	Well ID:	MW 206B
Casing Stickup (Ft)	-0.45	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	29-Nov-13
Total Well Depth (Ft) TOC	129.94	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft) TOC	1.98	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft)	127.96	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft) TOC	Annotation
13:44							0	1.98	Static
13:54	7.16	0.260	12.0	14.9	0.955		500		Start Time
13:57	7.16	0.240	12.0	10.0	0.955		500	1.98	clear
14:00	7.16	0.230	12.0	5.70	0.957		500		clear
14:03	7.16	0.230	11.9	-0.300	0.957		500		clear
14:06	7.16	0.200	12.0	-3.60	0.956		500	1.98	clear
14:09	7.16	0.200	12.0	-2.00	0.957	10	500		clear
MINUTES							TOTAL LITERS		
15.0	0.00	-15.00%	0.08%	-1.70	0.00%		7.50		

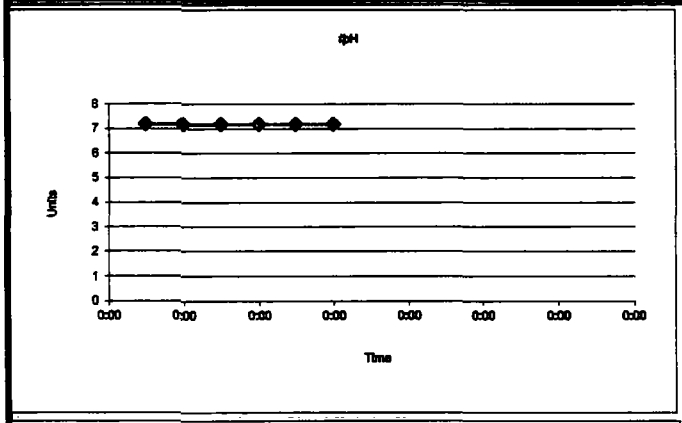

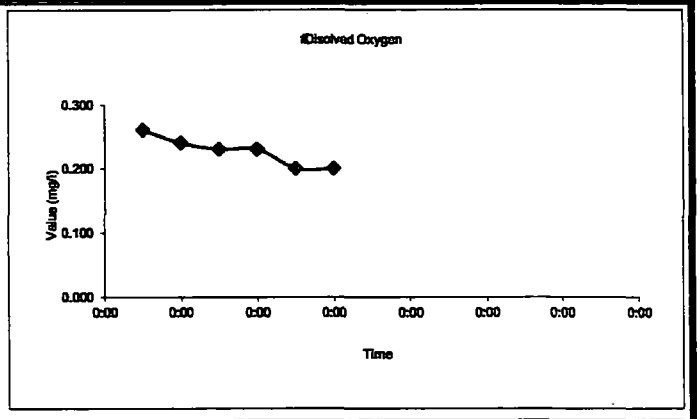

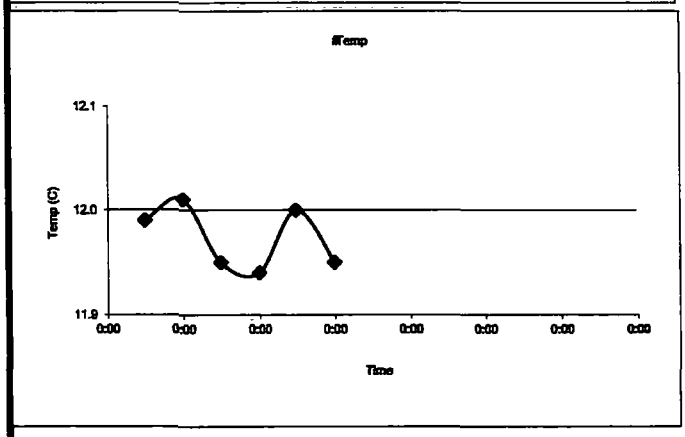

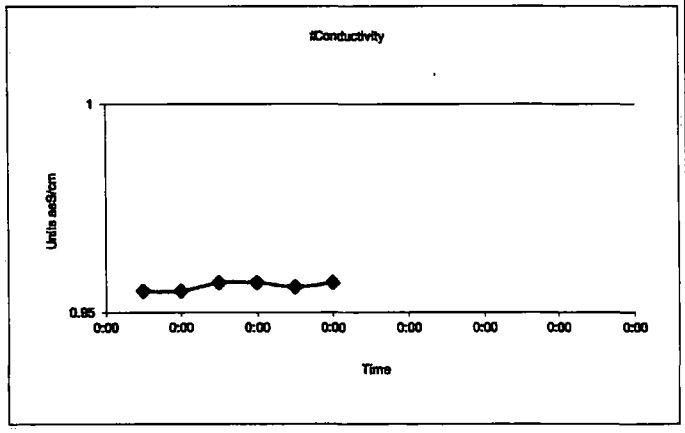

Remarks: (well condition, maintenance, etc...)

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (Inch)	2	**Pump Inlet** (Ft.) TOC	249	**Lab Analysis**	VOC per Target Compound List	Well ID:	**MW 206C**
Casing Stickup (Ft.)	-0.55	**Purge Method**	Low Flow Micro Purge	**Container**	40 mL VOA Vial	Sample Date	
Total Well Depth (Ft.) TOC	251.31	**Purge Equip**	QED Air Diaphragm	**Sample Type**	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC		**Field Analysis Method**	Flow Thru Analysis - 250 mL	**Preservation**	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	251.31	**Field Analysis Equip**	YSI 556 MSP	**Sampling Period**	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
MINUTES							**TOTAL LITERS**		
0.0	0.00	0.00%	0.00%	0.00	0.00%		**0.00**		

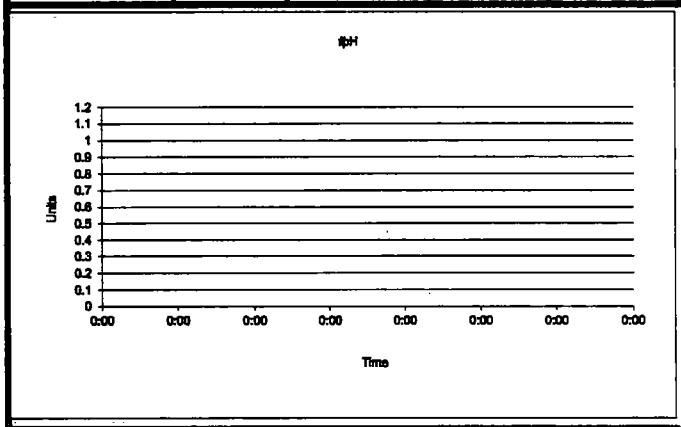

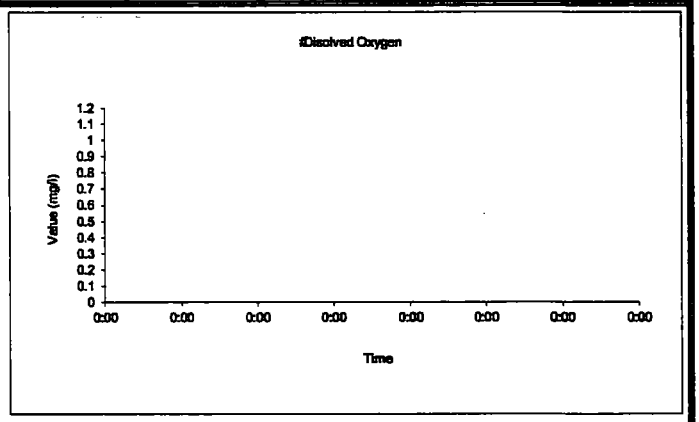

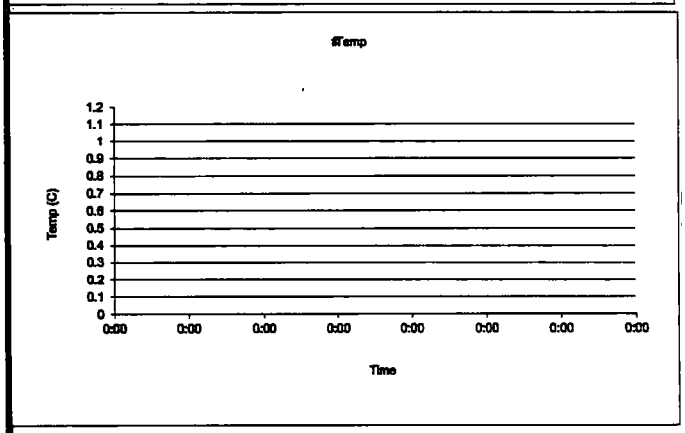

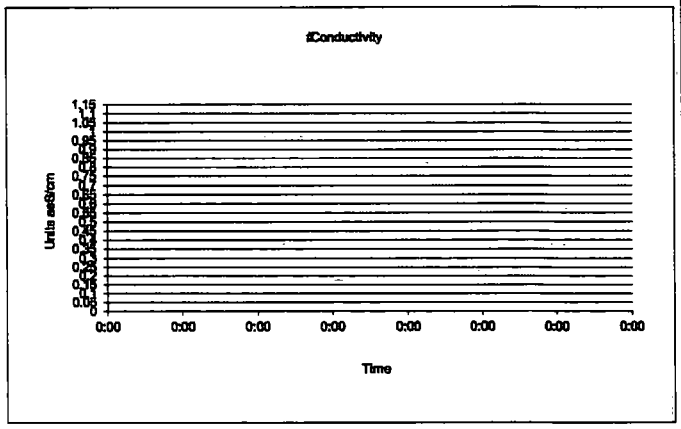

Remarks: (well condition, maintenance, etc...)

Inaccessible well - couldn't sample

SE Rockford Superfund Site Ground Water Sampling - Field Report

Casing Diameter (inch)	2	Pump Inlet (Ft.) TOC	88	Lab Analysis	VOC per Target Compound List	Well ID:	MW 207
Casing Stickup (Ft.)	-0.3	Purge Method	Low Flow Micro Purge	Container	40 mL VOA Vial	Sample Date	1-Dec-13
Total Well Depth (Ft.) TOC	90.81	Purge Equip	QED Air Diaphragm	Sample Type	Grab (Groundwater)	Sampled by:	Patrick Egan
Static Water Level (Ft.) TOC	35.54	Field Analysis Method	Flow Thru Analysis - 250 mL	Preservation	HCl / Ice	Site Visitors:	None
Water Thickness (Ft.)	55.27	Field Analysis Equip	YSI 556 MSP	Sampling Period	FALL 2013		

FIELD PURGE MONITORING

Time HHMMSS	pH Units	DO mg/l	Temp øC	ORP mV	SpCond mS/cm	TURB FTU	Flow Rate mL/min	Well Level (Ft.) TOC	Annotation
13:10							0	35.54	Static
13:24	7.12	6.02	11.7	116	1.17		420		redish brown cloudy
13:27	7.10	5.97	11.7	118	1.16		420	35.61	redish brown cloudy
13:30	7.11	6.05	11.7	117	1.16		420		clear
13:33	7.10	6.05	11.7	117	1.17		420	35.63	clear
13:36	7.12	6.02	11.7	112	1.16	92	420		clear
MINUTES						TOTAL LITERS			
12.0	0.01	-0.50%	-0.09%	-4.70	0.00%		5.04		

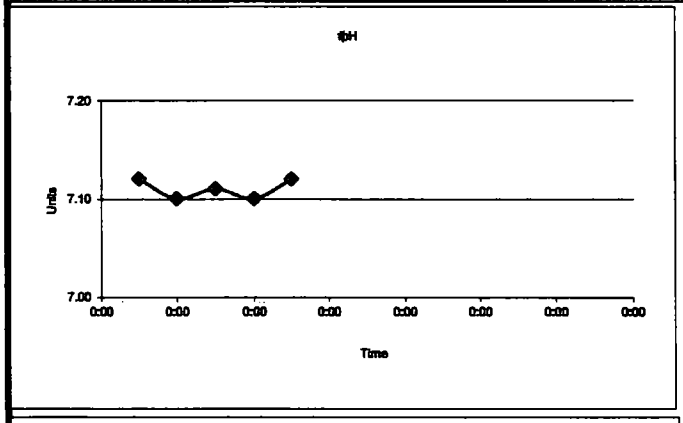

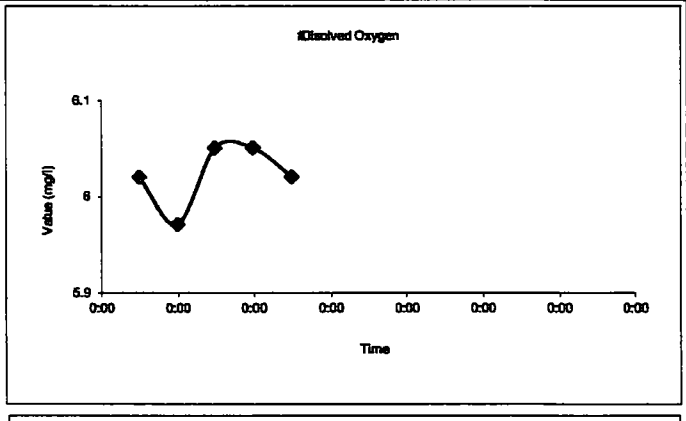

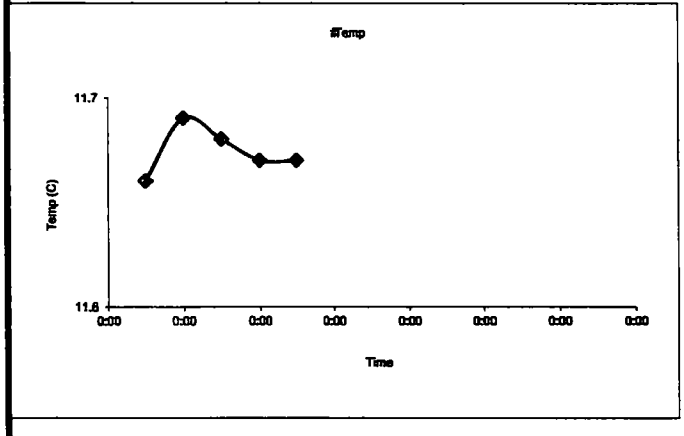

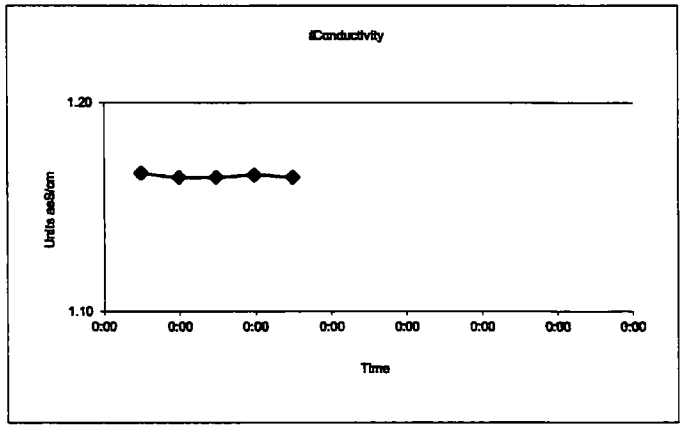

Remarks: (well condition, maintenance, etc...)