

OxyChem®

Wichita Plant



RECEIVED

FEB 17 2015

AWMD/WRAP IO

February 13, 2015

CERTIFIED MAIL: 7013 2250 0001 0126 5605
Return Receipt Requested

U.S. Environmental Protection Agency Region 7
Attn: Chief, RCRA Corrective Action and Permits Branch
AWMD/WRAP/KNRP
11201 Renner Blvd
Lenexa, Kansas 66219

**RE: NOTIFICATION OF PLANT CHANGES; OCCIDENTAL CHEMICALS CORPORATION,
WICHITA PLANT; USEPA ID# KSD007482029**

Dear Sir:

Enclosed please find a notification of a plant change, as required by Occidental Chemical Corporation's RCRA hazardous waste permit number KSD007482029 per *Section 1, I.E.10. Reporting Planned Changes*. The Wichita plant is planning on completing repairs and reducing the overall volume of Sump 417 located near the Pentachlorophenol Hazardous Waste Storage Yard. This sump is used for containment of the permitted Hazardous Waste Storage Yard, Pentachlorophenol Hazardous Waste Storage Yard which hasn't been utilized since 2005 when the Pentachlorophenol plant was permanently shut down, and the <90 day Hazardous Waste Storage Yard.

The repairs will be completed as weather permits. Additional concrete is going to be poured which will reduce the depth by approximately 14 inches and width by 8 inches. The proposed repairs and location map are attached for your review.

If you have any questions, please call Lisa R. Thurman at 316/529-7204.

Sincerely,

Lisa R. Thurman
Environmental Engineer

c.c.: Mostafa Kamal; KDHE
Brad Roberts, USEPA Region VII
Juan Somoano; GSHI
Bruce Clegg; CRA

CERTIFIED MAIL: 7013 2250 0001 0126 5612
CERTIFIED MAIL: 7013 2250 0001 0126 5629

L1502015

RCRA



534785

Occidental Chemical Corporation



Thurman, Lisa

From: Thompson, Rick
Sent: Thursday, February 12, 2015 8:56 AM
To: Thurman, Lisa
Subject: Reconstruct / Repair Sump 417

Rick

Per your request, we offer budget pricing for the following scope of work:

Reconstruct / Repair Sump 417 (WO #11568542)

- chip & remove section of paving enough to receive new coating (4'-6" wide on North & east side)
- Reinforce & pour new sump slab (14" ave. depth)
- Form, reinforce and pour 8" concrete walls around perimeter (1 side forms) (#5 rebar at 12" o.c.)
- Waterbar at slab & wall joint
- Temporary barricades
- Clean up
- Remodel sales tax

Exclusions:

- removal or disposal of hazardous material if encountered
- mechanical, electrical, utilities work
- epoxy coated rebar
- confined space watchman for slab pour - by Eisel
- coatings or sandblasting
- overtime or shift work

Our budget quote for the above scope of work is \$16,700 including sales tax. Project will be billed per labor and equipment rates previously provided to the owner.

Please contact me with any questions concerning this quote.

Chris Biggs
Project Manager
CONCO CONSTRUCTION
316-943-7111 office
316-285-6286 cell

BOB EISEL POWDER COATINGS, INC.PO BOX 12304
WICHITA, KANSAS

67277

(316)522-9499

FAX: (316)522-0444

DATE 2/12/2015

TO:

BEPC # 2013

OCCIDENTAL CHEMICAL CORPORATION
ATTN: RICK THOMPSON
6200 S RIDGE ROAD
WICHITA, KANSAS 67215

Job Description: To furnish all labor, material, equipment, supervision
and insurance necessary to complete the following

REF: REPAIR SUMP 417 --- WO#11568542

ITEM	DESCRIPTION	TOTAL
1	To abrasive blast using Black Beauty abrasive for concrete repair in the sump.	
2	To abrasive blast using Black Beauty abrasive, prime and finish sump 417 new concrete.	
3	To abrasive blast using Black Beauty abrasive, prime and finish concrete above ground per Rick Thompson's directions.	
	Primer : Polyspec 300ex @3 -5 mils	
	Base coat: NovoRez 351@ 16 mils	
	Top coat : NovoRez 351@ 16 mils	
	Materials & Equipment	\$9,259.00
	Labor	\$11,341.00
		\$20,600.00
	PRICE IS EXCLUDING SALES TAX.	

ESTIMATE BY

Don Sanford

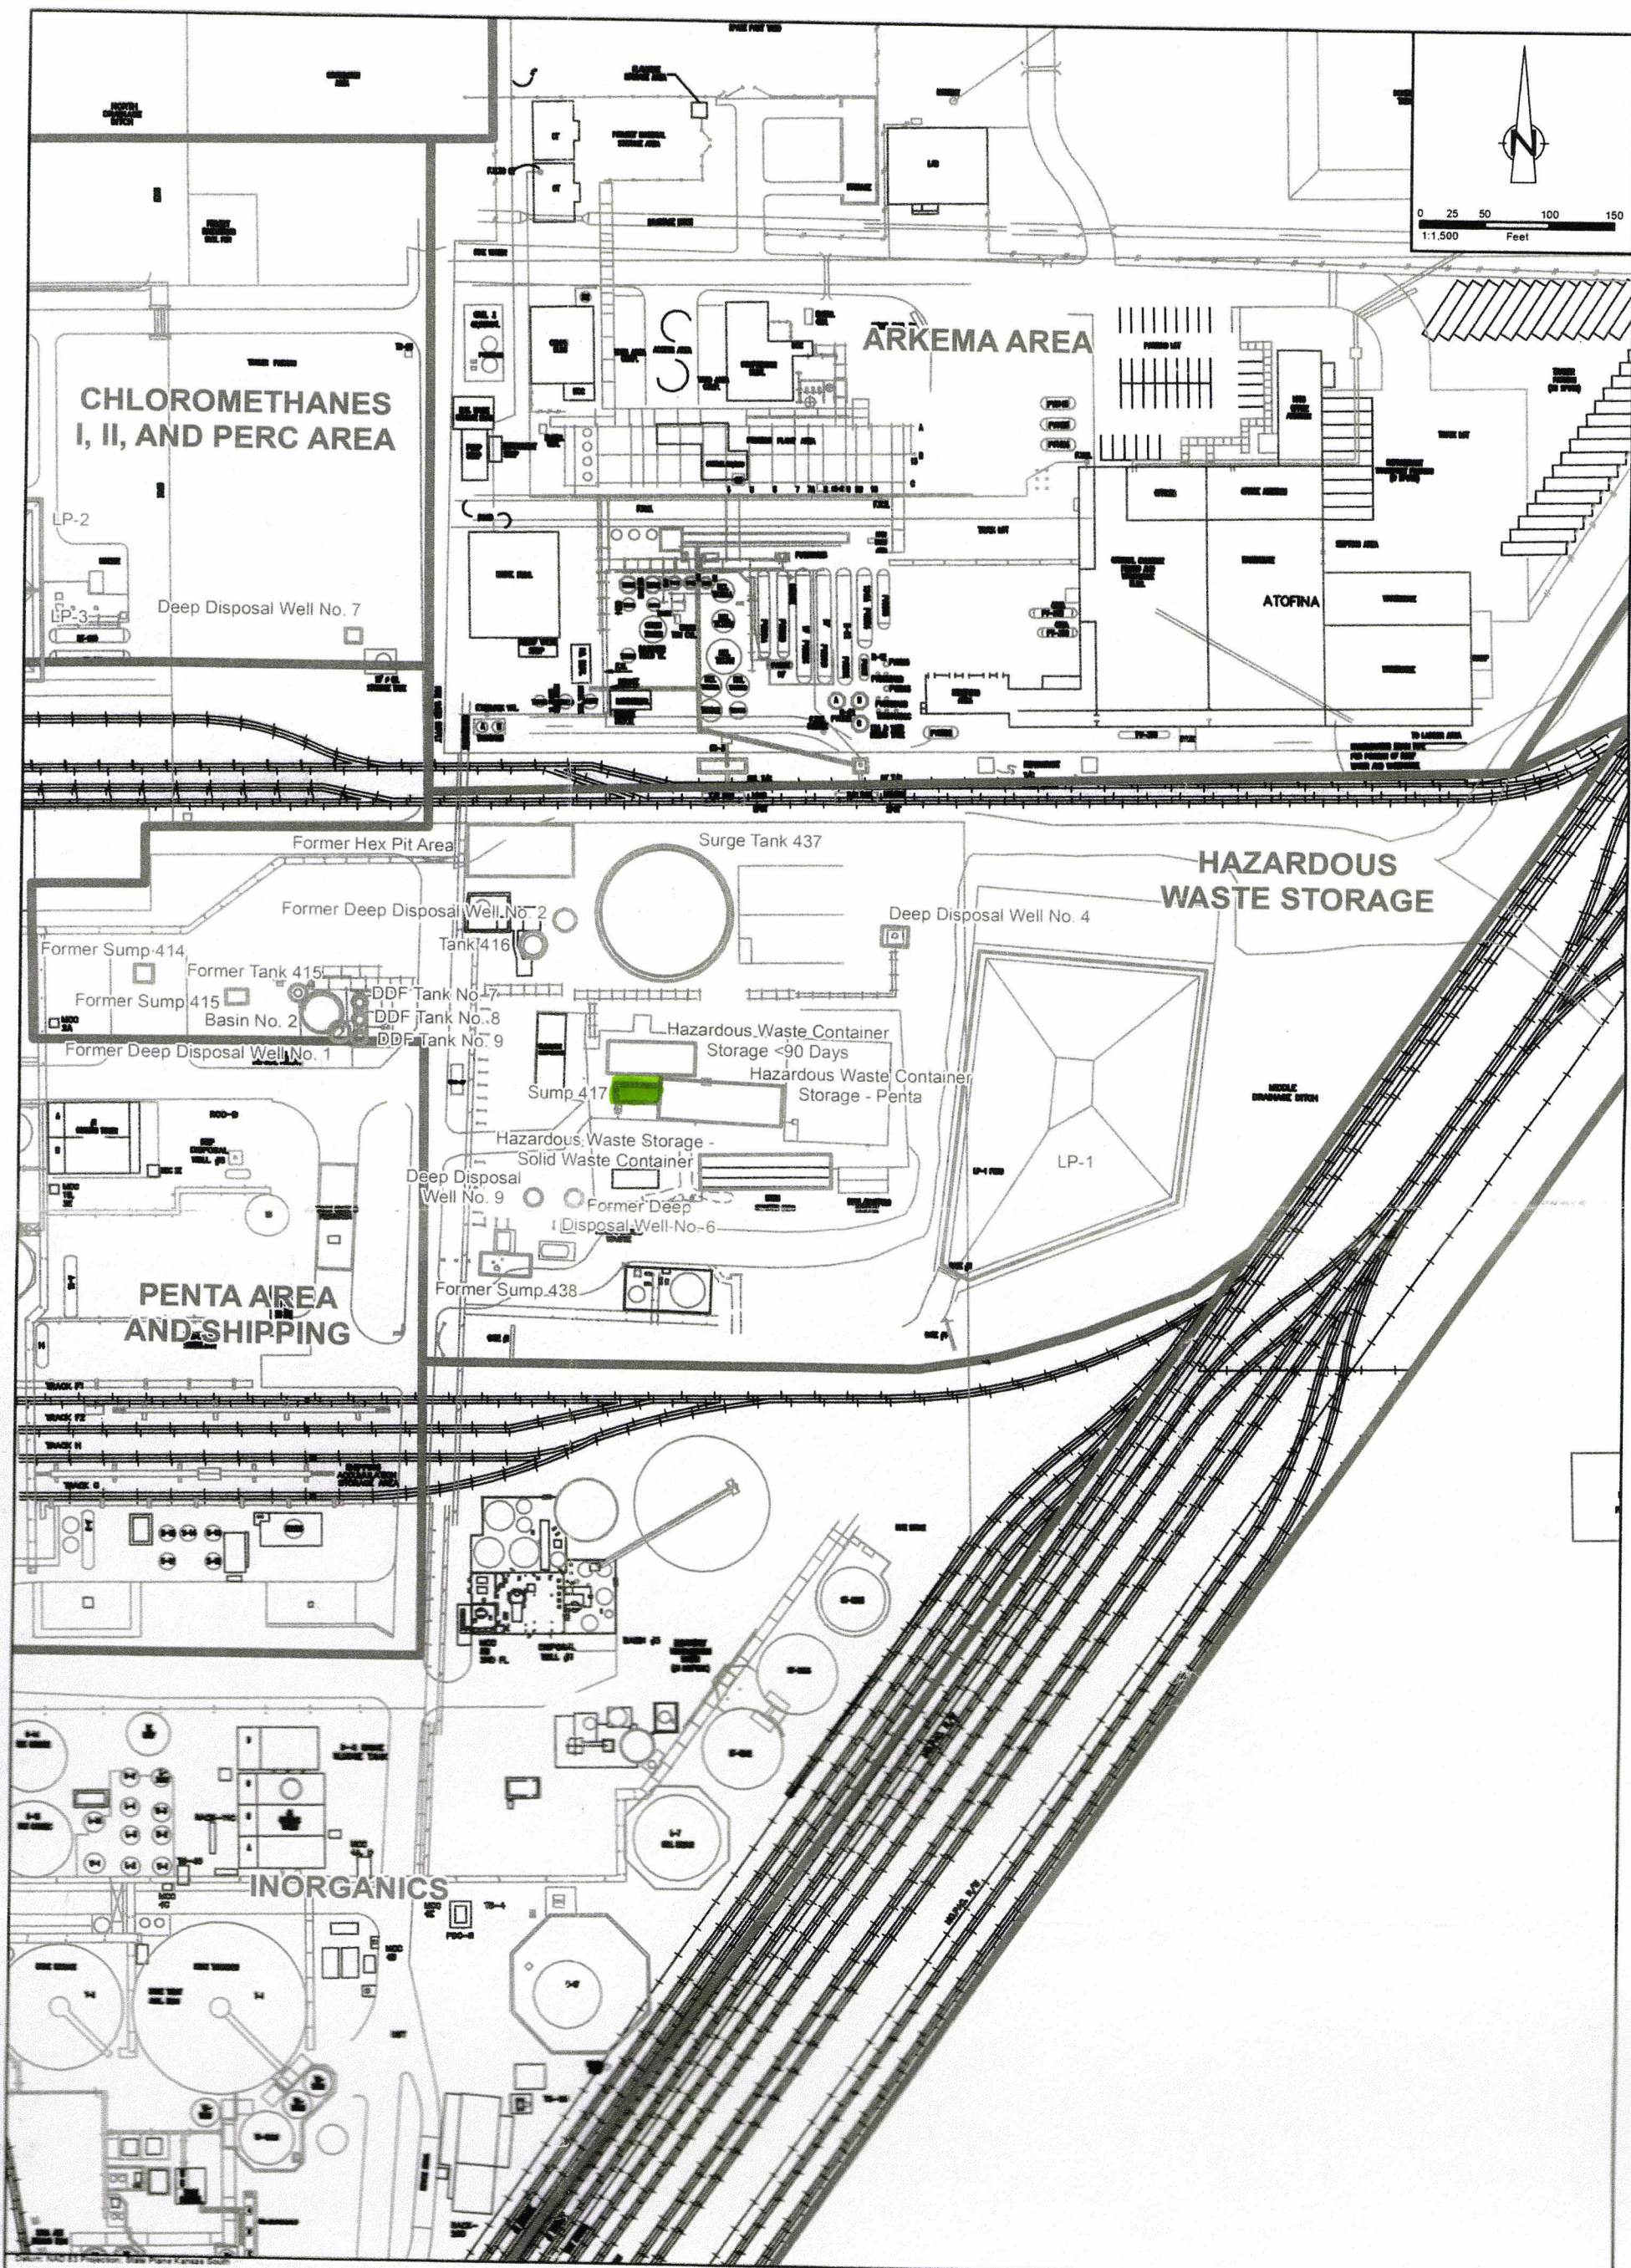


figure 4

HAZARDOUS WASTE STORAGE AREA SWMUs
RFI WORK PLAN
CHLOROMETHANES I, II, PERC & HAZWASTE AREAS
OCCIDENTAL CHEMICAL CORPORATION
Wichita, Kansas