ERG Operating Company, LLC
Cat Canyon Field, California
Cyclic Steam Stimulation Process Flow

SISQUOC S1B production zone
30-35% porosity
1,000-5,000md permeability
55-65% oil saturation
35-45% water saturation
0-5% gas saturation
110-130°F reservoir temperature
8-12°API oil gravity
28,000cp oil viscosity at 110°F
0.7 gas specific gravity
1,000 BTU/cu-ft

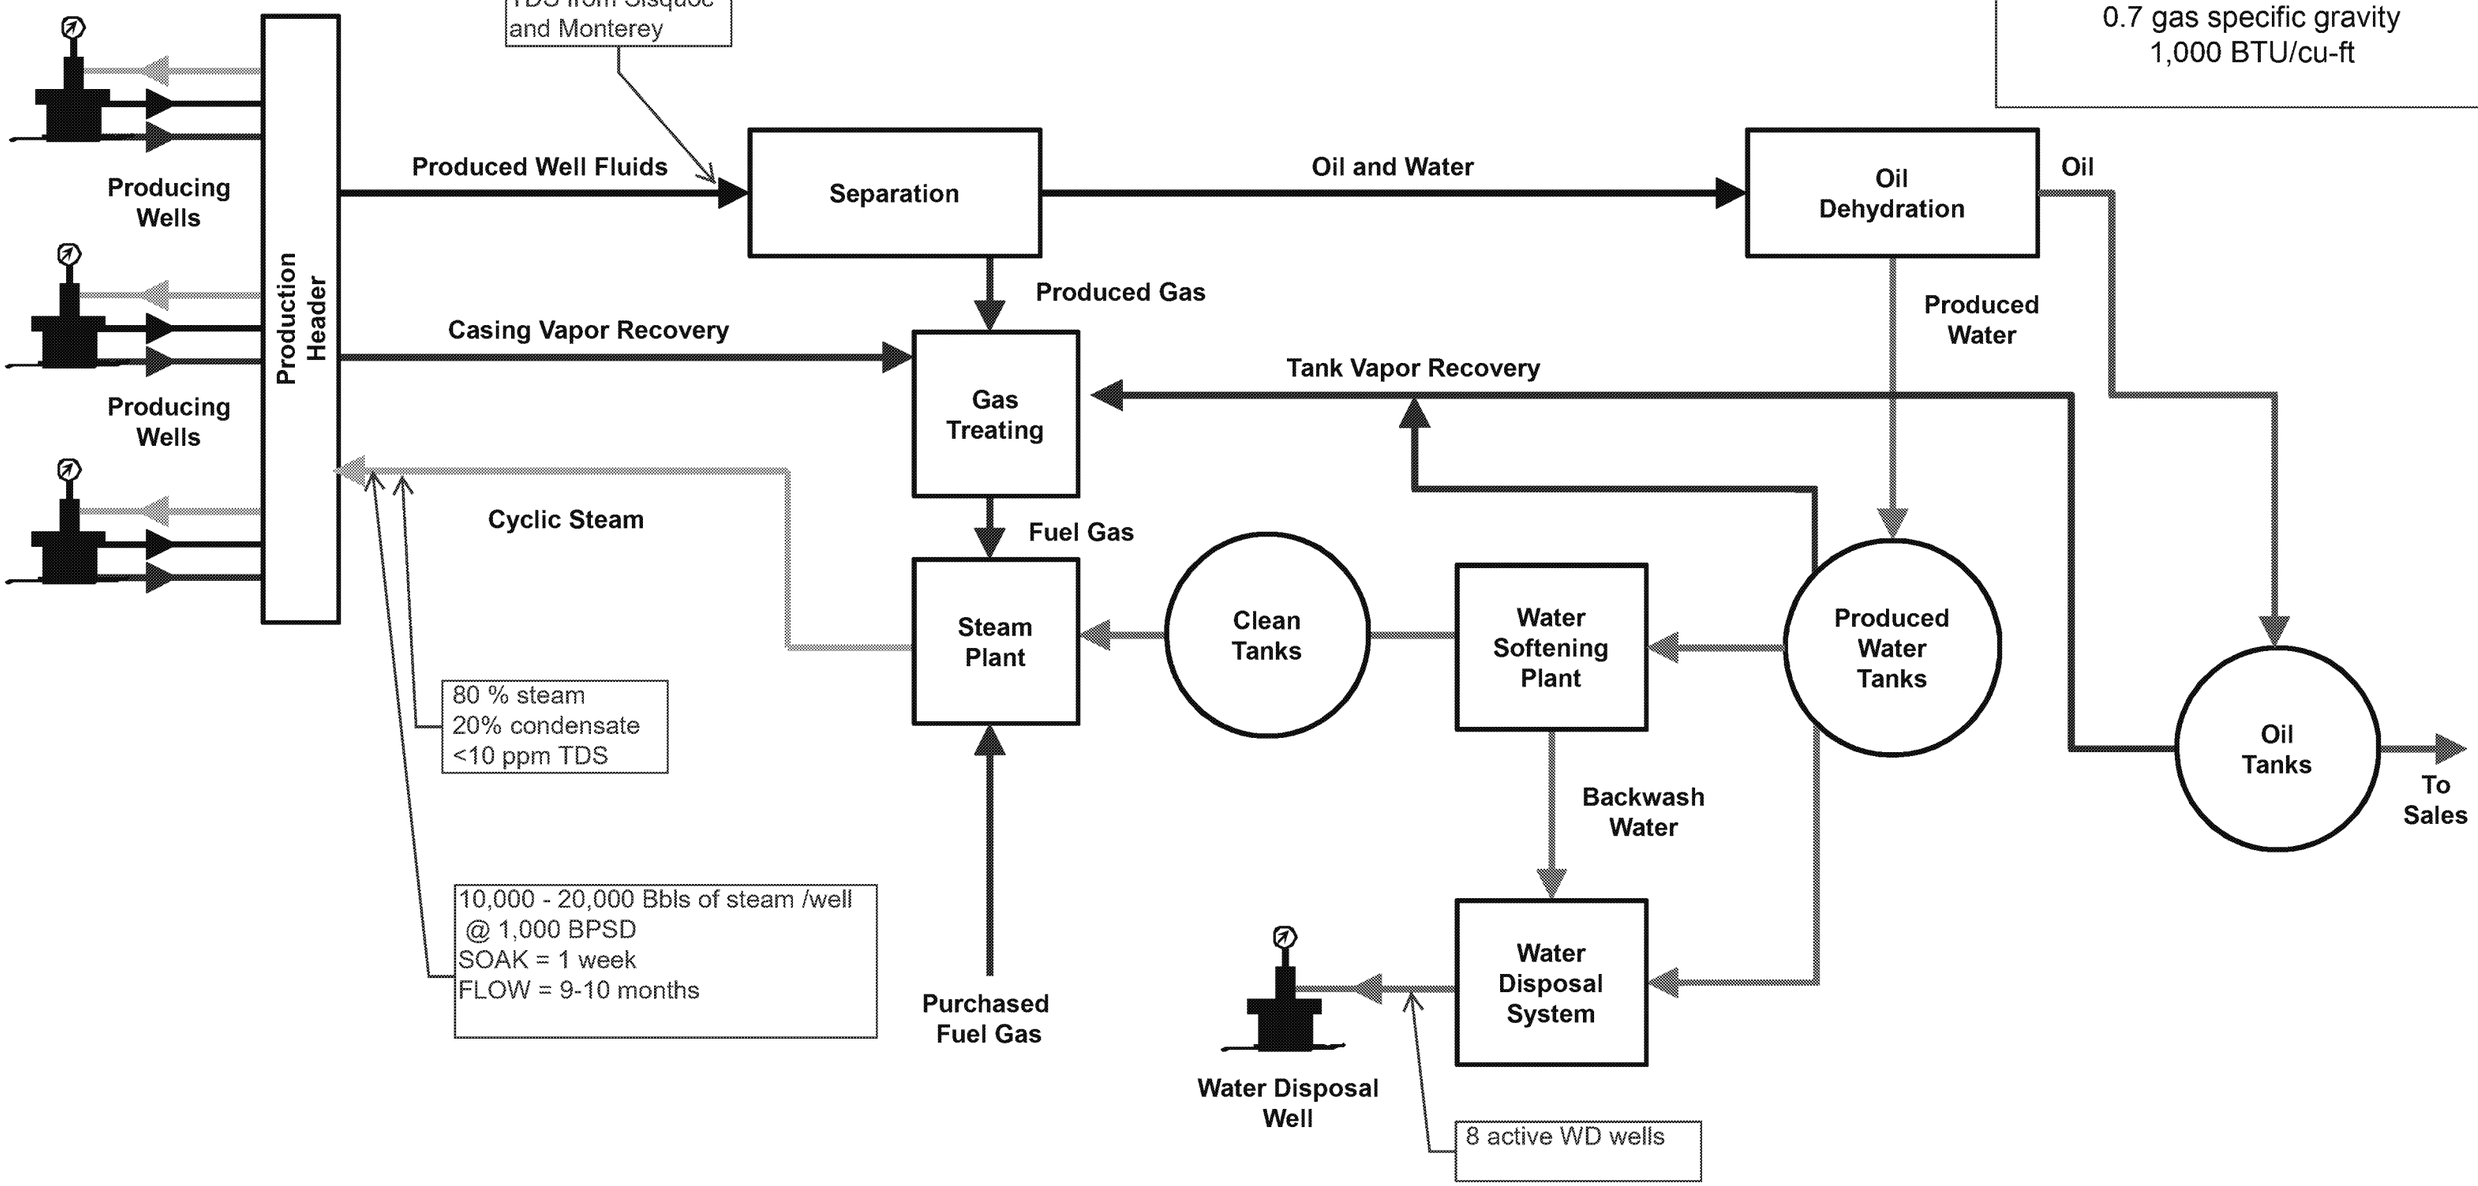

Exhibit 7