Lockheed Martin Corporation - Environment, Safety & Health Burbank Program Office 2550 North Hollywood Way, 3rd Floor Burbank, CA 91505-1055 Facsimile 818-847-0256 or 818-847-0170

LOCKHEED MARTIN

Via Federal Express CAY0799/277 WBS #48720

July 9, 1999

Mr. Gerard J. Thibeault Executive Officer California Regional Water Quality Control Board Santa Ana Region 3737 Main Street, Suite 500 Riverside, California 92501-3339

Dear Mr. Thibeault:

Subject: May 1999 Data Report

Water Supply Contingency Plan Production Well Sampling Program Crafton-Redlands Plume Project

In compliance with the approved Water Supply Contingency Plan, enclosed please find one copy of the May 1999, Production Well Sampling Program report prepared by HSI-Geotrans for the Lockheed Martin Corporation. This report presents analytical results from samples collected at Bunker Hill Basin Production Wells in May of 1999. Laboratory Quality Assurance/Quality Control documentation is in Attachment B which is also enclosed for your review.

Should you have any questions, comments, or request, please contact Tom Blackman at (818) 847-0791 or John Hemmans at (818) 847-0191.

Sincerely,

Carol A. Yuge

**Enclosures** 

CAY:JH:mg

cc: See Attached Distribution List

Gerard Thibeault July 9, 1999 CAY0799/277 Page 2

### Distribution:

cc: (Abbreviated Report Without Attachments "A, B, & C" Which are Available Upon Request)

Kim Alexander, Psomas

Kalyanpur Baliga, Department of Health Services (San Bernardino)

Tom Bartol, USAF, Norton Air Force Base

Henry Dennis, Mountainview Power Company

Dodie Farmer, Victoria Farms Mutual Water Company

Douglas Headrick, San Bernardino Valley Water Conservation District

Mike Huffstutler, City of Redlands

Ross Lewis, Gage Canal Company

Kevin Mayer, US EPA (Region IX)

Steve Mains, Western Municipal Water District

Morris Matson, Loma Linda University

Eugene McMeans, Riverside Highland Water Company

Zahra Panahi, City of Riverside

Dan Randall, City of Riverside

Bob Reiter, San Bernardino Valley Municipal Water District

Toby Roy, Department of Health Services (San Diego)

Alain Sharp, Earth Technology Corporation

Greg Snyder, City of Loma Linda

Joseph Stejskal, City of San Bernardino

Dieter Wirtzfeld, City of Riverside



3150 Bristol Street Suite 500 Costa Mesa, California 92626

714-513-1415 FAX 714-513-1278

July 12, 1999

Lockheed Martin Corporation West Coast Project Office 2550 N. Hollywood Way, 3<sup>rd</sup> Floor Burbank, California 91505

Attention:

Mr. John Hemmans

**Project Coordinator** 

Subject:

May 1999 Data Report

Water Supply Contingency Plan Production Well Sampling Program Crafton-Redlands Plume Project

### Dear Mr. Hemmans:

This report presents a summary of field procedures, protocols, and results of the Water Supply Contingency Plan production well sampling for the month of May 1999. The Water Supply Contingency Plan (WSCP) was prepared by Lockheed Martin Corporation and submitted to the State of California Regional Water Quality Control Board (RWQCB) Santa Ana Region on September 30, 1996. The plan was conditionally approved by the RWQCB in a letter dated March 6, 1997. The WSCP for the Crafton-Redlands Plume was prepared to address maintenance of water supply to purveyors in the event that wells became impacted with trichloroethene (TCE) from the Crafton-Redlands TCE Plume. A summary of key dates and WSCP sampling program evolution is provided on Table 1.

The locations of the WSCP wells and analytical results for the May 1999 sampling event for TCE and perchlorate are shown on Figures 1 and 2, respectively. Table 2 presents a summary of analytical tests performed on each WSCP well and water system sampling point. The sampling frequency of each well is once a month for the first year. More frequent sampling, if required, is based on the analytical results as outlined in the WSCP TCE and perchlorate decision matrices, provided as Figures 3 and 4, respectively. The perchlorate decision matrix was presented in the Perchlorate Work Plan and Schedule, which was submitted, to the RWQCB on August 15, 1997. The RWQCB approved the Perchlorate Work Plan on October

31, 1997. Table 3 presents a summary of the wells sampled twice monthly according to the decision matrices.

### **RESULTS**

A summary of the analytical results for the May 1999 WSCP sampling event for TCE and perchlorate is shown on Figures 1 and 2, respectively, and presented on Table 4. Available groundwater elevation data is provided on Table 5. The water sampling field forms are provided in Attachment A. The chain-of-custody, laboratory data sheets, and Level 1 Modified laboratory quality assurance/quality control (QA/QC) documentation is provided in Attachment B. Beginning in May 1999, the level of laboratory QA/QC documentation was changed from Level III to Level I Modified. Attachment A and B are available upon request.

### Trichloroethene

In May 1999, TCE was detected at or above the detection limit of 0.5  $\mu$ g/L in seven wells and two water system sampling points including; Richardson #1 (0.79 $\mu$ g/L), Gage 26-1 (10  $\mu$ g/L), Gage 27-1 (11  $\mu$ g/L), Gage 27-2 (1.6  $\mu$ g/L), Gage 29-1 (0.64  $\mu$ g/L), Gage 29-2 (4.3  $\mu$ g/L), Gage 92-1 (0.82  $\mu$ g/L), Gage Delivery (1.3  $\mu$ g/L) and 7th & Chicago (0.5  $\mu$ g/L), as shown on Figure 1 and Table 4. Groundwater samples collected from the remaining WSCP wells and system sampling points did not detect TCE.

Three groundwater samples collected in May met or exceeded  $2/5^{th}$  the MCL for TCE (2.0  $\mu g/L$ ) including; Gage 26-1 (10  $\mu g/L$ ), Gage 27-1 (11  $\mu g/L$ ), and Gage 29-2 (4.3  $\mu g/L$ ). The TCE impacts at Gage 26-1 and Gage 27-1 are attributed to the Norton AFB plume, thus, more frequent TCE sampling will not be implemented. The TCE impacts at Gage 29-2 are wholly or partially attributed to the Norton AFB plume, thus, more frequent sampling will not be implemented.

### Perchlorate

In May 1999, perchlorate was detected at or above the detection limit of 4  $\mu$ g/L in two COLL wells (Mountain View #2 and Richardson #1), nine City of Riverside Gage wells (Gage 26-1, Gage 27-1, Gage 27-2, Gage 29-1, Gage 29-2, Gage 46-1, Gage 51-1, Gage 66-1, and Gage 92-1), two Loma Linda University wells (Anderson #2 and Anderson #3), two City of Riverside system sampling points (Gage Delivery and 7<sup>th</sup> & Chicago), one City of Riverside irrigation sampling point (Gage Arlington), and two City of Loma Linda system sampling points (Mountain View Blend–Lawton and Richardson Blend), as presented on Figure 2 and Table 4.

In the May WSCP sampling, perchlorate was detected at or above 75 percent (13.5  $\mu$ g/L) of the PAL in one City of Riverside well (Gage 29-2). Gage 29-2 is currently being sampled on a twice a month basis.

### **CLOSING**

HSI GeoTrans greatly appreciates being of continued service to Lockheed Martin Corporation on this project. Should you have any questions or comments, please do not hesitate to call.

3

Sincerely,

**HSI GEOTRANS** 

Roy J. Marroquin

Project Manager

James C. Norman, R.G., C.HG.

**Project Director** 

**TABLES** 

### TABLE 1

### **KEY PROJECT DATES AND WSCP SAMPLING PROGRAM EVOLUTION**

September 30, 1996, Lockheed Martin submitted the Water Supply Contingency Plan (WSCP) to the RWQCB – Santa Ana Region.

March 6, 1997, the RWQCB conditionally approved the WSCP, which included sampling eight production wells (City of Loma Linda Richardson #1, Richardson #2, Mountain View #1, Mountain View #2, Victoria Farms Mutual Water Company Wells #1 and #3, and Southern California Edison #1 and #2).

June 1997, Victoria Farms Mutual Water Company was connected to City of San Bernardino Water. Pumping ceased at VFMWC #1 and #3, and the two wells were removed from the program.

June 1997, sampling of SCE #1 was discontinued due to sampling logistics. The WSCP consists of five wells, including COLL Mountain View #1 and #2, COLL Richardson #1 and #2, and SCE #2 (AUX).

August 1997, the WSCP was expanded due to the detection of perchlorate in municipal supply wells in the Bunker Hill Basin. Twenty-six wells were added to the WSCP including nineteen City of Riverside wells, five City of Redlands wells, and two Loma Linda University wells, for a total of 31 wells.

October 1997, three City of Riverside water system sampling points were added to the WSCP, including the Gage system pipeline (Gage Delivery), the Waterman system pipeline (Iowa Booster), and the sampling station measuring outflow from the Linden and Evans Reservoirs (7<sup>th</sup> & Chicago).

March 1998, two City of Loma Linda water system sampling points were added to the WSCP, including the Mountain View system pipeline (Mountain View Blend at Lawton) and the Richardson system pipeline (Richardson Blend).

June 1998, one City of Riverside irrigation water system sampling point (Gage Arlington) and one additional City of Loma Linda water system sampling point (Mountain View Blend at Timoteo) were added to the WSCP.

December 1998, COLL Richardson #3 Well Added to WSCP Sampling Program.

TABLE 2

HSI#	·····································	Perchiorate	TCE
City of Loma Linda		2000年1月1日 - 伊大河南部 1000年1月1日 - 1000日 -	
692	Mountain View #2	X	X
693	Richardson #1	X	X
694	Richardson #2	X	X
707	Richardson #3	Х	X
City of Loma Linda W	ater System Sampling Points 🧓 "		
3016	Mountain View - Timoteo	X	Х
2968	Richardson Blend	Х	X
Mountain View Power			The second second
554	SCE#2(AUX)	X	X
Loma Linda University	SCE#2(AUX)		
267	LLUniv Anderson #2	X	
717	LLUniv Anderson #3	Х	
City of Riverside (Gag	e System)		
252	Gage#26-1	X	X
258	Gage#27-1	X	X
259	Gage#27-2	X	X
260	Gage#29-1	Х	X
219	Gage#29-2	×	Х
220	Gage#29-3	X	X
218	Gage#30-1	×	X
214	Gage#31-1	X	Х
215	Gage#46-1	X	X
253	Gage#51-1	X	Х
216	Gage#56-1	Х	Х
257	Gage#66-1	X	X
644	Gage#92-1	X	Х
641	Gage#92-2	Х	X
642	Gage#92-3	Х	X
City of Riverside (Wat			
273	Hunt#6	X	
271	Hunt#10	X	
272	Hunt#11	X	
City of Riverside Wate	r System Sampling Points		na iku patén t
2946	Iowa Booster (Waterman)	×	X
2947	Gage Delivery (Gage)	X	X
2948	7th & Chicago (Reservoir)	X	Х
3018	Gage Arlington	X	Χ
City of Redlands		The state of the s	
542	COR Church St	X	· · · · · · · · · · · · · · · · · · ·
2673	COR#38	X	
535	COR Mentone Acres	X	
29	COR Orange st	X	
74	CORRees	X	Χ

Notes:

TCE = Trichloroethene

Perchlorate analyzed using DHS Method (EPA 300.0 Modified)

TCE analyzed using EPA Method 502.2

TABLE 3

## WSCP PRODUCTION WELL SAMPLING PROGRAM MAY 1999 WELLS SAMPLED TWICE MONTHLY

**-15.2HSI# ***		Perchlorate	TOE SE
City of Loma Linda			
692	Mountain View #2	X	
City of Riverside (Gage Systen	n)		ectes processes
219	Gage #29-2	X	
220	Gage #29-3	X	

### Notes:

TCE = Trichloroethene

Perchlorate analyzed using DHS Method (EPA 300.0 Modified).

TCE analyzed using EPA Method 502.2.

In May Gage 29-3 was not sampled because the well was off-line.

# TABLE 4 WSCP PRODUCTION WELL SAMPLING PROGRAM MAY 1999 DATA RESULTS

HS#	Well Name	Sample Date	Perchlorate (μg/L)	TCE (μg/L)
City of Loma L	inda 🦠 🐪		14 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	头人的: "4.4   医腹膜隔隔
692	Mountain View #2	5/4/99	7.6	ND(0.5)
692	MUN-740	5/4/99	7.4	ND(0.5)
692	Mountain View #2*	5/17/99	5.0	NA NA
692	MUN-741	5/17/99	5.0	NA NA
693	Richardson #1	5/4/99	12	0.79
694	Richardson #2	NS	NS	NS
707	Richardson #3	5/4/99	ND(4)	ND(0.5)
	inda Water System Sampling Poin			
2967	Mountain View Blend-Lawton	5/4/99	6.3	ND(0.5)
2968	Richardson Blend	5/4/99	5.8	ND(0.5)
	Power			
554	SCE#2(AUX)	5/3/99	ND(4)	ND(0.5)
	niversity			
267	LLUniv Anderson #2	5/4/99	4.7	NA
717	LLUniv Anderson #3	5/4/99	4.6	NA NA
	de (Gage System)			
252	Gage#26-1	5/17/99	6.8	10
258	Gage#27-1	5/4/99	6.3	11
259	Gage#27-2	5/4/99	7.8	1.6
260	Gage#29-1	5/4/99	8.5	0.64
219	Gage#29-2	5/3/99	23	4.3
219	MUN-739	5/3/99	24	4.7
219	Gage 29-2*	5/17/99	24	NA
220	Gage#29-3	NS	NS	NS
220	Gage#29-3*	NS	NS	NS
218	Gage#30-1	5/3/99	ND(4)	ND(0.5)
214	Gage#31-1	NS	NS	NS
215	Gage#46-1	5/3/99	6.1	ND(0.5)
253	Gage#51-1	5/3/99	12	ND(0.5)
216	Gage#56-1	5/3/99	ND(4)	ND(0.5)
257	Gage#66-1	5/4/99	11	ND(0.5)
644	Gage#92-1	5/3/99	11	0.82
641	Gage#92-2	5/3/99	ND(4)	ND(0.5)
642	Gage#92-3	5/3/99	ND(4)	ND(0.5)
City of Riversid	e (Waterman System)	iod⊈gara erike		
273	Hunt#6	NS	NS	NA
271	Hunt#10	NS	NS	NA
272	Hunt#11	NS	NS	NA
City of Riversid	e Water System Sampling Points			
2946	Iowa Booster (Waterman)	5/5/99	ND(4)	ND(0.5)
2946	MUN-741	5/5/99	ND(4)	ND(0.5)
2947	Gage Delivery (Gage)	5/5/99	5.8	1.3
2948	7th & Chicago (Reservoir)	5/5/99	4.2	0.5
3018	Gage Arlington	5/4/99	5.2	NA NA
City of Redland				
542	COR Church St <sup>a</sup>	NS	NS	NA
		<del></del>		
2673	COR#38ª	. NS	NS	NA NA
535	COR Mentone Acres <sup>a</sup>	NS	NS	NA
29	COR Orange St <sup>a</sup>	NS	NS	NA
74	COR Rees	NS	NS	NS

#### Notes:

= Twice-monthly sampling result

= Well sampled on quarterly basis, if active

ND(4) = Not detected at the specified limit

MUN = Duplicate sample collected from the well listed directly above

NA = Not Analyzed
NS = Not Sampled

TCE = Trichloroethene

DEL MAR = Del Mar Analytical Laboratory of Irvine, CA

Perchlorate analyzed using DHS Method (EPA 300.0 Modified)

TCE analyzed using EPA Method 502.2

(μg/L) = micrograms per liter

**TABLE 5** 

### SUMMARY OF WATER LEVEL MEASUREMENTS MAY 1999 SAMPLING EVENT

HS#	<b>V</b> <b>Well Name</b>	Measure Date	Depth to Water		* Elevation &	Comments
City of Lor	na Linda 🦠 💮 🔭		No. of State	3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	A THE THE PERSON OF THE PERSON	が対象的に対
692	Mountain View #2	05/04/99	170	1085	915	Pumping
693	Richardson #1	05/04/99	143	1077	934	Pumping
694	Richardson #2	NA	NM	1078	NM	NM
707	Richardson #3	05/04/99	135	1085	950	Static
Southern C	California Edison	到11. 的25. 现代 <b>经</b>			1 2 5 6 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	14.8
554	SCE#2(AUX)	NM	NM	1100.00	NM	Pumping
Loma Lind	a University		图 多 (4)			Ser Bulletine (195
267	LLUniv Anderson #2	NM	NM	1075	NM	Pumping
717	LLUniv Anderson #3	NM	NM	1070	NM	Pumping
City of Rive	erside (Gage System)	All The Part of th	entra Vije	legisk man legisk for the	A CALL TO SECTION OF THE SECTION OF	HAMP PARTER :
252	Gage#26-1	04/27/99	63.10	1045.33	982.23	Static
258	Gage#27-1	04/27/99	63.40	1044.64	981.24	Static
259	Gage#27-2	04/27/99	79.0	1044.64	965.64	Pumping
260	Gage#29-1	04/27/99	82.9	1044.43	961.53	Pumping
219	Gage#29-2	04/27/99	74.3	1046.31	972.01	Pumping
220	Gage#29-3	04/27/99	60.8	1048.75	987.95	Static
218	Gage#30-1	04/27/99	165.7	1054.17	888.47	Pumping
214	Gage#31-1	04/27/99	64.2	1054.64	990.44	Static
215	Gage#46-1	04/27/99	131.9	1065.50	933.60	Pumping
253	Gage#51-1	04/27/99	162.7	1044.64	881.94	Pumping
216	Gage#56-1	04/27/99	151.5	1065.50	914.0	Pumping
257	Gage#66-1	04/27/99	117.1	1044.85	927.75	Pumping
644	Gage#92-1	04/27/99	145.4	1047.78	902.38	Pumping
641	Gage#92-2	04/27/99	168.6	1053.38	884.78	Pumping
642	Gage#92-3	04/27/99	161.6	1058.78	897.18	Pumping
City of Rive	erside (Waterman Systen	n) s a s a		a to a factor		
273	Hunt#6	NM	NM	1015.5	NM	Pumping
271	Hunt#10	NM	NM	1017	NM	Pumping
272	Hunt#11	NM	NM	1015.7	NM	Pumping
City of Red	lands		Salana da		Marin Day of Name	r feith, feat (\$10).
542	COR Church St	May-99	91.0	1344.8	1253.8	Static
	COR#38	May-99	50.5	NA	NA	Static
535	COR Mentone Acres	May-99	143.0	1506.4	1363.4	Static
29	COR Orange St	May-99	127.0	1282	1155.0	Static
74	COR Rees	May-99	180.5	1490	1309.5	Static

### Notes:

All measurements reported in feet below measuring point (ft-bmp)


Water level measurements for all City of Loma Linda, City of Riverside, and City of Redlands wells were obtained by purveyor personnel. Elevations given in feet above mean sea level (ft-msl)


NM=Not measured


NA=Data not available


Static water levels were allowed to recover a minimum of 30 minutes to obtain a static water level measurement

### **FIGURES**

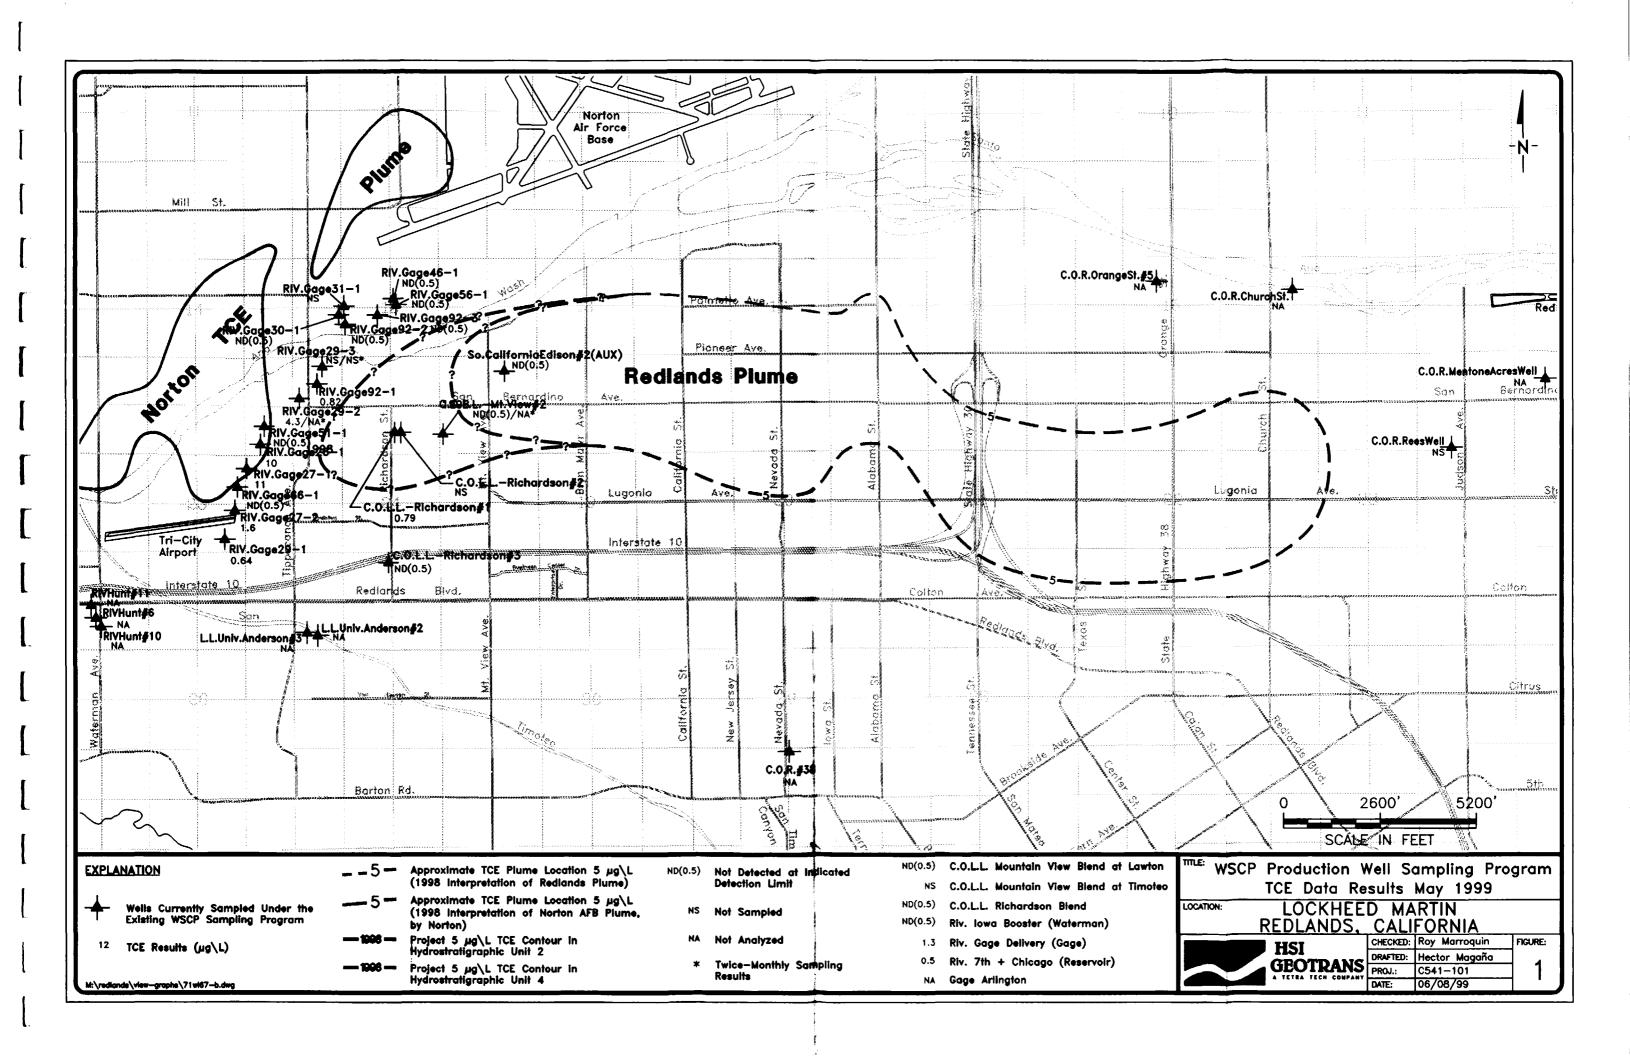

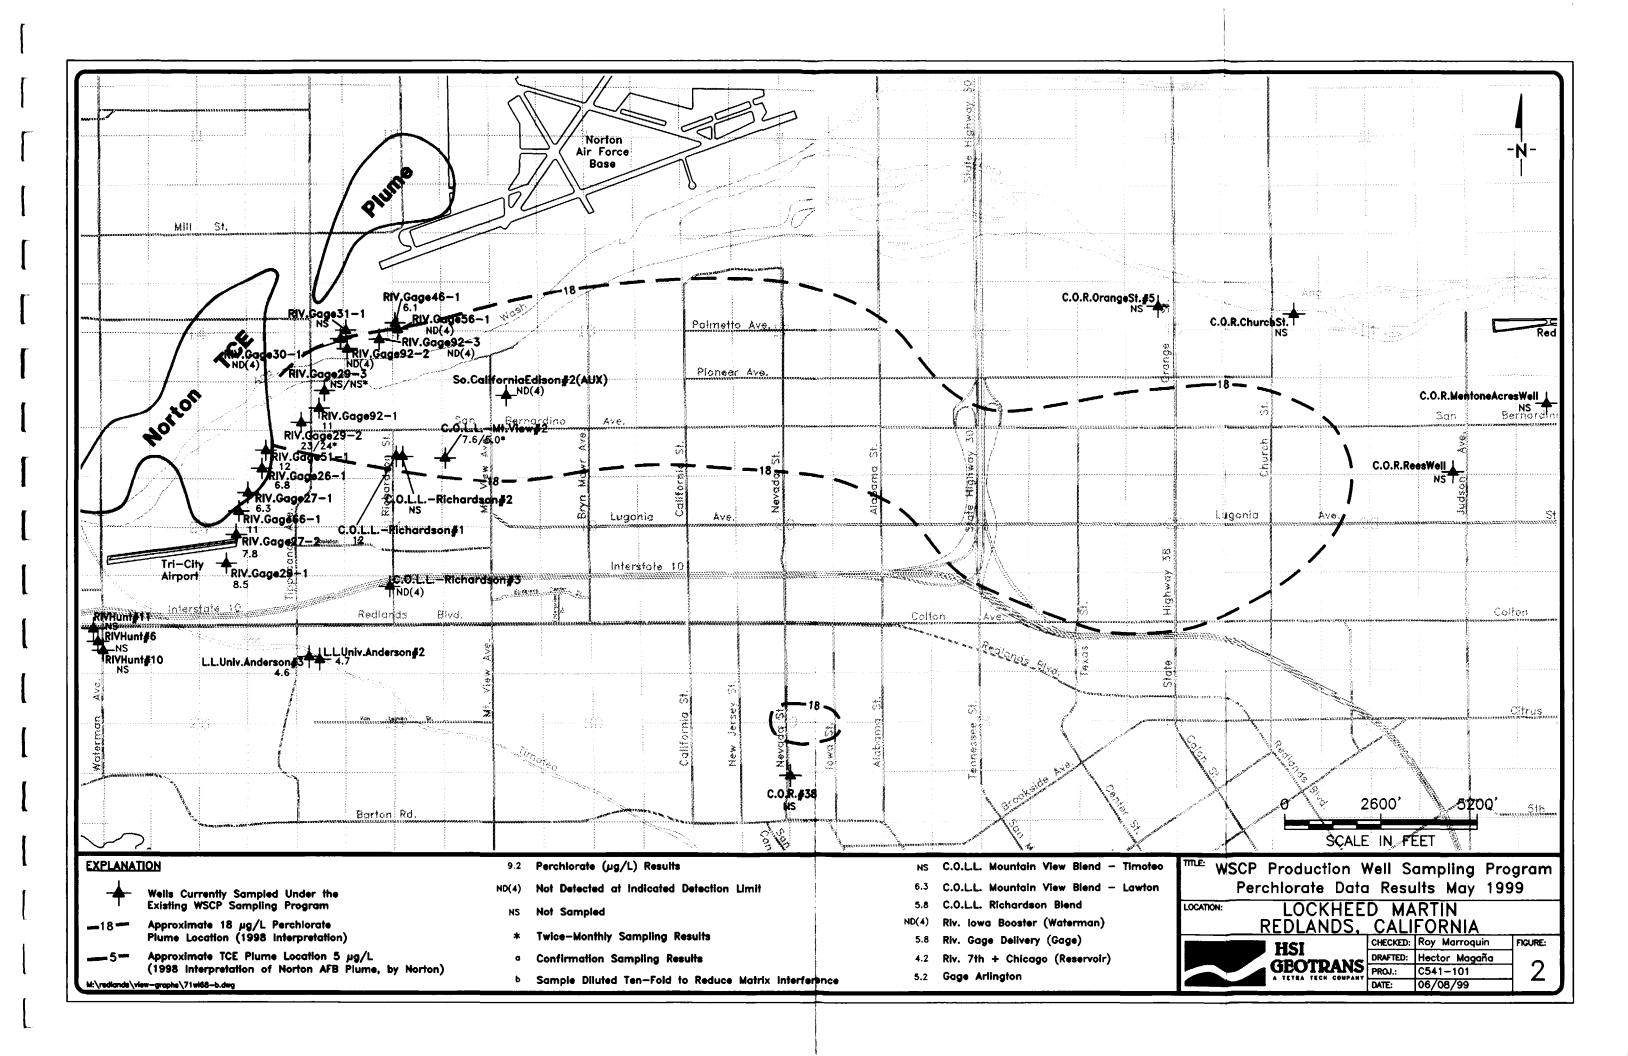

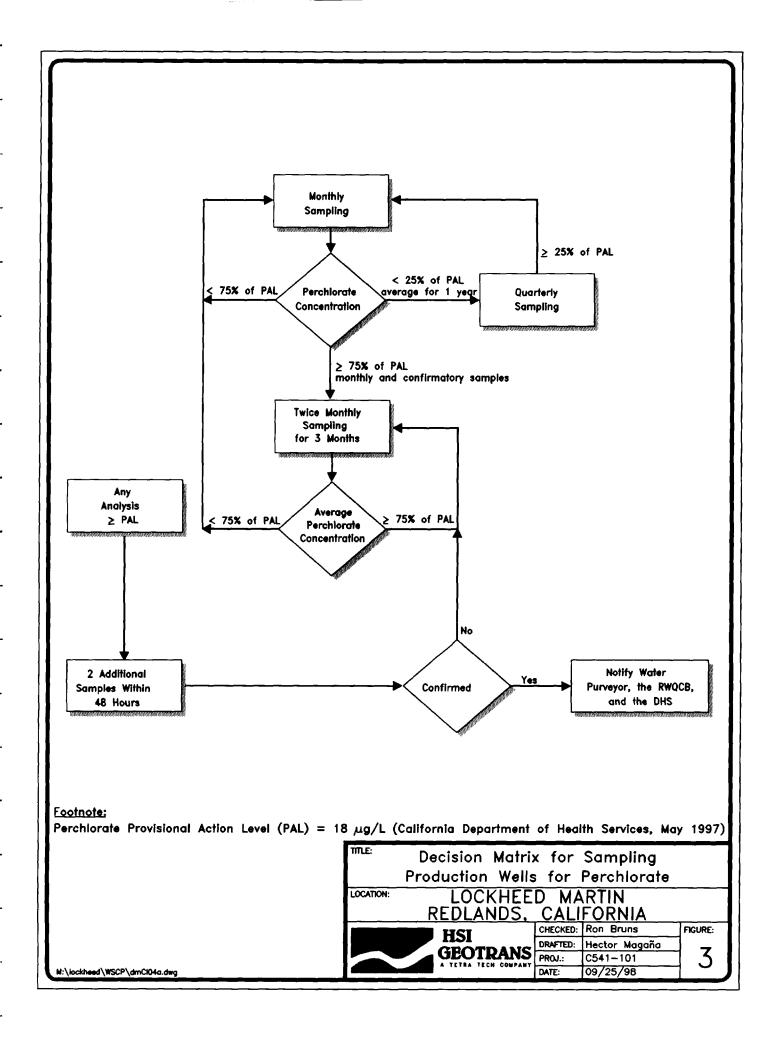

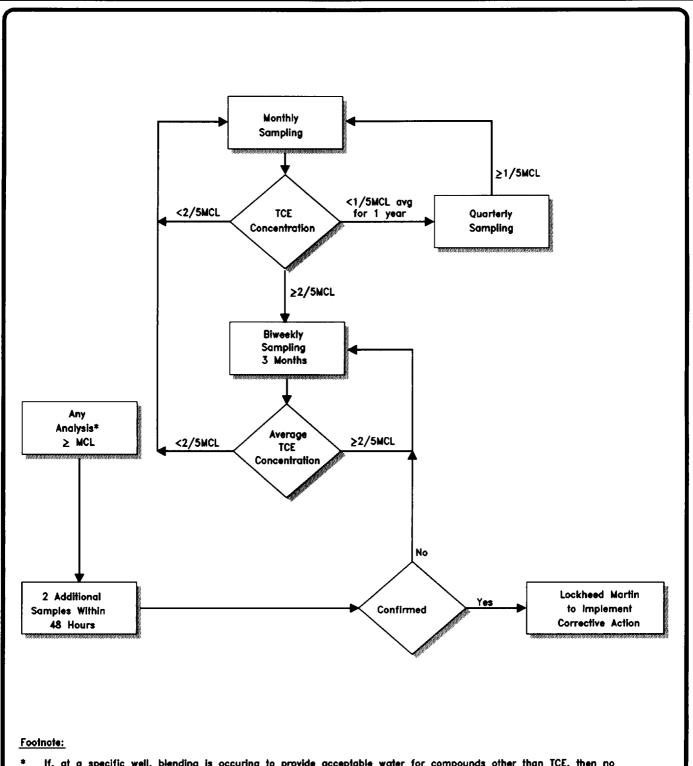

If, at a specific well, blending is occuring to provide acceptable water for compounds other than TCE, then no corrective action may be necessary as long as the concentration of TCE is less than 5.0 µg/L in the finished water.

TCE MCL =  $5 \mu g/L$  (California Regulations, Title 22, Division 4, Chapter 15, Section 64444) Decision Matrix for Sampling of Production Wells for TCE from the Crafton-Redlands Plume LOCATION: LOCKHEED MARTIN

REDLANDS, CALIFORNIA **HSI** GEOTRANS

	CHECKED:	Ron Bruns	FIGURE:
_	DRAFTED:	Hector Magaña	
2	PROJ.:	C541-101	4
	DATE:	09/25/98	•

M:\lockheed\WSCP\dm-prod3.dwg

# ATTACHMENT A GEOLIS FIELD FORMS

### **ATTACHMENT A**

GEOLIS FIELD FORMS (Available Upon Request)

### **ATTACHMENT B**

CHAIN-OF-CUSTODY RECORDS AND
LABORATORY DATA SHEETS
QUALITY ASSURANCE/QUALITY CONTROL DOCUMENTATION

### **ATTACHMENT B**

CHAIN-OF-CUSTODY RECORDS AND
LABORATORY DATA SHEETS
QUALITY ASSURANCE/QUALITY CONTROL DOCUMENTATION
(Available Upon Request)