Babcock Power Inc.

Standard OFA Nozzle Mechanical Design

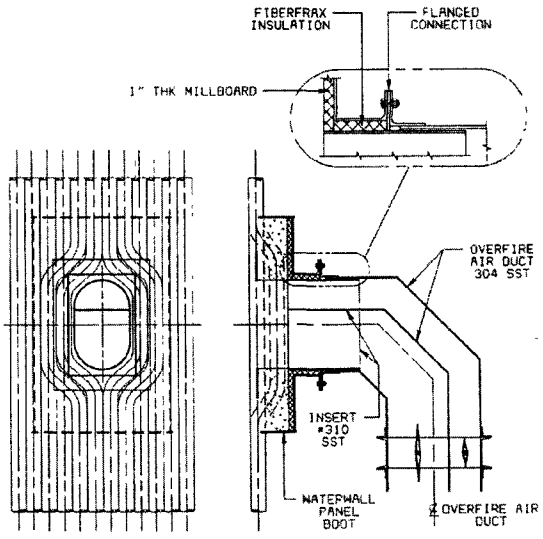

Babcock Power Inc.

Rule of thumb:
Air velocity out of port should be 5 to 6 times the velocity of the furnace/combustion velocity.

IP7_039605