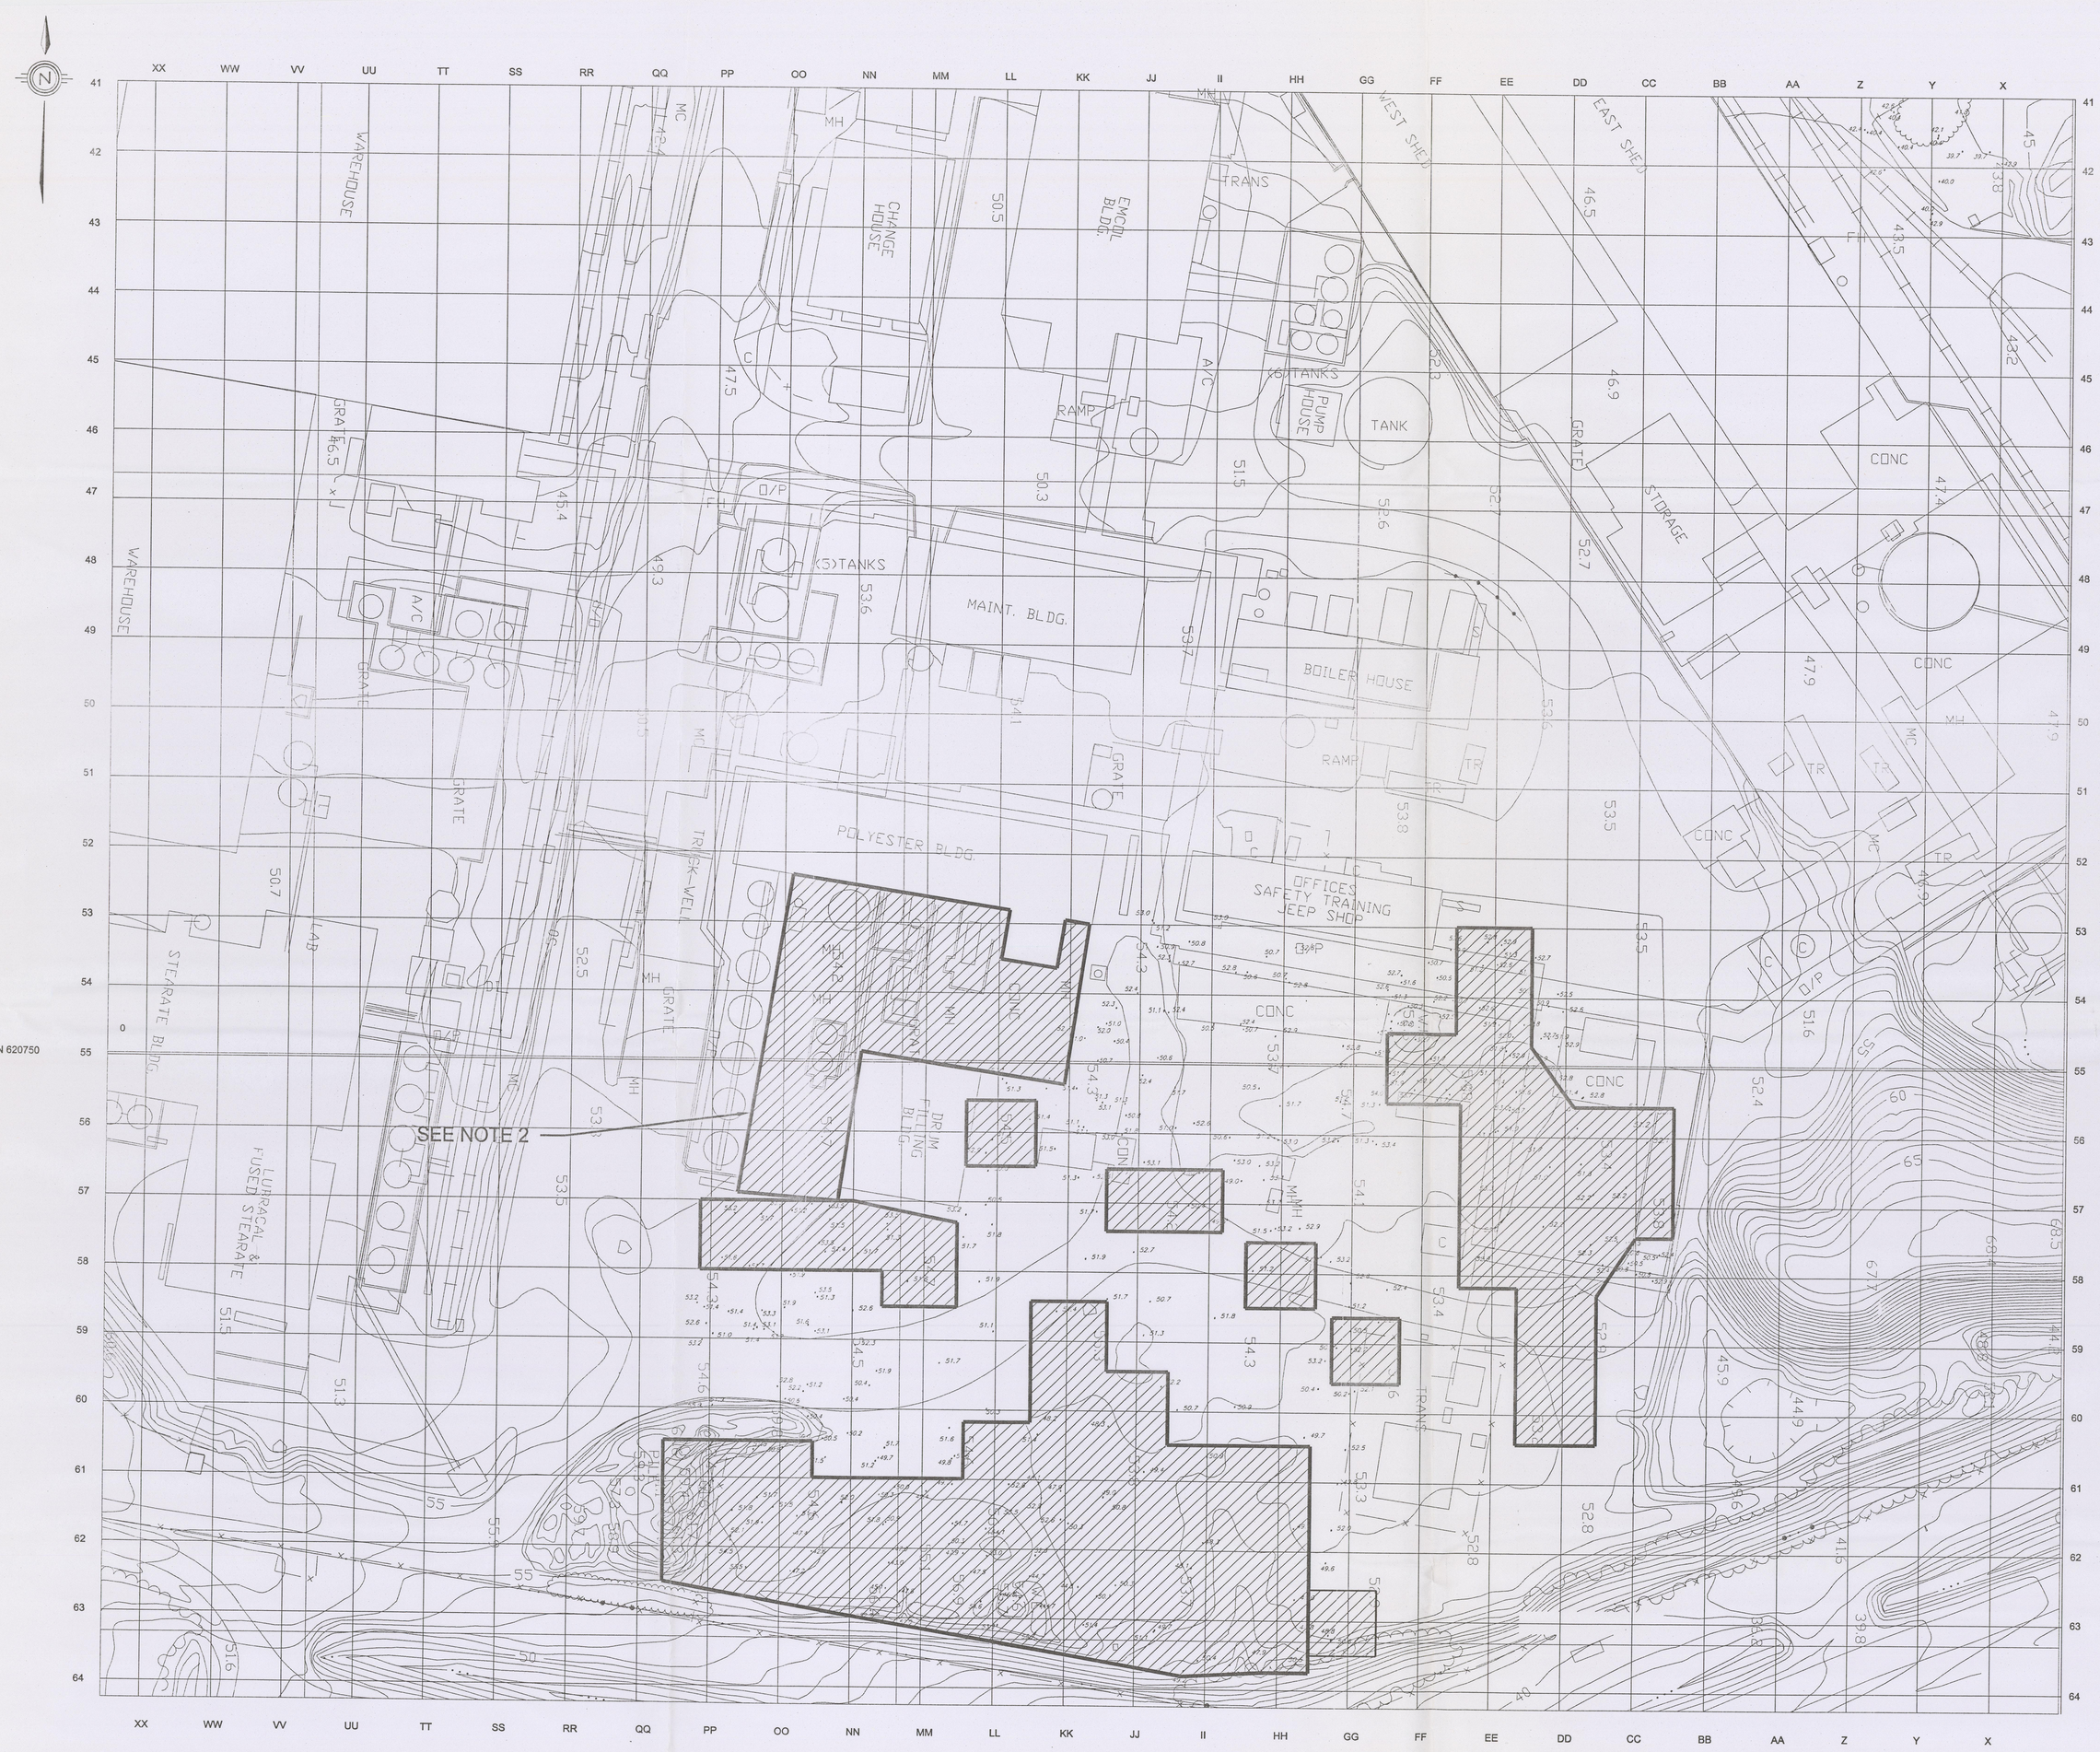

NOTES:

1. Designated engineering controlled areas contain residual PCB contamination at levels in excess of the State of New Jersey Non-Residential Direct Contact Soil Cleanup Criteria (=2 PPM). Remaining PCB concentrations are between 2 and 50 ppm. Engineering controls in the form of a clean soil cover with a minimum thickness of 2 feet are in place in areas where the cleanup standard is exceeded; therefore, the minimum depth at which contamination can be encountered is 2 feet.

2. Engineering controls in place in the heater pad area include a clean soil cover with a minimum thickness of 2 feet and a PVC liner that separates the bottom of the excavation from the clean soil cover. PCB concentrations in excess of 50 ppm can be found in minimal quantities in the Heater Pad area. USEPA and NJDEP approved the heater pad remedial action work plan with the understanding that some residual concentrations of PCBs in excess of the 50 ppm criterion would be left within close proximity to building foundations.

LEGEND

+52.6	FIELD SPOT ELEVATION (BOTTOM OF EXCAVATION)
	ENGINEERING CONTROLLED AREAS

FIGURE B-2.5	
FIGURE B-2.3	FIGURE B-2.4
FIGURE B-2.1	FIGURE B-2.2

KEY MAP

30 0 30 60 90

SCALE IN FEET

SOURCE: FROM ENVIRONMENTAL RESEARCH, INC.
PROJECT NO.R95-111, SHEET NO.R95111-D1 SHEET 1 OF 5.
DATED 7/31/96.REV. 1 9/24/96 (PER CLIENTS REVIEW)

THIS DRAWING PRODUCED ON AUTOCAD
DO NOT REVISE MANUALLY

WITCO CORPORATION

WITCO CORPORTAION
PERTH AMBOY, NEW JERSEY

DRAFT
FIGURE B-2.1
AREAS WITH ENGINEERING CONTROLS IN PLACE

FOSTER WHEELER ENVIRONMENTAL CORPORATION
LIVINGSTON,NEW JERSEY

CAD FILE NAME: WCDER1.DWG DATE: 5/25/99
PLOT SCALE: 1=1 TIME: 12:50 PM

FWG3R12.DWG