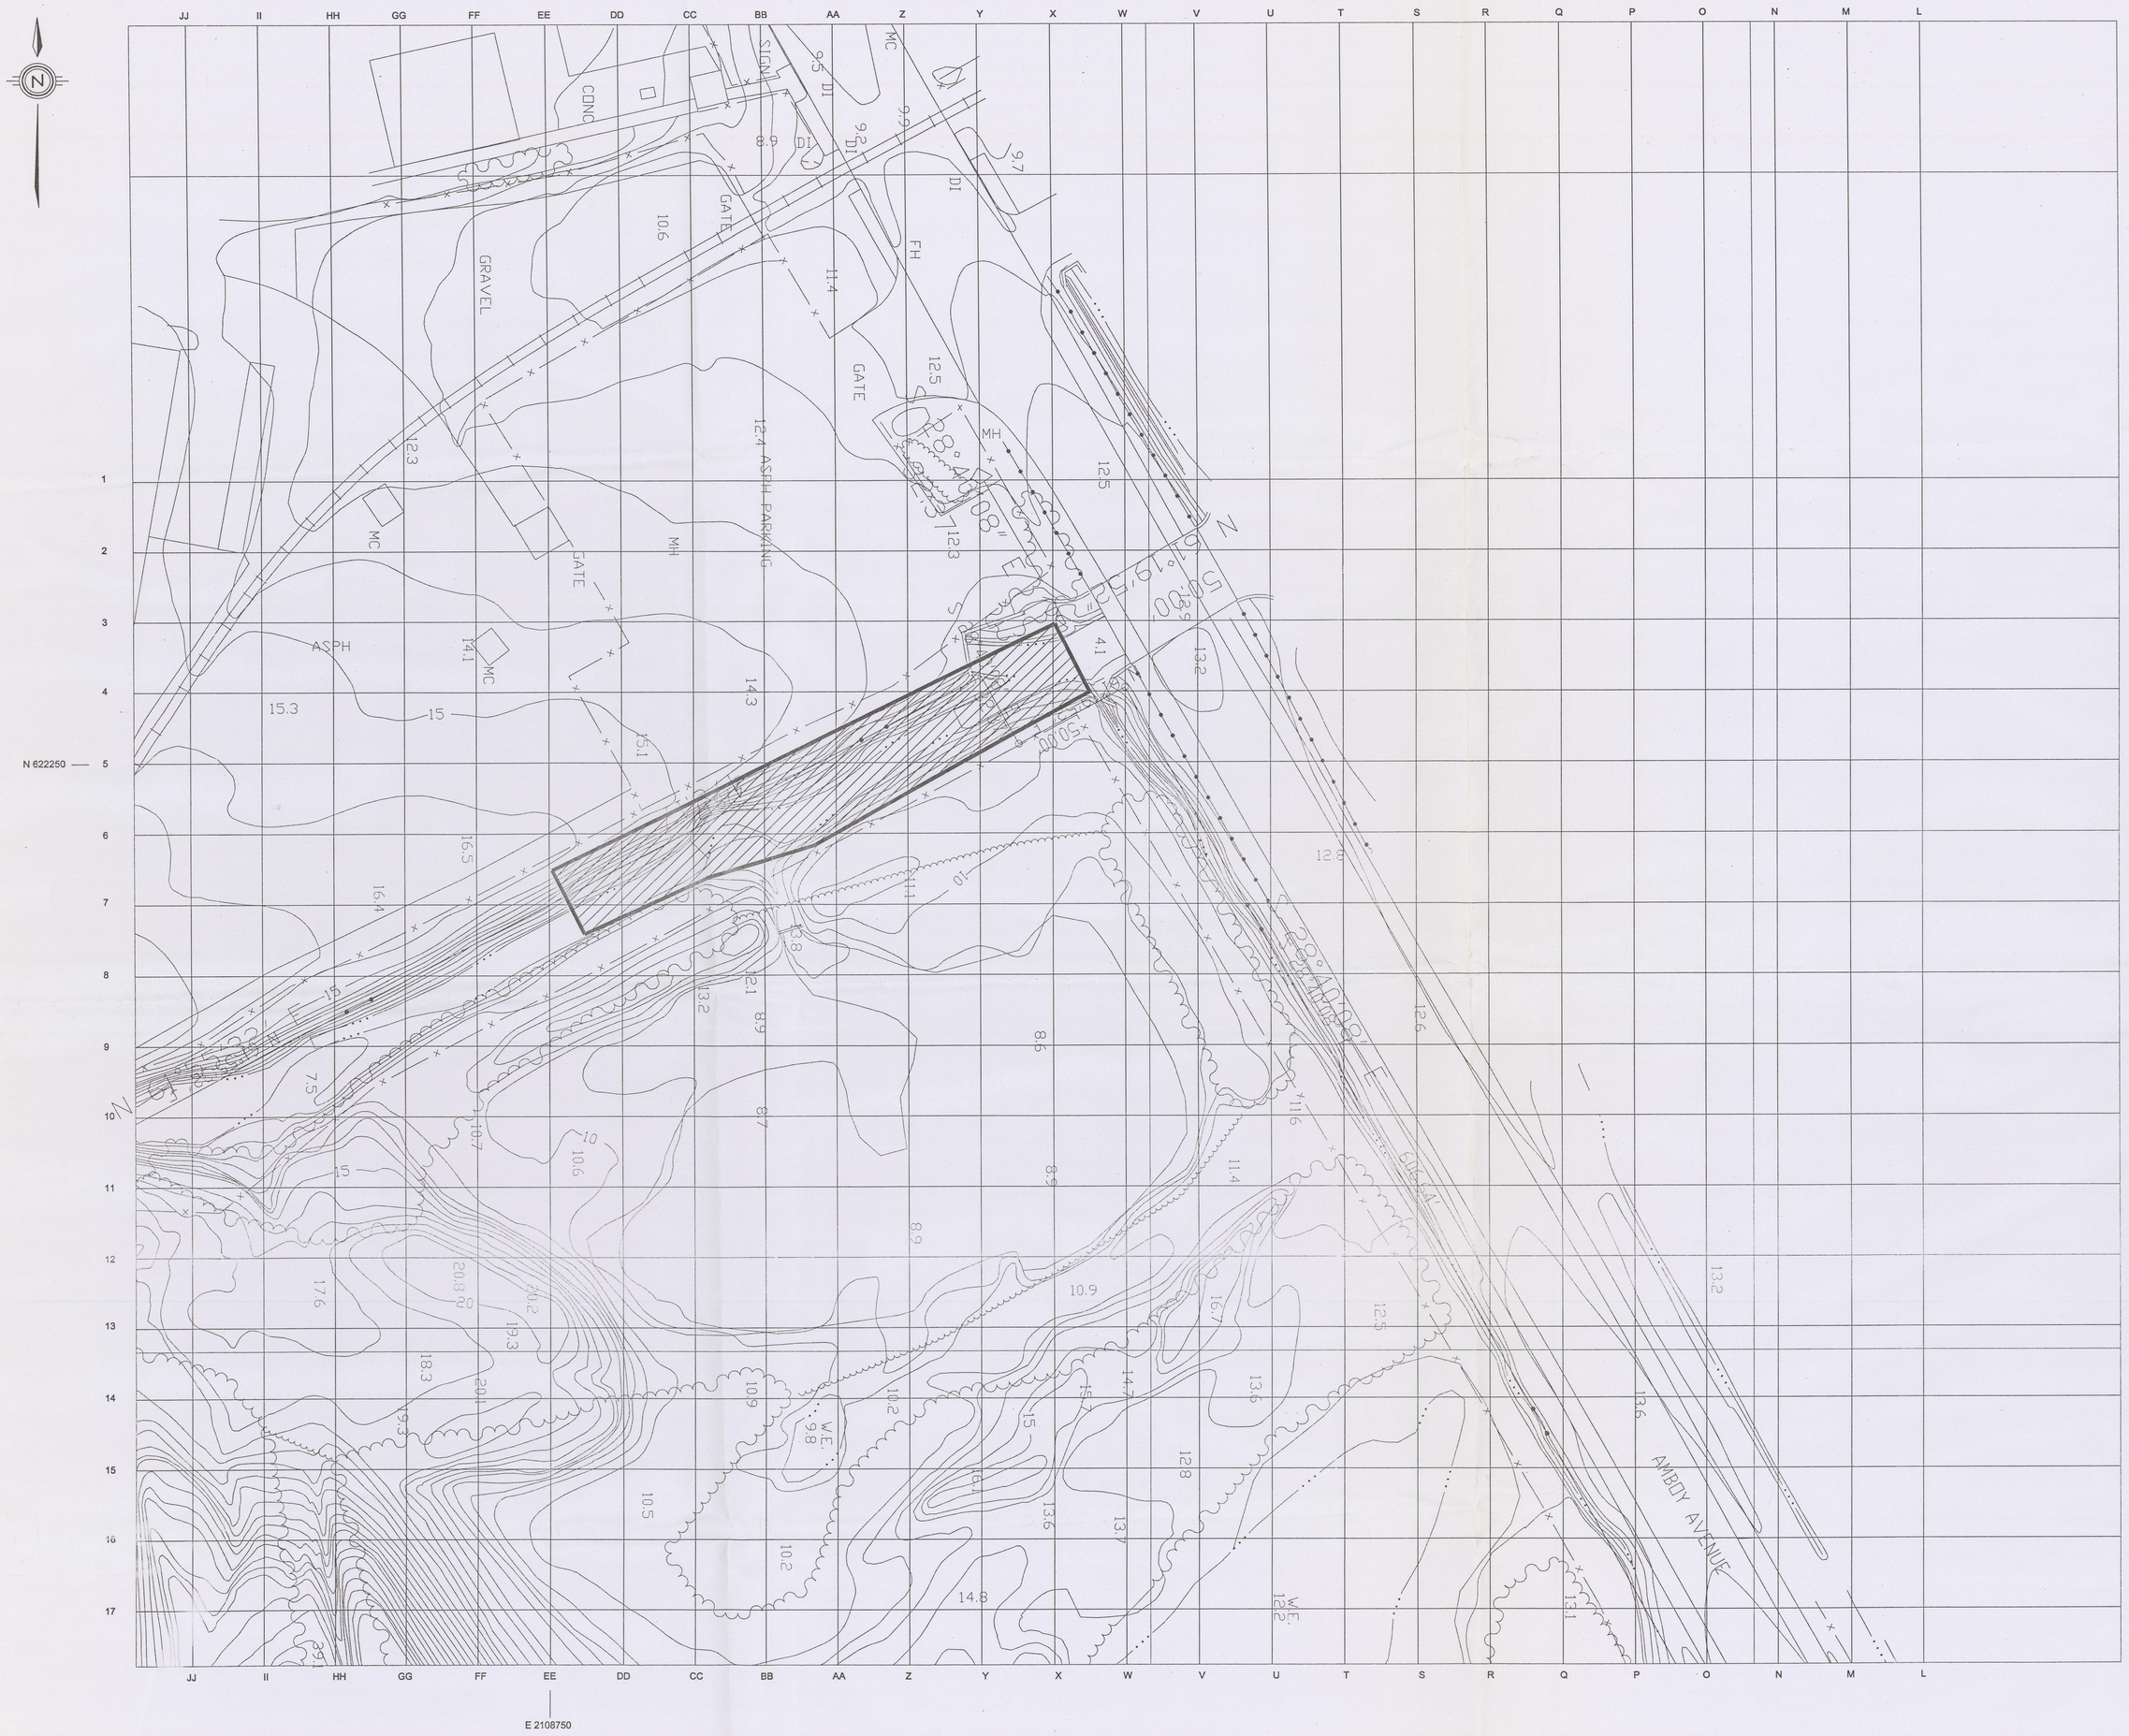

NOTE:

1. Designated engineering controlled areas contain residual PCB contamination at levels in excess of the State of New Jersey Non-Residential Direct Contact Soil Cleanup Criteria (<2 PPM). Remaining PCB concentrations are between 2 and 50 ppm. Engineering controls in the form of a clean soil cover with a minimum thickness of 2 feet are in place in areas where the cleanup standard is exceeded; therefore, the minimum depth at which contamination can be encountered is 2 feet.

LEGEND

+32.6	FIELD SPOT ELEVATION (BOTTOM OF EXCAVATION)
	ENGINEERING CONTROLLED AREAS



KEY MAP

30 0 30 60 90

SCALE IN FEET

SOURCE: FROM ENVIRONMENTAL RESEARCH, INC.
PROJECT NO.R95-111, SHEET NO.R95111-D5 SHEET 5 OF 5.
DATED 7/31/96.REV. 1 9/24/96 (PER CLIENTS REVIEW)

THIS DRAWING PRODUCED ON AUTOCAD
DO NOT REVISE MANUALLY

WITCO CORPORATION

WITCO CORPORTAION
PERTH AMBOY, NEW JERSEY

DRAFT
FIGURE B-2.5
AREAS WITH ENGINEERING CONTROLS IN PLACE

FOSTER WHEELER ENVIRONMENTAL CORPORATION
LIVINGSTON,NEW JERSEY

CAD FILE NAME: WCDERS.DWG DATE: 5/25/99
PLOT SCALE: 1=1 TIME: 1:10 PM