Orchard Storage Company LLC

Underground Injection Control – Class VI Permit Application for

Orchard #1

Gaines County, Texas

Prepared for *Orchard Storage Company LLC*
Odessa, Texas

By
Lonquist Sequestration, LLC
Austin, TX

January 2023

LONQUIST SEQUESTRATION LLC

FOREWORD

Orchard Storage Company LLC is proposing to develop a carbon sequestration facility in Gaines County, Texas, [redacted] The Orchard Project is being designed to handle captured carbon dioxide (CO_2) from various emitters through multiple sequestration wells. This site is ideally suited for the sequestration of CO_2 with minimal existing wellbores in the area, an injection interval with requisite and appropriate reservoir properties, and substantial sealing intervals. The storage site is also relatively near existing CO_2 pipeline infrastructure to accommodate the economic delivery of sourced CO_2 volumes to the Orchard Project.

The following application will fully detail and characterize the geology of the proposed well location, evaluate the formation for properties necessary to contain the sequestered CO_2 permanently, and describe the engineering design and safety considerations for the well. The application will also discuss the proposed monitoring system that will be utilized to compare and contrast actual injectate plume migration to reservoir modeling and simulation of the anticipated plume.

The application has been developed to meet all of the requirements of both Title 40, U.S. Code of Federal Regulations (40 CFR) **§146.82** through **§146.95** and the Texas Administrative Code (TAC), Part 1, Title 16, Chapter 5 (16 TAC **§5**). Both of these codes detail the regulations for Underground Injection Control Class VI wells. Once the permit has been issued, per the requirements of 40 CFR **§144.36(a)** and 16 TAC **§5.203(d)(1)(A)**, the permit will be updated every five years thereafter for the active injection life of the well.

CERTIFICATION

CERTIFIED BY:

I, Michael Blincow, certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Michael Blincow
Sr. Vice President Subsurface Operations

CERTIFICATION

CERTIFIED BY:

Lonquist Sequestration, LLC
Texas Registration No. F-22610

I, Ben H. Bergman P.E., certify that this application was prepared by me or under my direct supervision and that the information and analyses presented herein are true and accurate to the best of my knowledge.

Ben H. Bergman, P.E.
Senior Engineer

Texas License No. 95591
Date Signed: January 27th, 2023

I, Emily Olson, certify that the geologic and hydrologic evaluations in this application were prepared by me or under my direct supervision and that the information and analyses presented herein are true and accurate to the best of my knowledge.

Emily Olson, P.G.
Sr. Geologist
Texas License No. 15124
Date Signed: January 30th, 2023

ACRONYMS AND ABBREVIATIONS

Note: All terms are written as used in the text.

§45Q	IRS Tax Code §45Q
AFI	active fracture images
AOR	area of review
API	American Petroleum Institute
ARM	ambient reservoir monitoring
ATSM	American Society for Testing and Materials
bbl	barrel(s)
bcf	billion cubic feet
BHIP	bottomhole injection pressure
BHP	bottomhole pressure
bpm	barrels per minute
CAA	Clean Air Act
CBL	cement bond log
CCL	casing collar locator
CCS	carbon capture and storage
CDP	common depth point
CH_4	methane
CFR	U.S. Code of Federal Regulations
CMG	Computer Modelling Group
CMT	cement mapping tool
CO_2	carbon dioxide (may also refer to other Carbon Oxides)
CRA	corrosion resistant alloy
CWA	Clean Water Act
DTS	distributed temperature sensing
ECP	external casing packer
EOR	enhanced oil recovery
EOS	equation of state

EPA	Environmental Protection Agency
ESG	environmental, safety, and governance
FERC	Federal Energy Regulatory Commission
FMI	Fullbore Formation Microimager
g/cm^3	grams per cubic centimeter
GAPI	API gamma ray unit
GAU	Groundwater Advisory Unit
GR	gamma ray
HRVRT	high-resolution vertilog
Hz	hertz
IARF	infinite acting flow regime
ICS	Incident Command System
ID	inner diameter
IEA	International Energy Agency
kg/m^3	kilograms per cubic meter
km	kilometer(s)
KM	Kinder Morgan
lb/ft^3	pounds per cubic foot
Mbbls	thousand cubic feet
mD	Millidarcy(ies)
MD	measured depth
MDT	Modular Formation Dynamics Tester
MEQ	microseismic earthquakes
MPa	MegaPascal
mg/l	milligrams per liter
mGal	milligals
MIT	mechanical integrity test
MM	million
MMbbls	million barrels

MMcf	million cubic feet
MMscf	million standard cubic feet
MMscf/d	million standard cubic feet per day
MT	metric tons
MT/yr	metric tons per Year
MMT/yr	million metric tons per year
NETL	National Energy Technology Laboratory
OD	outer diameter
OIP	oil in place
P&A	plugging and abandonment
PE	photoelectric
PEC	Pulsed Eddy Current
PHIX_EFF	effective porosity
PISC	post-injection site care
ppg	pounds per gallon
ppm	parts per million
psi	pounds per square inch
psia	pounds per square inch absolute
psig	pounds per square inch gauge
QA/QC	quality assurance/quality control
QPT	Quartz Pressure Temperature
RCRA	Resource Conservation and Recovery Act
RFT	repeat formation tester
ROZ	Residual Oil Zone
rfn	rock fabric number(s)
SC	specific conductivity
SCADA	Supervisory Control and Data Acquisition
sDAS	seismic distributed acoustic sensing
SIC	Standard Industrial Classification

SOW	slip-on weld
SP	spontaneous potential
SS	subsea
TAC	Texas Administrative Code
TD	total depth
TDS	total dissolved solids
TEC	tubing encapsulated conductor
TRRC	Texas Railroad Commission
TVD	total vertical depth
UCL	upper confinement layer
UIC	Underground Injection Control
USDW	Underground Source of Drinking Water
USGS	U.S. Geological Survey
VSP	vertical seismic profile
WIRE	Well Integrity Real-time Evaluation
XPHI	cross-plot porosity
XRD	X-Ray Diffraction

TABLE OF CONTENTS

FOREWORD

CERTIFICATIONS

ACRONYMS AND ABBREVIATIONS

TABLE OF CONTENTS

REQUIREMENTS MATRIX

INTRODUCTION

SECTION 1 – SITE CHARACTERIZATION

SECTION 2 – PLUME MODEL

SECTION 3 – AREA OF REVIEW AND CORRECTIVE ACTION PLAN

SECTION 4 – ENGINEERING DESIGN AND OPERATING STRATEGY

SECTION 5 – TESTING AND MONITORING PLAN

SECTION 6 – INJECTION WELL PLUGGING PLAN

SECTION 7 – POST-INJECTION SITE CARE AND SITE CLOSURE PLAN

SECTION 8 – EMERGENCY AND REMEDIAL RESPONSE PLAN

SECTION 9 – FINANCIAL RESPONSIBILITY

SECTION 10 – ENVIRONMENTAL JUSTICE

APPENDICES:

- APPENDIX A: PLATS
- APPENDIX B: AREA OF REVIEW MAPS, TABLES
- APPENDIX C: WELL CONSTRUCTION SCHEMATICS AND PROCEDURES
- APPENDIX D: METALLURGY SUMMARY
- APPENDIX E: TESTING AND MONITORING
- APPENDIX F: EMERGENCY OPERATIONS PLAN
- APPENDIX G: PLUGGING SCHEMATICS AND PROCEDURES

REQUIREMENTS MATRIX

40 CFR - Subpart H - Criteria and Standards Applicable to Class VI Wells

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.82(a)(1)	Required class VI permit Information	Information required in § 144.31(e)(1) through (6) of this chapter;	§5.203 (a)(2)	General	General information.	
§146.82(a)(10)	Required class VI permit Information	Proposed procedure to outline steps necessary to conduct injection operation;	§5.203 (i)(1)	Operating Information	Operating plan. The applicant must submit a plan for operating the injection wells and the geologic storage facility that complies with the criteria set forth in §5.206(d) of this title, and that outlines the steps necessary to conduct injection operation The applicant must include the following proposed operating data in the plan:	
§146.82(a)(11)	Required class VI permit Information	Schematics or other appropriate drawings of the surface and subsurface construction details of the well;	§5.203 (e)(2)(K)	Injection well construction	Schematic drawings of the surface and subsurface construction details.	4.2.1
§146.82(a)(12)	Required class VI permit Information	Injection well construction procedures that meet the requirements of § 146.86;	§5.203 (e)(3)	Injection well construction	Well construction plan. The applicant must submit an injection well construction plan that meets the criteria in paragraph (1) of this subsection.	4.2.2
§146.82(a)(13)	Required class VI permit Information	Proposed area of review and corrective action plan that meets the requirements under § 146.84;	§5.203 (d)(2)	AOR and corrective action	Area of review and corrective action plan. As part of an application, the applicant must submit an AOR and corrective action plan that includes the following information:	3.8, 3.10
§146.82(a)(14)	Required class VI permit Information	A demonstration, satisfactory to the Director, that the applicant has met the financial responsibility requirements under § 146.85;	§5.202 (c)(2)	Applicability and compliance	Evidence of financial responsibility. The operator acquiring the permit must provide the director with evidence of financial responsibility satisfactory to the director in accordance with §5.205 of this title (relating to Fees, Financial Responsibility, and Financial Assurance).	9.1, 9.2
§146.82(a)(14)	Financial Responsibility	A demonstration, satisfactory to the Director, that the applicant has met the financial responsibility requirements under § 146.85;	§5.203 (n)	Fees, financial responsibility, and financial assurance	Fees, financial responsibility, and financial assurance. The applicant must pay the fees, demonstrate that it has met the financial responsibility requirements, and provide the Commission with financial assurance as required under §5.205 of this title (relating to Fees, Financial Responsibility, and Financial Assurance).	9.1, 9.2
§146.82(a)(15)	Required class VI permit Information	Proposed testing and monitoring plan required by § 146.90;	§5.203 (h)(2)	Mechanical integrity testing	Mechanical integrity testing plan. The applicant must prepare and submit a mechanical integrity testing plan as part of a permit application. [The plan must include a schedule for the performance of a series of tests at a minimum frequency of five years.] The performance tests must be designed to demonstrate the internal and external mechanical integrity of each injection well. These tests may include:	5.4.4
§146.82(a)(16)	Required class VI permit Information	Proposed injection well plugging plan required by § 146.92(b);	§5.206 (j)	Permit Standards	Well plugging. The operator of a geologic storage facility must maintain and comply with the approved well plugging plan required by §5.203(k) of this title.	6.1, 6.2
§146.82(a)(17)	Required class VI permit Information	Proposed post-injection site care and site closure plan required by § 146.93(a);	§5.206 (k)(1)	Permit Standards	Post-injection storage facility care and closure plan.	7.4, 7.5
§146.82(a)(18)	Required class VI permit Information	At the Director's discretion, a demonstration of an alternative post-injection site care timeframe required by § 146.93(c);	§5.203(m)(8)(F)	Post-Injection storage facility carea and closure plan	an analysis must be performed to identify and assess aspects of the alternative PISC timeframe demonstration that contribute significantly to uncertainty. The operator must conduct sensitivity analyses to determine the effect that significant uncertainty may contribute to the modeling demonstration;	
§146.82(a)(19)	Required class VI permit Information	Proposed emergency and remedial response plan required by § 146.94(a);	§5.206 (h)(1)	Permit Standards	The operator must maintain and comply with the approved emergency and remedial response plan required by §5.203(l) of this title. The operator must update the plan in accordance with §5.207(a)(2)(D)(vi) of this title (relating to Reporting and Record-Keeping). The operator must make copies of the plan available at the storage facility and at the company headquarters.	8.1

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.82(a)(2)	Required class VI permit Information	A map showing the injection well for which a permit is sought and the applicable area of review consistent with § 146.84. Within the area of review, the map must show the number or name, and location of all injection wells, producing wells, abandoned wells, plugged wells or dry holes, deep stratigraphic boreholes, State- or EPA-approved subsurface cleanup sites, surface bodies of water, springs, mines (surface and subsurface), quarries, water wells, other pertinent surface features including structures intended for human occupancy, State, Tribal, and Territory boundaries, and roads. The map should also show faults, if known or suspected. Only information of public record is required to be included on this map;	§5.203 (b)	Surface Map Information	Surface map and information. Only information of public record is required to be included on this map.	Intro, 3.9
§146.82(a)(2)	Required class VI permit Information	A map showing the injection well for which a permit is sought and the applicable area of review consistent with § 146.84. Within the area of review, the map must show the number or name, and location of all injection wells, producing wells, abandoned wells, plugged wells or dry holes, deep stratigraphic boreholes, State- or EPA-approved subsurface cleanup sites, surface bodies of water, springs, mines (surface and subsurface), quarries, water wells, other pertinent surface features including structures intended for human occupancy, State, Tribal, and Territory boundaries, and roads. The map should also show faults, if known or suspected. Only information of public record is required to be included on this map;	§5.203 (b)(1)	Surface Map Information	The applicant must file with the director a surface map delineating the proposed location of any injection wells and the boundary of the geologic storage facility for which a permit is sought and the applicable AOR.	3.8
§146.82(a)(2)	Required class VI permit Information	A map showing the injection well for which a permit is sought and the applicable area of review consistent with § 146.84. Within the area of review, the map must show the number or name, and location of all injection wells, producing wells, abandoned wells, plugged wells or dry holes, deep stratigraphic boreholes, State- or EPA-approved subsurface cleanup sites, surface bodies of water, springs, mines (surface and subsurface), quarries, water wells, other pertinent surface features including structures intended for human occupancy, State, Tribal, and Territory boundaries, and roads. The map should also show faults, if known or suspected. Only information of public record is required to be included on this map;	§5.203 (b)(2)	Surface Map Information	The applicant must show within the AOR on the map the number or name and the location of:	
§146.82(a)(2)	Required class VI permit Information	A map showing the injection well for which a permit is sought and the applicable area of review consistent with § 146.84. Within the area of review, the map must show the number or name, and location of all injection wells, producing wells, abandoned wells, plugged wells or dry holes, deep stratigraphic boreholes, State- or EPA-approved subsurface cleanup sites, surface bodies of water, springs, mines (surface and subsurface), quarries, water wells, other pertinent surface features including structures intended for human occupancy, State, Tribal, and Territory boundaries, and roads. The map should also show faults, if known or suspected. Only information of public record is required to be included on this map;	§5.203 (b)(2)(A)	Surface Map Information	all known artificial penetrations through the confining zone, including injection wells, producing wells, inactive wells, plugged wells, or dry holes;	3.9, Appendix B

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.82(a)(2)	Required class VI permit Information	A map showing the injection well for which a permit is sought and the applicable area of review consistent with § 146.84. Within the area of review, the map must show the number or name, and location of all injection wells, producing wells, abandoned wells, plugged wells or dry holes, deep stratigraphic boreholes, State- or EPA-approved subsurface cleanup sites, surface bodies of water, springs, mines (surface and subsurface), quarries, water wells, other pertinent surface features including structures intended for human occupancy, State, Tribal, and Territory boundaries, and roads. The map should also show faults, if known or suspected. Only information of public record is required to be included on this map;	§5.203 (b)(2)(B)	Surface Map Information	the locations of cathodic protection holes, subsurface cleanup sites, bodies of surface water, springs, surface and subsurface mines, quarries, and water wells; and	3.9, Appendix B
§146.82(a)(2)	Required class VI permit Information	A map showing the injection well for which a permit is sought and the applicable area of review consistent with § 146.84. Within the area of review, the map must show the number or name, and location of all injection wells, producing wells, abandoned wells, plugged wells or dry holes, deep stratigraphic boreholes, State- or EPA-approved subsurface cleanup sites, surface bodies of water, springs, mines (surface and subsurface), quarries, water wells, other pertinent surface features including structures intended for human occupancy, State, Tribal, and Territory boundaries, and roads. The map should also show faults, if known or suspected. Only information of public record is required to be included on this map;	§5.203 (b)(2)(C)	Surface Map Information	other pertinent surface features, including pipelines, roads, and structures intended for human occupancy.	3.9, Appendix B-3
§146.82(a)(2)	Required class VI permit Information	A map showing the injection well for which a permit is sought and the applicable area of review consistent with § 146.84. Within the area of review, the map must show the number or name, and location of all injection wells, producing wells, abandoned wells, plugged wells or dry holes, deep stratigraphic boreholes, State- or EPA-approved subsurface cleanup sites, surface bodies of water, springs, mines (surface and subsurface), quarries, water wells, other pertinent surface features including structures intended for human occupancy, State, Tribal, and Territory boundaries, and roads. The map should also show faults, if known or suspected. Only information of public record is required to be included on this map;	§5.203 (b)(3)	Surface Map Information	The applicant must identify on the map any known or suspected faults expressed at the surface.	3.9,N/A
§146.82(a)(20)	Required class VI permit Information	A list of contacts, submitted to the Director, for those States, Tribes, and Territories identified to be within the area of review of the Class VI project based on information provided in paragraph (a)(2) of this section; and				Intro
§146.82(a)(21)	Required class VI permit Information	Any other information requested by the Director.				
§146.82(a)(3)	Required class VI permit Information	Information on the geologic structure and hydrogeologic properties of the proposed storage site and overlying formations, including:	§5.203 (c)(2)	Geologic, geochemical, and hydrologic information	The applicant must submit information on the geologic structure and reservoir properties of the proposed storage reservoir and overlying formations, including the following information:	
§146.82(a)(3)(iii)	Required class VI permit Information	Data on the depth, areal extent, thickness, mineralogy, porosity, permeability, and capillary pressure of the injection and confining zone(s); including geology/facies changes based on field data which may include geologic cores, outcrop data, seismic surveys, well logs, and names and lithologic descriptions;	§5.203 (c)(2)(B)	Geologic, geochemical, and hydrologic information	The depth, areal extent, thickness, mineralogy, porosity, permeability, and capillary pressure of, and the geochemistry of any formation fluids in, the storage reservoir and confining zone and any other relevant geologic formations, including geology/facies changes based on field data, which may include geologic cores, outcrop data, seismic surveys, well logs, and lithologic descriptions, and the analyses of logging, sampling, and testing results used to make such determinations;	Section 1

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.82(a)(4)	Required class VI permit Information	A tabulation of all wells within the area of review which penetrate the injection or confining zone(s). Such data must include a description of each well's type, construction, date drilled, location, depth, record of plugging and/or completion, and any additional information the Director may require;	§5.203 (d)(1)(B)	AOR and corrective action	Identification and table of penetrations. The applicant must identify, compile, and submit a table listing all penetrations, including active, inactive, plugged, and unplugged wells and underground mines in the AOR [area of review] that may penetrate the confining zone, that are known or reasonably discoverable through specialized knowledge or experience. The applicant must provide a description of each penetration's type, construction, date drilled, location, depth, record of plugging and/or completion or closure. Examples of specialized knowledge or experience may include reviews of federal, state, and local government records, interviews with past and present owners, operators, and occupants, reviews of historical information (including aerial photographs, chain of title documents, and land use records), and visual inspections of the facility and adjoining properties.	3.9, Appendix B
§146.82(a)(5)	Required class VI permit Information	Maps and stratigraphic cross sections indicating the general vertical and lateral limits of all USDWs, water wells and springs within the area of review, their positions relative to the injection zone(s), and the direction of water movement, where known;	§5.203 (c)(2)(A)	Geologic, geochemical, and hydrologic information	geologic and topographic maps and cross sections illustrating regional geology, hydrogeology, and the geologic structure of the area from the ground surface to the base of the injection zone within the AOR that indicate the general vertical and lateral limits of all USDWs within the AOR, their positions relative to the storage reservoir and the direction of water movement, where known;	1.2.1, 1.2.2, 1.9.3
§146.82(a)(5)	Required class VI permit Information	Maps and stratigraphic cross sections indicating the general vertical and lateral limits of all USDWs, water wells and springs within the area of review, their positions relative to the injection zone(s), and the direction of water movement, where known;	§5.203 (c)(2)(A)	Geologic, geochemical, and hydrologic information	Geologic and topographic maps and cross sections that indicate the general vertical and lateral limits of all USDWs within the AOR, their positions relative to the injection zone(s), and the direction of water movement, where known;	1.2.1, 1.2.2, 1.9.3
§146.82(a)(6)	Required class VI permit Information	Baseline geochemical data on subsurface formations, including all USDWs in the area of review;	§5.203 (c)(2)(G)	Geologic, geochemical, and hydrologic information	Baseline geochemical data on subsurface formations, including all formations containing USDWs in the AOR;	1.6.2
§146.82(a)(7)	Required class VI permit Information	Proposed operating data for the proposed geologic sequestration site:	§5.203 (i)(1)	Operating Information	Operating plan. The applicant must submit a plan for operating the injection wells and the geologic storage facility that complies with the criteria set forth in §5.206(d) [§5.206(c)] of this title, and that outlines the steps necessary to conduct injection operations. The applicant must include the following proposed operating data in the plan:	4.2.6
§146.82(a)(7)(i)	Required class VI permit Information	Average and maximum daily rate and volume and/or mass and total anticipated volume and/or mass of the carbon dioxide stream;	§5.203 (i)(1)(A)	Operating Information	The average and maximum daily rate and volume and/or mass and total anticipated volume and/or mass of the carbon dioxide stream;	4.2.6, Intro
§146.82(a)(7)(ii)	Required class VI permit Information	Average and maximum injection pressure;	§5.203 (i)(1)(B)	Operating Information	The average and maximum surface injection pressure;	4.2.6
§146.82(a)(7)(iii)	Required class VI permit Information	The source(s) of the carbon dioxide stream; and	§5.203 (i)(1)(C)	Operating Information	The sources of the carbon dioxide stream and the volume of carbon dioxide from each source; and	Intro
§146.82(a)(7)(iv)	Required class VI permit Information	An analysis of the chemical and physical characteristics of the carbon dioxide stream.	§5.203 (i)(1)(D)	Operating Information	An analysis of the chemical and physical characteristics of the carbon dioxide stream prior to injection.	4.2.3
§146.82(a)(8)	Required class VI permit Information	Proposed pre-operational formation testing program to obtain an analysis of the chemical and physical characteristics of the injection zone(s) and confining zone(s) and that meets the requirements at § 146.87;	§5.203 (c)(2)(F)	Geologic, geochemical, and hydrologic information	a description of the formation testing program used and the analytical results used to determine the chemical and physical characteristics of the injection zone and the confining zone; and	4.2.4.2
§146.82(a)(9)	Required class VI permit Information	Proposed stimulation program, a description of stimulation fluids to be used and a determination that stimulation will not interfere with containment;	§5.203 (e)(4)	Injection well construction	Well stimulation plan. The applicant must submit, as applicable, a description of the proposed well stimulation program and a determination that stimulation will not compromise containment	4.2.5
§146.82(b)	Required class VI permit Information	The Director shall notify, in writing, any States, Tribes, or Territories within the area of review of the Class VI project based on information provided in paragraphs (a)(2) and (a)(20) of this section of the permit application and pursuant to the requirements at § 145.23(f)(13) of this chapter.				
§146.82(c)	Required class VI permit Information	Prior to granting approval for the operation of a Class VI well, the Director shall consider the following information:				
§146.82(c)(1)	Required class VI permit Information	The final area of review based on modeling, using data obtained during logging and testing of the well and the formation as required by paragraphs (c)(2), (3), (4), (6), (7), and (10) of this section;				

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.82(c)(10)	Required class VI permit Information	Any other information requested by the Director.				
§146.82(c)(2)	Required class VI permit Information	Any relevant updates, based on data obtained during logging and testing of the well and the formation as required by paragraphs (c)(3), (4), (6), (7), and (10) of this section, to the information on the geologic structure and hydrogeologic properties of the proposed storage site and overlying formations, submitted to satisfy the requirements of paragraph (a)(3) of this section;				
§146.82(c)(3)	Required class VI permit Information	Information on the compatibility of the carbon dioxide stream with fluids in the injection zone(s) and minerals in both the injection and the confining zone(s), based on the results of the formation testing program, and with the materials used to construct the well;	§5.203 (g)	Compatibility determination	Compatibility determination. Based on the results of the formation testing program required by subsection (f) of this section, the applicant must submit a determination of the compatibility of the CO2 stream with:	
§146.82(c)(3)	Required class VI permit Information	Information on the compatibility of the carbon dioxide stream with fluids in the injection zone(s) and minerals in both the injection and the confining zone(s), based on the results of the formation testing program, and with the materials used to construct the well;	§5.203 (g)(1)	Compatibility determination	the materials to be used to construct the well;	4.2.1, Appendix D
§146.82(c)(3)	Required class VI permit Information	Information on the compatibility of the carbon dioxide stream with fluids in the injection zone(s) and minerals in both the injection and the confining zone(s), based on the results of the formation testing program, and with the materials used to construct the well;	§5.203 (g)(2)	Compatibility determination	fluids in the injection zone; and	1.6.3
§146.82(c)(3)	Required class VI permit Information	Information on the compatibility of the carbon dioxide stream with fluids in the injection zone(s) and minerals in both the injection and the confining zone(s), based on the results of the formation testing program, and with the materials used to construct the well;	§5.203 (g)(3)	Compatibility determination	minerals in both the injection and the confining zone.	1.6.3
§146.82(c)(4)	Required class VI permit Information	The results of the formation testing program required at paragraph (a)(8) of this section;				
§146.82(c)(5)	Required class VI permit Information	Final injection well construction procedures that meet the requirements of § 146.86;				
§146.82(c)(6)	Required class VI permit Information	The status of corrective action on wells in the area of review;				
§146.82(c)(7)	Required class VI permit Information	All available logging and testing program data on the well required by § 146.87;				
§146.82(c)(8)	Required class VI permit Information	A demonstration of mechanical integrity pursuant to § 146.89;				
§146.82(c)(9)	Required class VI permit Information	Any updates to the proposed area of review and corrective action plan, testing and monitoring plan, injection well plugging plan, post-injection site care and site closure plan, or the emergency and remedial response plan submitted under paragraph (a) of this section, which are necessary to address new information collected during logging and testing of the well and the formation as required by all paragraphs of this section, and any updates to the alternative post-injection site care timeframe demonstration submitted under paragraph (a) of this section, which are necessary to address new information collected during the logging and testing of the well and the formation as required by all paragraphs of this section; and				
§146.82(d)	Required class VI permit Information	Owners or operators seeking a waiver of the requirement to inject below the lowermost USDW must also refer to § 146.95 and submit a supplemental report, as required at § 146.95(a). The supplemental report is not part of the permit application.	§5.201 (f)	Applicability and compliance	Injection depth waiver. An operator may seek a waiver from the Class VI injection depth requirements for geologic storage to allow injection into non-USDW formations while ensuring that USDWs above and below the injection zone are protected from endangerment. An operator seeking a waiver of the requirement to inject below the lowermost USDW shall submit, concurrent with the permit application, a supplemental report that complies with 40 21 CFR §146.95. The Commission adopts 40 CFR §146.95 by reference, effective July 1, 2022.	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.83(a)	Minimum Criteria for siting	Owners or operators of Class VI wells must demonstrate to the satisfaction of the Director that the wells will be sited in areas with a suitable geologic system. The owners or operators must demonstrate that the geologic system comprises:	§5.206 (b)(5)	General Criteria	the geologic storage facility will be sited in an area with suitable geology, which at a minimum must include:	
§146.83(a)(1)	Minimum Criteria for siting	An injection zone(s) of sufficient areal extent, thickness, porosity, and permeability to receive the total anticipated volume of the carbon dioxide stream;	§5.206 (b)(5)(A)	General Criteria	An injection zone(s) of sufficient areal extent, thickness, porosity, and permeability to receive the total anticipated volume of the carbon dioxide stream;	1.9.4
§146.83(a)(2)	Minimum Criteria for siting	Confining zone(s) free of transmissive faults or fractures and of sufficient areal extent and integrity to contain the injected carbon dioxide stream and displaced formation fluids and allow injection at proposed maximum pressures and volumes without initiating or propagating fractures in the confining zone(s).	§5.206 (b)(5)(B)	General Criteria	Confining zone(s) free of transmissive faults or fractures and of sufficient areal extent and integrity to contain the injected carbon dioxide stream and displaced formation fluids and allow injection at proposed maximum pressures and volumes without initiating or propagating fractures in the confining zone(s).	1.4.2
§146.83(b)	Minimum Criteria for siting	The Director may require owners or operators of Class VI wells to identify and characterize additional zones that will impede vertical fluid movement, are free of faults and fractures that may interfere with containment, allow for pressure dissipation, and provide additional opportunities for monitoring, mitigation, and remediation.				
§146.84	Area of review and corrective action		§5.203 (d)	AOR and corrective action	Area of Review and Corrective Action	Section 3
§146.84(a)	Area of review and corrective action	The area of review is the region surrounding the geologic sequestration project where USDWs may be endangered by the injection activity. The area of review is delineated using computational modeling that accounts for the physical and chemical properties of all phases of the injected carbon dioxide stream and is based on available site characterization, monitoring, and operational data.	§5.203 (d)	AOR and corrective action	This subsection describes the standards for the information regarding the delineation of the AOR, the identification of penetrations, and corrective action that an applicant must include in an application.	Section 3
§146.84(a)	Area of review and corrective action	The area of review is the region surrounding the geologic sequestration project where USDWs may be endangered by the injection activity. The area of review is delineated using computational modeling that accounts for the physical and chemical properties of all phases of the injected carbon dioxide stream and is based on available site characterization, monitoring, and operational data.	§5.203 (d)(1)(A)(ii)(IV)	AOR and corrective action	considers the physical and chemical properties of injected and formation fluids; and	3.3
§146.84(b)	Area of review and corrective action	The owner or operator of a Class VI well must prepare, maintain, and comply with a plan to delineate the area of review for a proposed geologic sequestration project, periodically reevaluate the delineation, and perform corrective action that meets the requirements of this section and is acceptable to the Director. The requirement to maintain and implement an approved plan is directly enforceable regardless of whether the requirement is a condition of the permit. As a part of the permit application for approval by the Director, the owner or operator must submit an area of review and corrective action plan that includes the following information:	§5.203 (d)(1)	AOR and corrective action	Initial delineation of the AOR and initial corrective action. The applicant must delineate the AOR, identify all wells that require corrective action, and perform corrective action on those wells. Corrective action may be phased.	3.10
§146.84(b)(1)	Area of review and corrective action	The method for delineating the area of review that meets the requirements of paragraph (c) of this section, including the model to be used, assumptions that will be made, and the site characterization data on which the model will be based;	§5.203 (d)(2)(A)	AOR and corrective action	The method for delineating the AOR, including the model to be used, assumptions that will be made, and the site characterization data on which the model will be based;	3.2, 3.3, 3.4
§146.84(b)(2)	Area of review and corrective action	A description of:	§5.203 (d)(2)(B)	AOR and corrective action	For AOR, a description of:	
§146.84(b)(2)(i)	Area of review and corrective action	The minimum fixed frequency, not to exceed five years, at which the owner or operator proposes to reevaluate the area of review;	§5.203 (d)(2)(B)(i)	AOR and corrective action	the minimum frequency subject to the annual certification pursuant to §5.206(f) of this title (relating to Permit Standards) at which the applicant proposes to re-evaluate the AOR during the life of the geologic storage facility;	3.11.1

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.84(b)(2)(ii)	Area of review and corrective action	The monitoring and operational conditions that would warrant a reevaluation of the area of review prior to the next scheduled reevaluation as determined by the minimum fixed frequency established in paragraph (b)(2)(i) of this section.	§5.203 (d)(2)(B)(iii)	AOR and corrective action	the monitoring and operational conditions that would warrant a re-evaluation of the AOR prior to the next scheduled re-evaluation; and	3.11.1
§146.84(b)(2)(iii)	Area of review and corrective action	How monitoring and operational data (e.g., injection rate and pressure) will be used to inform an area of review reevaluation; and	§5.203 (d)(2)(B)(ii)	AOR and corrective action	How monitoring and operational data (e.g., injection rate and pressure) will be used to inform an area of review reevaluation; and	3.11.1
§146.84(b)(2)(iv)	Area of review and corrective action	How corrective action will be conducted to meet the requirements of paragraph (d) of this section, including what corrective action will be performed prior to injection and what, if any, portions of the area of review will have corrective action addressed on a phased basis and how the phasing will be determined; how corrective action will be adjusted if there are changes in the area of review; and how site access will be guaranteed for future corrective action.	§5.203 (d)(2)(C)	AOR and corrective action	a corrective action plan that describes:	
§146.84(b)(2)(iv)	Area of review and corrective action	How corrective action will be conducted to meet the requirements of paragraph (d) of this section, including what corrective action will be performed prior to injection and what, if any, portions of the area of review will have corrective action addressed on a phased basis and how the phasing will be determined; how corrective action will be adjusted if there are changes in the area of review; and how site access will be guaranteed for future corrective action.	§5.203 (d)(2)(C)(i)	AOR and corrective action	how the corrective action will be conducted;	3.11.1
§146.84(b)(2)(iv)	Area of review and corrective action	How corrective action will be conducted to meet the requirements of paragraph (d) of this section, including what corrective action will be performed prior to injection and what, if any, portions of the area of review will have corrective action addressed on a phased basis and how the phasing will be determined; how corrective action will be adjusted if there are changes in the area of review; and how site access will be guaranteed for future corrective action.	§5.203 (d)(2)(C)(ii)	AOR and corrective action	how corrective action will be adjusted if there are changes in the AOR;	3.11.1
§146.84(b)(2)(iv)	Area of review and corrective action	How corrective action will be conducted to meet the requirements of paragraph (d) of this section, including what corrective action will be performed prior to injection and what, if any, portions of the area of review will have corrective action addressed on a phased basis and how the phasing will be determined; how corrective action will be adjusted if there are changes in the area of review; and how site access will be guaranteed for future corrective action.	§5.203 (d)(2)(C)(iii)	AOR and corrective action	if a phased corrective action is planned, how the phasing will be determined; and	3.11.1
§146.84(b)(2)(iv)	Area of review and corrective action	How corrective action will be conducted to meet the requirements of paragraph (d) of this section, including what corrective action will be performed prior to injection and what, if any, portions of the area of review will have corrective action addressed on a phased basis and how the phasing will be determined; how corrective action will be adjusted if there are changes in the area of review; and how site access will be guaranteed for future corrective action.	§5.203 (d)(2)(C)(iv)	AOR and corrective action	how site access will be secured for future corrective action.	3.11.1
§146.84(c)	Area of review and corrective action	Owners or operators of Class VI wells must perform the following actions to delineate the area of review and identify all wells that require corrective action:				

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.84(c)(1)	Area of review and corrective action	Predict, using existing site characterization, monitoring and operational data, and computational modeling, the projected lateral and vertical migration of the carbon dioxide plume and formation fluids in the subsurface from the commencement of injection activities until the plume movement ceases, until pressure differentials sufficient to cause the movement of injected fluids or formation fluids into a USDW are no longer present, or until the end of a fixed time period as determined by the Director. The model must:	§5.203 (d)(1)(A)(i)	AOR and corrective action	Using computational modeling that considers the volumes and the physical and chemical properties of the injected CO2 stream, the physical properties of the formation into which the CO2 stream is to be injected, and available data including data available from logging, testing, or operation of wells, the applicant must predict the lateral and vertical extent of migration for the CO2 plume and formation fluids and the pressure differentials required to cause movement of injected fluids or formation fluids into a USDW in the subsurface for the following time periods:	
§146.84(c)(1)	Area of review and corrective action	Predict, using existing site characterization, monitoring and operational data, and computational modeling, the projected lateral and vertical migration of the carbon dioxide plume and formation fluids in the subsurface from the commencement of injection activities until the plume movement ceases, until pressure differentials sufficient to cause the movement of injected fluids or formation fluids into a USDW are no longer present, or until the end of a fixed time period as determined by the Director. The model must:	§5.203 (d)(1)(A)(i)(II)	AOR and corrective action	five years after initiation of injection;	2.3.3
§146.84(c)(1)	Area of review and corrective action	Predict, using existing site characterization, monitoring and operational data, and computational modeling, the projected lateral and vertical migration of the carbon dioxide plume and formation fluids in the subsurface from the commencement of injection activities until the plume movement ceases, until pressure differentials sufficient to cause the movement of injected fluids or formation fluids into a USDW are no longer present, or until the end of a fixed time period as determined by the Director. The model must:	§5.203 (d)(1)(A)(i)(III)	AOR and corrective action	from initiation of injection to the end of the injection period proposed by the applicant; and	2.3.3
§146.84(c)(1)	Area of review and corrective action	Predict, using existing site characterization, monitoring and operational data, and computational modeling, the projected lateral and vertical migration of the carbon dioxide plume and formation fluids in the subsurface from the commencement of injection activities until the plume movement ceases, until pressure differentials sufficient to cause the movement of injected fluids or formation fluids into a USDW are no longer present, or until the end of a fixed time period as determined by the Director. The model must:	§5.203 (d)(1)(A)(i)(III)	AOR and corrective action	from initiation of injection until the plume movement ceases, for a minimum of [to] 10 years after the end of the injection period proposed by the applicant.	2.3.3, 2.4
§146.84(c)(1)	Area of review and corrective action	Predict, using existing site characterization, monitoring and operational data, and computational modeling, the projected lateral and vertical migration of the carbon dioxide plume and formation fluids in the subsurface from the commencement of injection activities until the plume movement ceases, until pressure differentials sufficient to cause the movement of injected fluids or formation fluids into a USDW are no longer present, or until the end of a fixed time period as determined by the Director. The model must:	§5.203 (d)(1)(A)(ii)	AOR and corrective action	The applicant must use a computational model that:	
§146.84(c)(1)(i)	Area of review and corrective action	Be based on detailed geologic data collected to characterize the injection zone(s), confining zone(s) and any additional zones; and anticipated operating data, including injection pressures, rates, and total volumes over the proposed life of the geologic sequestration project;	§5.203 (d)(1)(A)(ii)(I)	AOR and corrective action	Is based on geologic and reservoir engineering information collected to characterize the injection zone and the confining zone	2.2.1.1, 2.2.2, 2.2.3, 2.2.4
§146.84(c)(1)(i)	Area of review and corrective action	Be based on detailed geologic data collected to characterize the injection zone(s), confining zone(s) and any additional zones; and anticipated operating data, including injection pressures, rates, and total volumes over the proposed life of the geologic sequestration project;	§5.203 (d)(1)(A)(ii)(II)	AOR and corrective action	is based on anticipated operating data, including injection pressures, rates, temperatures, and total volumes and/or mass over the proposed duration of injection;	2.2.4, 2.2.5

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.84(c)(1)(ii)	Area of review and corrective action	Take into account any geologic heterogeneities, other discontinuities, data quality, and their possible impact on model predictions; and	§5.203 (d)(1)(A)(ii)(III)	AOR and corrective action	Take into account any geologic heterogeneities, other discontinuities, data quality, and their possible impact on model predictions; and	2.2.1, 2.2.2, 2.3.1
§146.84(c)(1)(iii)	Area of review and corrective action	Consider potential migration through faults, fractures, and artificial penetrations.	§5.203 (d)(1)(A)(ii)(V)	AOR and corrective action	Considers potential migration through known faults, fractures, and artificial penetrations and beyond lateral spill points.	1.4.2
§146.84(c)(2)	Required class VI permit Information	Using methods approved by the Director, identify all penetrations, including active and abandoned wells and underground mines, in the area of review that may penetrate the confining zone(s). Provide a description of each well's type, construction, date drilled, location, depth, record of plugging and/or completion, and any additional information the Director may require; and	§5.203 (d)(1)(B)	AOR and corrective action	Identification and table of penetrations. The applicant must identify, compile, and submit a table listing all penetrations, including active, inactive, plugged, and unplugged wells and underground mines in the AOR [area of review] that may penetrate the confining zone, that are known or reasonably discoverable through specialized knowledge or experience. The applicant must provide a description of each penetration's type, construction, date drilled or excavated, location, depth, and record of plugging and/or completion or closure. Examples of specialized knowledge or experience may include reviews of federal, state, and local government records, interviews with past and present owners, operators, and occupants, reviews of historical information (including aerial photographs, chain of title documents, and land use records), and visual inspections of the facility and adjoining properties.	3.9 N/A
§146.84(c)(3)	Area of review and corrective action	Determine which abandoned wells in the area of review have been plugged in a manner that prevents the movement of carbon dioxide or other fluids that may endanger USDWs, including use of materials compatible with the carbon dioxide stream.	§5.203 (d)(1)(C)	AOR and corrective action	Corrective action. The applicant must demonstrate whether each of the wells on the table of penetrations has or has not been plugged and whether each of the underground mines (if any) on the table of penetrations has or has not been closed in a manner that prevents the movement of injected fluids or displaced formation fluids that may endanger USDWs or allow the injected fluids or formation fluids to escape the permitted injection zone. The applicant must perform corrective action on all wells and underground mines in the AOR that are determined to need corrective action. The operator must perform corrective action using materials suitable for use with the CO2 stream. Corrective action may be phased.	3.9 N/A
§146.84(d)	Area of review and corrective action	Owners or operators of Class VI wells must perform corrective action on all wells in the area of review that are determined to need corrective action, using methods designed to prevent the movement of fluid into or between USDWs, including use of materials compatible with the carbon dioxide stream, where appropriate.	§5.203 (d)(1)(C)	AOR and corrective action	Corrective action. The applicant must demonstrate whether each of the wells on the table of penetrations has or has not been plugged and whether each of the underground mines (if any) on the table of penetrations has or has not been closed in a manner that prevents the movement of injected fluids or displaced formation fluids that may endanger USDWs or allow the injected fluids or formation fluids to escape the permitted injection zone. The applicant must perform corrective action on all wells and underground mines in the AOR that are determined to need corrective action. The operator must perform corrective action using materials suitable for use with the CO2 stream. Corrective action may be phased.	3.9 N/A
§146.84(e)	Area of review and corrective action	At the minimum fixed frequency, not to exceed five years, as specified in the area of review and corrective action plan, or when monitoring and operational conditions warrant, owners or operators must:	§5.206 (g)	AOR and corrective action	Area of review and corrective action. Notwithstanding the requirement in §5.203(d)(2)(B)(i) of 30 this title to perform a re-evaluation of the AOR, at the fixed frequency specified in the area of review and corrective action plan or permit, the operator of a geologic storage facility also must conduct the following whenever warranted by a material change in the monitoring and/or operational data or in the evaluation of the monitoring and operational data by the operator:	3.11.1
§146.84(e)(1)	Area of review and corrective action	Reevaluate the area of review in the same manner specified in paragraph (c)(1) of this section;	§5.206 (g)(1)	AOR and corrective action	a re-evaluation of the AOR [area of review] by performing all of the actions specified in §5.203(d)(1)(A) - (C) of this title to delineate the AOR [area of review] and identify all wells that require corrective action;	
§146.84(e)(2)	Area of review and corrective action	Identify all wells in the reevaluated area of review that require corrective action in the same manner specified in paragraph (c) of this section;	§5.206 (g)(2)	AOR and corrective action	Identify all wells in the reevaluated area of review that require corrective action; and	3.11.1

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.84(e)(3)	Area of review and corrective action	Perform corrective action on wells requiring corrective action in the reevaluated area of review in the same manner specified in paragraph (d) of this section; and	§5.206 (g)(3)	AOR and corrective action	Perform corrective action on wells requiring corrective action in the reevaluated area of review in the same manner specified in §5.203(d)(1)(C) of this title; and	
§146.84(e)(4)	Area of review and corrective action	Submit an amended area of review and corrective action plan or demonstrate to the Director through monitoring data and modeling results that no amendment to the area of review and corrective action plan is needed. Any amendments to the area of review and corrective action plan must be approved by the Director, must be incorporated into the permit, and are subject to the permit modification requirements at § 144.39 or § 144.41 of this chapter, as appropriate.	§5.206 (g)(4)	AOR and corrective action	Submit an amended area of review and corrective action plan or demonstrate to the Director through monitoring data and modeling results that no amendment to the area of review and corrective action plan is needed.	
§146.84(f)	Financial Responsibility	The emergency and remedial response plan (as required by § 146.94) and the demonstration of financial responsibility (as described by § 146.85) must account for the area of review delineated as specified in paragraph (c)(1) of this section or the most recently evaluated area of review delineated under paragraph (e) of this section, regardless of whether or not corrective action in the area of review is phased.	§5.205 (b)(3)	Fees, financial responsibility, and financial assurance	The applicant's demonstration of financial responsibiltiy must account for the entire AOR, regardless of whether corrective action in the AOR is phased.	9.2
§146.84(g)	Area of review and corrective action	All modeling inputs and data used to support area of review reevaluations under paragraph (e) of this section shall be retained for 10 years.				3.7
§146.85	Financial Responsibility		§5.205 (b)(1)	Fees, financial responsibility, and financial assurance	A person to whom a permit is issued under this subchapter must provide annually to the director evidence of financial responsibility that is satisfactory to the director. The operator must demonstrate and maintain financial responsibility and resources for corrective action, injection well plugging, post-injection storage facility care and storage facility closure, and emergency and remedial response until the director has provided written verification that the director has determined that the facility has reached the end of the post-injection storage facility care period.	9.1
§146.85	Financial Responsibility		§5.205 (b)(2)	Fees, financial responsibility, and financial assurance	In determining whether the person is financially responsible, the director must rely on:	
§146.85	Financial Responsibility		§5.205 (b)(2)(A)	Fees, financial responsibility, and financial assurance	the person's most recent audited annual report 1 filed with the U. S. Securities and Exchange Commission under Section 13 or 15(d), Securities Exchange Act of 1934 (15 U.S.C. Section 78m or 78o(d)); and	9.1
§146.85	Financial Responsibility		§5.205 (b)(2)(B)	Fees, financial responsibility, and financial assurance	the person's most recent quarterly report filed with the U. S. Securities and Exchange Commission under Section 13 or 15(d), Securities Exchange Act of 1934 (15 U.S.C. Section 78m or 78o(d)); or	9.1
§146.85	Financial Responsibility		§5.205 (b)(2)(C)	Fees, financial responsibility, and financial assurance	if the person is not required to file such a report, the person's most recent audited financial statement. The date of the audit must not be more than one year before the date of submission of the application to the director.	9.1
§146.85	Financial Responsibility		§5.205 (b)(3)	Fees, financial responsibility, and financial assurance	The applicant's demonstratio of financial responsibiltiy must account for the entire AOR, regardless of whether corrective action in the AOR is phased.	9.1
§146.85			§5.205 (c)	Financial assurance	Financial assurance.	
§146.85	Financial Responsibility		§5.205 (c)(1)	Fees, financial responsibility, and financial assurance	Injection and monitoring wells. The operator must comply with the requirements of §3.78 of this title for all monitoring wells that penetrate the base of usable quality water and this subsection for all injection wells.	
§146.85	Financial Responsibility		§5.205 (c)(2)	Fees, financial responsibility, and financial assurance	Geologic storage facility.	
§146.85	Financial Responsibility		§5.205 (c)(2)(A)	Fees, financial responsibility, and financial assurance	The applicant must include in an application for a geologic storage facility permit:	
§146.85	Financial Responsibility		§5.205 (c)(2)(A)(iii)	Fees, financial responsibility, and financial assurance	information concerning the issuer of the bond or letter of credit including the issuer's name and address and evidence of authority to issue bonds or letters of credit in Texas.	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.85	Financial Responsibility		§5.205 (c)(2)(B)	Fees, financial responsibility, and financial assurance	A geologic storage facility shall not receive CO2 until a bond or letter of credit in an amount approved by the director under this subsection and meeting the requirements of this subsection as to form and issuer has been filed with and approved by the director.	
§146.85	Financial Responsibility		§5.205 (c)(2)(C)	Fees, financial responsibility, and financial assurance	The determination of the amount of financial assurance for a geologic storage facility is subject to the following requirements:	
§146.85	Financial Responsibility		§5.205 (c)(2)(C)(ii)	Fees, financial responsibility, and financial assurance	A qualified professional engineer licensed by the State of Texas, as required under Occupations Code, Chapter 1001, relating to Texas Engineering Practice Act, must prepare or supervise the preparation of a written estimate of the highest likely amount necessary to close the geologic storage facility. The operator must submit to the director the written estimate under seal of a qualified licensed professional engineer, as required under Occupations Code, Chapter 1001, relating to Texas Engineering Practice Act; and	Cover sheets
§146.85	Financial Responsibility		§5.205 (c)(2)(C)(iii)	Fees, financial responsibility, and financial assurance	The Commission may use the proceeds of financial assurance filed under this subsection to pay the costs of plugging any well or wells at the facility if the financial assurance for plugging costs filed with the Commission is insufficient to pay for the plugging of such well or wells.	
§146.85	Financial Responsibility		§5.205 (c)(2)(D)	Financial assurance	Bonds and letters of credit filed in satisfaction of the financial assurance requirements for a geologic storage facility must comply with the following standards as to issuer and form.	
§146.85	Financial Responsibility		§5.205 (c)(2)(D)(i)	Financial assurance	The issuer of any geologic storage facility bond filed in satisfaction of the requirements of this subsection must be a corporate surety authorized to do business in Texas. The form of bond filed under this subsection must provide that the bond be renewed and continued in effect until the conditions of the bond have been met or its release is authorized by the director.	Cover sheets
§146.85	Financial Responsibility		§5.205 (c)(2)(D)(ii)	Financial assurance	Any letter of credit filed in satisfaction of the requirements of this subsection must be issued by and drawn on a bank authorized under state or federal law to operate in Texas. The letter of credit must be an irrevocable, standby letter of credit subject to the requirements of Texas Business and Commerce Code, §§5.101 - 5.118. The letter of credit must provide that it will be renewed and continued in effect until the conditions of the letter of credit have been met or its release is authorized by the director.	
§146.85	Financial Responsibility		§5.205 (c)(2)(D)	Fees, financial responsibility, and financial assurance	Bonds and letters of credit filed in satisfaction of the financial assurance requirements for a geologic storage facility must comply with the following standards as to issuer and form.	
§146.85	Financial Responsibility		§5.205 (c)	Fees, financial responsibility, and financial assurance	Financial assurance.	9.1
§146.85	Financial Responsibility		§5.205 (c)(2)(A)(ii)	Fees, financial responsibility, and financial assurance	a copy of the form of the bond or letter of credit that will be filed with the Commission; and	TBD
§146.85(a)(2)	Financial Responsibility		§5.205 (c)(2)(C)(i)	Fees, financial responsibility, and financial assurance	The director must approve the dollar amount of the financial assurance. The amount of financial assurance required to be filed under this subsection must be equal to or greater than the maximum amount necessary to perform corrective action, emergency response, and remedial action, post-injection monitoring and site care, and closure of the geologic storage facility at any time during the permit term in accordance with all applicable state laws, Commission rules and orders, and the permit;	9.2, 9.3
§146.85(a)(2)(i)	Financial Responsibility		§5.205 (c)(2)(A)(i)	Fees, financial responsibility, and financial assurance	a written estimate of the highest likely dollar amount necessary to perform post-injection monitoring and closure of the facility that shows all assumptions and calculations used to develop the estimate;	9.6.1

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.85(a)(4)(i)(A)			§5.205 (d)(3)	Nodtice of adverse financial conditions	Upon the incapacity of a bank or surety company by reason of bankruptcy, insolvency or suspension, or revocation of its charter or license, the Commission must deem the operator to be without bond coverage. The Commission must issue a notice to any operator who is without bond coverage and must specify a reasonable period to replace bond coverage, not to exceed 60 days.	
§146.85(c)	Financial Responsibility		§5.205 (c)(2)(A)(i)	Financial assurance	a written estimate of the highest likely dollar amount necessary to perform post-injection monitoring and closure of the facility that shows all assumptions and calculations used to develop the estimate;	9.6.1
§146.85(c)	Financial Responsibility		§5.205 (c)(2)(C)(i)	Financial assurance	The director must approve the dollar amount of the financial assurance. The amount of financial assurance required to be filed under this subsection must be equal to or greater than the maximum amount necessary to perform corrective action, emergency response, and remedial action, post-injection monitoring and site care, and closure of the geologic storage facility at any time during the permit term in accordance with all applicable state laws, Commission rules and orders, and the permit;	9.2, 9.3
§146.85(c)	Financial Responsibility		§5.205 (c)(2)(E)	Fees, financial responsibility, and financial assurance	The operator of a geologic storage facility must provide to the director annual written updates of the cost estimate to increase or decrease the cost estimate to account for any changes to the AOR and corrective action plan, the emergency response and remedial action plan, the injection well plugging plan, and the post-injection storage facility care and closure plan. The operator must provide to the director upon request an adjustment of the cost estimate if the director has reason to believe that the original demonstration is no longer adequate to cover the cost of injection well plugging and post-injection storage facility care and closure.	9.1, 9.8
§146.85(c)	Financial Responsibility		§5.205 (c)(3)	Fees, financial responsibility, and financial assurance	The director may consider allowing the phasing in of financial assurance for only corrective action based on project-specific factors.	
§146.85(c)(2)	Financial Responsibility		§5.205 (c)(2)(E)	Financial assurance	The operator of a geologic storage facility must provide to the director annual written updates of the cost estimate to increase or decrease the cost estimate to account for any changes to the AOR and corrective action plan, the emergency response and remedial action plan, the injection well plugging plan, and the post-injection storage facility care and closure plan. The operator must provide to the director upon request an adjustment of the cost estimate if the director has reason to believe that the original demonstration is no longer adequate to cover the cost of injection well plugging and post-injection storage facility care and closure.	9.1, 9.8
§146.85(c)(3)	Financial Responsibility		§5.205 (c)(4)	Fees, financial responsibility, and financial assurance	The director may approve a reduction in the amount of financial assurance required for post-injection monitoring and/or corrective action based on project-specific monitoring results.	
§146.85(d)	Financial Responsibility		§5.205 (D)	Fees, financial responsibility, and financial assurance	Notice of adverse financial conditions	
§146.85(d)	Financial Responsibility		§5.205 (D)(1)	Fees, financial responsibility, and financial assurance	The operator must notify the Commission of adverse financial conditions that may affect the operator's ability to carry out injection well plugging and post-injection storage facility care and closure. An operator must file any notice of bankruptcy in accordance with §3.1(f) of this title (relating to Organization Report; Retention of Records; Notice Requirements). The operator must give such notice by certified mail.	9.2
§146.85(d)	Financial Responsibility		§5.205 (D)(2)	Fees, financial responsibility, and financial assurance	The operator filing a bond must ensure that the bond provides a mechanism for the bond or surety company to give prompt notice to the Commission and the operator of any action filed alleging insolvency or bankruptcy of the surety company or the bank or alleging any violation that would result in suspension or revocation of the surety or bank's charter or license to do business.	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.85(d)	Financial Responsibility		§5.205 (D)(3)	Fees, financial responsibility, and financial assurance	Upon the incapacity of a bank or surety company by reason of bankruptcy, insolvency or suspension, or revocation of its charter or license, the Commission must deem the operator to be without bond coverage. The Commission must issue a notice to any operator who is without bond coverage and must specify a reasonable period to replace bond coverage, not to exceed 60 days.	
§146.85(a)	Financial Responsibility	The owner or operator must demonstrate and maintain financial responsibility as determined by the Director that meets the following conditions:				
§146.85(a)(1)		The financial responsibility instrument(s) used must be from the following list of qualifying instruments:				
§146.85(a)(1)(i)		Trust Funds.				
§146.85(a)(1)(ii)		Surety Bonds.				9.2
§146.85(a)(1)(iii)		Letter of Credit.				
§146.85(a)(1)(iv)		Insurance				9.2
§146.85(a)(1)(v)		Self Insurance (i.e., Financial Test and Corporate Guarantee).				
§146.85(a)(1)(vi)		Escrow Account				
§146.85(a)(1)(vii)		Any other instrument(s) satisfactory to the Director.				
§146.85(a)(2)		The qualifying instrument(s) must be sufficient to cover the cost of:				
§146.85(a)(2)(i)		Corrective action (that meets the requirements of § 146.84);				9.3
§146.85(a)(2)(ii)		Injection well plugging (that meets the requirements of § 146.92);				9.4
§146.85(a)(2)(iii)		Post injection site care and site closure (that meets the requirements of § 146.93); and				9.6
§146.85(a)(2)(iv)		Emergency and remedial response (that meets the requirements of § 146.94).				9.7
§146.85(a)(3)		The financial responsibility instrument(s) must be sufficient to address endangerment of underground sources of drinking water.				9.7.2
§146.85(a)(4)		The qualifying financial responsibility instrument(s) must comprise protective conditions of coverage.				
§146.85(a)(4)(i)		Protective conditions of coverage must include at a minimum cancellation, renewal, and continuation provisions, specifications on when the provider becomes liable following a notice of cancellation if there is a failure to renew with a new qualifying financial instrument, and requirements for the provider to meet a minimum rating, minimum capitalization, and ability to pass the bond rating when applicable.				9.2
§146.85(a)(4)(i)(A)		Cancellation - for purposes of this part, an owner or operator must provide that their financial mechanism may not cancel, terminate or fail to renew except for failure to pay such financial instrument. If there is a failure to pay the financial instrument, the financial institution may elect to cancel, terminate, or fail to renew the instrument by sending notice by certified mail to the owner or operator and the Director. The cancellation must not be final for 120 days after receipt of cancellation notice. The owner or operator must provide an alternate financial responsibility demonstration within 60 days of notice of cancellation, and if an alternate financial responsibility demonstration is not acceptable (or possible), any funds from the instrument being cancelled must be released within 60 days of notification by the Director.				

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.85(a)(4)(i)(B)		Renewal - for purposes of this part, owners or operators must renew all financial instruments, if an instrument expires, for the entire term of the geologic sequestration project. The instrument may be automatically renewed as long as the owner or operator has the option of renewal at the face amount of the expiring instrument. The automatic renewal of the instrument must, at a minimum, provide the holder with the option of renewal at the face amount of the expiring financial instrument.				
§146.85(a)(4)(i)(C)		Cancellation, termination, or failure to renew may not occur and the financial instrument will remain in full force and effect in the event that on or before the date of expiration: The Director deems the facility abandoned; or the permit is terminated or revoked or a new permit is denied; or closure is ordered by the Director or a U.S. district court or other court of competent jurisdiction; or the owner or operator is named as debtor in a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code; or the amount due is paid.				
§146.85(a)(5)		The qualifying financial responsibility instrument(s) must be approved by the Director.				
§146.85(a)(5)(i)		The Director shall consider and approve the financial responsibility demonstration for all the phases of the geologic sequestration project prior to issue a Class VI permit (§ 146.82).				
§146.85(a)(5)(ii)		The owner or operator must provide any updated information related to their financial responsibility instrument(s) on an annual basis and if there are any changes, the Director must evaluate, within a reasonable time, the financial responsibility demonstration to confirm that the instrument(s) used remain adequate for use. The owner or operator must maintain financial responsibility requirements regardless of the status of the Director's review of the financial responsibility demonstration.				9.2
§146.85(a)(5)(iii)		The Director may disapprove the use of a financial instrument if he determines that it is not sufficient to meet the requirements of this section.				
§146.85(a)(6)		The owner or operator may demonstrate financial responsibility by using one or multiple qualifying financial instruments for specific phases of the geologic sequestration project.				
§146.85(a)(6)(i)		In the event that the owner or operator combines more than one instrument for a specific geologic sequestration phase (e.g., well plugging), such combination must be limited to instruments that are not based on financial strength or performance (i.e., self insurance or performance bond), for example trust funds, surety bonds guaranteeing payment into a trust fund, letters of credit, escrow account, and insurance. In this case, it is the combination of mechanisms, rather than the single mechanism, which must provide financial responsibility for an amount at least equal to the current cost estimate.				
§146.85(a)(6)(ii)		When using a third-party instrument to demonstrate financial responsibility, the owner or operator must provide a proof that the third-party providers either have passed financial strength requirements based on credit ratings; or has met a minimum rating, minimum capitalization, and ability to pass the bond rating when applicable.				

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.85(a)(6)(iii)		An owner or operator using certain types of third-party instruments must establish a standby trust to enable EPA to be party to the financial responsibility agreement without EPA being the beneficiary of any funds. The standby trust fund must be used along with other financial responsibility instruments (e.g., surety bonds, letters of credit, or escrow accounts) to provide a location to place funds if needed.				
§146.85(a)(6)(iv)		An owner or operator may deposit money to an escrow account to cover financial responsibility requirements; this account must segregate funds sufficient to cover estimated costs for Class VI (geologic sequestration) financial responsibility from other accounts and uses.				
§146.85(a)(6)(v)		An owner or operator or its guarantor may use self insurance to demonstrate financial responsibility for geologic sequestration projects. In order to satisfy this requirement the owner or operator must meet a Tangible Net Worth of an amount approved by the Director, have a Net working capital and tangible net worth each at least six times the sum of the current well plugging, post injection site care and site closure cost, have assets located in the United States amounting to at least 90 percent of total assets or at least six times the sum of the current well plugging, post injection site care and site closure cost, and must submit a report of its bond rating and financial information annually. In addition the owner or operator must either: Have a bond rating test of AAA, AA, A, or BBB as issued by Standard & Poor's or Aaa, Aa, A, or Baa as issued by Moody's; or meet all of the following five financial ratio thresholds: A ratio of total liabilities to net worth less than 2.0; a ratio of current assets to current liabilities greater than 1.5; a ratio of the sum of net income plus depreciation, depletion, and amortization to total liabilities greater than 0.1; A ratio of current assets minus current liabilities to total assets greater than −0.1; and a net profit (revenues minus expenses) greater than 0.				
§146.85(a)(6)(vi)		An owner or operator who is not able to meet corporate financial test criteria may arrange a corporate guarantee by demonstrating that its corporate parent meets the financial test requirements on its behalf. The parent's demonstration that it meets the financial test requirement is insufficient if it has not also guaranteed to fulfill the obligations for the owner or operator.				
§146.85(a)(6)(vii)		An owner or operator may obtain an insurance policy to cover the estimated costs of geologic sequestration activities requiring financial responsibility. This insurance policy must be obtained from a third party provider.				9.2
§146.85(b)		The requirement to maintain adequate financial responsibility and resources is directly enforceable regardless of whether the requirement is a condition of the permit.				
§146.85(b)(1)		The owner or operator must maintain financial responsibility and resources until:				
§146.85(b)(1)(i)		The Director receives and approves the completed post-injection site care and site closure plan; and				9.1
§146.85(b)(1)(ii)		The Director approves site closure.				9.1
§146.85(c)		The owner or operator must have a detailed written estimate, in current dollars, of the cost of performing corrective action on wells in the area of review, plugging the injection well(s), post-injection site care and site closure, and emergency and remedial response.				9.2,9.3, 9.4, 9.5,9.6

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.85(c)(1)		The cost estimate must be performed for each phase separately and must be based on the costs to the regulatory agency of hiring a third party to perform the required activities. A third party is a party who is not within the corporate structure of the owner or operator.				
§146.85(c)(2)		During the active life of the geologic sequestration project, the owner or operator must adjust the cost estimate for inflation within 60 days prior to the anniversary date of the establishment of the financial instrument(s) used to comply with paragraph (a) of this section and provide this adjustment to the Director. The owner or operator must also provide to the Director written updates of adjustments to the cost estimate within 60 days of any amendments to the area of review and corrective action plan (§ 146.84), the injection well plugging plan (§ 146.92), the post-injection site care and site closure plan (§ 146.93), and the emergency and remedial response plan (§ 146.94).				9.8
§146.85(c)(3)		The Director must approve any decrease or increase to the initial cost estimate. During the active life of the geologic sequestration project, the owner or operator must revise the cost estimate no later than 60 days after the Director has approved the request to modify the area of review and corrective action plan (§ 146.84), the injection well plugging plan (§ 146.92), the post-injection site care and site closure plan (§ 146.93), and the emergency and response plan (§ 146.94), if the change in the plan increases the cost. If the change to the plans decreases the cost, any withdrawal of funds must be approved by the Director. Any decrease to the value of the financial assurance instrument must first be approved by the Director. The revised cost estimate must be adjusted for inflation as specified at paragraph (c)(2) of this section.				
§146.85(c)(4)		Whenever the current cost estimate increases to an amount greater than the face amount of a financial instrument currently in use, the owner or operator, within 60 days after the increase, must either cause the face amount to be increased to an amount at least equal to the current cost estimate and submit evidence of such increase to the Director, or obtain other financial responsibility instruments to cover the increase. Whenever the current cost estimate decreases, the face amount of the financial assurance instrument may be reduced to the amount of the current cost estimate only after the owner or operator has received written approval from the Director.				9.8
§146.85(c)(d)		The owner or operator must notify the Director by certified mail of adverse financial conditions such as bankruptcy that may affect the ability to carry out injection well plugging and post-injection site care and site closure.				9.2
§146.85(c)(d)(1)		In the event that the owner or operator or the third party provider of a financial responsibility instrument is going through a bankruptcy, the owner or operator must notify the Director by certified mail of the commencement of a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code, naming the owner or operator as debtor, within 10 days after commencement of the proceeding.				
§146.85(c)(d)(2)		A guarantor of a corporate guarantee must make such a notification to the Director if he/she is named as debtor, as required under the terms of the corporate guarantee.				

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.85(c)(d)(3)		An owner or operator who fulfills the requirements of paragraph (a) of this section by obtaining a trust fund, surety bond, letter of credit, escrow account, or insurance policy will be deemed to be without the required financial assurance in the event of bankruptcy of the trustee or issuing institution, or a suspension or revocation of the authority of the trustee institution to act as trustee of the institution issuing the trust fund, surety bond, letter of credit, escrow account, or insurance policy. The owner or operator must establish other financial assurance within 60 days after such an event.				
§146.85(e)	Financial Responsibility	The owner or operator must provide an adjustment of the cost estimate to the Director within 60 days of notification by the Director, if the Director determines during the annual evaluation of the qualifying financial responsibility instrument(s) that the most recent demonstration is no longer adequate to cover the cost of corrective action (as required by § 146.84), injection well plugging (as required by § 146.92), post-injection site care and site closure (as required by § 146.93), and emergency and remedial response (as required by § 146.94).				
§146.85(f)	Financial Responsibility	The Director must approve the use and length of pay-in-periods for trust funds or escrow accounts.				
§146.86	Injection well construction requirements		§5.203 (e)(2)	Injection well construction	Construction information. The applicant must provide the following information for each well to allow the director to determine whether the proposed well construction and completion design will meet the general performance criteria in paragraph (1) of this subsection:	
§146.86(a)	Injection well construction requirements	General. The owner or operator must ensure that all Class VI wells are constructed and completed to:	§5.203 (e)(1)(A)	Injection well construction	General. The operator of a geologic storage facility must ensure that all anthropogenic CO2 injection wells are constructed and completed in a manner that will:	
§146.86(a)	Injection well construction requirements	General. The owner or operator must ensure that all Class VI wells are constructed and completed to:	§5.203 (f)(1)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	Logs and surveys of newly drilled and completed injection wells.	4.2.4.2
§146.86(a)(1)	Injection well construction requirements	Prevent the movement of fluids into or between USDWs or into any unauthorized zones;	§5.203 (e)(1)(A)(i)	Injection well construction	Prevent the movement of injected CO2 or displaced fromation fluids into any unauthorized zones or into any areas where they could endanger USDWs;	4.2.3.2, 4.2.3.3
§146.86(a)(2)	Injection well construction requirements	Permit the use of appropriate testing devices and workover tools; and	§5.203 (e)(1)(A)(ii)	Injection well construction	Allow the use of appropriate testing devices and workover tools; and	4.2.3.4
§146.86(a)(3)	Injection well construction requirements	Permit continuous monitoring of the annulus space between the injection tubing and long string casing.	§5.203 (e)(1)(A)(iii)	Injection well construction	Allow continuous monitoring of the annulus space between the injection tubing and long string casing.	4.2.1
§146.86(b)	Injection well construction requirements	Casing and cementing of Class VI wells.	§5.203 (e)(1)(B)	Injection well construction	Casing and Cementing of anthropogenic CO2 injection wells	
§146.86(b)	Injection well construction requirements	Casing and cement or other materials used in the construction of each Class VI well must have sufficient structural strength and be designed for the life of the geologic sequestration project. All well materials must be compatible with fluids with which the materials may be expected to come into contact and must meet or exceed standards developed for such materials by the American Petroleum Institute, ASTM International, or comparable standards acceptable to the Director. The casing and cementing program must be designed to prevent the movement of fluids into or between USDWs. In order to allow the Director to determine and specify casing and cementing requirements, the owner or operator must provide the following information:	§5.203 (e)(1)(B)(ii)	Injection well construction	Casing and cement, cement additives, and/or other materials used in the construction of each injection well must have sufficient structural strength and must be of sufficient quality and quantity to maintain integrity over the design life of the injection well. All well materials must be suitable for use with fluids with which the well materials may be expected to come into contact and must meet or exceed standards developed for such materials by the American Petroleum Institute, ASTM International, or comparable standards approved by the Director.	4.2.1
§146.86(b)(1)(i)	Injection well construction requirements	Depth to the injection zone(s);	§5.203 (e)(2)(A)	Injection well construction	Depth to the injection zone(s);	4.2.1

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.86(b)(1)(ii)	Injection well construction requirements	Injection pressure, external pressure, internal pressure, and axial loading;				4.2.3, 4.2.3.6
§146.86(b)(1)(iii)	Injection well construction requirements	Hole size;	§5.203 (e)(2)(B)	Injection well construction	Hole size	4.2.3
§146.86(b)(1)(iv)	Injection well construction requirements	Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);	§5.203 (e)(2)(C)	Injection well construction	size and grade of all casing and tubing strings (e.g., wall thickness, external diameter, nominal weight, length, joint specification and construction material, tubing tensile, burst, and collapse strengths);	4.2.3.2, 4.2.3.3, 4.2.3.4
§146.86(b)(1)(ix)	Injection well construction requirements	Quantity, chemical composition, and temperature of the carbon dioxide stream.	§5.203 (e)(2)(J)	Injection well construction	Quantity, chemical composition, and temperature of the carbon dioxide stream.	4.2.3
§146.86(b)(1)(v)	Injection well construction requirements	Corrosiveness of the carbon dioxide stream and formation fluids;	§5.203 (e)(2)(F)	Injection well construction	a description of the capability of the materials to withstand corrosion when exposed to a combination of the CO2 stream and formation fluids;	Appendix D
§146.86(b)(1)(vi)	Injection well construction requirements	Down-hole temperatures;	§5.203 (e)(2)(G)	Injection well construction	Down-hole temperatures and pressures	4.2.3
§146.86(b)(1)(vii)	Injection well construction requirements	Lithology of injection and confining zone(s);	§5.203 (e)(2)(H)	Injection well construction	Lithology of injection and confining zone(s)	1.2.4
§146.86(b)(1)(viii)	Injection well construction requirements	Type or grade of cement and cement additives; and	§5.203 (e)(2)(I)	Injection well construction	Type or grade of cement and cement additives; and	4.2.3.3, Appendix C
§146.86(b)(2)	Injection well construction requirements	Surface casing must extend through the base of the lowermost USDW and be cemented to the surface through the use of a single or multiple strings of casing and cement.	§5.203 (e)(1)(B)(iii)	Injection well construction	Surface casing must extend through the base of the lowermost USDW above the injection zone and be cemented to the surface	4.2.2
§146.86(b)(3)	Injection well construction requirements	At least one long string casing, using a sufficient number of centralizers, must extend to the injection zone and must be cemented by circulating cement to the surface in one or more stages.	§5.203 (e)(1)(B)(v)	Injection well construction	At least one long string casing, using a sufficient number of centralizers, must extend to the injection zone and must be cemented by circulating cement to the surface in one or more stages. The long string casing must isolate the injection zone and other intervals as necessary for the protection of USDWs and to ensure confinement of the injected and formation fluids to the permitted injection zone using cement and/or other isolation techniques. If the long string casing does not extend through the injection zone, another well string or liner must be cemented through the injection zone (for example, a chrome liner).	4.2.3.5
§146.86(b)(4)	Injection well construction requirements	Circulation of cement may be accomplished by staging. The Director may approve an alternative method of cementing in cases where the cement cannot be recirculated to the surface, provided the owner or operator can demonstrate by using logs that the cement does not allow fluid movement behind the well bore.	§5.203 (e)(1)(B)(iv)	Injection well construction	Circulation of cement may be accomplished by staging. The Director may approve an alternative method of cementing in cases where the cement cannot be recirculated to the surface, provided the owner or operator can demonstrate by using logs that the cement does not allow fluid movement behind the well bore.	
§146.86(b)(5)	Injection well construction requirements	Cement and cement additives must be compatible with the carbon dioxide stream and formation fluids and of sufficient quality and quantity to maintain integrity over the design life of the geologic sequestration project. The integrity and location of the cement shall be verified using technology capable of evaluating cement quality radially and identifying the location of channels to ensure that USDWs are not endangered.	§5.203 (e)(1)(B)(vi)	Injection well construction	The applicant must verify the integrity and location of the cement using technology capable of radial evaluation of cement quality and identification of the location of channels to ensure that USDWs will not be endangered.	4.2.4.2
§146.86(c)(1)	Injection well construction requirements	Tubing and packer materials used in the construction of each Class VI well must be compatible with fluids with which the materials may be expected to come into contact and must meet or exceed standards developed for such materials by the American Petroleum Institute, ASTM International, or comparable standards acceptable to the Director.				4.2.1, Appendix D
§146.86(c)(2)	Injection well construction requirements	All owners or operators of Class VI wells must inject fluids through tubing with a packer set at a depth opposite a cemented interval at the location approved by the Director.	§5.203 (e)(1)(C)(i)	Injection well construction	All injection wells must inject fluids through tubing set on a mechanical packer. Packers must be set no higher than 100 feet above the top of the permitted injection interval or at a location approved by the director.	4.2.1
§146.86(c)(3)	Injection well construction requirements	In order for the Director to determine and specify requirements for tubing and packer, the owner or operator must submit the following information:				
§146.86(c)(3)(i)	Injection well construction requirements	Depth of setting;				4.2.1

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.86(c)(3)(ii)	Injection well construction requirements	Characteristics of the carbon dioxide stream (chemical content, corrosiveness, temperature, and density) and formation fluids;				4.2.3
§146.86(c)(3)(iii)	Injection well construction requirements	Maximum proposed injection pressure;				4.2.6
§146.86(c)(3)(iv)	Injection well construction requirements	Maximum proposed annular pressure;				4.2.6
§146.86(c)(3)(v)	Injection well construction requirements	Proposed injection rate (intermittent or continuous) and volume and/or mass of the carbon dioxide stream;	§5.203 (e)(2)(D)	Injection well construction	proposed injection rate (intermittent or continuous), maximum proposed surface injection pressure, and maximum proposed volume and/or mass of the CO2 stream to be injected;	4,2,6
§146.86(c)(3)(vi)	Injection well construction requirements	Size of tubing and casing; and				4.2.3.4, 4.2.3.6
§146.86(c)(3)(vii)	Injection well construction requirements	Tubing tensile, burst, and collapse strengths.				4.2.3.6
§146.87(a)	Logging, sampling, and testing prior to injection well operation	During the drilling and construction of a Class VI injection well, the owner or operator must run appropriate logs, surveys and tests to determine or verify the depth, thickness, porosity, permeability, and lithology of, and the salinity of any formation fluids in all relevant geologic formations to ensure conformance with the injection well construction requirements under § 146.86 and to establish accurate baseline data against which future measurements may be compared. The owner or operator must submit to the Director a descriptive report prepared by a knowledgeable log analyst that includes an interpretation of the results of such logs and tests. At a minimum, such logs and tests must include:	§5.203 (c)(1)	Geologic, geochemical, and hydrologic information	The applicant must submit a descriptive report prepared by a knowledgeable person that includes an interpretation of the results of appropriate logs, surveys, sampling, and testing sufficient to determine the depth, thickness, porosity, permeability, and lithology of, and the geochemistry of any formation fluids in, all relevant geologic formations.	4.2.4.1, 4.2.4.2, 4.2.4.3, 5.4.9
§146.87(a)	Logging, sampling, and testing prior to injection well operation	During the drilling and construction of a Class VI injection well, the owner or operator must run appropriate logs, surveys and tests to determine or verify the depth, thickness, porosity, permeability, and lithology of, and the salinity of any formation fluids in all relevant geologic formations to ensure conformance with the injection well construction requirements under § 146.86 and to establish accurate baseline data against which future measurements may be compared. The owner or operator must submit to the Director a descriptive report prepared by a knowledgeable log analyst that includes an interpretation of the results of such logs and tests. At a minimum, such logs and tests must include:	§5.203 (f)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	The applicant must submit a plan for logging, sampling, and testing of each injection well after permitting but prior to injection well operation. The plan need not include identical logging, sampling, and testing procedures for all wells provided there is a reasonable basis for different procedures. Such plan is not necessary for existing wells being converted to anthropogenic CO2 injection wells in accordance with this subchapter, to the extent such activities already have taken place. The plan must describe the logs, surveys, and tests to be conducted to verify the depth, thickness, porosity, permeability, and lithology of, and the salinity of any formation fluids in, the formations that are to be used for monitoring, storage, and confinement to assure conformance with the injection well construction requirements set forth in subsection (e) of this section, and to establish accurate baseline data against which future measurements may be compared. The plan must meet the following criteria and must include the following information.	4.2.4.1, 4.2.4.2, 4.2.4.3, 5.4.9
§146.87(a)(1)	Logging, sampling, and testing prior to injection well operation	Deviation checks during drilling on all holes constructed by drilling a pilot hole which is enlarged by reaming or another method. Such checks must be at sufficiently frequent intervals to determine the location of the borehole and to ensure that vertical avenues for fluid movement in the form of diverging holes are not created during drilling; and	§5.203 (f)(1)(A)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	During the drilling of any hole that is constructed by drilling a pilot hole which is enlarged by reaming or another method, the operator must perform deviation checks at sufficiently frequent intervals to determine the location of the borehole and to ensure that vertical avenues for fluid movement in the form of diverging holes are not created during drilling.	
§146.87(a)(2)	Logging, sampling, and testing prior to injection well operation	Before and upon installation of the surface casing:				
§146.87(a)(2)(i)	Logging, sampling, and testing prior to injection well operation	Resistivity, spontaneous potential, and caliper logs before the casing is installed; and	§5.203 (f)(1)(B)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	Before surface casing is installed, the operator must run appropriate logs, such as resistivity, spontaneous potential, and caliper logs.	4.2.4.2
§146.87(a)(2)(ii)	Logging, sampling, and testing prior to injection well operation	A cement bond and variable density log to evaluate cement quality radially, and a temperature log after the casing is set and cemented.				4.2.4.2

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
			§5.203 (f)(1)(C)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	After each casing string is set and cemented, the operator must run logs, such as a cement bond log, variable density log, and a temperature log, to ensure proper cementing.	4.2.4.2
§146.87(a)(3)	Logging, sampling, and testing prior to injection well operation	Before and upon installation of the long string casing:	§5.203 (f)(1)(D)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	Before long string casing is installed, the operator must run logs appropriate to the geology, such as resistivity, spontaneous potential, porosity, caliper, gamma ray, and fracture finder logs, to gather data necessary to verify the characterization of the geology and hydrology.	4.2.4.2
§146.87(a)(3)(i)	Logging, sampling, and testing prior to injection well operation	Resistivity, spontaneous potential, porosity, caliper, gamma ray, fracture finder logs, and any other logs the Director requires for the given geology before the casing is installed; and	§5.203 (f)(1)(D)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	Before long string casing is installed, the operator must run logs appropriate to the geology, such as resistivity, spontaneous potential, porosity, caliper, gamma ray, and fracture finder logs, to gather data necessary to verify the characterization of the geology and hydrology.	4.2.4.2
§146.87(a)(3)(ii)	Logging, sampling, and testing prior to injection well operation	A cement bond and variable density log, and a temperature log after the casing is set and cemented.	§5.203 (f)(1)(C)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	After each casing string is set and cemented, the operator must run logs, such as a cement bond log, variable density log, and a temperature log, to ensure proper cementing.	4.2.4.2
§146.87(a)(4)	Logging, sampling, and testing prior to injection well operation	A series of tests designed to demonstrate the internal and external mechanical integrity of injection wells, which may include:	§5.203 (h)(2)	Mechanical integrity testing	Mechanical integrity testing plan. The applicant must prepare and submit a mechanical integrity testing plan as part of a permit application. [The plan must include a schedule for the performance of a series of tests at a minimum frequency of five years.] The performance tests must be designed to demonstrate the internal and external mechanical integrity of each injection well. These tests may include:	
§146.87(a)(4)(i)	Logging, sampling, and testing prior to injection well operation	A pressure test with liquid or gas;	§5.203 (h)(2)(A)	Mechanical integrity testing	A pressure test with liquid or gas;	5.4.4
§146.87(a)(4)(ii)	Logging, sampling, and testing prior to injection well operation	A tracer survey such as oxygen-activation logging;	§5.203 (h)(2)(B)	Mechanical integrity testing	A tracer survey such as oxygen-activation logging;	
§146.87(a)(4)(iii)	Logging, sampling, and testing prior to injection well operation	A temperature or noise log;	§5.203 (h)(2)(C)	Mechanical integrity testing	A temperature or noise log;	5.4.5
§146.87(a)(4)(iv)	Logging, sampling, and testing prior to injection well operation	A casing inspection log; and	§5.203 (h)(2)(D)	Mechanical integrity testing	A casing inspection log; and	5.4.8
§146.87(a)(5)	Logging, sampling, and testing prior to injection well operation	Any alternative methods that provide equivalent or better information and that are required by and/or approved of by the Director.	§5.203 (h)(2)(E)	Mechanical integrity testing	Any alternative methods approved by the director, and if necessary by the Administrator of EPA under 40 CFR §146.89(e), that provides equivalent or better information approved by the director.	
§146.87(b)	Logging, sampling, and testing prior to injection well operation	The owner or operator must take whole cores or sidewall cores of the injection zone and confining system and formation fluid samples from the injection zone(s), and must submit to the Director a detailed report prepared by a log analyst that includes: Well log analyses (including well logs), core analyses, and formation fluid sample information. The Director may accept information on cores from nearby wells if the owner or operator can demonstrate that core retrieval is not possible and that such cores are representative of conditions at the well. The Director may require the owner or operator to core other formations in the borehole.	§5.203 (f)(3)(B)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	The operator must submit analyses of whole cores or sidewall cores representative of the injection zone and confining zone and formation fluid samples from nearby wells or other data if the operator can demonstrate to the director that such data are representative of conditions at the proposed injection well.	4.2.4.1
§146.87(c)	Logging, sampling, and testing prior to injection well operation	The owner or operator must record the fluid temperature, pH, conductivity, reservoir pressure, and static fluid level of the injection zone(s).	§5.203 (f)(3)(A)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	The operator must record the formation fluid temperature, pH, conductivity, reservoir pressure, and static fluid level of the injection zone.	4.2.4.3
§146.87(d)	Logging, sampling, and testing prior to injection well operation	At a minimum, the owner or operator must determine or calculate the following information concerning the injection and confining zone(s):	§5.203 (f)(2)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	Testing and determination of hydrogeologic characteristics of injection and confining zone.	
§146.87(d)(1)	Logging, sampling, and testing prior to injection well operation	Fracture pressure;				1.5.3, 4.2.4.4
§146.87(d)(2)	Logging, sampling, and testing prior to injection well operation	Other physical and chemical characteristics of the injection and confining zone(s); and				1.2.4, 4.2.4.2

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.87(d)(3)	Logging, sampling, and testing prior to injection well operation	Physical and chemical characteristics of the formation fluids in the injection zone(s).				1.6.1, 4.2.4.3
§146.87(e)	Logging, sampling, and testing prior to injection well operation	Upon completion, but prior to operation, the owner or operator must conduct the following tests to verify hydrogeologic characteristics of the injection zone(s):				
§146.87(e)(1)	Logging, sampling, and testing prior to injection well operation	A pressure fall-off test; and,	§5.203 (f)(2)(B)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	The operator must perform an initial pressure fall-off or other test and submit to the director a written report of the results of the test, including details of the methods used to perform the test and to interpret the results, all necessary graphs, and the testing log, to verify permeability, injectivity, and initial pressure using water or CO2.	5.4.2, 5.4.6
§146.87(e)(2)		A pump test; or				
§146.87(e)(3)		Injectivity tests.				5.4.2
§146.87(f)	Logging, sampling, and testing prior to injection well operations	The owner or operator must provide the Director with the opportunity to witness all logging and testing by this subpart. The owner or operator must submit a schedule of such activities to the Director 30 days prior to conducting the first test and submit any changes to the schedule 30 days prior to the next scheduled test.	§5.206 (i)	Permit Standards	Commission witnessing of testing and logging. The operator must provide the division with the opportunity to witness all planned well workovers, stimulation activities, other than stimulation for formation testing, and testing and logging. The operator must submit a proposed schedule of such activities to the Commission at least 30 days prior to conducting the first such activity and submit notice at least 48 hours in advance of any actual activity. Such activities shall not commence before the end of the 30 days unless authorized by the director.	4.2.4.2, 4.3.2, 5.4.8
§146.88(a)	Injection well operating requirements	Except during stimulation, the owner or operator must ensure that injection pressure does not exceed 90 percent of the fracture pressure of the injection zone(s) so as to ensure that the injection does not initiate new fractures or propagate existing fractures in the injection zone(s). In no case may injection pressure initiate fractures in the confining zone(s) or cause the movement of injection or formation fluids that endangers a USDW. Pursuant to requirements at § 146.82(a)(9), all stimulation programs must be approved by the Director as part of the permit application and incorporated into the permit.	§5.203 (i)(2)(C)	Operating Information	in no case may cause the movement of injection fluids or formation fluids in a manner that endangers USDWs.	4.2.5, 4.2.6
§146.88(a)		Except during stimulation, the owner or operator must ensure that injection pressure does not exceed 90 percent of the fracture pressure of the injection zone(s) so as to ensure that the injection does not initiate new fractures or propagate existing fractures in the injection zone(s). In no case may injection pressure initiate fractures in the confining zone(s) or cause the movement of injection or formation fluids that endangers a USDW. Pursuant to requirements at § 146.82(a)(9), all stimulation programs must be approved by the Director as part of the permit application and incorporated into the permit.				
§146.88(b)	Injection well construction requirements	Injection between the outermost casing protecting USDWs and the well bore is prohibited.	§5.206 (d)(2)(A)	Operating a geologic storage facility	Injection between the outermost casing protecting USDWs and the well bore is prohibited.	
§146.88(c)	Injection well construction requirements	The owner or operator must fill the annulus between the tubing and the long string casing with a non-corrosive fluid approved by the Director. The owner or operator must maintain on the annulus a pressure that exceeds the operating injection pressure, unless the Director determines that such requirement might harm the integrity of the well or endanger USDWs.	§5.206 (d)(2)(D)	Operating a geologic storage facility	The owner or operator must fill the annulus between the tubing and the long string casing with a corrosion inhibiting fluid approved by the Director. The owner or operator must maintain on the annulus a pressure that exceeds the operating injection pressure, unless the Director determines that such requirement might harm the integrity of the well or endanger USDWs.	4.2.3.7
§146.88(d)	Injection well operating requirements	Other than during periods of well workover (maintenance) approved by the Director in which the sealed tubing-casing annulus is disassembled for maintenance or corrective procedures, the owner or operator must maintain mechanical integrity of the injection well at all times.	§5.203 (h)(1)(A)	Mechanical integrity testing	Other than during periods of well workover in which the sealed tubing-casing annulus is of necessity disassembled for maintenance or corrective procedures, the operator must maintain mechanical integrity of the injection well at all times.	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.88(d)	Injection well operating requirements	Other than during periods of well workover (maintenance) approved by the Director in which the sealed tubing-casing annulus is disassembled for maintenance or corrective procedures, the owner or operator must maintain mechanical integrity of the injection well at all times.	§5.206 (f)(2)	Mechanical integrity	Other than during periods of well workover (maintenance) approved by the Director in which the sealed tubing casing annulus is disassembled for maintenance or corrective procedures, the owner or operator must maintain mechanical integrity of the injection well at all times.	
§146.88(e)	Injection well operating requirements	The owner or operator must install and use:	§5.206 (d)(2)(F)	Operating a geologic storage facility	The operator must comply with the following requirements for alarms and automatic shut-off systems.	
§146.88(e)(1)	Injection well operating requirements	Continuous recording devices to monitor: The injection pressure; the rate, volume and/or mass, and temperature of the carbon dioxide stream; and the pressure on the annulus between the tubing and the long string casing and annulus fluid volume; and	§5.206 (d)(2)(F)(i)	Operating a geologic storage facility	The operator must install and use alarms and automatic shut-off systems designed to alert the operator and shut-in the well when operating parameters such as annulus pressure, injection rate or other parameters diverge from permitted ranges and/or gradients. On offshore wells, the automatic shut-off systems must be installed down-hole.	5.5.1
§146.88(e)(2)	Injection well operating requirements	Alarms and automatic surface shut-off systems or, at the discretion of the Director, down-hole shut-off systems (e.g., automatic shut-off, check valves) for onshore wells or, other mechanical devices that provide equivalent protection; and	§5.206 (d)(2)(F)(i)	Operating a geologic storage facility	The operator must install and use alarms and automatic shut-off systems designed to alert the operator and shut-in the well when operating parameters such as annulus pressure, injection rate or other parameters diverge from permitted ranges and/or gradients. On offshore wells, the automatic shut-off systems must be installed down-hole.	5.4.7
§146.88(e)(3)	Injection well operating requirements	Alarms and automatic down-hole shut-off systems for wells located offshore but within State territorial waters, designed to alert the operator and shut-in the well when operating parameters such as annulus pressure, injection rate, or other parameters diverge beyond permitted ranges and/or gradients specified in the permit.	§5.206 (d)(2)(F)(i)	Operating a geologic storage facility	The operator must install and use alarms and automatic shut-off systems designed to alert the operator and shut-in the well when operating parameters such as annulus pressure, injection rate or other parameters diverge from permitted ranges and/or gradients. On offshore wells, the automatic shut-off systems must be installed down-hole.	
§146.88(f)	Injection well operating requirements	If a shutdown (i.e., down-hole or at the surface) is triggered or a loss of mechanical integrity is discovered, the owner or operator must immediately investigate and identify as expeditiously as possible the cause of the shutoff. If, upon such investigation, the well appears to be lacking mechanical integrity, or if monitoring required under paragraph (e) of this section otherwise indicates that the well may be lacking mechanical integrity, the owner or operator must:	§5.206 (d)(2)(F)(ii)	Operating a geologic storage facility	If a shutdown (i.e., down-hole or at the surface) is triggered or a loss of mechanical integrity is discovered, the owner or operator must immediately investigate and identify as expeditiously as possible the cause. If, upon such investigation, the well appears to be lacking mechanical integrity, or if monitoring otherwise indicates that the well may be lacking mechanical integrity, the owner or operator must	8.4.8
§146.88(f)(1)	Injection well operating requirements	Immediately cease injection;	§5.206 (d)(2)(F)(ii)(I)	Operating a geologic storage facility	Immediately cease injection;	8.4.8
§146.88(f)(2)	Injection well operating requirements	Take all steps reasonably necessary to determine whether there may have been a release of the injected carbon dioxide stream or formation fluids into any unauthorized zone;	§5.206 (d)(2)(F)(ii)(II)	Operating a geologic storage facility	Take all steps reasonably necessary to determine whether there may have been a release of the injected carbon dioxide stream or formation fluids into any unauthorized zone	8.4.8
§146.88(f)(3)	Injection well operating requirements	Notify the Director within 24 hours;	§5.206 (d)(2)(F)(ii)(III)	Operating a geologic storage facility	Notify the Director within 24 hours	8.4.8
§146.88(f)(4)	Injection well operating requirements	Restore and demonstrate mechanical integrity to the satisfaction of the Director prior to resuming injection; and	§5.206 (d)(2)(F)(ii)(IV)	Operating a geologic storage facility	Restore and demonstrate mechanical integrity to the satisfaction of the Director prior to resuming injection; and	8.4.8
§146.88(f)(5)	Injection well operating requirements	Notify the Director when injection can be expected to resume.	§5.206 (d)(2)(F)(ii)(V)	Operating a geologic storage facility	Notify the Director when injection can be expected to resume	8.4.8
§146.89	Mechanical Integrity	Mechanical Integrity	§5.203 (h)	Mechanical integrity testing	Mechanical integrity testing.	
§146.89	Mechanical Integrity	Mechanical Integrity	§5.203 (h)(1)	Mechanical integrity testing	Criteria. This paragraph establishes the criteria for the mechanical integrity testing plan for anthropogenic CO2 injection wells that an applicant must include in an application.	5.4.4
§146.89	Mechanical Integrity	Mechanical Integrity	§5.206 (f)	Mechanical integrity	Mechanical Integrity	
§146.89(a)	Mechanical Integrity	A Class VI well has mechanical integrity if:				
§146.89(a)(1)	Mechanical Integrity	There is no significant leak in the casing, tubing, or packer; and				
§146.89(a)(2)	Mechanical Integrity	There is no significant fluid movement into a USDW through channels adjacent to the injection well bore.				

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.89(b)	Mechanical Integrity	To evaluate the absence of significant leaks under paragraph (a)(1) of this section, owners or operators must, following an initial annulus pressure test, continuously monitor injection pressure, rate, injected volumes; pressure on the annulus between tubing and long-string casing; and annulus fluid volume as specified in § 146.88 (e);	§5.203 (h)(1)(C)	Mechanical integrity testing	Following an initial annulus pressure test, the operator must continuously monitor injection pressure, rate, injected volumes and pressure on the annulus between tubing and long-string casing to confrim that the injected fluids are confined to the injection zone.	5.5.1
§146.89(c)	Mechanical Integrity	At least once per year, the owner or operator must use one of the following methods to determine the absence of significant fluid movement under paragraph (a)(2) of this section:	§5.203 (h)(1)(D)	Mechanical integrity testing	At least once per year until the injection well is plugged the operator must confirm the absence of significant fluid movement into a USDW through channels adjacent to the injection wellbore (external integrity) using a method approved by the director (e.g., diagnostic surveys such as oxygen-activation logging or temperature or noise logs).	
§146.89(c)(1)	Mechanical Integrity	An approved tracer survey such as an oxygen-activation log; or	§5.203 (h)(1)(D)	Mechanical integrity testing	At least once per year until the injection well is plugged the operator must confirm the absence of significant fluid movement into a USDW through channels adjacent to the injection wellbore (external integrity) using a method approved by the director (e.g., diagnostic surveys such as oxygen-activation logging or temperature or noise logs).	
§146.89(c)(2)	Mechanical Integrity	A temperature or noise log.	§5.203 (h)(1)(D)	Mechanical integrity testing	At least once per year until the injection well is plugged the operator must confirm the absence of significant fluid movement into a USDW through channels adjacent to the injection wellbore (external integrity) using a method approved by the director (e.g., diagnostic surveys such as oxygen-activation logging or temperature or noise logs).	5.4.5
§146.89(d)	Mechanical Integrity	If required by the Director, at a frequency specified in the testing and monitoring plan required at § 146.90, the owner or operator must run a casing inspection log to determine the presence or absence of corrosion in the long-string casing.				
§146.89(e)	Mechanical Integrity	The Director may require any other test to evaluate mechanical integrity under paragraphs (a)(1) or (a)(2) of this section. Also, the Director may allow the use of a test to demonstrate mechanical integrity other than those listed above with the written approval of the Administrator. To obtain approval for a new mechanical integrity test, the Director must submit a written request to the Administrator setting forth the proposed test and all technical data supporting its use. The Administrator may approve the request if he or she determines that it will reliably demonstrate the mechanical integrity of wells for which its use is proposed. Any alternate method approved by the Administrator will be published in the Federal Register and may be used in all States in accordance with applicable State law unless its use is restricted at the time of approval by the Administrator.				
§146.89(f)	Mechanical Integrity	In conducting and evaluating the tests enumerated in this section or others to be allowed by the Director, the owner or operator and the Director must apply methods and standards generally accepted in the industry. When the owner or operator reports the results of mechanical integrity tests to the Director, he/she shall include a description of the test(s) and the method(s) used. In making his/her evaluation, the Director must review monitoring and other test data submitted since the previous evaluation.				
§146.89(g)	Mechanical Integrity	The Director may require additional or alternative tests if the results presented by the owner or operator under paragraphs (a) through (d) of this section are not satisfactory to the Director to demonstrate that there is no significant leak in the casing, tubing, or packer, or to demonstrate that there is no significant movement of fluid into a USDW resulting from the injection activity as stated in paragraphs (a)(1) and (2) of this section.	§5.206 (f)(4)	Mechanical integrity	The director may require additional or alternative tests if the results presented by the operator do not demonstrate to the director that there is no significant leak in the casing, tubing, or packer or movement of fluid into or between formations containing USDWs resulting from the injection activity.	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.90	Testing and monitoring requirements	The owner or operator of a Class VI well must prepare, maintain, and comply with a testing and monitoring plan to verify that the geologic sequestration project is operating as permitted and is not endangering USDWs. The requirement to maintain and implement an approved plan is directly enforceable regardless of whether the requirement is a condition of the permit. The testing and monitoring plan must be submitted with the permit application, for Director approval, and must include a description of how the owner or operator will meet the requirements of this section, including accessing sites for all necessary monitoring and testing during the life of the project. Testing and monitoring associated with geologic sequestration projects must, at a minimum, include:	§5.203 (j)	Plan for monitoring, sampling, and testing after initiation of operation	Plan for monitoring, sampling, and testing after initiation of operation.	5.2
§146.90	Testing and monitoring requirements	The owner or operator of a Class VI well must prepare, maintain, and comply with a testing and monitoring plan to verify that the geologic sequestration project is operating as permitted and is not endangering USDWs. The requirement to maintain and implement an approved plan is directly enforceable regardless of whether the requirement is a condition of the permit. The testing and monitoring plan must be submitted with the permit application, for Director approval, and must include a description of how the owner or operator will meet the requirements of this section, including accessing sites for all necessary monitoring and testing during the life of the project. Testing and monitoring associated with geologic sequestration projects must, at a minimum, include:	§5.203 (j)(1)	Plan for monitoring, sampling, and testing after initiation of operation	The applicant must submit a monitoring, sampling, and testing plan for verifying that the geologic storage facility is operating as permitted and that the injected fluids are confined to the injection zone.	5.2
§146.90	Testing and monitoring requirements	The owner or operator of a Class VI well must prepare, maintain, and comply with a testing and monitoring plan to verify that the geologic sequestration project is operating as permitted and is not endangering USDWs. The requirement to maintain and implement an approved plan is directly enforceable regardless of whether the requirement is a condition of the permit. The testing and monitoring plan must be submitted with the permit application, for Director approval, and must include a description of how the owner or operator will meet the requirements of this section, including accessing sites for all necessary monitoring and testing during the life of the project. Testing and monitoring associated with geologic sequestration projects must, at a minimum, include:	§5.203 (j)(2)	Plan for monitoring, sampling, and testing after initiation of operation	The plan must include the following:	
§146.90(a)	Testing and monitoring requirements	Analysis of the carbon dioxide stream with sufficient frequency to yield data representative of its chemical and physical characteristics;	§5.203 (j)(2)(A)	Plan for monitoring, sampling, and testing after initiation of operation	The analysis of the carbon dioxide stream prior to injection with sufficient frequency to yield data representative of its chemical and physical characteristics;	5.4.3
§146.90(b)	Testing and monitoring requirements	Installation and use, except during well workovers as defined in § 146.88(d), of continuous recording devices to monitor injection pressure, rate, and volume; the pressure on the annulus between the tubing and the long string casing; and the annulus fluid volume added;	§5.203 (j)(2)(B)	Plan for monitoring, sampling, and testing after initiation of operation	The installation and use of continuous recording devices to monitor injection pressure, rate, and volume and the pressure on the annulus between the tubing and the long string casing, except during workovers	5.5.1
§146.90(c)	Testing and monitoring requirements	Corrosion monitoring of the well materials for loss of mass, thickness, cracking, pitting, and other signs of corrosion, which must be performed on a quarterly basis to ensure that the well components meet the minimum standards for material strength and performance set forth in § 146.86(b), by:	§5.203 (j)(2)(C)	Plan for monitoring, sampling, and testing after initiation of operation	After initiation of injection, the performance on a semi-annual basis of corrosion monitoring of the well materials for loss of mass, thickness, cracking, pitting, and other signs of corrosion, which must be performed on a quarterly basis to ensure that the well components meet the minimum standards for material strength and performance set forth in subsection (e)(1)(A) of this section. The operator must report the results of such monitoring annually. Corrosion monitoring may be accomplished by:	5.5.2

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.90(c)(1)	Testing and monitoring requirements	Analyzing coupons of the well construction materials placed in contact with the carbon dioxide stream; or	§5.203 (j)(2)(C)(i)	Plan for monitoring, sampling, and testing after initiation of operation	Analyzing coupons of the well construction materials placed in contact with the carbon dioxide stream; or	5.5.2.1
§146.90(c)(2)	Testing and monitoring requirements	Routing the carbon dioxide stream through a loop constructed with the material used in the well and inspecting the materials in the loop; or	§5.203 (j)(2)(C)(ii)	Plan for monitoring, sampling, and testing after initiation of operation	Routing the carbon dioxide stream through a loop constructed with the material used in the well and inspecting the materials in the loop; or	
§146.90(c)(3)	Testing and monitoring requirements	Using an alternative method approved by the Director;	§5.203 (j)(2)(C)(iii)	Plan for monitoring, sampling, and testing after initiation of operation	using an alternative method, materials, or time period approved by the director;	
§146.90(d)	Testing and monitoring requirements	Periodic monitoring of the ground water quality and geochemical changes above the confining zone(s) that may be a result of carbon dioxide movement through the confining zone(s) or additional identified zones including:	§5.203 (j)(2)(D)	Plan for monitoring, sampling, and testing after initiation of operation	Monitoring of geochemical and geophysical changes, including:	
§146.90(d)	Testing and monitoring requirements	Periodic monitoring of the ground water quality and geochemical changes above the confining zone(s) that may be a result of carbon dioxide movement through the confining zone(s) or additional identified zones including:	§5.203 (j)(2)(D)(ii)	Plan for monitoring, sampling, and testing after initiation of operation	Periodic monitoring of the quality and geochemistry of a USDW within the AOR and the formation fluid in a permeable and porous formation near to and above the top confining zone to detect any movement of the injected CO2 through the confining zone into that monitored formation;	4.3.4
§146.90(d)(1)	Testing and monitoring requirements	The location and number of monitoring wells based on specific information about the geologic sequestration project, including injection rate and volume, geology, the presence of artificial penetrations, and other factors; and	§5.203 (j)(2)(D)(iii)	Plan for monitoring, sampling, and testing after initiation of operation	The location and number of monitoring wells justified on the basis of AOR, injection rate and volume, geology, the presence of artificial penetrations and other factors specific to the geologic storage facility; and	5.5.4
§146.90(d)(2)	Testing and monitoring requirements	The monitoring frequency and spatial distribution of monitoring wells based on baseline geochemical data that has been collected under § 146.82(a)(6) and on any modeling results in the area of review evaluation required by § 146.84(c).	§5.203 (j)(2)(D)(iv)	Plan for monitoring, sampling, and testing after initiation of operation	The monitoring frequency and spatial distribution of monitoring wells based on baseline geochemical data that has been collected under subsection (c)(2) of this section and any modeling results in the AOR evaluation;	5.5.4
§146.90(e)		A demonstration of external mechanical integrity pursuant to § 146.89(c) at least once per year until the injection well is plugged; and, if required by the Director, a casing inspection log pursuant to requirements at § 146.89(d) at a frequency established in the testing and monitoring plan;				5.4.5
§146.90(f)	Testing and monitoring requirements	A pressure fall-off test at least once every five years unless more frequent testing is required by the Director based on site-specific information;	§5.203 (j)(2)(F)	Plan for monitoring, sampling, and testing after initiation of operation	A pressure fall-off test at least once every five years unless more frequent testing is required by the director based on site-specific information; and	5.4.6
§146.90(g)	Testing and monitoring requirements	Testing and monitoring to track the extent of the carbon dioxide plume and the presence or absence of elevated pressure (e.g., the pressure front) by using:	§5.203 (j)(2)(E)	Plan for monitoring, sampling, and testing after initiation of operation	tracking the extent of the CO2 plume and the position of the pressure front by using indirect, geophysical techniques, which may include seismic, electrical, gravity, or electromagnetic surveys and/or down-hole CO2 detection tools;	
§146.90(g)(1)		Direct methods in the injection zone(s); and,				5.5.7.1
§146.90(g)(2)	Testing and monitoring requirements	Indirect methods (e.g., seismic, electrical, gravity, or electromagnetic surveys and/or down-hole carbon dioxide detection tools), unless the Director determines, based on site-specific geology, that such methods are not appropriate;	§5.203 (j)(2)(E)	Plan for monitoring, sampling, and testing after initiation of operation	tracking the extent of the CO2 plume and the position of the pressure front by using indirect, geophysical techniques, which may include seismic, electrical, gravity, or electromagnetic surveys and/or down-hole CO2 detection tools;	5.5.7.2
§146.90(h)		The Director may require surface air monitoring and/or soil gas monitoring to detect movement of carbon dioxide that could endanger a USDW.				
§146.90(h)(1)		Design of Class VI surface air and/or soil gas monitoring must be based on potential risks to USDWs within the area of review;				5.5.3
§146.90(h)(2)		The monitoring frequency and spatial distribution of surface air monitoring and/or soil gas monitoring must be decided using baseline data, and the monitoring plan must describe how the proposed monitoring will yield useful information on the area of review delineation and/or compliance with standards under § 144.12 of this chapter;				5.5.3

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.90(h)(3)		If an owner or operator demonstrates that monitoring employed under §§ 98.440 to 98.449 of this chapter (Clean Air Act, 42 U.S.C. 7401 et seq.) accomplishes the goals of paragraphs (h)(1) and (2) of this section, and meets the requirements pursuant to § 146.91(c)(5), a Director that requires surface air/soil gas monitoring must approve the use of monitoring employed under §§ 98.440 to 98.449 of this chapter. Compliance with §§ 98.440 to 98.449 of this chapter pursuant to this provision is considered a condition of the Class VI permit;				
§146.90(i)	Testing and monitoring requirements	Any additional monitoring, as required by the Director, necessary to support, upgrade, and improve computational modeling of the area of review evaluation required under § 146.84(c) and to determine compliance with standards under § 144.12 of this chapter;	§5.203 (j)(2)(G)	Plan for monitoring, sampling, and testing after initiation of operation	Additional monitoring as the director may determine to be necessary to support, upgrade, and improve computational modeling of the AOR evaluation and to determine compliance with the requirements that the injection activity not allow the movement of fluid containing any contaminant into USDWs and that the injected fluid remain within the permitted interval.	
§146.90(i)	Testing and monitoring requirements	Any additional monitoring, as required by the Director, necessary to support, upgrade, and improve computational modeling of the area of review evaluation required under § 146.84(c) and to determine compliance with standards under § 144.12 of this chapter;	§5.206 (e)(3)	Monitoring, sampling, and testing requirements	The director may require additional monitoring as necessary to support, upgrade, and improve computational modeling of the AOR evaluation and to determine compliance with the requirement that the injection activity not allow movement of fluid that would endanger USDWs	
§146.90(j)		The owner or operator shall periodically review the testing and monitoring plan to incorporate monitoring data collected under this subpart, operational data collected under § 146.88, and the most recent area of review reevaluation performed under § 146.84(e). In no case shall the owner or operator review the testing and monitoring plan less often than once every five years. Based on this review, the owner or operator shall submit an amended testing and monitoring plan or demonstrate to the Director that no amendment to the testing and monitoring plan is needed. Any amendments to the testing and monitoring plan must be approved by the Director, must be incorporated into the permit, and are subject to the permit modification requirements at § 144.39 or § 144.41 of this chapter, as appropriate. Amended plans or demonstrations shall be submitted to the Director as follows:				5.3
§146.90(j)(1)		Within one year of an area of review reevaluation;				5.3
§146.90(j)(2)		Following any significant changes to the facility, such as addition of monitoring wells or newly permitted injection wells within the area of review, on a schedule determined by the Director; or				5.3
§146.90(j)(3)		When required by the Director.				5.3
§146.90(k)	Testing and monitoring requirements	A quality assurance and surveillance plan for all testing and monitoring requirements.	§5.203 (a)(4)	General	Reports. An applicant must ensure that all descriptive reports are prepared by a qualified and knowledgeable person and include an interpretation of the results of all logs, surveys, sampling, and tests required in this subchapter. The applicant must include in the application a quality assurance and surveillance plan for all testing and monitoring, which includes, at a minimum, validation of the analytical laboratory data, calibration of field instruments, and an explanation of the sampling and data acquisition techniques.	Section 5
§146.91	Reporting requirements	The owner or operator must, at a minimum, provide, as specified in paragraph (e) of this section, the following reports to the Director, for each permitted Class VI well:	§5.207	Reporting and Record-Keeping	Reporting and Record-Keeping. The operator must provide, at a minimum, the following reports to the Director and retain the following information	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.91	Reporting requirements	The owner or operator must, at a minimum, provide, as specified in paragraph (e) of this section, the following reports to the Director, for each permitted Class VI well:	§5.207(a)(1)	Reporting and Record-Keeping	Test records. The operator must file a complete record of all tests in duplicate with the district office within 30 days after the testing. In conducting and evaluating the tests enumerated in this subchapter or others to be allowed by the director, the operator and the director must apply methods and standards generally accepted in the industry. When the operator reports the results of mechanical integrity tests to the director, the operator must include a description of any tests and methods [the test(s) and the method(s)] used. In making this evaluation, the director must review monitoring and other test data submitted since the previous evaluation.	5.2
§146.91(a)	Reporting requirements	Semi-annual reports containing:	§5.207 (a)(2)(C)	Reporting and Record-Keeping	Semi-annual reports containing:	
§146.91(a)(1)	Reporting requirements	Any changes to the physical, chemical, and other relevant characteristics of the carbon dioxide stream from the proposed operating data;	§5.207 (a)(2)(C)(ii)	Reporting and Record-Keeping	Any changes to the source as well as the physical, chemical, and other relevant characteristics of the carbon dioxide stream from the proposed operating data;	5.2
§146.91(a)(2)	Reporting requirements	Monthly average, maximum, and minimum values for injection pressure, flow rate and volume, and annular pressure;	§5.207 (a)(2)(C)(i)	Reporting and Record-Keeping	a summary of well head pressure monitoring;	5.2
§146.91(a)(2)	Reporting requirements	Monthly average, maximum, and minimum values for injection pressure, flow rate and volume, and annular pressure;	§5.207 (a)(2)(C)(iii)	Reporting and Record-Keeping	monthly average, maximum and minimum values for injection pressure, flow rate, temperature, and volume and/or mass, and annular pressure;	5.2
§146.91(a)(3)	Reporting requirements	A description of any event that exceeds operating parameters for annulus pressure or injection pressure specified in the permit;	§5.207 (a)(2)(C)(v)	Reporting and Record-Keeping	description of any event that significantly exceeds operating parameters for annulus pressure or injection pressure as specified in the permit;	5.2
§146.91(a)(4)	Reporting requirements	A description of any event which triggers a shut-off device required pursuant to § 146.88(e) and the response taken;	§5.207 (a)(2)(C)(vi)	Reporting and Record-Keeping	a description of any event that triggers a shutdown device and the response taken; and	5.2
§146.91(a)(5)	Reporting requirements	The monthly volume and/or mass of the carbon dioxide stream injected over the reporting period and the volume injected cumulatively over the life of the project;	§5.207 (a)(2)(D)(v)	Reporting and Record-Keeping	tons of CO2 injected; and	5.2
§146.91(a)(6)	Reporting requirements	Monthly annulus fluid volume added; and	§5.207 (a)(2)(C)(iv)	Reporting and Record-Keeping	monthly annulus fluid volume added;	5.2
§146.91(a)(7)	Reporting requirements	The results of monitoring prescribed under § 146.90.	§5.207 (a)(C)(vii)	Reporting and Record-Keeping	the results of monitoring prescribed under §5.206€ [§5.206(d)] of this title (relating to Permit Standards).	5.2
§146.91(b)	Reporting requirements	Report, within 30 days, the results of:	§5.207 (a)(2)(B)	Reporting and Record-Keeping	Report, within 30 days, the results of:	
§146.91(b)(1)	Reporting requirements	Periodic tests of mechanical integrity;	§5.207 (a)(2)(B)(i)	Reporting and Record-Keeping	Periodic tests of mechanical integrity;	5.2
§146.91(b)(2)	Reporting requirements	Any well workover; and,	§5.207 (a)(2)(B)(ii)	Reporting and Record-Keeping	Any well workover; and,	5.2
§146.91(b)(3)	Reporting requirements	Any other test of the injection well conducted by the permittee if required by the Director.	§5.207 (a)(2)(B)(iii)	Reporting and Record-Keeping	Any other test of the injection well conducted by the permittee if required by the Director.	5.2
§146.91(c)	Reporting requirements	Report, within 24 hours:	§5.207 (a)(2)(A)	Reporting and Record-Keeping	Report within 24 hours. The operator must report to the appropriate district office the discovery of any significant pressure changes or other monitoring data that indicate the presence of leaks in the well or the lack of confinement of the injected gases to the geologic storage reservoir. Such report must be made orally as soon as practicable, but within 24 hours, following the discovery of the leak, and must be confirmed in writing within five working days.	
§146.91(c)(1)	Reporting requirements	Any evidence that the injected carbon dioxide stream or associated pressure front may cause an endangerment to a USDW;	§5.207 (a)(2)(A)	Reporting and Record-Keeping	Report within 24 hours. The operator must report to the appropriate district office the discovery of any significant pressure changes or other monitoring data that indicate the presence of leaks in the well or the lack of confinement of the injected gases to the geologic storage reservoir. Such report must be made orally as soon as practicable, but within 24 hours, following the discovery of the leak, and must be confirmed in writing within five working days.	5.2
§146.91(c)(2)	Reporting requirements	Any noncompliance with a permit condition, or malfunction of the injection system, which may cause fluid migration into or between USDWs;	§5.207 (a)(2)(A)	Reporting and Record-Keeping	Report within 24 hours. The operator must report to the appropriate district office the discovery of any significant pressure changes or other monitoring data that indicate the presence of leaks in the well or the lack of confinement of the injected gases to the geologic storage reservoir. Such report must be made orally as soon as practicable, but within 24 hours, following the discovery of the leak, and must be confirmed in writing within five working days.	5.2

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.91(c)(3)	Reporting requirements	Any triggering of a shut-off system (i.e., down-hole or at the surface);	§5.207 (a)(2)(A)	Reporting and Record-Keeping	Report within 24 hours. The operator must report to the appropriate district office the discovery of any significant pressure changes or other monitoring data that indicate the presence of leaks in the well or the lack of confinement of the injected gases to the geologic storage reservoir. Such report must be made orally as soon as practicable, but within 24 hours, following the discovery of the leak, and must be confirmed in writing within five working days.	5.2
§146.91(c)(4)	Reporting requirements	Any failure to maintain mechanical integrity; or.	§5.207 (a)(2)(A)	Reporting and Record-Keeping	Report within 24 hours. The operator must report to the appropriate district office the discovery of any significant pressure changes or other monitoring data that indicate the presence of leaks in the well or the lack of confinement of the injected gases to the geologic storage reservoir. Such report must be made orally as soon as practicable, but within 24 hours, following the discovery of the leak, and must be confirmed in writing within five working days.	5.2
§146.91(c)(5)	Reporting requirements	Pursuant to compliance with the requirement at § 146.90(h) for surface air/soil gas monitoring or other monitoring technologies, if required by the Director, any release of carbon dioxide to the atmosphere or biosphere.				5.2
§146.91(d)	Reporting requirements	Owners or operators must notify the Director in writing 30 days in advance of	§5.206 (i)	Commission witnessing of testing and logging.	Commission witnessing of testing and logging. The operator must provide the division with the opportunity to witness all planned well workovers, stimulation activities, other than stimulation for formation testing, and testing and logging. The operator must submit a proposed schedule of such activities to the Commission at least 30 days prior to conducting the first such activity and submit notice at least 48 hours in advance of any actual activity. Such activities shall not commence before the end of the 30 days unless authorized by the director.	
§146.91(d)(1)	Reporting requirements	Any planned well workover;	§5.206 (i)	Commission witnessing of testing and logging.	Commission witnessing of testing and logging. The operator must provide the division with the opportunity to witness all planned well workovers, stimulation activities, other than stimulation for formation testing, and testing and logging. The operator must submit a proposed schedule of such activities to the Commission at least 30 days prior to conducting the first such activity and submit notice at least 48 hours in advance of any actual activity. Such activities shall not commence before the end of the 30 days unless authorized by the director.	5.2
§146.91(d)(2)	Reporting requirements	Any planned stimulation activities, other than stimulation for formation testing conducted under § 146.82; and	§5.206 (i)	Commission witnessing of testing and logging.	Commission witnessing of testing and logging. The operator must provide the division with the opportunity to witness all planned well workovers, stimulation activities, other than stimulation for formation testing, and testing and logging. The operator must submit a proposed schedule of such activities to the Commission at least 30 days prior to conducting the first such activity and submit notice at least 48 hours in advance of any actual activity. Such activities shall not commence before the end of the 30 days unless authorized by the director.	5.2
§146.91(d)(2)	Reporting requirements	Any planned stimulation activities, other than stimulation for formation testing conducted under § 146.82; and				
§146.91(d)(3)	Reporting requirements	Any other planned test of the injection well conducted by the permittee.	§5.206 (i)	Commission witnessing of testing and logging.	Commission witnessing of testing and logging. The operator must provide the division with the opportunity to witness all planned well workovers, stimulation activities, other than stimulation for formation testing, and testing and logging. The operator must submit a proposed schedule of such activities to the Commission at least 30 days prior to conducting the first such activity and submit notice at least 48 hours in advance of any actual activity. Such activities shall not commence before the end of the 30 days unless authorized by the director.	5.2
§146.91(e)	Reporting requirements	Regardless of whether a State has primary enforcement responsibility, owners or operators must submit all required reports, submittals, and notifications under subpart H of this part to EPA in an electronic format approved by EPA.	§5.207 (b)(2)	Reporting and Record-Keeping	The operators must submit all required reports, submittals, and notifications under subpart H of this part to EPA in an electronic format approved by director.	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.91(f)	Reporting requirements					
§146.91(f)(1)	Reporting requirements	All data collected under § 146.82 for Class VI permit applications shall be retained throughout the life of the geologic sequestration project and for 10 years following site closure.	§5.207 (e)	Reporting and Record-Keeping	Record retention. The operator must retain all wellhead pressure records, metering records, and integrity test results for at least 10 [ten] years. The operator must retain all documentation of good faith claim to necessary and sufficient property rights to operate the geologic storage facility until the director issues the final certificate of closure in accordance with §5.206(k)(7) [§5.206(j)(7)] of this title.	5.2
§146.91(f)(2)	Reporting requirements	Data on the nature and composition of all injected fluids collected pursuant to § 146.90(a) shall be retained until 10 years after site closure. The Director may require the owner or operator to deliver the records to the Director at the conclusion of the retention period.				5.2
§146.91(f)(3)	Reporting requirements	Monitoring data collected pursuant to § 146.90(b) through (i) shall be retained for 10 years after it is collected.				5.2
§146.91(f)(4)	Reporting requirements	Well plugging reports, post-injection site care data, including, if appropriate, data and information used to develop the demonstration of the alternative post-injection site care timeframe, and the site closure report collected pursuant to requirements at §§ 146.93(f) and (h) shall be retained for 10 years following site closure.				5.2
§146.91(f)(5)	Reporting requirements	The Director has authority to require the owner or operator to retain any records required in this subpart for longer than 10 years after site closure.				
§146.92	Injection Well Plugging	Injection well plugging	§5.203 (k)	Well Plugging Plan	Injection well plugging	
§146.92(a)	Injection Well Plugging	Prior to the well plugging, the owner or operator must flush each Class VI injection well with a buffer fluid, determine bottomhole reservoir pressure, and perform a final external mechanical integrity test.	§5.203 (k)(2)(A)	Well Plugging Plan	flush each injection well with a buffer fluid;	6.1.2
§146.92(a)	Injection Well Plugging	Prior to the well plugging, the owner or operator must flush each Class VI injection well with a buffer fluid, determine bottomhole reservoir pressure, and perform a final external mechanical integrity test.	§5.203 (k)(2)(B)	Well Plugging Plan	performing tests or measures to determine bottomhole reservoir pressure;	6.1.2
§146.92(a)	Injection Well Plugging	Prior to the well plugging, the owner or operator must flush each Class VI injection well with a buffer fluid, determine bottomhole reservoir pressure, and perform a final external mechanical integrity test.	§5.203 (k)(2)(C)	Well Plugging Plan	performing final tests to assess mechanical integrity; and	6.1.2
§146.92(b)	Injection Well Plugging	Well plugging plan. The owner or operator of a Class VI well must prepare, maintain, and comply with a plan that is acceptable to the Director. The requirement to maintain and implement an approved plan is directly enforceable regardless of whether the requirement is a condition of the permit. The well plugging plan must be submitted as part of the permit application and must include the following information:	§5.203 (k)	Well Plugging Plan	Well plugging plan. The applicant must submit a well plugging plan for all injection wells and monitoring wells that penetrate the base of usable quality water that includes the following:	
§146.92(b)	Injection Well Plugging	Well plugging plan. The owner or operator of a Class VI well must prepare, maintain, and comply with a plan that is acceptable to the Director. The requirement to maintain and implement an approved plan is directly enforceable regardless of whether the requirement is a condition of the permit. The well plugging plan must be submitted as part of the permit application and must include the following information:	§5.203 (k)(1)	Well Plugging Plan	A proposal for plugging all monitoring wells that penetrate the base of usable quality water and all injection wells upon abandonment in accordance with §3.14 of this title (relating to Plugging), in addition to the requirements of this section. The proposal must include:	6.1.3, 6.2.3, Appendix G
§146.92(b)(1)	Injection Well Plugging	Appropriate tests or measures for determining bottomhole reservoir pressure;	§5.203 (k)(2)(B)	Well Plugging Plan	performing tests or measures to determine bottomhole reservoir pressure;	6.1.2, 6.2.2
§146.92(b)(2)	Injection Well Plugging	Appropriate testing methods to ensure external mechanical integrity as specified in § 146.89;	§5.203 (k)(2)(C)	Well Plugging Plan	performing final tests to assess mechanical integrity; and	6.1.2, 6.2.2
§146.92(b)(3)	Injection Well Plugging	The type and number of plugs to be used;	§5.203 (k)(1)(A)	Well Plugging Plan	The type and number of plugs to be used;	6.1.4, 6.2.4

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.92(b)(4)	Injection Well Plugging	The placement of each plug, including the elevation of the top and bottom of each plug;	§5.203 (k)(1)(B)	Well Plugging Plan	The placement of each plug, including the elevation of the top and bottom of each plug;	6.1.4, 6.2.4
§146.92(b)(5)	Injection Well Plugging	The type, grade, and quantity of material to be used in plugging. The material must be compatible with the carbon dioxide stream; and	§5.203 (k)(1)(C)	Well Plugging Plan	The type, grade, and quantity of material to be used in plugging. The material must be compatible with the carbon dioxide stream; and	6.1.4, 6.2.4
§146.92(b)(6)	Injection Well Plugging	The method of placement of the plugs.	§5.203 (k)(1)(D)	Well Plugging Plan	The method of placement of the plugs.	6.1.4, 6.2.4
§146.92(c)	Injection Well Plugging	Notice of intent to plug. The owner or operator must notify the Director in writing pursuant to § 146.91(e), at least 60 days before plugging of a well. At this time, if any changes have been made to the original well plugging plan, the owner or operator must also provide the revised well plugging plan. The Director may allow for a shorter notice period. Any amendments to the injection well plugging plan must be approved by the Director, must be incorporated into the permit, and are subject to the permit modification requirements at § 144.39 or § 144.41 of this chapter, as appropriate.	§5.203 (k)(3)(A)	Well Plugging Plan	the operator notifies the director at least 60 days before plugging a well. At this time, if any changes have been made to the original well plugging plan, the operator must also provide a revised well plugging plan. At the discretion of the director, an operator may be allowed to proceed with well plugging on a shorter notice period; and	6.1.2, 6.2.2
§146.92(c)	Injection Well Plugging	Notice of intent to plug. The owner or operator must notify the Director in writing pursuant to § 146.91(e), at least 60 days before plugging of a well. At this time, if any changes have been made to the original well plugging plan, the owner or operator must also provide the revised well plugging plan. The Director may allow for a shorter notice period. Any amendments to the injection well plugging plan must be approved by the Director, must be incorporated into the permit, and are subject to the permit modification requirements at § 144.39 or § 144.41 of this chapter, as appropriate.	§5.203 (k)(3)(B)	Well Plugging Plan	the operator will file a notice of intention to plug and abandon (Form W-3A) a well with the appropriate Commission district office and the division in Austin at least five days prior to the beginning of plugging operations;	6.1.2, 6.2.2
§146.92(d)	Injection Well Plugging	Plugging report. Within 60 days after plugging, the owner or operator must submit, pursuant to § 146.91(e), a plugging report to the Director. The report must be certified as accurate by the owner or operator and by the person who performed the plugging operation (if other than the owner or operator.) The owner or operator shall retain the well plugging report for 10 years following site closure.	§5.203 (k)(4)	Well Plugging Plan	plugging report for monitoring wells that penetrate the base of usable quality water and all injection wells. The applicant's plan must ensure that within 30 days after plugging the operator will file a complete well plugging record (Form W-3) in duplicate with the appropriate district office. The operator and the person who performed the plugging operation (if other than the operator) must certify the report as accurate;	6.1.3, 6.2.3
§146.93	Post-injection and site closure	Post-injection site care and site closure	§5.203 (m)(7)	Post-injection storage facility care and closure plan	consideration and documentation of:	
§146.93(a)	Post-injection and site closure	The owner or operator of a Class VI well must prepare, maintain, and comply with a plan for post-injection site care and site closure that meets the requirements of paragraph (a)(2) of this section and is acceptable to the Director. The requirement to maintain and implement an approved plan is directly enforceable regardless of whether the requirement is a condition of the permit.	§5.203 (m)	Post-injection storage facility care and closure plan	The applicant must submit a post-injection storage facility care and closure plan.	7.4, 7.5
§146.93(a)(1)	Post-injection and site closure	The owner or operator must submit the post-injection site care and site closure plan as a part of the permit application to be approved by the Director.				7.4, 7.5
§146.93(a)(2)	Post-injection and site closure	The post-injection site care and site closure plan must include the following information:				
§146.93(a)(2)(i)	Post-injection and site closure	The pressure differential between pre-injection and predicted post-injection pressures in the injection zone(s);	§5.203 (m)(2)	Post-injection storage facility care and closure plan	The pressure differential between pre-injection and predicted post-injection pressures in the injection zone(s);	7.2
§146.93(a)(2)(ii)	Post-injection and site closure	The predicted position of the carbon dioxide plume and associated pressure front at site closure as demonstrated in the area of review evaluation required under § 146.84(c)(1);	§5.203 (m)(3)	Post-injection storage facility care and closure plan	the predicted position of the CO2 plume and associated pressure front at closure as demonstrated in the AOR evaluation required under subsection (d) of this section;	7.3
§146.93(a)(2)(iii)	Post-injection and site closure	A description of post-injection monitoring location, methods, and proposed frequency;	§5.203 (m)(4)	Post-injection storage facility care and closure plan	A description of post-injection monitoring location, methods, and proposed frequency;	7.4.1
§146.93(a)(2)(iv)	Post-injection and site closure	A proposed schedule for submitting post-injection site care monitoring results to the Director pursuant to § 146.91(e); and,	§5.203 (m)(5)	Post-injection storage facility care and closure plan	A proposed schedule for submitting post-injection site care monitoring results to the Director pursuant to § 146.91(e); and,	7.4.1

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.93(a)(2)(v)	Post-injection and site closure	The duration of the post-injection site care timeframe and, if approved by the Director, the demonstration of the alternative post-injection site care timeframe that ensures non-endangerment of USDWs.	§5.203 (m)(1)	Post-injection storage facility care and closure plan	a demonstration containing substantial evidence that the geologic storage project will no longer pose a risk of endangerment to USDWs at the end of the post-injection storage facility care timeframe. The demonstration must be based on significant, site-specific data and information, including all data and information collected pursuant subsections (b)-(d) of this section and §5.206(b)(5) of this title;	7.4.2
§146.93(a)(3)	Post-injection and site closure	Upon cessation of injection, owners or operators of Class VI wells must either submit an amended post-injection site care and site closure plan or demonstrate to the Director through monitoring data and modeling results that no amendment to the plan is needed. Any amendments to the post-injection site care and site closure plan must be approved by the Director, be incorporated into the permit, and are subject to the permit modification requirements at § 144.39 or § 144.41 of this chapter, as appropriate.	§5.206 (k)(1)(B)	Post-injection storage facility care and closure	The operator must update the plan in accordance with §5.207(a)(2)(D)(vi) of this title. At any time during the life of the geologic sequestration project, the operator may modify and resubmit the post-injection site care and site closure plan for the director's approval within 30 days of such change. Any amendments to the post-injection site care and site closure plan must be approved by the director, be incorporated into the permit, and are subject to the permit modification requirements in §5.202 of this title (relating to Permit Required), as appropriate.	7.1, 7.4.2
§146.93(a)(4)	Post-injection and site closure	At any time during the life of the geologic sequestration project, the owner or operator may modify and resubmit the post-injection site care and site closure plan for the Director's approval within 30 days of such change.	§5.206 (k)(1)(B)	Post-injection storage facility care and closure	The operator must update the plan in accordance with §5.207(a)(2)(D)(vi) of this title. At any time during the life of the geologic sequestration project, the operator may modify and resubmit the post-injection site care and site closure plan for the director's approval within 30 days of such change. Any amendments to the post-injection site care and site closure plan must be approved by the director, be incorporated into the permit, and are subject to the permit modification requirements in §5.202 of this title (relating to Permit Required), as appropriate.	7.1, 7.4.2
§146.93(b)	Post-injection and site closure	The owner or operator shall monitor the site following the cessation of injection to show the position of the carbon dioxide plume and pressure front and demonstrate that USDWs are not being endangered.				7.4.1
§146.93(b)(1)		Following the cessation of injection, the owner or operator shall continue to conduct monitoring as specified in the Director-approved post-injection site care and site closure plan for at least 50 years or for the duration of the alternative timeframe approved by the Director pursuant to requirements in paragraph (c) of this section, unless he/she makes a demonstration under (b)(2) of this section. The monitoring must continue until the geologic sequestration project no longer poses an endangerment to USDWs and the demonstration under (b)(2) of this section is submitted and approved by the Director.				
§146.93(b)(2)		If the owner or operator can demonstrate to the satisfaction of the Director before 50 years or prior to the end of the approved alternative timeframe based on monitoring and other site-specific data, that the geologic sequestration project no longer poses an endangerment to USDWs, the Director may approve an amendment to the post-injection site care and site closure plan to reduce the frequency of monitoring or may authorize site closure before the end of the 50-year period or prior to the end of the approved alternative timeframe, where he or she has substantial evidence that the geologic sequestration project no longer poses a risk of endangerment to USDWs.				
§146.93(b)(3)	Post-injection and site closure	Prior to authorization for site closure, the owner or operator must submit to the Director for review and approval a demonstration, based on monitoring and other site-specific data, that no additional monitoring is needed to ensure that the geologic sequestration project does not pose an endangerment to USDWs.	§5.206 (k)(3)	Post-injection storage facility care and closure	Prior to closure. Prior to authorization for storage facility closure, the operator must demonstrate to the Director based on monitoring and other site-specific data, that no additional monitoring is needed to ensure that the geologic sequestration project does not pose an endangerment to USDWs. The operator must demonstrate, based on the current understanding of the site, including monitoring data and/or modeling, all of the following:	7.4.2
§146.93(b)(4)						

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.93(c)	Post-injection and site closure	Demonstration of alternative post-injection site care timeframe. At the Director's discretion, the Director may approve, in consultation with EPA, an alternative post-injection site care timeframe other than the 50 year default, if an owner or operator can demonstrate during the permitting process that an alternative post-injection site care timeframe is appropriate and ensures non-endangerment of USDWs. The demonstration must be based on significant, site-specific data and information including all data and information collected pursuant to §§ 146.82 and 146.83, and must contain substantial evidence that the geologic sequestration project will no longer pose a risk of endangerment to USDWs at the end of the alternative post-injection site care timeframe.				
§146.93(c)(1)	Post-injection and site closure	A demonstration of an alternative post-injection site care timeframe must include consideration and documentation of:				
§146.93(c)(1)(i)	Post-injection and site closure	The results of computational modeling performed pursuant to delineation of the area of review under § 146.84;	§5.203 (m)(7)(A)	Post-injection storage facility care and closure plan	the results of computational modeling performed pursuant to delineation of the AOR under subsection (d) of this section;	
§146.93(c)(1)(ii)	Post-injection and site closure	The predicted timeframe for pressure decline within the injection zone, and any other zones, such that formation fluids may not be forced into any USDWs; and/or the timeframe for pressure decline to pre-injection pressures;	§5.203 (m)(7)(B)	Post-injection storage facility care and closure plan	the predicted timeframe for pressure decline within the injection zone, and any other zones, such that formation fluids may not be forced into any USDWs, and/or the timeframe for pressure decline to pre-injection pressures;	
§146.93(c)(1)(iii)	Post-injection and site closure	The predicted rate of carbon dioxide plume migration within the injection zone, and the predicted timeframe for the cessation of migration;	§5.203 (m)(7)(C)	Post-injection storage facility care and closure plan	the predicted rate of CO2 plume migration within the injection zone, and the predicted timeframe for the stabilization of the CO2 plume and associated pressure front;	
§146.93(c)(1)(iv)	Post-injection and site closure	A description of the site-specific processes that will result in carbon dioxide trapping including immobilization by capillary trapping, dissolution, and mineralization at the site;	§5.203 (m)(7)(D)	Post-injection storage facility care and closure plan	a description of the site-specific processes that will result in CO2 trapping including immobilization by capillary trapping, dissolution, and mineralization at the site;	
§146.93(c)(1)(ix)	Post-injection and site closure	A description of the well construction and an assessment of the quality of plugs of all abandoned wells within the area of review;	§5.203 (m)(7)(I)	Post-injection storage facility care and closure plan	a description of the well construction and an assessment of the quality of plugs of all abandoned wells within the AOR;	
§146.93(c)(1)(v)	Post-injection and site closure	The predicted rate of carbon dioxide trapping in the immobile capillary phase, dissolved phase, and/or mineral phase;	§5.203 (m)(7)(E)	Post-injection storage facility care and closure plan	the predicted rate of CO2 trapping in the immobile capillary phase, dissolved phase, and/or mineral phase;	
§146.93(c)(1)(vi)	Post-injection and site closure	The results of laboratory analyses, research studies, and/or field or site-specific studies to verify the information required in paragraphs (iv) and (v) of this section;	§5.203 (m)(7)(F)	Post-injection storage facility care and closure plan	the results of laboratory analyses, research studies, and/or field or site-specific studies to verify the information required in subparagraphs (D) and (E) of this paragraph;	
§146.93(c)(1)(vii)	Post-injection and site closure	A characterization of the confining zone(s) including a demonstration that it is free of transmissive faults, fractures, and micro-fractures and of appropriate thickness, permeability, and integrity to impede fluid (e.g., carbon dioxide, formation fluids) movement;	§5.203 (m)(7)(G)	Post-injection storage facility care and closure plan	a characterization of the confining zone(s) including a demonstration that it is free of transmissive faults, fractures, and micro-fractures and of appropriate thickness, permeability, and integrity to impede fluid (e.g., CO2, formation fluids) movement;	
§146.93(c)(1)(viii)	Post-injection and site closure	The presence of potential conduits for fluid movement including planned injection wells and project monitoring wells associated with the proposed geologic sequestration project or any other projects in proximity to the predicted/modeled, final extent of the carbon dioxide plume and area of elevated pressure;	§5.203 (m)(7)(H)	Post-injection storage facility care and closure plan	the presence of potential conduits for fluid movement including planned injection wells and project monitoring wells associated with the proposed geologic storage project or any other projects in proximity to the predicted/modeled, final extent of the CO2 plume and area of elevated pressure;	
§146.93(c)(1)(x)	Post-injection and site closure	The distance between the injection zone and the nearest USDWs above and/or below the injection zone; and	§5.203 (m)(7)(J)	Post-injection storage facility care and closure plan	the distance between the injection zone and the nearest USDWs above and/or below the injection zone; and	
§146.93(c)(1)(xi)	Post-injection and site closure	Any additional site-specific factors required by the Director.	§5.203 (m)(7)(K)	Post-injection storage facility care and closure plan	any additional site-specific factors required by the director; and	
§146.93(c)(2)	Post-injection and site closure	Information submitted to support the demonstration in paragraph (c)(1) of this section must meet the following criteria:	§5.203 (m)(8)	Post-injection storage facility care and closure plan	information submitted to support the demonstration in paragraph (1) of this subsection, which shall meet the following criteria:	
§146.93(c)(2)(i)	Post-injection and site closure	All analyses and tests performed to support the demonstration must be accurate, reproducible, and performed in accordance with the established quality assurance standards;	§5.203 (m)(8)(A)	Post-injection storage facility care and closure plan	all analyses and tests performed to support the demonstration must be accurate, reproducible, and performed in accordance with the established quality assurance standards;	
§146.93(c)(2)(ii)	Post-injection and site closure	Estimation techniques must be appropriate and EPA-certified test protocols must be used where available;	§5.203 (m)(8)(B)	Post-injection storage facility care and closure plan	estimation techniques must be appropriate and EPA-certified test protocols must be used where available;	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.93(c)(2)(iii)	Post-injection and site closure	Predictive models must be appropriate and tailored to the site conditions, composition of the carbon dioxide stream and injection and site conditions over the life of the geologic sequestration project;	§5.203 (m)(8)(C)	Post-injection storage facility care and closure plan	predictive models must be appropriate and tailored to the site conditions, composition of the CO2 stream, and injection and site conditions over the life of the geologic storage project;	
§146.93(c)(2)(iv)	Post-injection and site closure	Predictive models must be calibrated using existing information (e.g., at Class I, Class II, or Class V experimental technology well sites) where sufficient data are available;	§5.203 (m)(8)(D)	Post-injection storage facility care and closure plan	predictive models must be calibrated using existing information where sufficient data are available;	
§146.93(c)(2)(v)	Post-injection and site closure	Reasonably conservative values and modeling assumptions must be used and disclosed to the Director whenever values are estimated on the basis of known, historical information instead of site-specific measurements;	§5.203 (m)(8)(E)	Post-injection storage facility care and closure plan	reasonably conservative values and modeling assumptions must be used and disclosed to the director whenever values are estimated on the basis of known, historical information instead of site-specific measurements;	
§146.93(c)(2)(vi)	Post-injection and site closure	An analysis must be performed to identify and assess aspects of the alternative post-injection site care timeframe demonstration that contribute significantly to uncertainty. The owner or operator must conduct sensitivity analyses to determine the effect that significant uncertainty may contribute to the modeling demonstration.	§5.203 (m)(8)(F)	Post-injection storage facility care and closure plan	an analysis must be performed to identify and assess aspects of the alternative PISC timeframe demonstration that contribute significantly to uncertainty. The operator must conduct sensitivity analyses to determine the effect that significant uncertainty may contribute to the modeling demonstration;	
§146.93(c)(2)(vii)	Post-injection and site closure	An approved quality assurance and quality control plan must address all aspects of the demonstration; and	§5.203 (m)(8)(G)	Post-injection storage facility care and closure plan	an approved quality assurance and quality control plan must address all aspects of the demonstration; and	
§146.93(c)(2)(viii)	Post-injection and site closure	Any additional criteria required by the Director.	§5.203 (m)(8)(H)	Post-injection storage facility care and closure plan	any additional criteria required by the director.	
§146.93(d)	Post-injection and site closure	Notice of intent for site closure. The owner or operator must notify the Director in writing at least 120 days before site closure. At this time, if any changes have been made to the original post-injection site care and site closure plan, the owner or operator must also provide the revised plan. The Director may allow for a shorter notice period.	§5.206 (k)(4)	Post-injection storage facility care and closure	Notice of intent for site closure. The owner or operator must notify the Director in writing at least 120 days before site closure. At this time, if any changes have been made to the original post-injection site care and site closure plan, the owner or operator must also provide the revised plan. The Director may allow for a shorter notice period.	7.5.1
§146.93(e)	Post-injection and site closure	After the Director has authorized site closure, the owner or operator must plug all monitoring wells in a manner which will not allow movement of injection or formation fluids that endangers a USDW.	§5.206 (k)(5)	Post-injection storage facility care and closure	Authorization for storage facility closure. No operator may initiate storage facility closure until the director has approved closure of the storage facility in writing. After the Director has authorized site closure, the operator must plug all monitoring wells in accordance with the approved plan required by §5.203(k) of this title.	7.5.1, 7.5.2
§146.93(f)	Post-injection and site closure	The owner or operator must submit a site closure report to the Director within 90 days of site closure, which must thereafter be retained at a location designated by the Director for 10 years. The report must include:	§5.206 (k)(6)	Post-injection storage facility care and closure	Storage facility closure report. Once the director has authorized storage facility closure, The operator must submit a site closure report to the Director within 90 days of site closure, which must thereafter be retained at a location designated by the Director for 10 years. The report must include:	7.5.4
§146.93(f)(1)	Post-injection and site closure	Documentation of appropriate injection and monitoring well plugging as specified in § 146.92 and paragraph (e) of this section. The owner or operator must provide a copy of a survey plat which has been submitted to the local zoning authority designated by the Director. The plat must indicate the location of the injection well relative to permanently surveyed benchmarks. The owner or operator must also submit a copy of the plat to the Regional Administrator of the appropriate EPA Regional Office;	§5.206 (k)(6)(A)	Post-injection storage facility care and closure	Documentation of appropriate injection and monitoring well plugging. The operator must provide a copy of a survey plat which has been submitted to the Regional Administrator of Region 6 of the United States Environmental Protection Agency. The plat must indicate the location of the injection well relative to permanently surveyed benchmarks.	7.5.4
§146.93(f)(2)	Post-injection and site closure	Documentation of appropriate notification and information to such State, local and Tribal authorities that have authority over drilling activities to enable such State, local, and Tribal authorities to impose appropriate conditions on subsequent drilling activities that may penetrate the injection and confining zone(s); and	§5.206 (k)(6)(B)	Post-injection storage facility care and closure	Documentation of appropriate notification and information to such State and local authorities that have authority over drilling activities to enable such State and local authorities to impose appropriate conditions on subsequent drilling activities that may penetrate the injection and confining zone(s); and	
§146.93(f)(3)	Post-injection and site closure	Records reflecting the nature, composition, and volume of the carbon dioxide stream.	§5.206 (k)(6)(C)	Post-injection storage facility care and closure	Records reflecting the nature, composition, and volume of the carbon dioxide stream.	7.5.4

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.93(g)	Post-injection and site closure	Each owner or operator of a Class VI injection well must record a notation on the deed to the facility property or any other document that is normally examined during title search that will in perpetuity provide any potential purchaser of the property the following information:	§5.206 (l)	Deed notation	Deed notation. The operator of a geologic storage facility must record a notation on the deed to the facility property; on any other document that is normally examined during title search; or on any other document that is acceptable to the county clerk for filing in the official public records of the county that will in perpetuity provide any potential purchaser of the property the following information:	7.5.4
§146.93(g)	Required class VI permit Information	Each owner or operator of a Class VI injection well must record a notation on the deed to the facility property or any other document that is normally examined during title search that will in perpetuity provide any potential purchaser of the property the following information:	§5.206 (l)(1)	Permit Standards	a complete legal description of the affected property;	7.5.4
§146.93(g)(1)	Post-injection and site closure	The fact that land has been used to sequester carbon dioxide;	§5.206 (l)(2)	Deed notation	The fact that land has been used to sequester carbon dioxide;	7.5.4
§146.93(g)(2)	Post-injection and site closure	The name of the State agency, local authority, and/or Tribe with which the survey plat was filed, as well as the address of the Environmental Protection Agency Regional Office to which it was submitted; and	§5.206 (l)(4)	Deed notation	the address of the office of the United States Environmental Protection Agency, Region 6, to which the operator sent a copy of the survey plat; and	7.5.4
§146.93(g)(3)	Post-injection and site closure	The volume of fluid injected, the injection zone or zones into which it was injected, and the period over which injection occurred.	§5.206 (l)(5)	Deed notation	The volume of fluid injected, the injection zone or zones into which it was injected, and the period over which injection occurred.	7.5.4
§146.93(h)	Post-injection and site closure	The owner or operator must retain for 10 years following site closure, records collected during the post-injection site care period. The owner or operator must deliver the records to the Director at the conclusion of the retention period, and the records must thereafter be retained at a location designated by the Director for that purpose.	§5.206 (m)	Retention of Records	The operator must retain for 10 years following facility closure records collected during the post-injection facility care period. The operator must deliver the records to the Director at the conclusion of the retention period, and the records must thereafter be retained at the Austin headquarters of the Commission.	7.5.4
§146.94	Emergency and remedial response	Emergency and remedial response	§5.206 (h)	Emergency, mitigation, and remedial response	Emergency mitigation, and remedial response	
§146.94(a)	Emergency and remedial response	As part of the permit application, the owner or operator must provide the Director with an emergency and remedial response plan that describes actions the owner or operator must take to address movement of the injection or formation fluids that may cause an endangerment to a USDW during construction, operation, and post-injection site care periods. The requirement to maintain and implement an approved plan is directly enforceable regardless of whether the requirement is a condition of the permit.	§5.203 (l)	Emergency and remedial response plan	Emergency and remedial response plan. The applicant must submit an emergency and remedial response plan that:	
§146.94(a)	Emergency and remedial response	As part of the permit application, the owner or operator must provide the Director with an emergency and remedial response plan that describes actions the owner or operator must take to address movement of the injection or formation fluids that may cause an endangerment to a USDW during construction, operation, and post-injection site care periods. The requirement to maintain and implement an approved plan is directly enforceable regardless of whether the requirement is a condition of the permit.	§5.203 (l)(2)	Emergency and remedial response plan	describes actions to be taken to address escape from the permitted injection interval or movement of the injection fluids or formation fluids that may cause an endangerment to USDWs during construction, operation, closure, and post-closure periods;	8.4
§146.94(b)	Emergency and remedial response	If the owner or operator obtains evidence that the injected carbon dioxide stream and associated pressure front may cause an endangerment to a USDW, the owner or operator must:				
§146.94(b)(1)	Emergency and remedial response	Immediately cease injection;	§5.206 (d)(2)(F)(ii)(I)			8.4
§146.94(b)(2)	Emergency and remedial response	Take all steps reasonably necessary to identify and characterize any release;	§5.206 (d)(2)(F)(ii)(II)			8.4
§146.94(b)(3)	Emergency and remedial response	Notify the Director within 24 hours; and	§5.206 (d)(2)(F)(ii)(III)			8.4
§146.94(b)(4)	Emergency and remedial response	Implement the emergency and remedial response plan approved by the Director.				8.4

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
§146.94(c)	Emergency and remedial response	The Director may allow the operator to resume injection prior to remediation if the owner or operator demonstrates that the injection operation will not endanger USDWs.	§5.206 (h)(4)	Permit Standards	Resumption of injection. The Director may allow the operator to resume injection prior to remediation if the operator demonstrates that the injection operation will not endanger USDWs.	
§146.94(d)	Emergency and remedial response	The owner or operator shall periodically review the emergency and remedial response plan developed under paragraph (a) of this section. In no case shall the owner or operator review the emergency and remedial response plan less often than once every five years. Based on this review, the owner or operator shall submit an amended emergency and remedial response plan or demonstrate to the Director that no amendment to the emergency and remedial response plan is needed. Any amendments to the emergency and remedial response plan must be approved by the Director, must be incorporated into the permit, and are subject to the permit modification requirements at § 144.39 or § 144.41 of this chapter, as appropriate. Amended plans or demonstrations shall be submitted to the Director as follows:				8.7
§146.94(d)(1)	Emergency and remedial response	Within one year of an area of review reevaluation;				8.7
§146.94(d)(2)	Emergency and remedial response	Following any significant changes to the facility, such as addition of injection or monitoring wells, on a schedule determined by the Director; or				8.7
§146.94(d)(3)	Emergency and remedial response	When required by the Director.				8.7
			§5.203 (a)(1)(A)	General	Form and filing. Each applicant for a permit to construct and operate a geologic storage facility must file an application with the division in Austin on a form prescribed by the Commission. The applicant must file the application and all attachments with the division and with EPA Region 6 in an electronic format approved by EPA. **On the same date, the applicant must file one copy with each appropriate district office and one copy with the Executive Director of the Texas Commission on Environmental Quality.**	Intro
			§5.203 (a)(1)(B)	General	Signatories to permit applications. An applicant must ensure that the application is executed by a party having knowledge of the facts entered on the form and included in the required attachments. All permit applications shall be signed as specified in this subparagraph:	Intro
			§5.203 (a)(1)(B)(i)	General	For a corporation, the permit application shall be signed by a responsible corporate officer. For the purpose of this section, a responsible corporate officer means a president, secretary, treasurer, or vice president of the corporation in charge of a principal business function, or any other person who performs similar policy- or decision making functions for the corporation, or the manager of one or more manufacturing, production, or operating facilities employing more than 250 persons or having gross annual sales or expenditures exceeding $25 million (in second-quarter 1980 dollars), if authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures.	
			§5.203 (a)(1)(B)(ii)	General	For a partnership or sole proprietorship, the permit application shall be signed by a general partner or the proprietor, respectively.	
			§5.203 (a)(1)(B)(iii)	General	For a municipality, State, Federal, or other public agency, the permit application shall be signed by either a principal executive officer or ranking elected official.	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
			§5.203 (a)(1)(C)	General	Certification. Any person signing a permit application or permit amendment application shall make the following certification: "I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."	Intro
			§5.203 (a)(2)(D)	General	A person making an application to the director for a permit under this subchapter must submit a copy of the application to the Texas Commission on Environmental Quality (TCEQ) and must submit to the director a letter of determination from TCEQ concluding that drilling and operating an anthropogenic CO2 injection well for geologic storage or constructing or operating a geologic storage facility will not impact or interfere with any previous or existing Class I injection well, including any associated waste plume, or any other injection well authorized or permitted by TCEQ. The letter must be submitted to the director before any permit under this subchapter may be issued.	Intro
			§5.203 (a)(3)	General	Application completeness. The Commission shall [may] not issue a permit before receiving a complete application. A permit application is complete when the director determines that the application contains information addressing each application requirement of the regulatory program and all information necessary to initiate the final review by the director.	
			§5.203 (a)(5)	General	If otherwise required under Occupations Code, Chapter 1001, relating to Texas Engineering Practice Act, or Chapter 1002, relating to Texas Geoscientists Practice Act, respectively, a licensed professional engineer or geoscientist must conduct the geologic and hydrologic evaluations required under this subchapter and must affix the appropriate seal on the resulting reports of such evaluations.	Intro
			§5.203 (d)(1)(A)(iii)	AOR and corrective action	The applicant must provide the name and a description of the model, software, the assumptions used to determine the AOR, and the equations solved.	3.2
			§5.203 (e)(1)(B)(i)	Injection well construction	The operator must ensure that injection wells are cased and the casing cemented in compliance with §3.13 of this title (relating to Casing, Cementing, Drilling, Well Control, and Completion Requirements), in addition to the requirements of this section.	4.2.1
			§5.203 (e)(2)(E)	Injection well construction	type of packer and packer setting depth	4.2.3.7
			§5.203 (f)(1)(C)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	After each casing string is set and cemented, the operator must run logs, such as a cement bond log, variable density log, and a temperature log, to ensure proper cementing.	4.2.4.2
			§5.203 (f)(2)(A)	Plan for logging, sampling, and testing of each injection well after permitting but prior to injection operation	Prior to operation, the operator must conduct tests to verify hydrogeologic characteristics of the injection zone.	4.2.4.2
			§5.203 (h)(1)(E)	Mechanical integrity testing	The operator must test injection wells after any workover that disturbs the seal between the tubing, packer, and casing in a manner that verifies internal mechanical integrity of the tubing and long string casing.	5.4.4
			§5.203 (h)(1)(F)	Mechanical integrity testing	An operator must either repair and successfully retest or plug a well that fails a mechanical integrity test.	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
			§5.203 (i)(2)	Operating Information	Maximum injection pressure. The director will approve a maximum injection pressure limit that:	4.2.6
			§5.203 (i)(2)(A)	Operating Information	Considers the risks of tensile failure and, where appropriate, geomechanical or other studies that assess the risk of tensile failure and shear failure;	4.2.3
			§5.203 (i)(2)(B)	Operating Information	With a reasonable degree of certainty will avoid initiation or propagation of fractures in the confining zone or cause otherwise non-transmissive faults transecting the confining zone to become transmissive; and	4.2.6
			§5.203 (j)(2)(D)(i)	Plan for monitoring, sampling, and testing after initiation of operation	Periodic sampling of the fluid temperature, pH, conductivity, reservoir pressure and static fluid level of the injection zone and monitoring for pressure changes, and for changes in geochemistry, in a permeable and porous formation near to and above the top confining zone;	Section 5.5.5
			§5.203 (j)(2)(D)(ii)	Plan for monitoring, sampling, and testing after initiation of operation	Periodic monitoring of the quality and geochemistry of a USDW within the AOR and the formation fluid in a permeable and porous formation near to and above the top confining zone to detect any movement of the injected CO2 through the confining zone into that monitored formation;	4.3.4
			§5.203 (k)(5)	Well Plugging Plan	A plan for plugging all monitoring wells that do not penetrate the base of usable quality water in accordance with 16 TAC Chapter 76 (relating to Water Well Drillers and Water Well Pump Installers); and	TBD
			§5.203 (k)(5)	Well Plugging Plan	A plan for certifying that all monitoring wells that do not penetrate the base of usable quality water will be plugged in accordance with 16 TAC Chapter 76.	TBD
			§5.203 (l)(1)	Emergency and remedial response plan	accounts for the entire AOR, regardless of whether or not corrective action in the AOR is phased;	3.5, 3.6
			§5.203 (l)(3)	Emergency and remedial response plan	Includes a safety plan that includes:	
			§5.203 (l)(4)	Emergency and remedial response plan	includes a description of the training and testing that will be provided to each employee at the storage facility on operational safety and emergency response procedures to the extent applicable to the employee's duties and responsibilities. The operator must train all employees before commencing injection and storage operations at the facility. The operator must train each subsequently hired employee before that employee commences work at the storage facility. The operator must hold a safety meeting with each contractor prior to the commencement of any new contract work at a storage facility. Emergency measures specific to the contractor's work must be explained in the contractor safety meeting. Training schedules, training dates, and course outlines must be provided to Commission personnel upon request for the purpose of Commission review to determine compliance with this paragraph.	8.5
			§5.203 (l)(A)	Emergency and remedial response plan	emergency response procedures;	8.4
			§5.203 (l)(B)	Emergency and remedial response plan	provisions to provide security against unauthorized activity;	8.4.9
			§5.203 (l)(C)	Emergency and remedial response plan	CO2 release detection and prevention measures;	8.4.2
			§5.203 (l)(D)	Emergency and remedial response plan	instructions and procedures for alerting the general public and public safety personnel of the existence of an emergency;	8.6
			§5.203 (l)(E)	Emergency and remedial response plan	procedures for requesting assistance and for follow-up action to remove the public from an area of exposure;	8.6
			§5.203 (l)(F)	Emergency and remedial response plan	provisions for advance briefing of the public within the AOR on subjects such as the hazards and characteristics of CO2,	8.6
			§5.203 (l)(G)	Emergency and remedial response plan	the manner in which the public will be notified of an emergency and steps to be taken in case of an emergency; and	8.6

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
			§5.203 (l)(H)	Emergency and remedial response plan	if necessary, proposed actions designed to minimize and respond to risks associated with potential seismic events, including seismic monitoring; and	8.6
			§5.203 (m)(6)	Post-injection storage facility care and closure plan	the estimated cost of proposed post-injection storage facility care and closure; and	9.2
			§5.206 (a)	Permit Standards	Each condition applicable to a permit shall be incorporated into the permit either expressly or by reference. If incorporated by reference, a specific citation to the rules in this chapter shall be given in the permit. The requirements listed in this section are directly enforceable regardless of whether the requirement is a condition of the permit.	
			§5.206 (b)	Permit Standards	General criteria. The director may issue a permit under this subchapter if the applicant demonstrates and the director finds that:	
			§5.206 (b)(1)	Permit Standards	the injection and geologic storage of anthropogenic CO2 will not endanger or injure any existing or prospective oil, gas, geothermal, or other mineral resource, or cause waste as defined by Texas Natural Resources Code, §85.046(11);	1.7
			§5.206 (b)(10)	Permit Standards	the applicant has paid the fees required in §5.205(a) of this title (relating to Fees, Financial Responsibility, and Financial Assurance);	
			§5.206 (b)(11)	Permit Standards	the director has determined that the applicant has sufficiently demonstrated financial responsibility as required in §5.205(b) of this title; and	
			§5.206 (b)(12)	Permit Standards	the applicant submitted to the director financial assurance in accordance with §5.205(c) of this title.	9.2
			§5.206 (b)(2)	Permit Standards	with proper safeguards, both USDWs and surface water can be adequately protected from CO2 migration or displaced formation fluids;	
			§5.206 (b)(3)	Permit Standards	the injection of anthropogenic CO2 will not endanger or injure human health and safety;	
			§5.206 (b)(4)	Permit Standards	the reservoir into which the anthropogenic CO2 is injected is suitable for or capable of being made suitable for protecting against the escape or migration of anthropogenic CO2 from the storage reservoir;	
			§5.206 (b)(5)(B)	Permit Standards	a confining zone that is laterally continuous and free of known transecting transmissive faults or fractures over an area sufficient to contain the injected CO2 stream and displaced formation fluids and allow injection at proposed maximum pressures and volumes without compromising the confining zone or causing the movement of fluids that endangers USDWs;	1.3.3, 1.4.2, 1.5.3, 4.2.6
			§5.206 (b)(6)	Permit Standards	the applicant for the permit meets all of the other statutory and regulatory requirements for the issuance of the permit;	
			§5.206 (b)(7)	Permit Standards	the applicant has provided a letter from the Groundwater Advisory Unit of the Oil and Gas Division in accordance with §5.203(o) of this title (relating to Application Requirements);	TBD
			§5.206 (b)(8)	Permit Standards	the applicant has provided a letter of determination from TCEQ concluding that drilling and operating an anthropogenic CO2 injection well for geologic storage or constructing or operating a geologic storage facility will not impact or interfere with any previous or existing Class I injection well, including any associated waste plume, or any other injection well authorized or permitted by TCEQ;	TBD
			§5.206 (b)(9)	Permit Standards	the applicant has provided a signed statement that the applicant has a good faith claim to the necessary and sufficient property rights for construction and operation of the geologic storage facility for at least the first five years after initiation of injection in accordance with §5.203(d)(1)(A) of this title;	TBD
			§5.206 (c)(1)	Permit Standards	Construction of anthropogenic CO 2 injection wells must meet the criteria in §5.203(e) of this title.	4.1

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
			§5.206 (c)(2)	Permit Standards	Within 30 days after the completion or conversion of an injection well subject to this subchapter, the operator must file with the division a complete record of the well on the appropriate form showing the current completion.	4.2.2
			§5.206 (c)(3)	Permit Standards	Except in the case of an emergency repair, the operator of a geologic storage facility must notify the director in writing at least 30 days prior to conducting any well workover that involves running tubing and setting packers, beginning any workover or remedial operation, or conducting any required pressure tests or surveys. Such activities shall not commence before the end of the 30 days unless authorized by the director. In the case of an emergency repair, the operator must notify the director of such emergency repair as soon as reasonably practical.	5.2
			§5.206 (d)	Permit Standards	Operating a geologic storage facility.	
			§5.206 (d)(1)	Permit Standards	Operating plan. The operator must maintain and comply with the approved operating plan.	
			§5.206 (d)(2)	Permit Standards	Operating criteria.	
			§5.206 (d)(2)(B)	Permit Standards	The total volume of CO2 injected into the storage facility must be metered through a master meter or a series of master meters. The volume and/or mass of CO2 injected into each injection well must be metered through an individual well meter. If mass is determined using volume, the operator must provide calculations.	5.5.1
			§5.206 (d)(2)(C)	Permit Standards	The operator must comply with a maximum surface injection pressure limit approved by the director and specified in the permit. In approving a maximum surface injection pressure limit, the director must consider the results of well tests and, where appropriate, geomechanical or other studies that assess the risks of tensile failure and shear failure. The director must approve limits that, with a reasonable degree of certainty, will avoid initiation or propagation of fractures in the confining zone or cause otherwise non-transmissive faults or fractures transecting the confining zone to become transmissive. In no case may injection pressure cause movement of injection fluids or formation fluids in a manner that endangers USDWs. The Commission shall include in any permit it might issue a limit of 90 percent of the fracture pressure to ensure that the injection pressure does not initiate new fractures or propagate existing fractures in the injection zone(s). In no case may injection pressure initiate fractures in the confining zone(s) or cause the movement of injection or formation fluids that endangers a USDW. The director may approve a plan for controlled artificial fracturing of the injection zone.	4.2.6
			§5.206 (d)(2)(E)	Permit Standards	The operator must install and use continuous recording devices to monitor the injection pressure, and the rate, volume, and temperature of the CO2 stream. The operator must monitor the pressure on the annulus between the tubing and the long string casing. The operator must continuously record, continuously monitor, or control by a preset high-low pressure sensor switch the wellhead pressure of each injection well.	5.5.1
			§5.206 (e)	Permit Standards	Monitoring, sampling, and testing requirements.	
			§5.206 (e)(1)	Permit Standards	The operator of an anthropogenic CO2 injection well must maintain and comply with the approved monitoring, sampling, and testing plan to verify that the geologic storage facility is operating as permitted and that the injected fluids are confined to the injection zone.	
			§5.206 (e)(2)	Permit Standards	All permits shall include the following requirements:	
			§5.206 (e)(2)(A)	Permit Standards	the proper use, maintenance, and installation of monitoring equipment or methods;	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
			§5.206 (e)(2)(B)	Permit Standards	monitoring including type, intervals, and frequency sufficient to yield data that are representative of the monitored activity including, when required, continuous monitoring;	5.2
			§5.206 (e)(2)(C)	Permit Standards	reporting no less frequently than as specified in §5.207 of this title (relating to Reporting and Record-Keeping).	5.2
			§5.206 (e)(3)	Permit Standards	The director may require additional monitoring as necessary to support, upgrade, and improve computational modeling of the AOR evaluation and to determine compliance with the requirement that the injection activity not allow movement of fluid that would endanger USDWs.	
			§5.206 (e)(4)	Permit Standards	The director may require measures and actions designed to minimize and respond to risks associated with potential seismic events, including seismic monitoring.	
			§5.206 (f)(1)	Permit Standards	The operator must maintain and comply with the approved mechanical integrity testing plan submitted in accordance with §5.203(j) of this title.	5.4.4
			§5.206 (f)(3)	Permit Standards	The operator must either repair and successfully retest or plug a well that fails a mechanical integrity test.	
			§5.206 (h)(2)(A)	Permit Standards	The operator must prepare and implement a plan to train and test each employee at the storage facility on occupational safety and emergency response procedures to the extent applicable to the employee's duties and responsibilities. The operator must make copies of the plan available at the geological storage facility. The operator must train all employees before commencing injection and storage operations at the facility. The operator must train each subsequently hired employee before that employee commences work at the storage facility.	8.5
			§5.206 (h)(2)(B)	Permit Standards	The operator must hold a safety meeting with each contractor prior to the commencement of any new contract work at a storage facility. The operator must explain emergency measures specific to the contractor's work in the contractor safety meeting.	8.5
			§5.206 (h)(2)(C)	Permit Standards	The operator must provide training schedules, training dates, and course outlines to Commission personnel annually and upon request for the purpose of Commission review to determine compliance with this paragraph.	8.5
			§5.206 (j)	Permit Standards	Schedule of compliance: The permit may, when appropriate, specify a schedule of compliance leading to compliance with all provisions of this subchapter and Chapter 3 of this title.	
			§5.206 (j)(i)	Permit Standards	Any schedule of compliance shall require compliance as soon as possible, and in no case later than three years after the effective date of the permit.	
			§5.206 (j)(ii)	Permit Standards	If the schedule of compliance is for a duration of more than one year from the date of permit issuance, then interim requirements and completion dates (not to exceed one year) must be incorporated into the compliance schedule and permit.	
			§5.206 (j)(iii)	Permit Standards	Progress reports must be submitted no later than 30 days following each interim date and the final date of compliance.	
			§5.206 (k)(1)(A)	Permit Standards	The operator of an injection well must maintain and comply with the approved post-injection storage facility care and closure plan.	7.4, 7.5
			§5.206 (k)(1)(C)	Permit Standards	Upon cessation of injection, the operator of a geologic storage facility must either submit an amended plan or demonstrate to the director through monitoring data and modeling results that no amendment to the plan is needed.	7.1, 7.4.2
			§5.206 (k)(3)(A)	Permit Standards	the estimated magnitude and extent of the facility footprint (the CO2 plume and the area of elevated pressure);	7.3
			§5.206 (k)(3)(B)	Permit Standards	that there is no leakage of either CO2 or displaced formation fluids that will endanger USDWs;	7.4.2

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
			§5.206 (k)(3)(C)	Permit Standards	that the injected or displaced fluids are not expected to migrate in the future in a manner that encounters a potential leakage pathway into USDWs;	7.4.1
			§5.206 (k)(3)(D)	Permit Standards	that the injection wells at the site completed into or through the injection zone or confining zone will be plugged and abandoned in accordance with these requirements; and	7.5.2
			§5.206 (k)(3)(E)	Permit Standards	any remaining facility monitoring wells will be properly plugged or are being managed by a person and in a manner approved by the director.	7.5.2
			§5.206 (n)	Permit Standards	Signs. The operator must identify each location at which geologic storage activities take place, including each injection well, by a sign that meets the requirements specified in §3.3(1), (2), and (5) of this title (relating to Identification of Properties, Wells, and Tanks). In addition, each sign must include a telephone number where the operator or a representative of the operator can be reached 24 hours a day, seven days a week in the event of an emergency.	
			§5.206 (o)	Permit Standards	Other permit terms and conditions.	
			§5.206 (o)(1)	Permit Standards	Protection of USDWs. In any permit for a geologic storage facility, the director must impose terms and conditions reasonably necessary to protect USDWs. Permits issued under this subchapter continue in effect until revoked, modified, or terminated by the Commission. The operator must comply with each requirement set forth in this subchapter as a condition of the permit unless modified by the terms of the permit.	
			§5.206 (o)(2)	Permit Standards	Other conditions. The following conditions shall also be included in any permit issued under this subchapter.	
			§5.206 (o)(2)(A)	Permit Standards	Duty to comply. The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Safe Drinking Water Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or for denial of a permit renewal application. However, the permittee need not comply with the provisions of the permit to the extent and for the duration such noncompliance is authorized in an emergency permit under 40 CFR §144.34.	
			§5.206 (o)(2)(B)	Permit Standards	Need to halt or reduce activity not a defense. It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.	
			§5.206 (o)(2)(C)	Permit Standards	Duty to mitigate. The permittee shall take all reasonable steps to minimize or correct any adverse impact on the environment resulting from noncompliance with this permit.	
			§5.206 (o)(2)(D)	Permit Standards	Proper operation and maintenance. The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance includes effective performance, adequate funding, adequate operator staffing and training, and adequate laboratory and process controls, including appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems only when necessary to achieve compliance with the conditions of the permit.	
			§5.206 (o)(2)(E)	Permit Standards	Property rights not conveyed. The issuance of a permit does not convey property rights of any sort, or any exclusive privilege.	
			§5.206 (o)(2)(F)		Activities not authorized. The issuance of a permit does not authorize any injury to persons or property or invasion of other private rights, or any infringement of State or local law or regulations.	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
			§5.206 (o)(2)(G)	Permit Standards	Coordination with exploration. The permittee of a geologic storage well shall coordinate with any operator planning to drill through the AOR to explore for oil and gas or geothermal resources and take all reasonable steps necessary to minimize any adverse impact on the operator's ability to drill for and produce oil and gas or geothermal resources from above or below the geologic storage facility.	1.7 ???
			§5.206 (o)(2)(H)	Permit Standards	Duty to provide information. The operator shall furnish to the Commission, within a time specified by the Commission, any information that the Commission may request to determine whether cause exists for modifying, revoking and reissuing, or terminating the permit, or to determine compliance with the permit. The operator shall also furnish to the Commission, upon request, copies of records required to be kept under the conditions of the permit.	
			§5.206 (o)(2)(I)	Permit Standards	Inspection and entry. The operator shall allow any member or employee of the Commission, on proper identification, to:	
			§5.206 (o)(2)(I)(i)	Permit Standards	enter upon the premises where a regulated activity is conducted or where records are kept under the conditions of the permit;	
			§5.206 (o)(2)(I)(ii)	Permit Standards	have access to and copy, during reasonable working hours, any records required to be kept under the conditions of the permit;	
			§5.206 (o)(2)(I)(iii)	Permit Standards	inspect any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under the permit; and	
			§5.206 (o)(2)(iv)	Permit Standards	sample or monitor any substance or parameter for the purpose of assuring compliance with the permit or as otherwise authorized by the Texas Water Code, §27.071, or the Texas Natural Resources Code, §91.1012.	
			§5.207 (a)(2)(C)(v)	Reporting and Record-Keeping	A description of any event that exceeds operating parameters for annulus pressure or injection pressure specified in the permit;	5.2
			§5.207 (a)(D)	Reporting and Record-Keeping	Annual reports. The operator must submit an annual report detailing:	5.2
			§5.207 (d)	Reporting and Record-Keeping	Certification. All reports required by permits and other information requested by the director under this subchapter, shall be certified as follows: "I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."	Cover Pages
			§5.207 (c)(2)	Reporting and Record-Keeping	Changes to authorization. If an authorization under paragraph (1) of this subsection is no longer accurate because a different individual or position has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of paragraph (1) of this subsection must be submitted to the director prior to or together with any reports, information, or applications to be signed by an authorized representative.	
			§5.207 (a)(2)(D)(i)	Reporting and Record-Keeping	corrective action performed;	
			§5.207 (c)(1)	Reporting and Record-Keeping	Reports. All reports required by permits and other information requested by the director, shall be signed by a person described in §5.203(a)(1)(B) of this title, or by a duly authorized representative of that person. A person is a duly authorized representative only if:	
			§5.207 (c)	Reporting and Record-Keeping	Signatories to reports.	
			§5.207 (c)(1)(A)	Reporting and Record-Keeping	the authorization is made in writing by a person described in §5.203(a)(1)(B) of this title;	

EPA 40 CFR	CFR Category	CFR Text	16 TAC Chapter 5	TAC Category	Description	Permit Application
			§5.207 (c)(1)(B)	Reporting and Record-Keeping	the authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity, such as the position of plant manager, operator of a well or a well field, superintendent, or position of equivalent responsibility; and	
			§5.207 (b)(1)	Reporting and Record-Keeping	The operator must report the results of injection pressure and injection rate monitoring of each injection well on Form H-10, Annual Disposal/Injection Well Monitoring Report, and the results of internal mechanical integrity testing on Form H-5, Disposal/Injection Well Pressure Test Report. Operators must submit other reports in a format acceptable to the Commission. At the discretion of the director, other formats may be accepted.	
			§5.207 (c)(1)(C)	Reporting and Record-Keeping	the written authorization is submitted to the director.	

SECTION 0 – INTRODUCTION

TABLE OF CONTENTS

Project Overview 2

Project Key Attributes 4

Pore Space Agreement Discussion 5

Proposed CO_2 Sequestration System Discussion 5

- Injectate Information 5
- Surface Facility Details 6

Site Suitability 6

Summary 8

Required Administrative Information 9

- General Application Information 9
- Additional Permits 10

Figures

Figure 0-1 – Emission Sources 2

[redacted]

Tables

[redacted]

Project Overview

The International Energy Agency (IEA) states that in 2021 just over 40 million metric tons per year (MMT/yr) of CO_2 were captured worldwide[1]. By 2070, the world will need to capture and store more than 10,000 MMT/yr of CO_2 to meet the Sustainable Development Scenario plan outlined by the IEA[2]. To meet these climate goals, real projects and investment are paramount—such as carbon capture, which is becoming an essential addition to industrial processes emitting carbon dioxide into the atmosphere.[3]

[redacted] Orchard Storage team members have extensive expertise in the capture, transport, and geologic storage of CO_2. Carbon capture and storage represent meaningful, physical reductions in CO_2 emission—to dramatically decrease Scope 1, 2, and 3 emissions, as described in Figure 0-1.

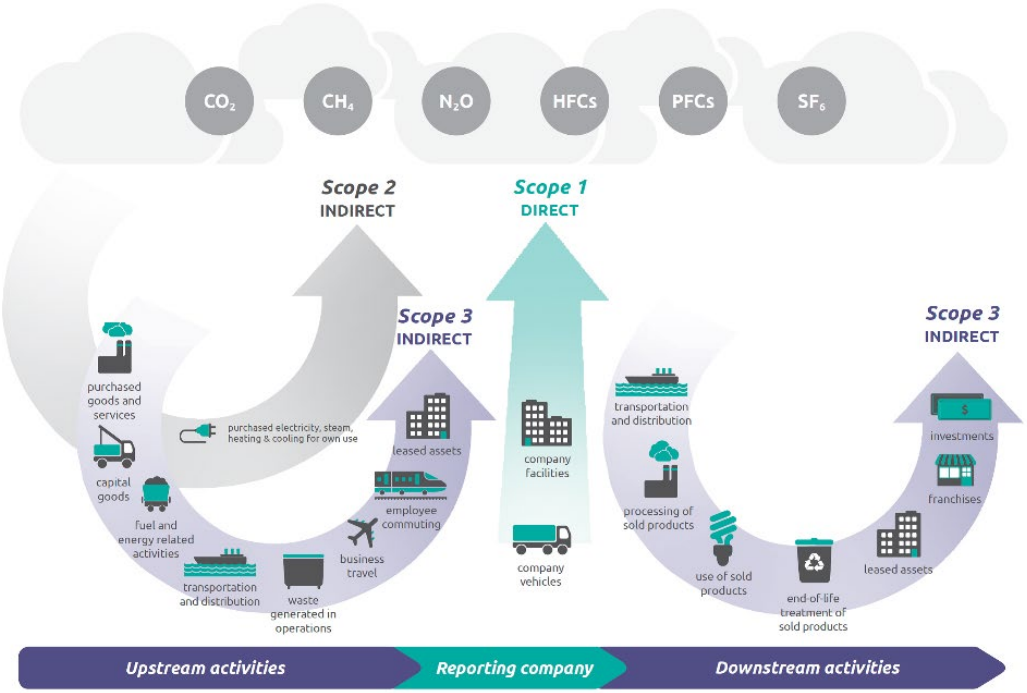

Figure 0-1 – Emission Sources[4]

[1] https://www.iea.org/reports/about-ccus
[2] https://www.iea.org/reports/about-ccus
[redacted]
[4] https://ghgprotocol.org/sites/default/files/standards/Corporate-Value-Chain-Accounting-Reporing-Standard_041613_2.pdf, page 5

The Orchard Project is being developed to accommodate and sequester, in secure geologic storage, anthropogenic CO_2 sourced regionally from various emitters. The Orchard Project plans to use multiple wells at the storage site to accommodate the captured CO_2 volumes. The extensive screening process for Orchard's site selection resulted in a site that meets Underground Injection Control (UIC) requirements with minimal existing wellbores, an injection interval with requisite and appropriate reservoir properties, and substantial sealing intervals. The storage site is also relatively near existing CO_2 pipeline infrastructure to accommodate the economic delivery of sourced CO_2 volumes to the Orchard Project.

[redacted] The CO_2 injection well is designed to meet the requirements of American Petroleum Institute (API) 1171, along with the regulatory requirements outlined in 16 Texas Administrative Code (TAC) **§5.206(c)** [Title 40, U.S. Code of Federal Regulations (40 CFR) **§146.86**].

[redacted]

[redacted] *Section 1 – Site Characterization* of this permit application will detail the geology and reservoir characterization of this project.

[redacted]

Project Key Attributes

[redacted]

[redacted]

[6] https://www.epa.gov/energy/greenhouse-gas-equivalencies-calculator

- No major shallow faults, which may cause CO_2 to breach containment and contaminate Underground Sources of Drinking Water (USDWs), were observed.
- No artificial penetrations, which could cause CO_2 to breach containment and contaminate USDWs, were identified in the area of review (AOR) of Orchard [redacted]
- No Environmental Protection Agency (EPA)-identified environmental justice communities exist within the Orchard Project area.
- No adverse disproportionate effects on populations in environmental justice areas will arise from the construction, operation, and maintenance of the project.

Pore Space Agreement Discussion

[redacted]

Proposed CO_2 Sequestration System Discussion

[redacted]

Injectate Information

[redacted]

[redacted]

[redacted]

[redacted]

Surface Facility Details

[redacted]

<u>Site Suitability</u>

[redacted]

[redacted]

[redacted]

[redacted]

In compliance with regulations, an evaluation of the proposed site ("Site Suitability") was conducted by assessing factors such as:

- Location of the proposed project site
- Consideration of the project area relative to federal sites/buildings/facilities, etc.
- Endangered species research
- Flood zone
- Existing infrastructure, surface, and subsurface mines or quarries
- Faults or fractures in the project area based on seismic analysis or geophysical well log characterization
- State or federal subsurface cleanup sites within the project area
- Environmental justice issues
- Artificial penetrations in the project area
- Drinking water in the project area
- Any other site-related issues

The results of this site assessment make up the content of this permit application.

Summary

[redacted]

This permit application includes a detailed assessment of the overall geologic environment (*Section 1 – Site Characterization*) and the resulting plume model and results (*Section 2 – Plume Model*) used to determine the aerial extent of the plume and the resulting AOR. As detailed in *Section 3 – Area of Review and Corrective Action Plan*, the AOR for Orchard [redacted] Well design and construction plans that take into consideration the needs of the project, the modeling results, and the requirements to ensure the protection of the USDWs are detailed in *Section 4 – Engineering Design and Operating Strategy*.

To ensure that the CO_2 plume is being monitored over the life of the project, a detailed Testing and Monitoring Plan has been assembled in *Section 5 – Testing and Monitoring Plan*. The plan consists of (1) an above-confining-zone monitoring well, (2) USDW monitoring wells, (3) soil-gas monitoring stations, and (4) the use of fiber optics in conjunction with vertical seismic profile (VSP) technology to monitor the growth of the CO_2 plume over the life of the project.

The proposed Orchard [redacted] project addresses all the requirements for a Class VI sequestration well. This well is ideally located to sequester significant amounts of CO_2 with minimal impact to the surface and surrounding communities.

Required Administrative Information

General Application Information

Injection Well Information:

Well Name and Number	Orchard [redacted]
County	[redacted]
Location	
Latitude and Longitude	

Applicant:

Name	Orchard Storage Company LLC
Address	620 N. Grant Street Odessa, Texas 79761
Facility contacts	[redacted]
	[redacted]
Ownership Status	[redacted]
Entity Status	[redacted]

Standard Industrial Classification (SIC) Codes:

- 4925 – Mixed, Manufactured, or Liquified Petroleum Gas Production and/or Distribution
- 4953 – Refuse Systems (nonhazardous waste disposal sites)

This facility is not located on federal or Indian lands.

[redacted]

[redacted]

[redacted]

SECTION 1 – SITE CHARACTERIZATION

TABLE OF CONTENTS

1.1 Overview 5

1.2 Regional Geology 5
1.2.1 Regional Geologic Setting 5
1.2.2 Regional Stratigraphic Model 7
1.2.3 Regional Depositional Model 11
1.2.4 Major Stratigraphic Units 13

1.3 Site Geology 28
1.3.1 Subsurface Data and Methods 32
1.3.2 Injection Zone 35
1.3.3 Primary Upper Confining Zone 73
1.3.4 Primary Lower Confining Zone 101

1.4 Site Structure, Stratigraphy, and Deposition: 2D Seismic Integration 108
1.4.1 Horizon Interpretation 112
1.4.2 Fault Interpretation 118

1.5 Geomechanics 123
1.5.1 Elastic Moduli 123
1.5.2 Local Stress Conditions 127
1.5.3 Injection Zone Fracture Gradient 130

1.6 Geochemistry 134
1.6.1 Fluid Chemistry (Injection Zone) 134
1.6.2 Rock Chemistry (Injection Zone and Upper Confining Zone) 137
1.6.3 Simulated Interactions (Injection Zone and Upper Confining Zone) 139

1.7 Site Evaluation of Mineral Resources 139

1.8 Seismic History 140

1.9 Site Suitability 143
1.9.1 Lithofacies 143
1.9.2 Leakage Pathways 143
1.9.3 Hydrology and Hydrogeology 143
1.9.4 Total Storage Capacity 146
1.9.5 Injection Capacity 149
1.9.6 Secondary Confinement 149

1.10 Further Site Characterization 150
1.10.1 Core 150
1.10.2 Sequence Stratigraphy 150
1.10.3 Facies 150
1.10.4 Secondary Injection Targets 150

1.11 References 151

Figures

[redacted]

[redacted]

Figure 1-67 – Regional fault map 122

Tables

Table 1-8 – Mohr Circle Analysis Parameters 131

1.1. Overview

This site characterization for Orchard Storage Company LLC's Orchard #1 well was prepared to meet the requirements of 16 Texas Administrative Code (TAC) **§5.203 (c)(2)** [Title 40, U.S. Code of Federal Regulations (40 CFR) **§146.82(a)(3)**]. This section describes the regional and site geology for the proposed location. This site characterization incorporates analysis from multiple data types, including core, well logs, seismic (2D), academic and professional publications (e.g., regional geologic frameworks), and nearby subsurface analogs.

1.2. Regional Geology

1.2.1 Regional Geologic Setting

[redacted]

[redacted]

[redacted]

1.2.2 Regional Stratigraphic Model

[redacted]

[redacted]

Each stratigraphic succession reflects a composite of high-frequency cyclicity incorporating lowstand, transgressive, and highstand system tracts across the region. These successions are reflective of paleo-topographic changes across the area caused by sea-level fluctuation, subsidence, water depth, and compaction forces. [redacted]

[redacted]

[redacted]

[redacted]

1.2.3 Regional Depositional Model

[redacted]

[redacted]

1.2.4 Major Stratigraphic Units

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

1.3. Site Geology

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

1.3.1 Subsurface Data and Methods

Well Logs

Digital well log files (.las file format) were used for several site characterization tasks, including stratigraphic top determinations, petrophysical calculations, integration to the core and seismic data, and creation of a 3D conceptual and numerical model ("geomodel"). These well logs were the primary source for understanding vertical and lateral rock quality changes in the injection and confining zones. [redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

Seismic

[redacted]

1.3.2 Injection Zone

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

Figure 1-22 – A west-east cross section of well log data from five wells (Figure 1-23 shows the well locations).

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

Permeability (Horizontal)

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

1.3.3 Primary Upper Confining Zone

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

Lithology

The primary upper confining zone in Orchard can prevent the migration of injected CO_2 from the injection zone to shallower geologic intervals and USDWs. The sealing capability is high based on core, well log, and subsurface analog data.

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

Porosity

Density porosity was derived using the bulk density log and an estimated matrix density for the upper confining zone. [redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

Water Saturation

The confining zone is assigned 100% water saturation with the same salinity as the injection zone.

1.3.4 Primary Lower Confining Zone

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

Porosity

Density porosity was derived using the bulk density log and an estimated matrix density for this confining zone. [redacted]

[redacted]

[redacted]

Permeability (Horizontal and Vertical)

[redacted]

Water Saturation

The confining zone is assigned 100% water saturation with the same salinity as the injection zone.

1.4. Site Structure, Stratigraphy, and Deposition: 2D Seismic Integration

[redacted]

[redacted]

[redacted]

Tying well log data to seismic surveys involved forward modeling of a synthetic seismogram, derived from sonic and density well log data. The seismogram was used to generate "normal reflectivity," reflection coefficients, and acoustic impedance log curves. [redacted]

The seismic-to-well tie allowed for selection of seismic horizons that either matched well log data and well tops, or were not observable on well log data or current well tops—but were visible on the seismic data. [redacted]

[redacted]

[redacted]

1.4.1 Horizon Interpretation

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

1.4.2 Fault Interpretation

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

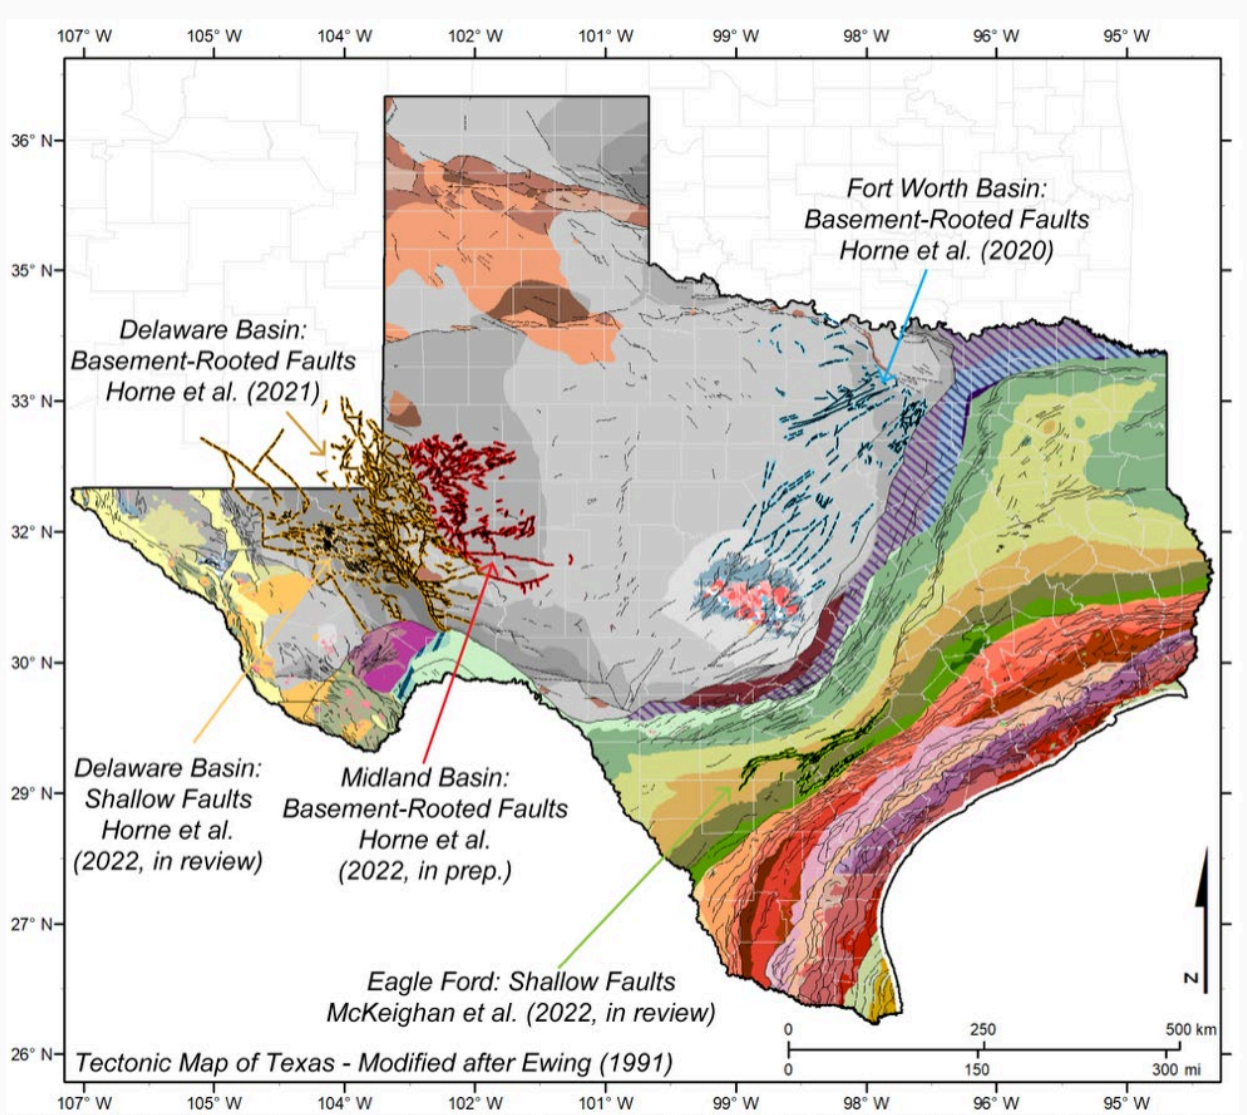

R1: TexNet-CISR principal fault mapping regions. Add links to sub-pages (Fort Worth Basin, Delaware Basin, Midland Basin, Eagle Ford, and supplemental materials).

Figure 1-67 – Regional fault map generated by researchers at the TexNet Seismic Monitoring and Center for Integrated Seismicity research group (https://www.beg.utexas.edu/texnet-cisr/fault-maps).

[redacted]

1.5. Geomechanics

[redacted]

[redacted]

1.5.1 Elastic Moduli

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

1.5.2 Local Stress Conditions

[redacted]

[redacted]

[redacted]

A method to predict a simplified fracture gradient is the standard Eaton equation (i.e., S_h minimum horizontal stress, or fracture closure pressure). Eaton's equation is shown below:

$$P_f = (v / 1 - v) * (S_v - P_p) + P_p$$

Where:
P_f = fracture closure pressure gradient
v = Poisson's ratio
S_v (overburden stress gradient) = 1.0
P_p (pore pressure gradient) = 0.433

Biot's constant was based on approximate dynamic elastic moduli calculated using the equation based on data from Detournay & Cheng (1993):

$$a = 0.62 + 0.935 * phi$$

Where phi = porosity.

The minimum stress equation (Barree, 2009) used to estimate the fracture closure pressure is below:

$$Pf = (v / 1 - v) * (S_v - a_v * P_p) + a_h * P_p \cancel{[+ \varepsilon_x * E + \sigma_t]}$$

Where:
P_f = fracture closure pressure gradient
v = Poisson's ratio
S_v (overburden stress gradient) = 1.0
P_p (pore pressure gradient) = 0.433
a = Biot's constant (vertical is calculated and horizontal = 1)

(Not used, but shown above, ε_x is regional horizontal strain, E is Young's modulus, and σ_t is regional horizontal tectonic stress.[1])

The following dynamic elastic moduli (for well API# 42-165-38804) were calculated using well logs using methods summarized in Crain's Petrophysical Handbook:

- Shear Modulus (G)
- Poisson's ratio (*v*)

[redacted]

- Young's modulus (E)
- Bulk modulus (Kb)
- Biot's constant (*a*)
- Minimum horizontal stress (S_h)

1.5.3 Injection Zone Fracture Gradient

[redacted]

[redacted]

Table 1-8 – Mohr Circle Analysis Parameters

Parameter	Value
Expected Angle of Internal Friction	30°
Coefficient of Internal Friction	0.6
Lithostatic Stress Gradient	1.0 psi/ft
Pore Pressure Gradient	0.433 psi/ft
Confining Pressure	1,180 psi
Cohesive Strength	2,175 psi
Tensile Strength	1,087 psi

[redacted]

[redacted]

[redacted]

[redacted]

1.6. Geochemistry

This section discusses the fluid and solid-phase geochemistry in the Orchard site and the wider area.

1.6.1 Fluid Chemistry (Injection Zone)

[redacted]

[redacted]

[redacted]

[redacted]

1.6.2 Rock Chemistry (Injection Zone and Upper Confining Zone)

[redacted]

[redacted]

[redacted]

[redacted]

1.6.3 Simulated Interactions (Injection Zone and Upper Confining Zone)

[redacted]

[redacted]

1.7. Site Evaluation of Mineral Resources

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

1.8. Seismic History

[redacted]

[redacted]

[redacted]

[redacted]

1.9. Site Suitability

[redacted]

1.9.1 Lithofacies

[redacted]

1.9.2 Leakage Pathways

[redacted]

1.9.3 Hydrology and Hydrogeology

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

1.9.4 Total Storage Capacity

[redacted]

*CO_2 Storage prospeCtive Resource Estimation Excel aNalysis, which DOE's NETL developed to screen saline formations for prospective CO_2 storage resources.

1.9.5 Injection Capacity

Several iterations of the porosity and permeability model have incorporated site-specific data, regional geologic frameworks, and subsurface analog information to reduce uncertainty around the quality of the injection zone in the Orchard area. [redacted]

1.9.6 Secondary Confinement

[redacted]

1.10. Further Site Characterization

Several topics below are opportunities for future work to increase accuracy and reduce the uncertainty of the Orchard site characterization. [redacted]

1.10.1 Core

Further core analysis will be performed when confining and injection zone cores are obtained. Testing may include thin section description, mercury injection, core description (confining zone), x-ray diffraction, scanning electron microscopy, relative permeability (CO_2, brine), etc.

1.10.2 Sequence Stratigraphy

[redacted]

1.10.3 Facies

[redacted]

1.10.4 Secondary Injection Targets

[redacted]

[redacted]

[redacted]

SECTION 2 – PLUME MODEL

TABLE OF CONTENTS

2.1 Introduction 3

2.2 Model Inputs 3

2.2.1 Trapping Mechanisms 3
2.2.2 Structural and Stratigraphic Elements 12
2.2.3 Relative Permeability and Capillary Pressure 14
2.2.4 Initial Conditions 19
2.2.5 Injection Rate 22
2.2.6 Injected Fluids Composition 23
2.2.7 Completion Plan 23

2.3 Model Orientation and Gridding Parameters 25

2.3.1 Spatial Conditions 25
2.3.2 Boundary Conditions 26
2.3.3 Model Time Frame 29

2.4 CO_2 Plume Model Results 30

2.4.1 Critical Pressure Front 34

2.5 Area of Review Delineation 40

[redacted]

Figures

[redacted]

[redacted]

Tables

[redacted]

2.1 Introduction

This section discusses key details of the plume model. The model characterizes the performance of CO_2 injection wells, the 3D spatial distribution of the CO_2 plume, and the associated pressure front over time. It incorporates hydrogeologic data with subsurface flow physics to model the significant physical processes that affect the plume and pressure front evolution. The distribution of the plume and pressure front defines the area of review (AOR) for the well, a corrective action plan if necessary, and the overall viability of the project.

While the following discussion specifically focuses on the [redacted] well, [redacted] This also helps to verify that the pressure of the reservoir remains below the fracture pressure gradient limits of the formation during combined injection operations.

The modeling software used to evaluate this project was Computer Modelling Group's GEM 2022.10 (GEM) simulator. Computer Modelling Group (CMG) has put together one of the most accurate and technically sound reservoir simulation software packages for conventional, unconventional, and secondary recovery. GEM uses equation-of-state (EOS) algorithms and some of the most advanced computational methods to evaluate compositional, chemical, and geochemical processes and characteristics, to produce highly accurate and reliable simulation models for carbon sequestration.

For the purposes of injection into a reservoir, CO_2 can be a relatively complex component in the supercritical phase as seen in downhole conditions. The GEM simulator utilizes the compositional methods described, along with equations specific to CO_2, to effectively model and simulate plume behavior within the injection intervals.

[redacted]

2.2 Model Inputs

2.2.1 Trapping Mechanisms

The CO_2 injected into the reservoir will take the form of a mobile CO_2-rich supercritical phase. In this phase, the CO_2 will displace reservoir fluids as it moves laterally and vertically into the reservoir.

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

Movement of the CO_2 phase does not continue indefinitely. As the CO_2 moves both vertically and horizontally, various trapping mechanisms immobilize the CO_2 within the reservoir. [redacted]

2.2.1.1 Upper Confining Zone

[redacted]

2.2.1.2 Residual Gas Trapping

While the CO_2 will remain in the supercritical phase within the storage interval ("reservoir"), the gas-liquid relative permeability relationships will govern fluid flow between the CO_2 and liquid phases present. [redacted]

[redacted] (Land C. S., 1971).

[redacted] (Land C. , 1968). [redacted]

[redacted] (Keelan, 1975). [redacted]

[redacted]

[redacted]

[redacted]

[redacted]

2.2.1.3 Solubility Trapping in Brines

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

2.2.1.5 Structural Trapping

[redacted]

2.2.1.6 Geochemical Trapping

Mineral trapping can also occur due to the adsorption of CO_2 onto clay minerals. Once hysteresis and solubility trapping have been included in the model, geochemical formulae can be added through an internal geochemistry database to describe mineral trapping reactions. For aqueous reactions, the following formulae can be used:

$$CO_2(aq) + H_2O = H^+ + HCO_3^-$$
$$CO_3^{-2} + H^+ = HCO_3^-$$
$$OH^- + H^+ = H_2O$$

These three reactions are all common ionic reactions that can occur in the reservoir between water and/or CO_2. The following formulae show the mineral reactions that may be used within the model. Each of these is a common mineral that may be found in carbonates in an underground aquifer and cause the precipitation of carbon oxides in a solid state:

$$Anhydrite\ (CaSO_4) = Ca^{2+} + SO_4^{2-}$$
$$Calcite\ (CaCO_3) + H^+ = Ca^{2+} + HCO_3^-$$
$$Dolomite\ (CaMg(CO_3)_2) + 2H^+ = Ca^{2+} + 2(HCO_3^-) + Mg^{2+}$$
$$Illite\ (K_6Mg_{25}Al_{2.3}Si_{3.5}O_{10}(OH)_2) + 8H^+ = 2.3Al^{3+} + 5H_2O + 0.6K^+ + 0.25Mg^{2+} + 3.5SiO_2$$
$$Kaolinite\ \left(Al_2Si_2O_5(OH_4)\right) + 6H^+ = 5H_2O + 2Al^{3+} + 2SiO_2$$
$$K - Feldspar\ (KAlSi_3O_8) + 4H^+ = 2H_2O + Al^{3+} + 3SiO_2$$

While geochemical trapping can have a greater impact on carbon dioxide over hundreds or thousands of years, the short-term effects of these trapping mechanisms are relatively small, and fluid movement is predominated by hydrodynamic and solubility trapping. Inclusion of geochemical reactions and trapping mechanisms into the GEM simulator does create significant computational burden on the model runs. Because the impacts are not significant, the geochemical processes have not been included in the simulation cases.

2.2.1.7 Trapping Summary

After the containment zone overlying the reservoir, the significant mechanisms by which CO_2 is trapped in the storage interval [redacted]

[redacted]

2.2.2 Structural and Stratigraphic Elements

The model was built using the geologic data described in *Section 1 – Site Characterization*, which describes how the analysis of well logs, core data, and seismic data were used to generate structure maps and hydrogeology, and to define other rock properties. [redacted]

[redacted]

[redacted]

[redacted]

Vertical Permeability

Permeability normal to the bedding plane is usually lower than the permeability in the parallel direction. In most cases, "normal to the bedding plane" equates to vertical permeability, while the parallel-direction permeability corresponds to horizontal permeability. This contrast is caused by vertical heterogeneity over multiple scales, from very small (fractional inch) through many feet in range. By comparison, the scales of heterogeneity in the horizontal orientation will be significantly larger.

[redacted]

[redacted]

2.2.3 Relative Permeability and Capillary Pressure

Relative permeability curves were generated using the industry standard power law model based on the approach developed by Corey (Corey, 1954). In this model, the relative permeability for the respective water and supercritical gas phases are based on the normalized saturation, scaled between the end points of mobility for a respective phase, and raised to an exponent value (termed the "Corey exponent"). Relationships for water and gas relative permeabilities can be expressed with the following equation. The gas relative permeability applies to the supercritical CO_2 phase.

$$k_{rw} = k_{rwcg} \left[\frac{(S_w - S_{wc})}{(1 - S_{wc} - S_{gc})} \right]^{nw}$$

And

$$k_{rg} = k_{rgrl} \left[\frac{(S_g - S_{gc})}{(1 - S_{wc} - S_{gc})} \right]^{ng}$$

With variables defined as follows:

k_{rw}, k_{rg} = Relative permeability to water and gas phases, respectively

k_{rwcg} = Water relative permeability endpoint, k_{rw} at critical gas saturation

k_{rgrl} = Gas relative permeability endpoint, k_{rc} at irreducible water saturation

S_w, S_g = Water and gas saturations, respectively

S_{wc} = Irreducible saturation of water

S_{gc} = Critical saturation of gas

nw, ng = Corey exponents for water and gas curves, respectively

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

When considering a relative permeability relationship, it is important to look at the data in the context of reservoir conditions, using in situ fluid properties by the generation of a fractional flow curve. Absent gravity effects, the fractional flow of CO_2 versus saturation is calculated using the relationship:

$$f_g = \frac{1}{1 + \frac{\mu_g}{\mu_w}\frac{k_{rw}}{k_{rg}}}$$

Where f_g represents the volume fraction of the gas (supercritical CO_2), μ_g and μ_w represent the in situ viscosity for the CO_2 and brine, and k_{rw} and k_{rg} represent the relative permeability for the brine and CO_2 at the saturations evaluated. [redacted]

[redacted] (Buckley & Leverett, 1942) (Welge, 1952). [redacted]

[redacted]

[redacted]

[redacted]

2.2.3.1 Capillary Pressure Relations

[redacted] Low permeabilities together with associated high capillary entry pressures will combine to prevent flow through the confining interval. [redacted]

[redacted]

2.2.4 Initial Conditions

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

2.2.5 Injection Rate

[redacted]

[redacted]

[redacted]

2.2.6 Injected Fluids Composition

[redacted]

[redacted]

2.2.7 Completion Plan

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

2.3 Model Orientation and Gridding Parameters

2.3.1 Spatial Conditions

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

2.3.2 Boundary Conditions

Boundary Definition

The top and base of the model were set up as no-flow boundaries to vertical flow, these being the upper and lower confining zones, respectively. Each of the lateral edges of the model has been connected to one or more numerical aquifers, using the Fetkovich water influx calculation option (Fetkovich, 1971) to characterize connections between the modeled area and surrounding region. The use of Fetkovich-type numerical aquifers allows for the definition of aquifers having finite connectivity to the reservoir model. [redacted]

[redacted]

[redacted]

[redacted] (Leibrock, Hiltz, & and Huzarevich, 1951). [redacted]

[redacted] (Craft & Hawkins, 1959).

[redacted]

[redacted]

[redacted]

2.3.3 Model Time Frame

[redacted]

[redacted]

[redacted]

[redacted]

2.4 CO_2 Plume Model Results

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

2.4.1 Critical Pressure Front

The second component to defining the AOR is the determination of the extent of the critical pressure front. The worst-case scenario for moving reservoir fluids to the Underground Source of Drinking Water (USDW) would be through an improperly plugged and abandoned wellbore or subsurface feature that is open in the base of the USDW and at the top of the injection interval. This resultant pressure is referred to as the critical pressure. The methodology for finding critical pressure was sourced from Environmental Protection Agency (EPA) Method 1 guidance, for calculations based on displacing fluid initially present in the borehole in the hydrostatic case.

[redacted] (McCain, 1991).

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

2.5 Area of Review Delineation

Title 16 of the Texas Administrative Code (TAC) **§5.203(d)(1)** [Title 40, U.S. Code of Federal Regulations (40 CFR) **§146.84(b)**] requires that an AOR be delineated for a Class VI carbon sequestration well application. The EPA defines the AOR as the greater of either the maximum extent of the separate-phase plume (pore occupancy plume) or the pressure front where the pressure buildup is of sufficient magnitude to force fluids from the injection zone into the formation matrix of a USDW. Both parts of this definition were analyzed to define the Orchard #1 AOR.

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

SECTION 3 – AREA OF REVIEW AND CORRECTIVE ACTION PLAN

TABLE OF CONTENTS

3.1 Introduction 3

3.2 Model Background 3

3.3 Model Inputs and Assumptions 3

3.4 Site Geology and Hydrology 4

3.4.1 Surfaces 4
3.4.2 Mesh 4
3.4.3 Property Distribution 5
3.5 Area of Review: Pore Occupancy Plume 13

3.6 Area of Review: Pressure Front 14

3.7 Reevaluation of AOR 18

3.8 Operating Strategies Influencing Reservoir Modeling Results 19

3.9 Area of Review Results 24

3.10 Corrective Action Plan and Schedule 27

3.11 Area of Review Reevaluation Plan and Schedule 27

3.11.1 Proposed Reevaluation Cycle 27
3.12 Conclusion 28

Figures

[redacted]

[redacted]

Tables

[redacted]

Table 3-5 – USDW Depths from Offset GAU Letters 14
Table 3-6 – Inputs for Critical Pressure Calculation 17
Table 3-7 – Freshwater Wells in the AOR.....27
Table 3-8 – Triggers for AOR Reevaluations.....27

3.1 Introduction

Title 16 of the Texas Administrative Code (TAC) **§5.203(d)(1)** [Title 40, U.S. Code of Federal Regulations (40 CFR) **§146.84(b)**] requires that an area of review (AOR) be conducted for a Class VI carbon sequestration well application. The Environmental Protection Agency (EPA) defines the AOR as the greater of either the maximum extent of the separate-phase plume (pore occupancy plume) or the pressure front where the pressure buildup is of sufficient magnitude to force fluids from the injection zone into the formation matrix of an Underground Source of Drinking Water (USDW). Both parts of this definition were analyzed for the Orchard [redacted] AOR.

3.2 Model Background

Model Name and Version: **GEM 2022.10**

Model Authors/Institution: Computer Modelling Group, Ltd.

Description of model: Equation-of-state (EOS) reservoir simulator for compositional, chemical, and unconventional reservoir modeling.

3.3 Model Inputs and Assumptions

The input parameters for the GEM model are summarized in Table 3-1. These parameters are based on the values estimated at the Orchard [redacted] location.

[redacted]

3.4 Site Geology and Hydrology

A 3D computational model of the geologic layers from [redacted] was constructed using Schlumberger's Petrel™ software. The results from the site characterization work were used as inputs to create static (geologic) and dynamic (simulation) models.

3.4.1 Surfaces

[redacted]

3.4.2 Mesh

The 3D mesh (or grid) was created using the surfaces as inputs. The horizontal (I-J) grid dimensions in the static model are [redacted] Table 3-2 shows the cell count and average thickness for the vertical cells in the static model within the Orchard area. Figure 3-1 shows a map of the static model grid boundary.

[redacted]

[redacted]

3.4.3 Property Distribution

Properties (e.g., porosity, permeability) were populated in all cells [redacted] layers in the 3D static model. [redacted]

3.4.3.1 Facies

The site characterization results incorporate facies determinations to build the porosity and permeability models [redacted]

3.4.3.2 Porosity

Cross-plot porosity was calculated for wells with both neutron and density well logs. The porosity was upscaled from well logs (resolution approximately 0.25') to grid cells [redacted] via arithmetic averaging. Figure 3-2 shows a comparison of the well logs and the upscaled porosity values within grid cells for the type well. A normalized score of the porosity data using all the upscaled porosity data was completed prior to distributing porosity between well locations in the grid.

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

3.4.3.3 Permeability

Permeability was calculated for each cell with porosity for the injection zone within the 3D static model by applying [redacted]

Figures 3-9 and 3-10 show selected snapshots of cross sections (approximately north-south and east-west) of the permeability 3D property from the static model.

[redacted]

[redacted]

3.4.3.4 Water Saturation

Water saturation was initiated in the dynamic simulation model.

[redacted]

[redacted]

3.5 Area of Review: Pore Occupancy Plume

The first component of the AOR is delineated using computational plume modeling of an injected CO_2 stream. Computational modeling accounts for the physical and chemical properties of all phases of the injectate and is constructed based on available site characterization, operational, and monitoring data. *Section 2 – Plume Model* discusses the methodology and process in detail. The pore occupancy plume is considered and reviewed based on three primary details: artificial penetrations, subsurface features, and pore space rights.

Any artificial penetrations located within the AOR must be evaluated for proper completions, plugging, and construction materials. These wellbores must be constructed and/or plugged using appropriate materials to support long-term storage of carbon oxides. Most legacy wells in North America, however, were not constructed with the intent of CO_2 storage in mind. Thus, most wellbores located within the pore occupancy plume, that penetrate the gross injection zone, would require a corrective action or a contingency plan to ensure that stored gases do not risk escaping containment by way of these penetrations. Any wells that are identified within this AOR but that do not penetrate the gross injection zone would not pose a threat to the containment integrity. Those wells would be excluded from any corrective action or contingency plan considerations.

Subsurface features identified within the AOR will be assessed for their expected impact to the gross injection zone. Such features could include faults, folds, mapped fractures, steeply dipping formations, and salt diapirs. Should any structural anomalies be discovered within the AOR, efforts to assess their sealing nature will be conducted. These features can act as either barriers aiding in containing the stored CO_2, or conversely as conduits moving the CO_2 out of the containment zone. [redacted]

Pore space rights are critically important when evaluating a project's potential due to the classification of carbon injection wells as storage wells rather than disposal wells. To mitigate the risk of an uneconomically viable project, operating strategies and reservoir management practices were designed with the utmost care to maintain control of the resulting subsurface injectate plume extent.

The area determined for pore space rights was used to identify landowners within the CO_2 plume area. [redacted]

[redacted]

3.6 Area of Review: Pressure Front

A second component of the AOR delineation considers the pressure front created by the injection of fluids into a previously stable reservoir. Both calculation and computational modeling determine this AOR. The pressure buildup that could cause potential fluid migration is determined for either insufficiently plugged and abandoned artificial penetrations, or subsurface features that are found to penetrate the upper confining interval of the gross injection zone.

The worst-case scenario for moving reservoir fluids to the USDW would be through an improperly plugged and abandoned wellbore or subsurface feature that is open both at the base of the USDW and at the top of the injection interval. This resultant pressure is referred to as the critical pressure. The methodology for finding critical pressure was sourced from EPA Method 1 guidance for calculations based on displacing fluid initially present in the borehole in the hydrostatic case.

Nearby Texas Railroad Commission (TRRC) Groundwater Advisory Unit (GAU) letters [redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

Calculations for the pressure at the base of the USDW are determined from the hydraulic head [redacted]

The complete AOR for Orchard is the total area covered by both pore space and pressure front areas. Any features identified within the AOR were assessed for appropriate USDW protection and, if deemed insufficient, included in the corrective action or contingency plan.

3.7 Reevaluation of AOR

Per 16 TAC **§5.203(d)(2)(B)** [40 CFR **§146.84(b)(2)**] requirements, Orchard Storage will reevaluate the AOR at each of the following intervals:

- A minimum frequency of five years

- Upon detection of a significant change in the plume
- As otherwise warranted by routine monitoring or operational conditions

Wells identified requiring corrective action within the reevaluated AOR will be addressed in an amended AOR and corrective action plan that will be submitted to the EPA Underground Injection Control (UIC) Program Director for approval. Once approved, all amendments and corrective plans will be incorporated into the permit and subjected to permit alteration requirements.

If the evaluation does not result in changes to the AOR or the corrective action plan, Orchard Storage will demonstrate to the UIC Program Director that such changes are not needed, by providing the supporting monitoring data and model results. All model inputs and data used in AOR reevaluations will be retained for 10 years.

3.8 Operating Strategies Influencing Reservoir Modeling Results

[redacted]

[redacted]

[redacted]

The shape and lateral extent of the stabilized plume for the proposed well is illustrated in Figure 3-15. This extent was used to determine the initial project AOR.

These plume extents were digitized from the GEM output and imported into ArcGIS for use as the defined area of influence from which the Orchard AOR was established. Orchard Storage conducted a review to identify any artificial penetrations or other features that may endanger the lowermost USDW as a result of injection activity or operations per 16 TAC **§5.203(d)(1)(C)** [40 CFR **§146.84(c)(3)**]. Orchard Storage also generated maps showing the area of influence and any man-made structures found within the AOR.

[redacted]

3.9 Area of Review Results

[redacted]

[redacted] No faults, other geologic features, or other man-made structures were found within the AOR that could affect the integrity of the disposal intervals for permanent CO_2 sequestration.

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

3.10 Corrective Action Plan and Schedule

As discussed above, the AOR is described as the maximum area covered by the plume extent and pressure front boundaries. The plume extent considers the pore space occupied by the CO_2 plume as determined by the reservoir modeling results, as explained in *Sections 3.5* and *3.6*. The pressure front covers a calculated distance where the injected CO_2 could pressure up the reservoir enough to allow brine and other formation fluids to be pushed upward into a USDW. The calculations for determining this area were included in *Section 3.6*. No wells were found to be present within the bounds of the AOR.

Upon each reevaluation of the AOR, a new review of all artificial penetrations and other geologic structures will be performed and the corrective action plan updated as needed.

3.11 Area of Review Revaluation Plan and Schedule

3.11.1 Proposed Reevaluation Cycle

In accordance with 16 TAC **§5.203(d)(2)(B)(i)** [40 CFR **§146.84(b)(2)(i)**], Orchard Storage will reevaluate the AOR at least every five years or upon a triggering event. Table 3-8 provides a list of these possible triggers. The evaluations will be used to validate the plume model against actual, empirical results.

[redacted]

[redacted]

3.12 Conclusion

The results of this AOR investigation validate the favorable conditions for carbon sequestration at the proposed Orchard [redacted] area. [redacted] Unless otherwise triggered by one of the cases above, the AOR investigation will be reevaluated at least every five years.

[redacted]

SECTION 4 – ENGINEERING DESIGN AND OPERATING STRATEGY

TABLE OF CONTENTS

4.1 Introduction 3

4.2 Injection Well 3

4.2.1 Engineering Design 3
4.2.2 General Outline of Well Design and Completion Schematic 5
4.2.3 Detailed Discussion of Injection Well Design 6
4.2.4 Testing and Logging During Drilling and Completion Operations 18
4.2.5 Completion/Stimulation Plans 19
4.2.6 Injection Well Operating Strategy 20
4.2.7 Injection Well Operational Summary 22

4.3 Monitoring Well 22

4.3.1 General Outline of Monitoring Well Design 24
4.3.2 Testing and Logging of Monitoring Well During Drilling and Completion Operations 31
4.3.3 Overview of Well Completion Program 32
4.3.4 Monitoring Well Operational Strategy Summary 32

Figures

[redacted]

Tables

Table 4-1 – CO_2 Standard Conditions 6

[redacted]

[redacted]

4.1 Introduction

This section describes the engineering design details and operational strategies employed during the planning of the proposed [redacted] injection well and Orchard MW [redacted] monitoring well. The engineering design details meet the requirements of Title 16, Texas Administrative Code (TAC) **§5.203(e)** [Title 40, U.S. Code of Federal Regulations (40 CFR) **§146.86**]. Class VI regulations include specific requirements for the design and operation of a carbon capture and storage (CCS) well. This section of the permit application addresses each of those requirements in detail.

4.2 Injection Well

4.2.1 Engineering Design

A Class VI CO_2 sequestration well must be designed to protect any Underground Source of Drinking Water (USDW) from any CO_2 injectate contamination. The design parameters for Orchard [redacted] will consider injection rates, volumes, pressures plus fluid properties, chemical properties of the injectate fluid, and estimated total storage volumes in the formation.

CO_2 mixed with formation fluids and other injectate components is highly corrosive to the metallurgy of many of the well components. This combination produces carbonic acid with a pH as low as 3. The injection and monitoring wells are designed to withstand the corrosiveness of the injectate. Special metallurgies are considered for the casing, tubing, wellhead equipment, and downhole tools.

The drilling program also includes the types of cement used in the wellbore. The cement design and products used to cement the well are designed to create good bonding between the casing and formations while withstanding the corrosive nature of the injectate. [redacted] The production packer will also be made of CR22/CR25 material. Figure 4-1 shows the wellbore schematic.

The tubing and casing annulus pressures will be continuously monitored to ensure that well integrity is maintained. A Supervisory Control and Data Acquisition (SCADA) monitoring system will be in place throughout the well's life. The system will be able to measure and record downhole temperatures and pressures in the injection interval and monitor the plume's size.

[redacted]

4.2.2 General Outline of Well Design and Completion Schematic

Orchard [redacted] was designed with the following specifications:

[redacted]

[redacted]

Within 30 days after the completion of Orchard #1, Orchard Storage will file a complete record of the well with the UIC Division showing the current completion details, per 16 TAC **§5.206 (c)(2).** [redacted]

4.2.3 Detailed Discussion of Injection Well Design

[redacted]

Table 4-1 shows the standard conditions of CO_2 used in the modeling and flow calculations.

Table 4-1 – CO_2 Standard Conditions

Temperature °F	Pressure Psia*	Density lbm**/cu ft	Enthalpy Btu/lbm	Entropy Btu/lbm-°R
60	14.7	0.11666	214.18	0.64759

*Pounds per square inch absolute
**Pound mass

Tubing design sensitivity was run, considering calculated pipe friction losses, exit velocities, and economic considerations. Detailed reservoir-engineering model runs estimated the bottomhole injection pressures (BHIPs) over time (Figure 4-2). The data in Figure 4-2 not only identifies when the maximum BHIP occurs during project life and the resulting maximum injection pressure at the surface, but also allows for the proper design of the casing, tubing, and wellhead configurations.

[redacted]

[redacted]

The pipeline specifications for the CO_2 stream to be injected in Orchard #1 is provided in Table 4-2.

[redacted]

[redacted]

[redacted] The chemical composition modeled is outlined in Table 4-3.

[redacted]

[redacted]

The results in Table 4-4 were determined from those inputs:

[redacted]

[redacted]

[redacted]

The phase diagram shown in Figure 4-3 highlights the supercritical state of the CO_2 within the formation.

[redacted]

[redacted]

[redacted]

4.2.3.1 Conductor Casing

[redacted]

4.2.3.2 Surface Casing

[redacted] casing will be run and cemented with the casing centered in the open hole using centralizers. Being centralized, the size of the annulus chosen will provide a

consistent cement thickness between the casing and the open hole. This will help to ensure a quality cement bond and create two barriers between the USDW formation and wellbore during the remaining drilling operations. Cement will be circulated to the surface, and a top job will be provided, if needed, should the cement level fall after the cement has been circulated to the surface. After cementing, a cement bond log will be run to evaluate and verify good bonding throughout the surface hole. Once the production casing has been run and cemented to the surface, there will be four barriers between the USDW formation and the wellbore.

[redacted]

[redacted]

[redacted]

4.2.3.3 Production Casing

The production (i.e., long-string) casing is the final, permanently cemented string of casing installed in the well, to be run from the surface to TD then cemented back to the surface. There are several critical design criteria for the long string:

[redacted]

A detailed metallurgical analysis was performed that considered the chemical composition of the injectate and downhole conditions (Table 4-2) and is included in *Appendix D*. When dry, CO_2 is not considered corrosive. The production casing and related accessories will be a [redacted] prevent corrosion and downhole or surface failures should fluids enter the wellbore and contact the injectate stream. The production casing will be installed using premium connections.

The production casing will be cemented with acid-resistant tail cement from TD to 500' above the UCL. This will protect the cement in the annulus from carbonic acid damage and prevent channeling. The cement is intended to maintain good bonding between formation and casing to preserve integrity and maximize the well's life. The annular section from the top of the UCL to surface will be cemented with a Type I/II salt saturated cement (Figure 4-1).

The engineering and design parameters for the production casing are summarized in the following tables (4-8 through 4-10):

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

4.2.3.6 Injection Tubing

The injection tubing size was selected based on the injection volumes, rates, and injectate composition. The injectate composition and the potential for a corrosive environment were considered when determining the metallurgy of the tubing as it was for the casing string. Although the injectate stream is anticipated to be dry and noncorrosive, the planned design allows for a surface upset or invasion of connate water from the reservoir. [redacted]

[redacted]

[redacted]

[redacted]

[redacted]

Before setting the packer, the tubing/production casing annulus will be filled with a noncorrosive fluid as approved by the Director. Pressure will be maintained and monitored on the annulus at a pressure that exceeds the operating injection pressure of the well.

4.2.3.8 Wellhead Discussion

The wellhead is designed to accommodate anticipated working pressures and eliminate corrosion complications. The wellhead equipment will be manufactured from a combination of stainless-steel components across the hanger and casing spool. Inconel lining will be placed across trims, stems, gates, valves, etc. The final pressure rating will be confirmed before beginning the manufacturing process. [redacted]

[redacted]

4.2.4 Testing and Logging During Drilling and Completion Operations

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

4.2.4.3 Formation Fluid Testing

Before setting the production casing string, samples of the formation fluid will be obtained by running an open-hole fluid recovery tool. Recovery sections will be determined based on open-hole evaluations. Multiple samples will be taken per section based upon results of the open hole logs. Data collected during testing and logging will include formation fluid temperature, pH, conductivity, reservoir pressure and static fluid level. Additionally, drawdown and buildup tests, as described in *Section 5 – Testing and Monitoring Plan*, will be performed to further quantify reservoir properties.

4.2.4.4 Step-Rate Test

After the initial injection interval is perforated, a step-rate test will be performed prior to any stimulation work, as discussed in *Section 5*. The purpose of this test is to quantify the injectivity potential and the fracture pressure of the injection zone.

[redacted]

[redacted]

4.2.6 Injection Well Operating Strategy

[redacted]

[redacted]

Surface and bottomhole injection pressures will be continuously monitored during injection, with surface injection rates and pressures adjusted as necessary to ensure that bottomhole pressures remain below maximum pressure limits. The maximum injection pressure limits will be [redacted]

The operating strategy for Orchard [redacted] is as follows:

- The gross injection interval will be perforated at the initial completion.
- The injectate fluids will be injected throughout the entire injection interval.
- Plume migration surveys will be conducted every five years to contrast actual plume development with the simulated plume model as discussed in *Section 5.*
- The wellbore will have continual monitoring of bottomhole pressures and temperatures throughout the life of the well.

4.2.7 Injection Well Operational Summary

The Orchard [redacted] well is designed to maximize the available pore space and safely sequester CO_2. Formation pressures and temperatures will be measured within the wellbore and used to update the plume model and refine future injection strategies, as discussed in *Section 5 – Testing and Monitoring Plan*. This process will provide accurate evaluation and assurance of where the CO_2 is moving and at what rate, allowing for alteration to the injection and operation strategy if required. After injection ceases, the well will be plugged as discussed in *Section 6 – Injection Well Plugging Plan*.

4.3 Monitoring Well

Orchard Storage plans to drill and complete one monitoring well, Orchard MW [redacted]

Figure 4-7 shows the proposed design for Orchard MW [redacted]

[redacted]

[redacted]

4.3.1 General Outline of Monitoring Well Design

[redacted]

Once the conductor pipe is established, the inner portions can be flushed out and evacuated, and drilling can commence.

4.3.1.2 Surface Casing

The surface hole will be drilled with a 12-1/4" bit with casing set below the USDW. [redacted] with the casing centered in the open hole using centralizers. Being centralized, the size of the annulus chosen will provide a consistent cement thickness between the casing and the open hole. This will help to ensure a quality cement bond and create two barriers between the USDW formation and wellbore during the remaining drilling operations. Cement will be circulated to the surface, and a top job will be provided, if needed, should the cement level fall after the cement has been circulated to the surface. After cementing, a cement bond log will be run to evaluate and verify good bonding throughout the surface hole. [redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

To ensure that cement returns to the surface are achieved, 100% excess open-hole volumes were used. The equipment and cement will be on location to perform a top job if needed.

4.3.1.3 Production Casing

- The production (i.e., long-string) casing is the final, permanently cemented string of casing installed in the well, to be run from the surface to TD then cemented back to the surface. As this well does not penetrate the UCL, acid-resistant cements and tubulars were not considered.

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

4.3.1.7 Wellhead Discussion

The wellhead is designed to accommodate anticipated working pressure. The final pressure rating will be confirmed before beginning the manufacturing process. [redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

4.3.3 Overview of Well Completion Program

After setting and cementing the production casing, the production tubing string will be run. The completion program includes the following:

- Make bit and scraper run to TD.
- Run cased hole logs as described in Table 4-21.
- Test the casing.
- [redacted]
- Displace the hole with corrosion resistant packer fluid.
- Run tubing and packer to depth, set and test the same.

4.3.4 Monitoring Well Operational Strategy Summary

[redacted]

The location for this project is ideally situated for carbon sequestration monitoring purposes. Combining the best engineering practices in the design of the well with a state-of-the-art monitoring system and robust reservoir management strategy, this monitoring well will help to safely store CO_2 for years to come.

[redacted]

SECTION 5 – TESTING AND MONITORING PLAN

TABLE OF CONTENTS

5.1 Introduction 3
5.2 Reporting Requirements 3
5.3 Testing Plan Review and Updates 5
5.4 Testing Strategies 5
5.4.1 Open Hole Logging 5
5.4.2 Initial Step-Rate Injectivity Test 6
5.4.3 Chemical Composition Confirmation Testing 8
5.4.4 Mechanical Integrity Testing – Annulus Pressure Test 8
5.4.5 External Mechanical Integrity Testing – Temperature Log 9
5.4.6 Pressure Fall-Off Testing 9
5.4.7 Injection Conformance Monitoring 10
5.4.8 Cement Evaluation and Casing Inspection Logs 10
5.5 Monitoring Programs 13
5.5.1 Continuous Injection Stream Monitoring 13
5.5.2 Corrosion Coupon Monitoring 13
5.5.3 Soil Gas Monitoring 14
5.5.4 Ground Water Quality Monitoring 14
5.5.5 Upper Confining Interval Monitoring 17
5.5.6 Seismic Monitoring 17
5.5.7 Injection Plume Monitoring 19
5.5.8 VSP Monitoring Conclusion 40
5.6 Conclusion 40
5.7 References 41

Figures

Figure 5-1 – Example Step-Rate Injectivity Test 7

[redacted]

Figure 5-10 – Illustration of a Checkshot Survey 26
Figure 5-11 – 4D Processing Workflow Diagram 27

[redacted]

Tables

Table 5-1 – Step-Rate Injectivity Test Example 6
Table 5-2 – Injectivity Test Parameters and Analytes Measured and Measurement Frequency 8
Table 5-3 – PEC Tool List.....12
Table 5-4 – Ground Water Quality Parameters Measured and Measurement Frequency.....15

5.1 Introduction

The operating plans for the proposed Orchard Storage Company LLC (Orchard Storage) Orchard [redacted] injection well include robust testing and monitoring programs, which are designed to satisfy the requirements of 16 Texas Administrative Code (TAC) ***§*5.203 (j)** [Title 40, U.S. Code of Federal Regulations (40 CFR) **§146.90**]. This section discusses the key details of this program.

5.2 Reporting Requirements

In compliance with 16 TAC **§5.207** [40 CFR **§146.91**] requirements, Orchard Storage will provide the following routine reports to the Underground Injection Control (UIC) Director.

Per-Occurrence Reporting:

- Any noncompliance with a permit condition or malfunction of the injection system, which may cause fluid migration into or between Underground Sources of Drinking Water (USDWs)
    - Verbal Notification – Reported within 24 hours of the event
- Any evidence that the injected CO_2 stream or associated pressure front may cause an endangerment to a USDW
    - Verbal Notification – Reported within 24 hours of the event
    - Written Notification – Reported within five working days of the event
- Any failure to maintain mechanical integrity
    - Verbal Notification – Reported within 24 hours of the event
- Any significant data that indicate the presence of leaks in the well or lack of confinement to the storage reservoir
    - Verbal Notification – Reported within 24 hours of the event
    - Written Notification – Reported within five working days of the event
- Any changes to the physical, chemical, and other relevant characteristics of the CO_2 stream from what has been described in the proposed operating data
    - Written Notification – Reported within 72 hours of composition change
- Description of any event that exceeds operating parameters for annulus pressure or injection pressure as specified in the permit
    - Verbal Notification – Reported within 24 hours of the event
    - Written Notification – Reported within 72 hours of the event
- Description of any event that triggers a shut-off device either downhole or at the surface and the response taken
    - Verbal Notification – Reported within 24 hours of the event
    - Written Notification – Reported within 72 hours of the event
- Any release of CO_2 into the atmosphere or biosphere
    - Verbal Notification – Reported within 24 hours of the event

Semi-Annual Reports:

- Summary of wellhead pressure monitoring
- Any changes to the source of the CO_2 stream
- Any changes to the physical, chemical, and other relevant characteristics of the CO_2 stream from what has been described in the proposed operating data
- Monthly average, maximum and minimum values of injection pressure, flow rate, temperature, volume, and annular pressure
- Description of any event that exceeds operating parameters for annulus pressure or injection pressure as specified in the permit
- Monthly volume and/or mass of the CO_2 stream injected over the reporting period, and the volume injected cumulatively over the life of the project
- Monthly annulus fluid volume added
- Results of any monitoring as described in this section

Annual Reports:

- Any corrective action performed
- Recalculated area of review (AOR) or statement confirming monitoring and operational data supports current delineation of AOR on file with the Commission
- Proof of good faith claim to sufficient property rights for storage facility operation
- Tons of CO_2 injected

Reports to be submitted within 30 days after the following events:

- Any well workover
- Any test of the injection well conducted if required by the Director
- Any periodic mechanical integrity tests

Notification to the UIC authority (16 TAC **§5.206(c)**), in writing, 30 days in advance of:

- Any planned workover
- Any planned stimulation activities
- Any other planned test of the injection well

Orchard Storage will submit all reports, submittals, and notifications to the Environmental Protection Agency (EPA) and Texas Railroad Commission (TRRC) and ensure that all records are retained throughout the project's life. Per 16 TAC **§5.207(e)** [40 CFR **§146.91(f)**], these records will be maintained for 10 years after site closure. The records will be delivered to the Director upon request after the retention period. Monitoring data will be retained for 10 years post-collection, while well-plugging reports, post-injection site care data, and the site closure report will be retained for 10 years after site closure.

5.3 Testing Plan Review and Updates

Per 16 TAC **§5.207(a)(3)** [40 CFR **§146.90(j)**], the Testing and Monitoring Plan will be reviewed and revised as necessary at least every five years to incorporate collected monitoring data. Plan amendments will also be submitted within one year of an AOR reevaluation following significant facility changes, such as the development of offset monitoring wells or newly permitted injection wells within the AOR, or as required by the Director.

5.4 Testing Strategies

5.4.1 Open Hole Logging

Orchard Storage plans to run an advanced suite of open hole logs to obtain data for parameters used in static and dynamic subsurface modeling. The following Baker Technology log descriptions are provided as an example of the types of logs to be run. The specific logging vendor will be selected just prior to drilling the well. Commercial and supply chain issues may affect the final vendor selection.

A list of planned open hole logs is provided in Table 4-10 of *Section 4 – Engineering Design and Operating Strategy*.

Baker Hughes Rockview™ Formation Lithology eXplorer (FLeX)
Mineralogical characterization tool equipped with a pulsed neutron spectrometer. Allows for a resolution of uncertainties compared to traditional petrophysical evaluation methods. Enhanced porosity determination, clay type/volume determination, and lithofacies identification.

Baker Hughes MR eXplorer (MReX)
Nuclear magnetic resonance-based instrument. By alternating static and pulsed radio frequency magnetic fields, the pore space fluid hydrogen protons are aligned and spun when interacting with the two magnetic fields. These “spin-echoes” can be recorded and analyzed based on amplitude and echo decay rates. This gives information on the porosity, pore size, and type of present fluid. Reliable data acquisition is available in almost every borehole environment.

Baker Hughes UltrasonicXplorer (UXPL)
Borehole acoustic imaging service using a rotating acoustic transducer. Provides high-resolution feedback during drilling, completion, and production operations. Documents stratigraphic features, unconformities, dip/strike, and borehole shape. The design allows for use in any mud type, large diameter boreholes, and full 360° coverage.

Baker Hughes STAR-XR
High-resolution formation resistivity imaging in conductive mud systems. Carries 144 sensors downhole to measure geologic features coupled with enhanced petrophysical reservoir evaluation. Identifies structural dips, depositional environments, borehole stability, and net pay in thinly bedded sequences. Applicable in the well-to-well correlation of sedimentary and stratigraphic

information.

Baker Hughes XMAC F1 (XMAC-F1)

Acoustic services using monopole and dipole measurements provide quality compressional and shear-wave measurements in low-velocity and unconsolidated formations, enhanced value and understanding of petrophysics, reservoir characterization, and rock mechanical properties. The XMAC-F1 service builds on the previous XMAC ELITE, can log at twice the speed, and can measure shear slowness up to 1,200 microseconds per foot (µs/ft).

5.4.2 Initial Step-Rate Injectivity Test

Before beginning CO_2 injection, Orchard Storage will conduct a step-rate injectivity test to measure the fracture gradient of [redacted] in compliance with 16 TAC **§5.203(f)(2)(A)** [40 CFR **§146.87(d)(1)**] and 16 TAC **§5.203(f)(2)(C)** [40 CFR **§146.87(e)(3)**]. Bottom hole, surface readout pressure and temperature gauges will be run to the total depth of the wellbore. Initial bottom hole pressure and temperature readings will be measured before injection. All gauges will be calibrated before testing.

5.4.2.1 Testing Method

Specific wellbore and injection zone properties will define the final test parameters. The following test method outlines the expected test injection rates and times. The injection of brine will begin at 1.5 barrels per minute (bpm) and be held for a minimum of 30 minutes. The injection rates will be stepped up in 2.0-3.0 bpm increments until at least three measurements have been taken both below and above the estimated formation fracture initiation pressure. Each stage will require a hold duration of at least 30 minutes or until pressure has stabilized.

A plot of stabilized injection pressure versus injection rate at each step should graphically represent a linearly sloped line until the fracture initiation pressure has been exceeded. Table 5-1 shows a step-rate test example, and Figure 5-1 is the corresponding graphical representation.

Table 5-1 – Step-Rate Injectivity Test Example

Step	Rate (bbl/min)	Time (min)	Pressure (psi)
0	0	0	0
1	0.2	30	100
2	0.4	30	200
3	0.8	30	400
4	1.6	30	802
5	2.4	30	1,201
6	3.2	30	1,400
7	4.0	30	1,600

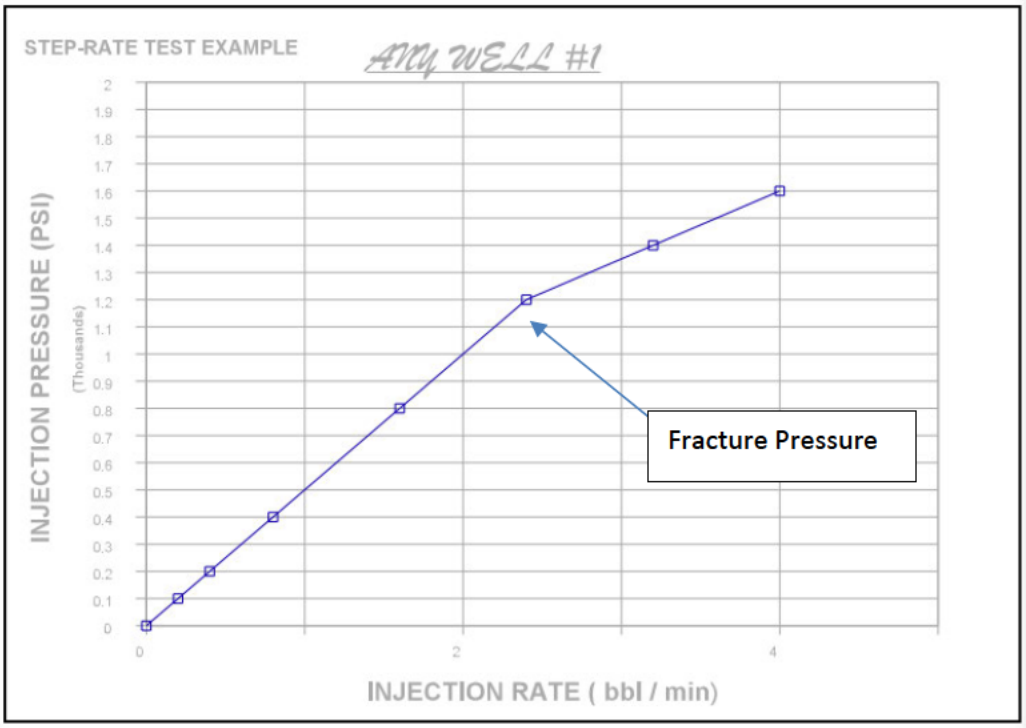

Figure 5-1 – Example Step-Rate Injectivity Test[1]

Upon reaching a stabilized pressure after completing the final step, pressures will be recorded at the highest frequency of the gauge for a period indicated by the step-up phase of testing, to calculate the rate of pressure bleed-off.

[1] https://www.epa.gov/sites/default/files/documents/INFO-StepRateTest.pdf

5.4.3 Chemical Composition Confirmation Testing

In compliance with 16 TAC **§5.203(j)(2)(A)** [40 CFR **§146.90(a)**] requirements, Orchard Storage will sample the CO_2 injection stream and evaluate any potential interactions of carbon dioxide and other injectate components. CO_2 injection stream samples will be taken quarterly for chemical analysis of the parameters listed in Table 5-2 plus continuous pressure and temperature analysis.

5.4.3.1 Sampling Methods

[redacted] Sampling cylinders will be purged with the injectate gas to expel laboratory-added gas.

Table 5-2 – Injectivity Test Parameters and Analytes Measured and Measurement Frequency

Parameter/Analyte	Frequency
Pressure	Continuous
Temperature	Continuous
CO_2 (%)	Quarterly
Water (lb/MMscf)	Quarterly
Oxygen (%)	Quarterly
Sulfur (ppm)	Quarterly
Methane (%)	Quarterly
Ethane (%)	Quarterly
Other Hydrocarbons (%)	Quarterly
Hydrogen Sulfide (ppm)	Quarterly
Benzene (%)	Quarterly

5.4.4 Mechanical Integrity Testing – Annulus Pressure Test

In accordance with 16 TAC **§5.203 (h)(1)(C)** [40 CFR **§146.89(b)**], Orchard Storage will demonstrate mechanical integrity by performing annular pressure tests when the well is completed, before the start of injection, and after any workover operation involving the removal and replacement of the tubing and packer.

The annular pressure tests should demonstrate the mechanical integrity of the casing, tubing, and packer. These tests are conducted by pressuring the annulus to a minimum of 500 pounds per square inch (psi) fluid pressure, then using a block valve to isolate the test pressure source from the test pressure gauge upon test initiation, with all ports into the casing annulus closed except the one monitored by the test pressure gauge. The test pressure will be monitored and recorded for a minimum duration of 30 minutes using a pressure gauge, with sensitivities that can indicate a loss

of 5%. Any loss of test pressure exceeding 5% during the minimum 30 minutes will indicate a lack of mechanical integrity.

All annulus pressure test results will be submitted to the TRRC on Form H-5 within 30 days of log run completion.

5.4.5 External Mechanical Integrity Testing – Temperature Log

In adherence to the requirements of 16 TAC **§5.203 (h)(1)(D)** [40 CFR **§146.89(c)**], Orchard Storage will perform an annual external mechanical integrity test (MIT) by deploying a temperature log, through the tubing. Temperature logs will be run before initiating injection operations, to establish a baseline against which future logs can be compared. The well will be shut in for approximately 36 hours before running the temperature logs to allow temperatures to stabilize. Satisfactory mechanical integrity is demonstrated by the proper correlation between the baseline and subsequent logs.

All temperature logs recorded during the MIT will be submitted to the TRRC within 30 days of completing the log run.

5.4.6 Pressure Fall-Off Testing

Orchard Storage will perform a required pressure fall-off test every five years per 16 TAC **§5.203 (j)(2)(F)** [40 CFR **§146.90(f)**]. The tests will measure near-wellbore formation properties and monitor for near-wellbore environmental changes that may impact injectivity and result in pressure increases.

5.4.6.1 <u>Testing Method</u>

Injection rates and pressures will be held as constant as is practical prior to the test. Pressure and rate data will be recorded continuously before and during the fall-off period. Pressure gauges to supplement the permanent gauges will be run into the well, if needed, several days prior to initiation of the fall-off test to allow for a period of stable injection prior to shut-in. The length of time for stabilization prior to shut-in will be determined in advance using pressure-transient well-test design methods that incorporate anticipated rates and formation properties.

Ideally, the fall-off test will be run sufficiently long to allow identification and analysis of the Infinite Acting Flow Regime (IARF). Given the heterogeneous nature of the injection interval, it may not be possible to identify this IARF flow regime through simple, semi-log straight line plots. [redacted]

5.4.6.2 Analytical Methods

Mechanical integrity will be determined through standard diagnostic plotting. This determination is accomplished via analysis of observed pressure changes and pressure derivatives on standard diagnostic log-log and semi-log plots, using specialized pressure-transient analysis software. The analysis will integrate additional data beyond the injection well's rate and pressure data. The additional data may include operational history, offset wells' injection and operational history, and distributed temperature sensing (DTS) sensor data from the injection well being tested. Depending on the complexity of the pressure response, it may be necessary to incorporate numerical modeling into the interpretation workflow.

Comparing pressure fall-off tests can expose significant changes in the well or reservoir conditions before initial injection with later tests. The effects of the fluid flow as well as the injected fluid's compressibility will be considered and incorporated into the analysis. The well parameters resulting from fall-off testing will be compared against those used in AOR determination and computational site modeling. Notable changes in reservoir properties may dictate that an AOR reevaluation is necessary.

5.4.6.3 Quality Assurance/Control

All field equipment will undergo inspection and testing before operation. Manufacturer calibration recommendations will be adhered to during the pressure gauge use in the fall-off test. Documentation certifying proper calibration will also be enclosed with the test results. Further validation of the test results will be recorded using a second bottom hole pressure gauge.

5.4.7 Injection Conformance Monitoring

[redacted] If the rate changes at a specific set of perforations, this data can be used, along with other pressure and rate information, to gain valuable insight into injection conformance. The use of this data will allow changes to operating or completion parameters as necessary for storage zone management purposes.

Per 16 TAC **§5.206 (d)(2)(F)(i)** [40 CFR **§146.88(e)(2)]**, automatic shut-off systems and alarms will be installed to alert the operator and shut-in the well when operating parameters such as annulus pressure, injection rate, etc. diverge from permitted ranges or gradients.

5.4.8 Cement Evaluation and Casing Inspection Logs

Per 16 TAC **§5.203 (h)(2)** [40 CFR **§146.89(d)**], a comprehensive cased hole logging suite will be run on the production casing string at the time of initial well completion. This suite of logs will include

a radial cement investigation, a multi-arm caliper, and a digital log to establish the condition of the casing metal. This survey will characterize the original state of the wellbore materials. Following the tubing and packer installation, an initial through-tubing inspection log will be run on the well. This survey will serve as the baseline for future casing inspection efforts.

Casing inspection logs will be performed every five years using a combination of conventional casing inspection logs and through-tubing surveys. The tools that will be run at that time include:

- Five-year casing inspection
    - Casing section below the packer:
        - Multiple-armed calipers to measure the inner diameter of the casing as the tool is raised or lowered into the well
        - Ultrasonic tools to measure wall thickness and provide information about the outer surface of the casing or tubing as well as cement bonding
        - Electromagnetic tools that measure the magnetic flux of the tubular and can provide mapped circumferential images to indicate potential pitting
    - Casing section from packer to surface:
        - Through-tubing casing inspection log
- If tubing must be removed, conventional casing inspection logs only will be run, consisting of:
    - Multiple-armed calipers to measure the inner diameter of the casing as the tool is raised or lowered into the well
    - Ultrasonic tools to measure wall thickness and provide information about the outer surface of the casing or tubing as well as cement bonding
    - Electromagnetic tools that measure the magnetic flux of the tubular and can provide mapped circumferential images to indicate potential pitting

Orchard Storage will provide a schedule of all logging plans to the Director at least 30 days prior to conducting the first test. Notice will be provided at least 48 hours in advance of such activity.

5.4.8.1 Casing Log Equipment Overview

Through-tubing logging technology provides the ability to evaluate casing deformation and eccentricity measurements, in conjunction with other well-integrity tools such as multi-finger calipers and multiple pipe-thickness logging tools. This technology provides quality measurements without requiring the removal of the tubing and packer (Yang et al., 2021).

The following descriptions of the through-tubing logging tools that will be run are provided for information purposes. The final vendor will be selected prior to operations based on availability and commercial considerations.

The GOWell instruments listed in Table 5-3 utilize Pulsed Eddy Current (PEC) decay technology to measure the thicknesses of multiple concentric tubulars. Basic PEC decay technology theory is included in the supplemental information at the end of this document. These tools can be run stand-alone or combined with other well integrity and correlation instruments—such as multi-finger

imaging caliper, temperature, noise, pressure, fluid density, capacitance, flowmeter, gamma ray, and casing collar locator.

GOWell PEC decay measurements are not affected by wellbore fluid type, chemical precipitates, or other foreign material deposits. They are also not affected by the type or distribution of annular materials such as cement, mud, liquid, or gas.

Table 5-3 – PEC Tool List

Pulsed Eddy Current Decay Thickness Instruments					
Tool	Tool O.D.	Max # concentric pipes	Max O.D.	Max Combined Wall Thicknesses	Ratings (degF/K psi)
MTD-B/C	1-11/16"	2	10-3/4"	1.75"	350/15
MTD-G	1-11/16"	3	16"	2.5"	350/15
ePDT-II	2" / 1-11/16"	3-5	30" / 18-5/8"	3.5"	350/20

Technical specification documents are included in *Appendix E*. Logging speeds depend on the size and number of tubulars to be logged. In general, multiple tubulars and larger sizes will necessitate slower data acquisition speeds, which range from 30 feet per minute to 5 feet per minute, based on the complexity of the wellbore configuration.

GOWell PEC decay instruments measure the increase or decrease of metal thickness for each concentric tubular. PEC decay data combined with inspection of the tubular's inner diameter (ID) using an imaging caliper or other methods can reliably predict the inside versus outside location of corrosion or flaws on the innermost tubular. Internal wear based on drilling or other known causes of internal damage is readily assessed with the assumption that the measured metal loss in such cases is "internal."

The degree of penetration is reported in percent wall loss from the nominal and absolutes value of metal thickness, expressed in inches or millimeters. Due to well-understood and long-established PEC decay physics principles, reported metal gain or loss is assumed to be distributed evenly around the pipe's circumference.

The GOWell PEC decay instruments measure the increase or decrease of metal thickness, which includes both internal and external corrosion effects. This overall metal thickness/degree of penetration is valid in identifying areas of well integrity concern. Additionally, integrity assessment of the production tubulars (i.e., tubing(s) and first casing) is only part of whether a wellbore and its associated tubulars are in such a condition as to be protective of public health, safety, and the environment. The newer generation GOWell PEC decay instruments provide an opportunity to assess the state of the protection tubulars (i.e., second casing, surface casing, etc.). Protection string(s) data is acquired simultaneously with the tubing and production string data.

5.4.9 Logging and Testing Reporting

A report that includes log and test results obtained during the drilling and construction of Orchard #1, and interpretated by a knowledgeable log analyst, will be submitted to the Director as per 16 TAC **5.203 (h)(2)** [40 CFR **§146.87(a)**]

5.5 Monitoring Programs

5.5.1 Continuous Injection Stream Monitoring

Orchard Storage will continuously monitor the injection pressures, rates and volumes, and annulus pressures to meet the 16 TAC ***§*5.203 (j)(2)(B)** [40 CFR **§146.90(b)**] requirements. [redacted] Per 16 TAC ***§*5.206 (d)(2)(B**), the total volume of CO_2 injected into the Project Orchard facility will be metered through a master meter or a series of master meters. The volume or mass of CO_2 injected into [redacted] will be metered through an individual well meter.

[redacted]

[redacted]

5.5.1.1 Analytical Methods

Orchard Storage will review and interpret continuously monitored parameters to validate that they are within permitted limits. The data review will also review trends to help determine any need for equipment maintenance or calibration. These data reports will be submitted semiannually.

5.5.2 Corrosion Coupon Monitoring

Orchard Storage will monitor for corrosion of the well tubing and casing materials per the 16 TAC ***§*5.203 (j)(2)(C)** [40 CFR ***§*146.90(c)**] requirements. A corrosion coupon monitoring system will be employed for this evaluation. Additionally, the casing inspection logs run every five years will provide information regarding corrosion of the tubulars.

5.5.2.1 Sampling Methods

Corrosion coupons, comprised of the same material as the injection flowline, tubing, and production casing, will be placed in the CO_2 injection flowline. These coupons will be removed quarterly and examined for corrosion per American Society for Testing and Materials (ASTM) standards for corrosion testing evaluation. After removal, the coupons will be visually inspected for signs of corrosion, including pitting, and measured for weight and size. The corrosion rate will be estimated by applying a weight loss calculation method that divides the weight loss recorded during the exposure period by the duration.

5.5.3 Soil Gas Monitoring

Soil gas monitoring will be used to check chemical compositions of the near surface environment and soil vadose zone. These environments are subjected to strong seasonal effects and influenced by a wide range of natural process and human activities. As with any of these types of monitoring, establishing a baseline condition is very important. Orchard Storage intends to install the soil gas monitoring stations at least a year prior to injection to better understand baseline conditions through multiple seasons. [redacted] Quality assurance and traceability methods will be used to ensure proper handling of samples and lab techniques.

5.5.4 Ground Water Quality Monitoring

To meet 16 TAC **§5.203 (j)(2)(C)** [40 CFR **§146.90(d)**] requirements, ground-water quality and geomechanical monitoring will be conducted above the confining zone to detect potential changes that could result from fluid leakage from the injection zone. [redacted]

[redacted]

The parameters to be measured are provided in Table 5-4.

Table 5-4 – Ground Water Quality Parameters Measured and Measurement Frequency

Parameter/Analyte	Frequency
Aqueous and pure-phase carbon dioxide	Every five years
Total dissolved solids	Every five years

pH	Every five years
Specific conductivity (SC)	Every five years
Temperature	Every five years
Density	Every five years
Other parameters including major anions and cations, trace metals, hydrocarbons, and volatile organic compounds	Every five years

5.5.4.1 Sampling Methods

Fluid samples will be acquired from the groundwater monitoring wells at monitored formation temperatures and maintained at formation pressures within a pressurized container. This step is taken to ensure that dissolved gas losses do not occur. [redacted]

5.5.4.2 Analytical Methods

Orchard Storage will test water samples and maintain results for the parameters listed in Table 5-4. If the CO_2 injectate contains unique impurities, then groundwater samples will also be tested to flag any concentrations of these impurities exceeding the baseline. Testing results will be stored in an electronic database.

Potential signs that fluid may be leaking from the injection interval(s) may be detected upon observation of the following trends:

- Change in total dissolved solids
- Changing signature of major cations and anions
- Increasing carbon dioxide concentration
- Decreasing pH
- Increasing concentration of injectate impurities
- Increased concentration of leached constituents
- Increased reservoir pressure and/or static water levels

5.5.4.3 Laboratory to Be Used/Chain of Custody Procedures

[redacted]

Orchard Storage will observe standard chain-of-custody procedures and maintain records, to allow full reconstruction of the sampling procedure, storage, and transportation, including problems encountered.

5.5.4.4 Quality Assurance and Surveillance Measures

Orchard Storage will collect duplicate samples and trip blanks for quality assurance/quality control (QA/QC) purposes. These duplicate samples will validate test results and ensure that samples have

not been contaminated.

[redacted]

5.5.5 Upper Confining Interval Monitoring

An above-zone monitoring well, Orchard MW#1, will be drilled and completed on the Orchard Storage property, as shown in Figure 5-3. [redacted] Any deviations from baseline pressures or temperature will initiate additional investigations in the area. If necessary, fluid samples can be obtained from this well.

5.5.6 Seismic Monitoring

[redacted] If an event greater than 2.5 is detected, Orchard Storage will compare it with injection history and publicly available data from nearby oil and gas activity to determine if a correlation to injection activity can be determined.

[redacted]

[redacted]

[redacted]

5.5.7 Injection Plume Monitoring

Orchard Storage will use both direct and indirect methods to track the CO_2 plume and the pressure front tracking, in accordance with 16 TAC **§5.203 (j)(2)(E)** [40 CFR **§146.90(g)**]. The direct monitoring method uses the continuously recorded pressures and temperatures to calculate the plume extent. [redacted]

Orchard Storage will use these methods to verify reservoir conditions during injection, track plume migration, and validate the plume model. Continuous pressure and temperature monitoring of the injection reservoir will allow for monitoring of reservoir conditions and inform calculations, while VSP surveys will determine the actual plume migration. [redacted]

5.5.7.1 <u>Direct Monitoring: Rate Transient Analysis</u>

Rate transient analysis, in conjunction with reservoir simulations using known reservoir characteristics, will allow for calculating more complex parameters within the injection interval. Direct monitoring will be based on continuous pressure, temperature, and injection rate data to calculate the properties of the reservoir and verify the plume model results.

The reservoir model built during the site evaluation phase will be used to monitor the reservoir conditions during injection operations predictively. Through flow simulation and transient flow

analyses, the reservoir model will be updated with injection activity regularly to evaluate the injection stream's effect on reservoir conditions. This analysis can be performed to monitor the magnitude and extent of temperature and pressure changes within the injection zone. Continual monitoring of bottom hole pressures and temperatures combined with known reservoir parameters will predict reservoir conditions throughout the injection intervals.

Additionally, any shut-in periods can be observed and treated as a pressure fall-off test. To do this, the shut-in wellhead pressure, bottom hole pressure, and temperature readings will be recorded and used for pressure transient analysis of the reservoir. The analysis results will include the radius and magnitude of pressure buildup and reservoir performance characteristics such as permeability and transmissibility. Analysis results will then confirm, and adjust as necessary, the previous model realizations.

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

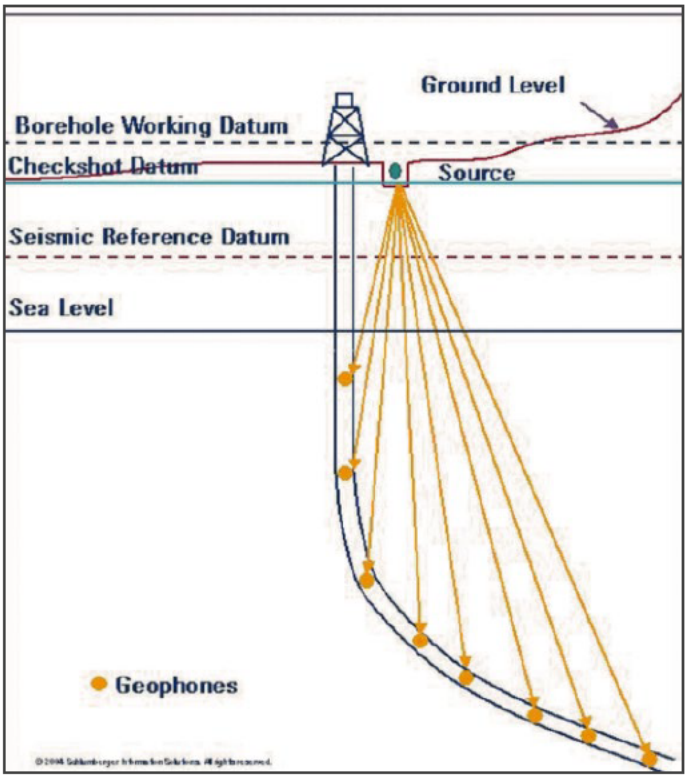

Figure 5-10 – Illustration of a Checkshot Survey

[redacted]

[redacted]

[redacted]

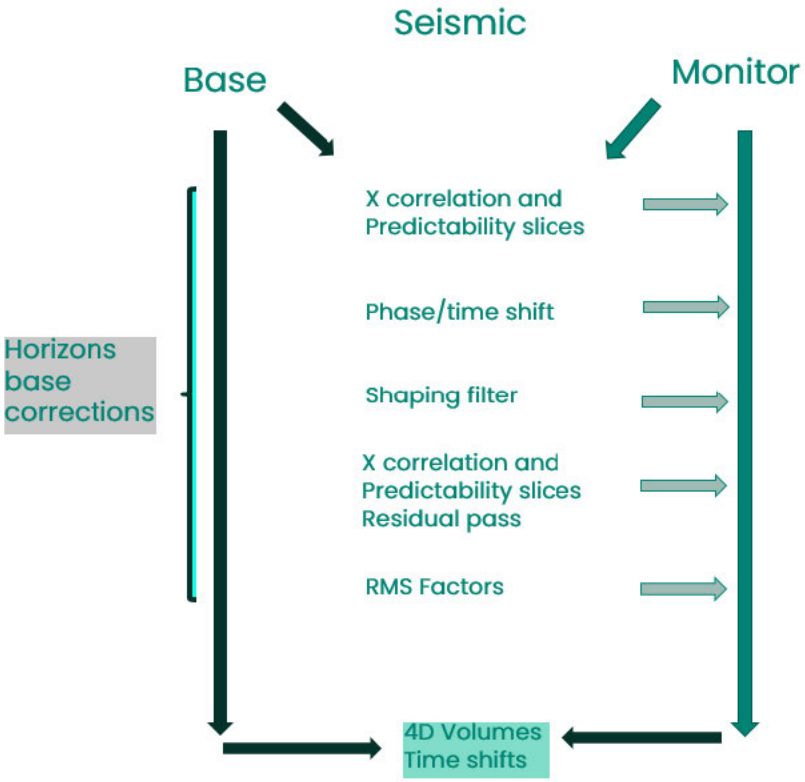

Figure 5-11 – 4D Processing Workflow Diagram

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

5.6 Conclusion

The testing and monitoring plans developed for Orchard [redacted] are designed to acquire essential data to support static and dynamic reservoir modeling, track the growth of the CO_2 plume, and ensure that CO_2 does not reach USDWs or pose a risk to health, safety, or the environment.

A larger scale map of the monitoring wells, plus specification sheets for the planned technologies are provided in *Appendix E*.

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

SECTION 6 – INJECTION WELL PLUGGING PLAN

TABLE OF CONTENTS

6.1 Injection Well Plugging Plan and Regulatory Requirements 2

6.1.1 Wellbore Profile Prior to Plugging and Abandonment 3

6.1.2 Pre-Plugging Activities 4

6.1.3 Plugging Activities 4

6.1.4 Plug Details 5

6.2 Monitoring Well Plugging Plan and Regulatory Requirements 7

6.2.1 Monitoring Wellbore Profile Prior to Plugging and Abandonment 7

6.2.2 Monitoring Well Pre-Plugging Activities 9

6.2.3 Plugging Activities 9

6.2.4 Plug Details 10

Figures

[redacted]

Tables

[redacted]

6.1 Injection Well Plugging Plan and Regulatory Requirements

As described in *Section 4 – Engineering Design and Operating Strategy*, Orchard [redacted] will be completed as a single injection interval [redacted] After the conclusion of [redacted] injection operations, the well will be permanently plugged. Complete plugging and abandonment prognoses have been included in [redacted] of this application.

The following outline describes the procedures and types of plugs that will be set to isolate the injection interval, to prevent contamination of the Underground Sources of Drinking Water (USDWs), and to properly plug and abandon Orchard [redacted] according to Title 16, Texas Administrative Code (16 TAC) **§5.203** and 16 TAC **§3.14** [Title 40, U.S. Code of Federal Regulations (40 CFR) **§146.92**] regulations.

6.1.1 Wellbore Profile Prior to Plugging and Abandonment

The original wellbore schematic for Orchard [redacted], prior to beginning plugging operations, is provided in Figure 6-1.

[redacted]

[redacted]

6.1.2 Pre-Plugging Activities

1. Orchard Storage will comply with all reporting and notification provisions.
   a. The Environmental Protection Agency (EPA) Underground Injection Control (UIC) Program Director will be notified 60 days in advance of planned plugging efforts [40 CFR ***§*146.92(c)**].
   b. The Texas Railroad Commission (TRRC) UIC Director will be notified at least 60 days before plugging a well. If any changes are proposed to the original well plugging plan, a revised well plugging plan will be submitted [16 TAC ***§*5.201(k)(3)(A)**].
   c. A notice of intention to plug and abandon (Form W-3A) will be filed with the appropriate TRRC district office and the UIC Director at least five days prior to the beginning of plugging operations.
   d. Plugging operations will not start until the proposed procedure has been approved by the UIC Director.
   e. The district office will be notified at least four hours before commencing plugging operations.
2. Casing inspection and cement bond logs will be run prior to plugging.
3. Bottomhole reservoir pressure will be measured [redacted] *Section 5 – Testing and Monitoring Plan* (16 TAC **§5.203 (h)(1)(C)** [40 CFR **§146.89(b)**]).
4. External mechanical integrity will be demonstrated through approved temperature logging methods as described in *Section 5*, per 16 TAC **§5.203 (h)(1)(D)** [40 CFR **§146.89(c)**].
5. Orchard [redacted] will be flushed with a buffer fluid prior to pulling the injection tubing and packer (16 TAC **§5.203** and **§3.14** [40 CFR **§146.92(a)**]).
6. All uncemented, non-permanent components of the well will be removed.

[redacted]

6.1.3 Plugging Activities

1. Pull seal assembly from the packer to just above the packer.
2. Fill the wellbore with at least 9.5 pounds per gallon (ppg) of 40 viscosity-treated drilling mud, and ensure the well is in static condition.
3. Pull tubing and seal assembly and remove from the well.
4. Isolate the gross injection interval:
   a. Set a permanent bridge plug made of corrosion resistant alloy (CRA) at [redacted]

b. Place a 300' acid-resistant cement plug above the permanent bridge plug to cover [redacted]
c. Displace the cement with at least 9.5 ppg of 40 viscosity-treated drilling mud.
d. The plug will be qualified by tagging the top and conducting a successful pressure test.

5. Spot a ~400' cement [redacted] Displace cement with at least 9.5 ppg of 40 viscosity-treated drilling mud.
6. Set a 50' cement plug from 50' to the surface.
7. Cut casing 3' below ground level and weld on a ½" steel plate.

Within 60 days after plugging, Orchard Storage will submit, pursuant to 40 CFR **§146.91(e)**, a certified plugging report to the UIC Director. The well plugging report will be retained for 10 years following site closure. Also note that a complete well plugging record (Form W-3), pursuant to 16 TAC **§5.203**, will be filed within **30 days** to the appropriate TRRC District Office after plugging operations are completed.

6.1.4 Plug Details

Table 6-2 shows the planned plugging details for Orchard #1. Figure 6-2 shows a schematic of Orchard #1 after the well is plugged.

[redacted]

[redacted]

[redacted]

6.2 Monitoring Well Plugging Plan and Regulatory Requirements

As described in *Section 4 – Engineering Design and Operating Strategy*, Orchard [redacted] At the conclusion of the post-injection site care period, the well will be permanently plugged. Complete plugging and abandonment prognoses have been included in *Appendix G* of this application.

The following outline describes the procedures and types of plugs that will be set to isolate the perforated interval and to prevent contamination of the USDWs. Orchard [redacted] will be properly plugged and abandoned according to 16 TAC **§5.203** and 16 TAC **§3.14** [40 CFR **§146.92**] regulations.

6.2.1 Monitoring Wellbore Profile Prior to Plugging and Abandonment

The original wellbore schematic for Orchard [redacted] prior to beginning plugging operations, is provided in Figure 6-3.

[redacted]

[redacted]

6.2.2 Monitoring Well Pre-Plugging Activities

1. Orchard Storage will comply with all reporting and notification provisions.
    a. The EPA UIC Program Director will be notified 60 days in advance of planned plugging efforts [40 CFR ***§146.92(c)***].
    b. The TRRC UIC Director will be notified at least 60 days before plugging a well. If any changes are proposed to the original well plugging plan, a revised well plugging plan will be submitted [16 TAC ***§5.201(k)(3)(A)***].
    c. A notice of intention to plug and abandon (Form W-3A) will be filed with the appropriate TRRC district office and the UIC Director at least five days prior to the beginning of plugging operations.
    d. Plugging operations will not start until the proposed procedure has been approved by the UIC Director.
    e. The district office will be notified at least four hours before commencing plugging operations.
2. Casing inspection and cement bond logs will be run prior to plugging.
3. External mechanical integrity will be demonstrated through approved temperature logging methods as described in *Section 5* per 16 TAC **§5.203 (h)(1)(D)** [40 CFR **§146.89(c)**].
4. Orchard [redacted] will be flushed with a buffer fluid prior to pulling the injection tubing and packer seal assembly (16 TAC **§5.203** and **§3.14** [40 CFR **§146.92(a)**]).
5. All uncemented, non-permanent components of the well will be removed.

[redacted]

Within **60 days** after plugging, Orchard Storage will submit, pursuant to [40 CFR **§146.91(e)**], a certified plugging report to the UIC Director. The well plugging report will be retained for 10 years following site closure. Also note that a complete well plugging record (Form W-3), pursuant to 16 TAC **§5.203**, will be filed within **30 days** to the appropriate TRRC District Office after plugging operations are completed.

[redacted]

[redacted]

[redacted]	[redacted]
[redacted]	[redacted]
[redacted]	[redacted]
[redacted]	[redacted]

SECTION 7 – POST-INJECTION SITE CARE AND SITE CLOSURE PLAN

TABLE OF CONTENTS

7.1. Overview 2

[redacted]

7.3. CO_2 Plume Position and Pressure Front at End of Injection and at Closure 4

7.4. Post-Injection Monitoring Plan 6

7.4.1. Post-Injection Monitoring Activities 6

7.4.2. Demonstration of Non-Endangerment of USDW 7

7.5. Site Closure Plan 7

7.5.1. Pre-closure 7

7.5.2. Plugging Activities 8

7.5.3. Site Restoration 8

7.5.4. Documentation of Site Closure 8

Figures

[redacted]

Tables

[redacted]

Table 7-2 – Post-Injection Monitoring and Reporting Frequency 7

7.1. Overview

This Post-Injection Site Care (PISC) and Site Closure Plan is prepared to meet the requirements of 16 Texas Administrative Code (TAC) **§5.206(k)** [Title 40, U.S. Code of Federal Regulations (40 CFR) **§146.93**]. This section provides a comprehensive overview of (1) the anticipated plume and pressure front behavior at the end of the injection phase, (2) post-injection monitoring plans, (3) a discussion demonstrating non-endangerment to the Underground Source of Drinking Water (USDW), and (4) site closure plans. This plan provides the activities that Orchard Storage Company LLC (Orchard Storage) will perform once injection has ceased. The program will conclude with the site closure activities once it is demonstrated that no additional monitoring is needed to ensure that this project does not endanger the USDW. This plan will be maintained during the life of the project and reevaluated every five years and submitted to the Director.

[redacted]

To meet the requirements of 16 TAC **§5.203(m)(2)** [40 CFR **§146.93(a)(2)**], Table 7-1 and Figure 7-1 show the expected pressure differential between pre-injection and post-injection pressures in the injection zone, as determined by the plume model described in *Section 2 – Plume Model*.

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

7.3. CO_2 Plume Position and Pressure Front at End of Injection and at Closure

To meet the requirements of 16 TAC **§5.203(m)(3)** [40 CFR **§146.93(a)(2)**], Figure 7-2 shows the predicted position of the carbon dioxide plume and associated pressure front at site closure. Figures 7-3 and 7-4 present the cross-sectional views of the stabilized plume at the end of injection and at the time of site closure.

[redacted]

[redacted]

[redacted]

[redacted]

7.4. Post-Injection Monitoring Plan

As required by 16 TAC **§5.206(k)(2)** [40 CFR **§146.93(b)**], Orchard Storage will continue to monitor the site until the project no longer poses an endangerment to USDWs.

7.4.1. Post-Injection Monitoring Activities

Post-injection monitoring will be utilized to track the movement of the plume and pressure front per 16 TAC **§5.206 (k)(2)** [40 CFR **§146.93(b)**]. The Testing and Monitoring Plan will be extended and used to confirm not only that the injection project is continuing to conform to the permit conditions, but also that any unexpected USDW endangerment is identified and mitigated. Testing and monitoring activities, as described in *Section 5 – Testing and Monitoring Plan*, will be performed and reported at the frequency shown in Table 7-2.

Table 7-2 – Post-Injection Monitoring and Reporting Frequency

Testing/Monitoring Activity	Frequency	Reporting Schedule
Groundwater Monitoring Well Geochemical Analysis	Every five years	Within 30 days after data collection and analysis
Soil Gas Monitoring	Annually	Within 30 days after data collection and analysis
Seismic Monitoring	Continuously	Annually
Pressure and Temperature Monitoring (Monitor Wells)	Continuously	Annually
Indirect Plume and Pressure Front Monitoring (Vertical Seismic Profile (VSP))	Every five years	Within 30 days after data collection and analysis
Direct Plume Calculations Based on Pressure and Temperature Data	Annually	Annually

All testing and monitoring activities listed will be performed and analyzed as discussed in *Section 5*, including quality assurance/quality control measures.

7.4.2. Demonstration of Non-Endangerment of USDW

Before the approval of the site closure authorization, Orchard Storage will provide documentation that the USDW is not at risk of endangerment from the CO_2 plume, as required by 16 TAC **§5.206(k)(3)** [40 CFR **§146.93(c)**]. Orchard Storage will submit a report to the Director demonstrating the non-endangerment of the USDW, including site-specific conditions, updated plume model, predicted pressure decline within the injection zone, and any updates to the underlying geological assumptions used in the original model.

7.5. Site Closure Plan

Orchard Storage will perform site closure activities to meet the requirements of 16 TAC **§5.203(m)(3)** [40 CFR **§146.93(e)**]. These activities include removing surface equipment, plugging all wells, site restoration, and submission of final site-closure reports.

7.5.1. Pre-closure

Notice of intent to close the site will be submitted to the Underground Injection Control (UIC) Director at least 120 days before closing operations, per 16 TAC **§5.206(k)(4)** [40 CFR **§146.93(d)**]. If any changes have been made to the original PISC and Site Closure Plan, a revised plan must also be submitted. Relevant notifications and applications, such as plugging requests, must be submitted

to and approved by the Texas Railroad Commission (TRRC) before commencing such activities. No facility closure activities will be executed until the Director has authorized closure.

7.5.2. Plugging Activities

Orchard [redacted] and the related monitoring well [redacted] will be plugged as discussed in *Section 6 – Injection Well Plugging Plan*. The plugging and abandonment procedures are designed to prevent the migration of CO_2 or formation fluids from the injection interval to the USDW. Before plugging the wells, their mechanical integrity will be determined by an annulus pressure test, casing inspection log, and temperature log as described in *Section 5*. Plugging schematics and procedures are provided in [redacted]

7.5.3. Site Restoration

Once the injection well and the monitoring well are plugged and capped below grade, all surface equipment will be decommissioned and removed from the site. The sites will be restored as agreed with the surface owners.

7.5.4. Documentation of Site Closure

Within 90 days of site closure, a final report must be submitted to the Director, per 16 TAC **§5.206 (k)(6)** [40 CFR **§146.93(f)**], and include the following:

- Documentation of appropriate injection and monitoring well plugging, including a copy of the survey plats
- Documentation of well-plugging report
- Records of the nature, composition, and volume of the CO_2 stream over the injection period

A record of notation in the facility property deed will be added to provide, in perpetuity, any potential purchaser of the property the following information:

- A complete legal description of the affected party;
- The fact that the land was used to sequester CO_2;
- That the survey plat has been filed with the TRRC/Environmental Protection Agency (EPA);
- The address of the office of the EPA, to which the operator sent a copy of the survey plat; and
- The total volume of fluid injected, the injection zones into which it was injected, and the period over which the injection occurred.

Orchard Storage will retain all records collected during the PISC period for 10 years following site closure. At the end of the retention period, Orchard Storage will deliver all records to the Director, which will thereafter be retained at a location designated by the Director for that purpose.

SECTION 8 – EMERGENCY AND REMEDIAL RESPONSE PLAN

TABLE OF CONTENTS

8.1 Emergency and Remedial Response Plan Overview 2

8.2 Resources/Infrastructure in the AOR 2

8.3 Degree of Risk for Emergency Events....1

8.4 Infrastructure/Resource-Specific Events and Response Plans 3

8.4.1 Water Quality Contamination 3
8.4.2 CO_2 Release to the Surface 4
8.4.3 Storage Rights Infringement....5
8.4.4 Mineral Rights Infringement....6
8.4.5 Entrained Contaminant (Non-CO_2) in Injection Stream 7
8.4.6 Well Blowout 8
8.4.7 Surface Spill 8
8.4.8 Loss of Mechanical Integrity....9
8.4.9 Accidents/Unplanned Events (Typical Insurable Events) 10

8.5 Training....11

8.6 Communications Plan and Emergency Notification Procedures....11

8.7 Emergency and Remedial Response Plan Review and Updates....13

Figures

[redacted]

Tables

[redacted]

Table 8-3 – Degree of Severity 3

[redacted]

8.1 Emergency and Remedial Response Plan Overview

This Emergency and Remedial Response Plan for the Orchard Project was prepared to meet the requirements of 16 Texas Administrative Code (TAC) **§5.206(h)** [Title 40, U.S. Code of Federal Regulations (40 CFR) **§146.94**]. This section is organized into six distinct parts. The parts address the issues of (1) potentially affected infrastructure and parties, (2) definitions of degrees of severity, (3) specific events and their response plans, (4) training, (5) communications plans and notification procedures, and (6) Emergency and Remedial Response Plan review and updates. These sections aim to ensure an expeditious and appropriate response to protect any Underground Sources of Drinking Water (USDWs) and maximize the protection of the environment, surrounding community, and company property. This plan will remain in place during the construction, operation, closure, and post-closure periods of the Orchard Project.

8.2 Resources/Infrastructure in the AOR

[redacted]

Local resources (Table 8-1) may be activated to supplement Orchard Storage's response to an emergency or adverse event, if required to minimize the event's impact.

[redacted]

Figure 8-1 shows the location of the Orchard Project AOR, with existing and planned infrastructure identified.

[redacted]

[redacted]

8.3 Degree of Risk for Emergency Events

Response actions will depend on the degree of the severity of the event triggering an emergency response. Incident response will be managed via the Incident Command System (ICS) to organize, scale, and coordinate the response with third parties and communicate via a common emergency response language. Response teams will be assembled, organized, and scaled as necessary, depending on the severity of the event. At a minimum, response teams will be comprised of Orchard operations specialists and the Orchard Storage team. The team will be expanded as needed to include specialty environmental-response resources, specialty well-intervention specialists, local first responders, and Gaines County officials. All responses will be coordinated and communicated as necessary with the relevant regulatory bodies.

A risk matrix was developed to aid in identifying situations of elevated risk with the major categories summarized in Table 8-2. The risk matrix combines the severity of the consequences of a given adverse event and the likelihood that the event will occur. The severity score is weighted 40% for safety, 40% environmental, and 20% financial. The risk and severity scores are weighted into a "Total Score" for the final risk assessment; this score is then graded as shown in Table 8-3. This matrix provides a framework for mitigation efforts during emergency response planning and as an input for the financial assurance determination. The full risk matrix is provided in *Appendix F*.

[redacted]

[redacted]

Table 8-3 – Degree of Severity

Risk Assessment Score	Description
>15	Avoid to the degree possible. Mitigate through an immediate responsive action plan to reduce likelihood to an acceptable level.
10-14.9	Preventative and mitigative measures are required.
3.5-9.9	Preventative and mitigative measures are optional. Monitoring is required.
0-3.4	No preventative or mitigative measures are required. Monitor the situation.

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

- [redacted]
- [redacted]
- [redacted]

[redacted]

- [redacted]
- [redacted]
- [redacted]

[redacted]

[redacted]

[redacted]

[redacted]

- [redacted]

[redacted]

- [redacted]
- [redacted]
- [redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

- [redacted]

[redacted]

- [redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

- [redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

8.5 Training

Orchard Storage staff will attend, as a minimum, annual training associated with Health, Safety, and Environment (HSE). This training will include all the required Occupational Safety and Health Administration (OSHA) training (HAZWOPER, etc). The staff will be trained in the Incident Command Structure (ICS) to ensure efficient response to incidents. In addition, the Orchard Storage staff will be provided technical training regarding the specific properties associated with CO_2 and standard operating procedures related to CO_2 storage.

Training will be reinforced by emergency drills that create scenarios to highlight specific incident responses. These drills will be as realistic as possible and may include local county first responders. All training and emergency drills will be documented for verification.

Orchard Storage intends to implement an active outreach program with county first responders and the resident neighbors in the project storage area. Before starting CO_2 injection operations, Orchard Storage will provide a copy of this Emergency and Remedial Response Plan to local first responders and discuss potential response scenarios.

Per 16 TAC **§5.206 (h)(2)(C)**, Orchard Storage will provide training schedules, dates, and course outlines to the Commission annually and upon request.

8.6 Communications Plan and Emergency Notification Procedures

Orchard Storage intends to implement the ICS to respond to emergencies. The system, widely utilized by emergency response professionals, provides a common language and hierarchy to emergency response—a Unified Command—so that multiple agencies can effectively work together. The system can also be scaled to fit the incident.

A high-level structure for the ICS is as follows:

The chain-of-command members will be developed after the operating company has been formed and commercial agreements have been arranged. This section will then be updated to reflect the nomination of the chain-of-command members. As these positions are filled, relevant phone numbers including a phone number for the local Orchard Storage office will be provided.

Emergency response contacts are provided in Table 8-4.

[redacted]

As appropriate, Orchard Storage will communicate with the public regarding events that require an emergency response, including the impact of the event on drinking water or the severity of the event, actions taken or planned, etc.

Prior to commencing operations, Orchard Storage will develop Emergency Operating Procedures that will include:

- Procedures for requesting assistance and for follow-up action to remove the public from an area of exposure;
- Provisions for advance briefing of the public within the AOR on subjects such as the hazards and characteristic of CO_2;
- The manner in which the public will be notified of an emergency and steps to be taken in case of an emergency; and
- if necessary, proposed actions designed to minimize and respond to risks associated with potential seismic events, including seismic monitoring

8.7 Emergency and Remedial Response Plan Review and Updates

This Emergency and Remedial Response Plan will be reviewed annually to ensure its applicability. Additionally, the plan will be reviewed after any AOR reevaluation and following any significant changes to the project that would necessitate such a review.

Any amendments to this plan must be approved by the Director and incorporated into the permit. This plan will also be reviewed and submitted to the Director within one year of an AOR evaluation—following any significant changes to the facility (e.g., addition of injection or monitoring wells), change in personnel, or when required by the Director.

SECTION 9 – FINANCIAL ASSURANCE

TABLE OF CONTENTS

9.1 Financial Responsibility 2
9.2 Financial Assurance 2
9.3 Corrective Action Plan 4
9.4 Injection Well Plugging and Abandonment 4
9.5 Monitoring Well Plugging and Abandonment 4
9.6 Post-Injection Site Care and Site Closure 4
9.6.1 Post-Injection Monitoring 4
9.6.2 Site Closure 4
9.7 Emergency and Remedial Response Plan 5
9.7.1 Scenario 1: Mineral Rights Infringement (Trespass) 5
9.7.2 Scenario 2: Water Quality Contamination 5
9.7.3 Scenario 3: Single Large-Volume Release to the Surface 5
9.7.4 Scenario 4: Low-Level Release to the Surface 5
9.7.5 Scenario 5: Entrained Contaminant Release 6
9.7.6 Scenario 6: Accidents/Unplanned Events 6
9.8 Updates to Financial Assurance 6

Figures

(None)

Tables

9.1 Financial Responsibility

To meet the requirements of 16 Texas Administrative Code (TAC) **§5.205** [Title 40, U.S. Code of Federal Regulations (40 CFR) **§146.82(a)(14)** and **§146.85(a)**], this section was prepared to summarize actions that Orchard Storage Company LLC (Orchard Storage) will take to demonstrate financial responsibility for injection well plugging, post-injection site care and site closure, and emergency and remedial response. This section also provides cost estimates to conduct these activities.

Orchard Storage will annually provide to the Director evidence of financial responsibility as required by 16 TAC **§5.205** [40 CFR **§146.85**]. This ensures that Orchard Storage has enough financial resources to cover corrective action, injection well plugging, post-injection site care and site closure, and emergency and remedial response if financial difficulties are encountered. This annual report will be submitted until the Director has determined that the facility has reached the end of the post-injection site care period. The following financial information will account for the entire area of review (AOR) and be submitted to aid in the Director's determination of financial responsibility:

- The most recent audited annual report filed with the U.S. Securities and Exchange Commission under Section 13 or 15(d), Securities Exchange Act of 1934 (15 U.S.C. Section 78m or 78o(d))
- The most recent quarterly report filed with the U.S. Securities and Exchange Commission under Section 13 or 15(d), Securities Exchange Act of 1934 (15 U.S.C. Section 78m or 78o(d))
- The operator's most recently audited financial statements, if the person is not required to file a report with the U.S. Securities and Exchange Commission

9.2 Financial Assurance

As required by 16 TAC **§5.205** [40 CFR **§146.85**], the following financial instruments will be secured and used to provide sufficient funding for the following activities:

- Injection Well Plugging – Bond
- Post-Injection Site Care and Site Closure – Insurance
- Emergency and Remedial Response – Insurance

[redacted]

Table 9-1 summarizes the cost estimates for those activities—estimates that will be revised annually and account for any changes in the AOR, emergency and remedial response plan, and injection well plugging.

[redacted]

[redacted]

This instrument will remain in effect until site closure. The financial instrument will, at a minimum, contain provisions for cancelation, renewal, and continuation. If Orchard Storage faces adverse economic conditions, it will notify the Commission and file a bankruptcy notice via certified mail to the Director.

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted].

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

SECTION 10 – ENVIRONMENTAL JUSTICE ANALYSIS

TABLE OF CONTENTS

10.1 Introduction 2
10.2 Existing Conditions 3
10.2.1 Demographics in the Vicinity of the Site 3
10.2.2 Limited English Proficiency in Vicinity of the Site 4
10.2.3 Demographics of Region 5
10.3 EJScreen Analysis 6
10.3.1 EJ Index 6
10.3.2 Sensitive Receptors 7
10.4 Project Impacts and Mitigation 7
10.5 Summary of Environmental Justice Analysis 7
10.6 References 8

Figures

[redacted]

Tables

[redacted]

10.1 Introduction

The purpose of this environmental justice (EJ) evaluation is to determine if the proposed Orchard [redacted] Class VI injection well (Orchard Project) could have a significant and adverse disproportionate environmental impact on defined communities or populations. [redacted]

Environmental justice is defined as the fair treatment and meaningful involvement of all people regardless of race, color, national origin, or income with respect to the development, implementation, and enforcement of environmental laws, regulations, and policies (Environmental Protection Agency (EPA) 1998). Executive Order 12898, *Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations*, was published in the Federal Register (59 FR 7629) on February 11, 1994. Executive Order 12898 requires federal agencies to identify and address the potential for disproportionately high and adverse human health or environmental effects resulting from the implementation of their programs, policies, and activities on minority and low-income populations.

The assessment of potential EJ impacts is guided by the Council on Environmental Quality's (CEQ) *Environmental Justice Guidance under the National Environmental Policy Act* [NEPA] (CEQ 1997) and the *U.S. Environmental Protection Agency's Promising Practices for EJ Methodologies in NEPA Reviews* (EPA, 2016). Determination of EJ impacts requires three steps: (1) determining the geographic distribution of minority and low-income populations in the affected area; (2) assessing whether the action under consideration would produce impacts that are high and adverse; and (3), if impacts are high and adverse, determining whether these impacts would disproportionately affect minority and low-income populations. This analysis is based on the definition outlined by the EPA, which considers an EJ area or community to be a location with a "meaningfully greater" percentage of minority population than the general population, or locations in which minority populations comprise more than 50% of the affected area's population.

Consistent with *Promising Practices*, EJ areas have been identified according to the following criteria, based on block group-level data from the U.S. Census Bureau's American Community Survey (ACS):

- For minority populations, use the **50%** and **meaningfully greater analysis methods**. This means, if the minority population percentage of the block groups in the affected area exceeds 50% OR the minority population in the block group affected is 20% higher than the minority population percent in the county or state, then an EJ community is present.

- For low-income populations, use the **low-income threshold criteria** method. This means, if the low-income population percentage in the identified block group is 20% higher than the low-income population percent of the county or state, then an EJ community is present.

For this evaluation, populations were reviewed relative to both the federal poverty level and the EPA's EJScreen "low-income" measure of twice the federal poverty level.

As a Class VI injection well, Orchard [redacted] will not generate air emissions or have other significant environmental impacts during operation or construction. Therefore, Orchard Storage has defined the "Impact Study Area" for EJ considerations to consist of a 1-mile radius around the project site.

10.2 Existing Conditions

10.2.1 Demographics in the Vicinity of the Site

The Orchard Project and its 1-mile buffer are wholly located [redacted]

Orchard Storage reviewed the most current ACS[1] data from the U.S. Census Bureau, from 2016 to 2020 (2020 vintage), to determine the presence of minority and/or low-income communities (i.e., areas with EJ concerns). [redacted]

As shown above, 58.6% of the statewide population identify as minority individuals, with 33.2% of the households considered low income. [redacted] in which the project site is located—is not considered a likely EJ area.

10.2.2 Limited English Proficiency in Vicinity of the Site

Table 10-2 presents the limited English-speaking households in the census block groups crossed by the Orchard Project. Limited English-speaking households are ones in which no member over the age of 13 (1) speaks only English or (2) speaks a non-English language and speaks English "very well." In other words, all members over the age of 13 have at least some difficulty with English. In total, [redacted]

[1] ACS is an ongoing survey program that provides updated demographic, social, housing, and economic data. ACS surveys 3.5 million households annually, covering more than 40 topics.

[redacted]

10.2.3 Demographics of Region

Economic impacts of the Orchard Project are anticipated to extend throughout the areas within roughly a one-hour drive of the project. The majority of the construction workforce is expected to be drawn from this area, located within a 50-mile radius of the project. [redacted]

[redacted]

10.3 EJScreen Analysis

10.3.1 EJ Index

The EPA has developed an environmental justice mapping and screening tool called EJScreen. The tool is based on nationally consistent data and an approach that combines environmental and demographic indicators in maps and reports. To evaluate a facility, EJScreen approximates site boundaries and, with the appropriate buffer applied, generates what the EPA terms a "Standard Report," which includes socioeconomic and environmental data on the facility site and its buffer.

EJScreen's EJ Index is a series of environmental and demographic datasets that are used to populate 12 EJScreen indicators (indices). An EJ Index combines demographic information with a single environmental indicator—such as proximity to traffic—to help identify communities that may have a high combination of environmental burdens and vulnerable populations. The EJ Index is higher in block groups with large numbers of mainly minority and/or low-income residents with a higher environmental indicator value. For each environmental factor, the EJ Index equals the environmental indicator percentile multiplied by the demographic index for the host block group. The EPA has identified the 80th percentile filter as an initial starting point for screening an EJ Index.

The Orchard Project was evaluated with EJScreen using a 1-mile buffer, [redacted]

[redacted]

As shown in Table 10-4, for the Impact Study Area, none of the EJ Index measures, which identify communities with a high combination of environmental burdens and vulnerable populations, are at or above the EPA's screening threshold of the 80th percentile for the state and/or the nation. Based on EJScreen results for the project area, the Study Area appears not to have a combination of high environmental burdens and vulnerable populations and, thus, would not be considered an EJ area of concern to the EPA.

10.3.2 Sensitive Receptors

Sensitive receptors are areas and facilities where the occupants are more susceptible to the adverse effects of exposure to toxic chemicals, pesticides, and other pollutants. Sensitive receptors include, but are not limited to, hospitals, schools, daycare facilities, parks and playgrounds, elderly housing, and convalescent facilities. The review of the area found no sensitive receptors within 1 mile of the Orchard Project.

10.4 Project Impacts and Mitigation

Neither the Orchard Project's construction nor its operation and maintenance will result in significant and adverse disproportionate effects on EJ populations, from impacts to traffic noise, visual resources, or transportation. Resource-specific best management practices for these resources will be employed. These practices include screening measures for visual resources and the local school districts for transportation-related effects. The Orchard Project will not result in significant and adverse disproportionate environmental impacts on any EJ communities because there are no EJ communities within the study area. Therefore, no impact avoidance measures, impact mitigation measures, or impact offset measures are required.

To mitigate potential impacts, on-site personnel will ensure (1) no leakage from below-ground storage, (2) persistent water quality monitoring of nearby water sources, (3) regular soil gas sampling, and (4) ambient air quality monitoring for carbon dioxide leakage at the well site. Orchard Project plans anticipate one month of construction with daily well visits and periodic maintenance to ensure quality.

10.5 Summary of Environmental Justice Analysis

A review of the demographics of the block group in which the Impact Study Area is located found that the area does not meet the established criteria of an EJ area based on both minority and low-income populations. Further, EJScreen did not identify any EJ Index measures at or above the 80th percentile for the vicinity of the Orchard Project. No significant environmental or human health impacts are anticipated in relation to the project. Therefore, no adverse disproportionate effects on populations in EJ areas will arise from the construction and operation and maintenance of the project.

10.6 References

U.S. Census Bureau (2022). 2016-2020 American Community Survey 5-Year Estimates. Retrieved November 2022, from URL https://data.census.gov

U.S. Environmental Protection Agency (2022). EJScreen Tool. Retrieved November 2022, from URL https://www.epa.gov/ejscreen

U.S. Environmental Protection Agency (1998). Final Guidance for Incorporating Environmental Justice Concerns in EPA's NEPA Compliance Analyses. April 1998.

APPENDIX A: SURVEY PLATS

[redacted]

APPENDIX B: AOR

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

[redacted]

APPENDIX C: CONSTRUCTION

[redacted]

APPENDIX D: METALLURGY

APPENDIX E: TESTING AND MONITORING

[redacted] [redacted]

[redacted] [redacted]

APPENDIX F: EMERGENCY OPERATIONS

[redacted] [redacted]

APPENDIX G: PLUGGING AND ABANDONMENT

[redacted]

APPENDIX H: FINANCIAL ASSURANCE

[redacted]