




**Performance evaluation in shipboard test
of the Auramarine ballast water
management system CrystalBallast®75**



This report has been prepared under the DHI Business Management System certified by DNV and specifically for ballast water management system testing certified by Lloyd's Register	
Quality Management	BWMS Testing
ISO 9001	IMO Resolution MEPC.174(58) Annex part 2
	

Approved by
<div style="text-align: right;">31-08-2012</div> <div style="text-align: center;">  </div>
Approved by
Signed by: Jens Tørsløv

Performance evaluation in shipboard test of the Auramarine ballast water management system CrystalBallast®75

Prepared for Auramarine Ltd.
Represented by Mr Jukka Suvanto, R&D Manager
 Mr Markku Helamaa, Project Manager



M/S Ahtela in Hundested Harbor

Project No	11811494
Classification	Confidential

Author	Michael Andersen	
--------	------------------	--

QA unit	Louise Schlüter	
---------	-----------------	--

Contents

1	Executive summary and conclusion	2
2	Introduction.....	2
3	Testing laboratory.....	3
4	Ballast water management system	3
5	Experimental design.....	3
5.1	Trial periods and locations	3
5.2	Sampling.....	4
5.2.1	Sample overview	4
5.2.2	Samples for enumeration of organisms $\geq 50 \mu\text{m}$	5
5.2.3	Samples for enumeration of organisms $\geq 10 \mu\text{m}$ and $< 50 \mu\text{m}$	5
5.2.4	Samples for enumeration of bacteria	5
5.2.5	Samples for DOC, POC and TSS analyses	5
5.3	Analyses	6
5.3.1	Analysis overview	6
5.3.2	Organism size class $\geq 50 \mu\text{m}$	6
5.3.3	Organism size class $\geq 10 \mu\text{m}$ and $< 50 \mu\text{m}$	6
5.3.4	Bacteria.....	7
5.3.5	Physical-chemical parameters	7
6	Results.....	8
6.1	Physical-chemical parameters	8
6.2	Biological parameters	9
6.2.1	Organism size class $\geq 50 \mu\text{m}$	9
6.2.2	Organism size class ≥ 10 and $< 50 \mu\text{m}$	9
6.2.3	Bacteria.....	11
7	References	11

Tables

Table 5.1	Details for inlet and discharge operations for shipboard test cycles.....	4
Table 5.2	Number of samples and sample volumes.....	5
Table 5.3	Overview of analyses and sample replicates	6
Table 6.1	Average concentrations of total suspended solids (TSS), particulate organic carbon (POC) and dissolved organic carbon (DOC)	8
Table 6.2	Average measurements of oxygen (O_2), salinity, temperature, pH, UV transmittance (UVT) and turbidity.....	8
Table 6.3	Total sample volumes and average concentrations of viable organisms in the size class $\geq 50 \mu\text{m}$. Specific data and individual sample volumes are provided in Appendix B.	9
Table 6.4	Average concentrations of viable organisms in the size class $\geq 10 \mu\text{m}$ and $< 50 \mu\text{m}$. The primary production decrease is expressed as the percentage reduction of the measured primary production in inlet water. Specific data are provided in Appendix B.	10
Table 6.5	Algal species identified in inlet water and their capability for growth under the conditions applied in the MPN assay.....	10
Table 6.6	Average bacterial concentrations. Specific data are provided in Appendix B.	11

Appendices

- A Data logging from the shipboard testing with CrystalBallast®75
- B Test reports for physical and chemical properties and biological efficacy analyses in shipboard testing of CrystalBallast®75
- C QMP and QAPP with Amendments Nos. 1-4
- D Certificate of compliance, ISO 9001 certificate, accreditation and GLP authorisation

Abbreviations

Abbreviation	Description
AVG	Average
BWMS	Ballast water management system
CFU	Colony-forming units
DOC	Dissolved organic carbon
DNV	Det Norske Veritas
DPM	Disintegrations per minute
DWT	Deadweight tonnage
FR	Field replicate
IMO	International Maritime Organization
MEPC	Marine Environment Protection Committee
MPN	Most probable number
NTU	Nephelometric turbidity unit
POC	Particulate organic carbon
PSU	Practical salinity unit
QAPP	Quality assurance project plan
QMP	Quality management plan
SOP	Standard operating procedure
STD	Standard deviation
TSS	Total suspended solids
UVT	UV transmittance

1 Executive summary and conclusion

DHI provides independent verification testing services to developers of ballast water management systems. DHI's quality assurance project plan is consistent with the requirements of the International Convention for the Control and Management of Ships Ballast Water and Sediments.

From November 2011 through June 2012, DHI conducted shipboard tests of the Auramarine ballast water management system CrystalBallast®75 (CB75) in accordance with DHI's certification by Lloyd's Register verified by Det Norske Veritas. The ability of the CB75 to (a) successfully treat ballast water without interruption and (b) meet IMO D-2 discharge standards was evaluated during a series of three valid test cycles.

The first test cycle was conducted in the Port of Høvedsted, Denmark, at a salinity of 19 PSU and water temperature of 9-10°C. The two remaining test cycles were conducted in the Port of Skagen, Denmark, at salinities of 27-28 PSU and water temperature of 13-14°C.

The average densities of viable organisms in the $\geq 50 \mu\text{m}$ size class in the inlet water varied from approx. 11,000 to approx. 31,000 organisms/ m^3 . For the size class ≥ 10 and $< 50 \mu\text{m}$, the average densities in the inlet water varied from approx. 160 to approx. 310 organisms/mL when determined by inverted microscopy. The contents of *E. coli* were generally low and enterococci were hardly detected. The inlet water concentrations of organisms $\geq 50 \mu\text{m}$ and the smaller planktonic organisms (≥ 10 and $< 50 \mu\text{m}$) fulfilled the validity criteria defined in the IMO G8 guidelines. For shipboard testing, there are no requirements in the IMO G8 guidelines in relation to the density of bacteria in the inlet water.

The numbers of viable organisms in the $\geq 50 \mu\text{m}$ size class in the treated discharge water were 0.74, 5.3 and 5.9 organisms/ m^3 in the three test cycles, which is 1.7-14 times below the threshold value defined in the IMO D-2 standard. In all three test cycles, the density of viable algae in the treated discharge water was determined to be 0.18 organisms/mL or less by use of a most probable number (MPN) assay, and micro-zooplankton was not observed in the treated discharge water. By using the result of the MPN assay, the density of viable organisms representing the ≥ 10 and $< 50 \mu\text{m}$ size class in the treated discharge water was thus approx. 55 times or more below the IMO D-2 standard. Measurements of primary production showed a decrease 99.9-100% after treatment with the ballast water management system compared with the control with untreated ballast water, which confirmed that the treatment resulted in an immediate impact on the algal photosynthesis. In the treated discharge water, the average contents of *E. coli* and enterococci were below the detection limit in all three test cycles. *Vibrio cholerae* was not identified in any of the test cycles.

The CB75 functioned properly during all three test cycles and effectively reduced live organism densities. Live organisms in the size classes defined in the IMO G8 guidelines (MEPC.174(58) (G8)) were discharged at densities below the IMO D-2 standard.

2 Introduction

The objective of this project was to conduct a shipboard test of the Auramarine CrystalBallast®75 in accordance with the guidance given in Resolution MEPC.174(58), Guidelines for approval of ballast water management systems (G8) (IMO, 2008), hereafter referred to as the IMO G8 guidelines.

DHI holds a certificate of compliance issued by Lloyd's Register. The acting classification society for the shipboard test of the Auramarine ballast water management system (BWMS) CrystalBallast®75 (CB75) was DNV (Det Norske Veritas).

DHI has no involvement, intellectual or financial, in the mechanics, design or marketing of the BWMS whose performance has presently been evaluated. To ensure that DHI tests are uncom-

promised by any real or perceived individual or team bias relative to test outcomes, DHI test activities are subject to rigorous quality assurance, quality control procedures and documentation.

During the shipboard testing campaigns, a CrystalBallast®75 ballast water treatment unit with automatic filtration and UV light reactors with nominal flow capacities of 75 m³/h was tested. The CB75 installation consisted of three UV light reactors (3×75 m³/h) in order to match the pump capacity of the vessels ballast pumps.

During three consecutive valid test cycles, the CB75 was evaluated for its ability to: (a) successfully treat ballast water without interruption and (b) meet IMO D-2 standard at discharge.

3 Testing laboratory

DHI is an independent, international consulting and research organisation with the objectives to advance technological development and competence within the fields of water, environment and health. DHI established the DHI Ballast Water Centre with the purpose to provide performance evaluation of BWMS. The DHI Ballast Water Centre includes land-based test facilities and environmental laboratories in Denmark and Singapore.

The shipboard test was carried out by:

DHI
Agern Allé 5
DK-2970 Hørsholm
Denmark

4 Ballast water management system

A description of the CB75 as provided by Auramarine is included in the quality assurance project plan (QAPP) in Appendix C.

The three test cycles were conducted with a FilterSafe BSF – 100H (40 µm) filter. Specifications of UV intensity readings from the CB75 system are available in the data logging provided in Appendix A.

5 Experimental design

5.1 Trial periods and locations

The shipboard test was conducted on-board the trailer carrier M/S Ahtela (IMO 8911736). M/S Ahtela is a cargo ship from 1991 and has been converted in 1998 and 2008. M/S Ahtela is a DNV class general cargo carrier Ro-Ro registered in Rauma, Finland. The vessel has a deadweight (DWT) tonnage of 6,600 tons and a gross tonnage of 8,610 tons. During the shipboard testing period, the M/S Ahtela was not in regular route. Therefore, ballast and de-ballast operations were conducted 3-4 times a week every other week to simulate normal operation. Between these ballast and de-ballast operations, the vessel would conduct voyages between at least two different ports, as described in Appendix A of the QAPP (Appendix C in the present report). The CB75 was installed in two 20' containers placed in the aft part of the lower hold and connected to the ballast water system of the vessel. For the shipboard testing, the ballast tank pairs 7 and 8 were used for treated water and the ballast tank pair 3 was used for control water. The individual tests with the CB75 were conducted as presented in Table 5.1.

Table 5.1 Details for inlet and discharge operations for shipboard test cycles

Test cycle	Location	Operation	Inlet	Volume and flow rate	Discharge	Volume and flow rate
CB75-Test#1	Hundested	Control	2011.11.08 11:10-12:10	225 m ³ 225 m ³ /h	2011.11.09 11:10-11:59	184 m ³ 225 m ³ /h
		Treatment	2011.11.08 12:20-14:05	394 m ³ 225 m ³ /h	2011.11.09 09:06-10:34	320 m ³ 218 m ³ /h
CB75-Test#2	Skagen	Control	2012.06.25 10:01-10:42	157 m ³ 230m ³ /h	2012.06.26 09:11-09:44	126m ³ 229 m ³ /h
		Treatment	2012.06.25 11:39-13:11	350 m ³ 228 m ³ /h	2012.06.26 07:32-08:35	228 m ³ 217 m ³ /h
CB75-Test#3	Skagen	Control	2012.06.26 11:40-12:21	149 m ³ 218 m ³ /h	2012.06.27 09:25-09:57	234 m ³ 125 m ³ /h
		Treatment	2012.06.26 13:14-14:50	349 m ³ 218 m ³ /h	2012.06.27 08:06-09:08	233 m ³ 225 m ³ /h

In test cycle #1, ballast and de-ballast operations were conducted while the vessel was docked in the Port of Hundested, Denmark. The ballast and de-ballast operations for test cycles #2 and #3 were conducted while the vessel was docked in the Port of Skagen, Denmark. The holding time varied from 17 to 19 hours for treated water and from 21 to 23 hours for control water. Each test cycle consisted of sampling and analyses of:

- **Inlet water:** Physical-chemical and biological parameters in the inlet water were considered as sufficiently stable during the ballasting, and, thus, only one set of samples and analyses was used to represent the control tank and the ballast tank
- **Discharge control water:** Stored without treatment from the time of ballasting to discharge
- **Discharge treated water:** Treated and stored from the time of ballasting to discharge

5.2 Sampling

5.2.1 Sample overview

All samples were collected by DHI staff in accordance with the description in the QAPP (Appendix C).

Table 5.2 Number of samples and sample volumes

Water type	Sample replicates	Sample volume per replicate
Inlet water	3 replicates	Organisms $\geq 50 \mu\text{m}$: $>1 \text{ m}^3$ *
		Organisms ≥ 10 and $50 \mu\text{m}$: $>1 \text{ L}$ **
		Bacteria: $>0.5 \text{ L}$ **
		DOC + POC: Approx. 0.5 L **
		TSS: Approx. 2 L **
Control discharge water	3 replicates	Organisms $\geq 50 \mu\text{m}$: $>1 \text{ m}^3$ *
		Organisms ≥ 10 and $50 \mu\text{m}$: $>1 \text{ L}$ **
		Bacteria: $>0.5 \text{ L}$ **
		DOC + POC: Approx. 0.5 L **
		TSS: Approx. 2 L **
Treated discharge water	3 replicates	Organisms $\geq 50 \mu\text{m}$: $>3 \text{ m}^3$ *
	3×3 replicates	Organisms ≥ 10 and $50 \mu\text{m}$: $>1 \text{ L}$ **
	3×3 replicates	Bacteria: $>0.5 \text{ L}$ **
	3 replicates	DOC + POC: Approx. 0.5 L **
	3 replicates	TSS: Approx. 2 L **

* Samples collected by continuous flow during the entire period of intake or discharge; this continuous sampling of 3 replicates, each with a volume $>3 \text{ m}^3$, provides the same statistical basis for counting as the sampling of 3×3 replicates of $>1 \text{ m}^3$, which is recommended in the IMO G8 guidelines

** Samples collected over the period of intake or discharge (start, middle and end)

DOC Dissolved organic carbon

POC Particulate organic carbon

TSS Total suspended solids

5.2.2 Samples for enumeration of organisms $\geq 50 \mu\text{m}$

Three replicates were collected by parallel continuous sampling during the entire periods of inlet and discharge. The samples were gently filtered through a net with a mesh size of $35 \mu\text{m}$ and a reservoir (cod-end) at the bottom for collecting the organisms $\geq 50 \mu\text{m}$. Each replicate was transferred to 1-L glass bottles. The total volume of the filtered sample exceeded 3 m^3 per replicate for the treated discharge samples and 1 m^3 per replicate for the inlet and control discharge samples. The exact sample volume for each of the three replicates was determined by use of three flow meters that were connected to the relevant sampling ports installed in the system.

5.2.3 Samples for enumeration of organisms $\geq 10 \mu\text{m}$ and $<50 \mu\text{m}$

Samples (3 replicates for the inlet water, 3 replicates for the control discharge water, and 3×3 replicates for the treated discharge water) with a volume of at least 1 L were collected in polyethylene containers.

5.2.4 Samples for enumeration of bacteria

Samples (3 replicates for the inlet water, 3 replicates for the control discharge water, and 3×3 replicates for the treated discharge water) with a volume of at least 0.5 L were collected in sterile polyethylene containers.

5.2.5 Samples for DOC, POC and TSS analyses

Samples (3 replicates for the inlet water, 3 replicates for the control discharge water, and 3 replicates for the treated discharge water) of at least 0.5 L were collected in heat-sterilized blue cap bottles for analysis of DOC and POC. For TSS analysis, samples with a volume of approx. 2 L were collected in polyethylene containers.

5.3 Analyses

5.3.1 Analysis overview

Table 5.3 Overview of analyses and sample replicates

Replicate	Temperature	Salinity	$\geq 50\text{ }\mu\text{m}$	10-50 μm , primary production	10-50 μm , MPN	10-50 μm , Lugol's solution	Bacteria	DOC + POC	TSS
Inlet water									
Replicate 1 (start)	1	1	Three repli- cates	1	1	1	1	1	1
Replicate 2 (mid)	2	2		2	2	2	2	2	2
Replicate 3 (end)	3	3		3	3	3	3	3	3
Control discharge water									
Replicate 1 (start)	1	1	Three repli- cates	1	1	1	1	1	1
Replicate 2 (mid)	2	2		2	2	2	2	2	2
Replicate 3 (end)	3	3		3	3	3	3	3	3
Treated discharge water									
Replicate 1-3 (start)	1	1	Three repli- cates	1	1-3	-	1-3	1	1
Replicate 4-6 (mid)	4	4		4	4-6	-	4-6	4	4
Replicate 7-9 (end)	7	7		7	7-9	-	7-9	7	7

MPN Most probable number

DOC Dissolved organic carbon

POC Particulate organic carbon

TSS Total suspended solids

All analyses were carried out in accordance with the QAPP (Appendix C) and the relevant standard operating procedures (DHI SOPs). In test cycle #1, performed in the Port of Hundested, samples were transported from Hundested to the DHI laboratory in Hørsholm, where analyses were performed. In test cycles #2 and #3, performed in Port of Skagen, samples were processed on-board the vessel. Analyses were initiated within 4 h from the time of sampling.

5.3.2 Organism size class $\geq 50 \mu\text{m}$

The concentrations of viable organisms $\geq 50 \mu\text{m}$ in the samples were determined by using a stereo microscope and a counting chamber. Viable organisms were determined on the basis of observed mobility and morphology according to DHI SOP 30/1700. The viable organisms were characterized according to broad taxonomic groups. Compliance with the IMO D-2 standard (IMO, 2004) was verified by using the direct count of viable organisms $\geq 50 \mu\text{m}$.

5.3.3 Organism size class $\geq 10 \mu\text{m}$ and $< 50 \mu\text{m}$

The polyethylene container with a volume of 2-10 L was gently turned upside down five times, after which subsamples were taken for the analyses described below.

Organisms in inlet water

One subsample per replicate, with a volume of approx. 10 mL, was transferred to 10-mL polyethylene tubes with screw-caps. The concentrations of viable algae were determined by use of the most probable number (MPN) assay. A dilution series was made for each replicate and 1 mL-aliquots containing 1 mL, 0.1 mL and 0.01 mL of the subsample were added to series of five test tubes with 5 mL of liquid medium. Blank controls containing 5 mL of liquid medium without

sample were also prepared. In test cycles #2 and #3, the test tubes were sealed and kept in the dark at ambient temperature during storage on-board the vessel and transport to the DHI laboratory. The fluorescence of the test tubes was determined prior to the incubation. The concentrations of viable algae in the samples were determined by measuring the fluorescence in the test tubes after 14 days of incubation under continuous light. Incubation temperatures were 13-15°C.

The concentrations of organisms in the size class ≥ 10 and < 50 μm were determined by inverted microscopy. Subsamples with a volume of approx. 100 mL were transferred from the inlet water samples to brown 100-mL glass bottles. The subsamples were preserved by addition of Lugol's solution to achieve 2% final concentration. The organisms identified in the inlet water were assumed to be viable at the time of sampling. The identification comprised detailed examination of the algal chloroplasts to confirm that the organisms had been alive and classification of the algae in major taxonomic groups.

The algal primary production was determined by measuring the ^{14}C fixed by photosynthesis. Two subsamples per replicate, each with a volume of approx. 60 mL, were transferred to 60-mL bottles and $\text{NaH}^{14}\text{CO}_3$ (2 μCi) was added to each bottle. The bottles were incubated for approx. 75 min under light from a light panel. In test cycle #1, the bottles were incubated at 9-11°C, and in test cycles #2 and #3, the incubation temperature was 14-16°C. After incubation, the samples were filtered onto Whatman GF/D filters, and the filters were transferred to glass vials, after which 200 μL 0.1 N HCl was added directly to the filters. The ^{14}C activity remaining in the algae on the filters after acidification was quantified by liquid scintillation counting.

Organisms in discharge water

The concentrations of viable algae in the discharge control water and the discharge treated water were determined by use of the MPN assay. Compliance with the IMO D-2 standard (IMO, 2004) was verified by using the total of viable algae determined by the MPN assay and viable micro-zooplankton ≥ 10 and < 50 μm as described in DHI SOPs 30/1701 and 30/1704. As a supporting parameter, measurements of primary production were conducted by use of the method described above.

Furthermore, organisms in the size class ≥ 10 and < 50 μm in the control discharge water samples were also counted by inverted microscopy after fixation with Lugol's solution.

5.3.4 Bacteria

The concentrations of *E. coli* and enterococci were determined by diluting the samples with a special microplate diluent (1:1), after which the samples were distributed in a specific 96-wells test kit for either *E. coli* or enterococci (BIO-RAD, MUG/MUD kits for *E. coli* or enterococci quantification). The inoculated test kits were incubated for 36 hours at 44°C (42°C to 44.5°C), after which positive wells were used to calculate the most probable numbers.

Samples for detection of *Vibrio cholerae* were filtered through a 0.45- μm filter. In test cycle #2 and #3, the filters were stored in the dark at ambient temperature in sterile polyethylene tubes. On arrival at the laboratory, the filters were submerged into alkaline saline peptone water for two selective enrichments. The cultures obtained by the enrichments were used for inoculation of agar plates. Following 24 hours of incubation at $37 \pm 1^\circ\text{C}$, the morphology of the colonies on the agar plates was inspected.

5.3.5 Physical-chemical parameters

Dissolved oxygen, salinity, temperature and pH were measured by use of portable multi parameter instrument equipped with electrodes. In test cycles #2 and #3 (Table 5.1), turbidity was also measured. Measurements were conducted at regular intervals throughout the inlet and discharge operations.

Samples for determination of organic carbon content were filtered through a 0.45- μm syringe filter. By using a TOC analyser, the TOC was determined by analysis of non-filtered samples

whereas the dissolved organic carbon (DOC) was determined by analysis of filtered samples. The particulate organic carbon (POC) was calculated as the difference between TOC and DOC.

Samples for determination of total suspended solids (TSS) were filtered through a glass fibre filter, which had already been weighed in the laboratory, and the TSS was determined by weighing of filters containing sample after drying at 105 °C.

6 Results

6.1 Physical-chemical parameters

For the CB75 system, the physical-chemical conditions of inlet and discharge waters for test cycles are summarized in Tables 6.1 and 6.2. Onsite measurement data are also available in the data logging in Appendix A. Detailed data on TSS, POC and DOC are available in Appendix B.

Table 6.1 Average concentrations of total suspended solids (TSS), particulate organic carbon (POC) and dissolved organic carbon (DOC)

Test cycle	Water type	TSS (mg/L)	POC (mg/L)	DOC (mg/L)
CB75-Test#1	Inlet water	0.80	0.27	3.0
	Control discharge water	0.93	0.36	2.9
	Treated discharge water	1.3	0.28	3.0
CB75-Test#2	Inlet water	1.1	0.47	1.7
	Control discharge water	0.76	0.38	1.8
	Treated discharge water	1.1	0.49	1.7
CB75-Test#3	Inlet water	0.93	0.58	1.9
	Control discharge water	0.75	0.64	1.9
	Treated discharge water	0.85	0.49	2.0

Table 6.2 Average measurements of oxygen (O₂), salinity, temperature, pH, UV transmittance (UVT) and turbidity

Test cycle	Water type	O ₂ (%)	Salinity (PSU)	Temperature (°C)	pH	UVT (%)	Turbidity (NTU)
CB75-Test#1	Inlet water	92	19.3	9.5	7.9	86	-
	Control discharge water	96	19.3	9.6	8.0	86	-
	Treated discharge water	94	19.2	9.8	8.0	87	-
CB75-Test#2	Inlet water	91	27.4	13.5	8.2	93	5
	Control discharge water	87	27.6	14.1	8.1	93	2
	Treated discharge water	87	27.3	13.8	8.2	93	4
CB75-Test#3	Inlet water	88	26.5	13.7	8.2	92	3
	Control discharge water	83	26.9	14.4	8.1	93	1
	Treated discharge water	85	26.6	13.6	8.2	93	3

PSU Practical salinity units

NTU Nephelometric turbidity units

UVT UV transmittance

6.2 Biological parameters

The densities of live organisms in the inlet and control discharge water were in accordance with the IMO G8 guidelines (IMO, 2008) in all test cycles. Detailed data from the biological efficacy analyses are available in Appendix A.

6.2.1 Organism size class $\geq 50 \mu\text{m}$

The average densities of viable organisms in the $\geq 50 \mu\text{m}$ size class varied from approx. 11,000 to 31,000 organisms/ m^3 in the inlet water and from approx. 9,000 to 25,000 organisms/ m^3 in the control discharge water. The majority of organisms $\geq 50 \mu\text{m}$ in the inlet water were identified as copepods and copepod nauplii.

Table 6.3 Total sample volumes and average concentrations of viable organisms in the size class $\geq 50 \mu\text{m}$. Specific data and individual sample volumes are provided in Appendix B.

Test cycle	Inlet water		Control discharge water		Treated discharge water	
	Total sample volume (m^3)	organisms/ m^3	Total sample volume (m^3)	organisms/ m^3	Total sample volume (m^3)	organisms/ m^3
CB75-Test#1	3.46	11,445	3.57	8,905	9.44	0.74
CB75-Test#2	3.24	22,941	3.39	10,545	9.57	5.3
CB75-Test#3	3.15	31,238	3.42	25,180	9.59	5.9
IMO G8	≥ 3	>100	≥ 3	>10	≥ 9	<10

In the treated discharge water, the numbers of viable organisms in the $\geq 50 \mu\text{m}$ size range varied from 0.74 to 5.9 organisms/ m^3 , which is 1.7-14 times below the threshold value defined in the IMO D-2 standard.

6.2.2 Organism size class ≥ 10 and $< 50 \mu\text{m}$

The densities in the inlet water varied from approx. 160 to 310 organisms/mL when determined by inverted microscopy (Table 6.4). The average densities of viable algae in the inlet and control discharge water determined by the MPN assay were >160 organisms/mL in all three test cycles. Furthermore, inverted microscopy of the ≥ 10 and $< 50 \mu\text{m}$ size class showed densities of approx. 110 to 250 organisms/mL in the control discharge water samples.

The MPN of algae in the treated discharge water was below the MPN assay detection limit of 0.18 organisms/mL in test cycle #1. In test cycles #2 and #3, the average densities of viable algae determined by MPN were 0.18 organisms/mL. The highest MPN measured in the individual replicates were 0.20 organisms/mL (Appendix B). Heterotrophic micro-zooplankton ≥ 10 and $< 50 \mu\text{m}$ was not observed in the treated discharge water. By using the results of the MPN assay, the average densities of viable organisms representing the ≥ 10 and $< 50 \mu\text{m}$ size class in the treated discharge water were thus approx. 55 times or more below the IMO D-2 standard.

Table 6.4 Average concentrations of viable organisms in the size class $\geq 10 \mu\text{m}$ and $< 50 \mu\text{m}$. The primary production decrease is expressed as the percentage reduction of the measured primary production in inlet water. Specific data are provided in Appendix B.

Test cycle	Water type	Microscopy (organisms/mL)	MPN (organisms/mL)	Primary production	
				DPM	Decrease (%)
CB75-Test#1	Inlet water	311	>160	1164	99.9
	Control discharge water	246	>160	698	
	Treated discharge water	-	<0.18	1.2	
CB75-Test#2	Inlet water	159	>160	648	100
	Control discharge water	139	>160	42	
	Treated discharge water	-	0.18	0	
CB75-Test#3	Inlet water	161	>160	115	100
	Control discharge water	111	>160	110	
	Treated discharge water	-	0.18	0	
IMO G8	Inlet water	>100	>100	-	-
	Control discharge water	-	>10	-	-
	Treated discharge water	-	<10	-	-

MPN Most probable number

DPM Disintegrations per minute

Table 6.5 Algal species identified in inlet water and their capability for growth under the conditions applied in the MPN assay.

Groups and species	CB75-Test#1	CB75-Test#2	CB75-Test#3	Capable to grow in MPN assay
Bacillariophyceae				
<i>Chaetoceros curvisetus</i>		X	X	+
<i>Chaetoceros danicus</i>		X	X	+
<i>Dactyliosolen fragilissimus</i>		X	X	+
<i>Gonioceros septentrionalis</i>		X	X	+
<i>Leptocylindrus minimus</i>	X			+
<i>Pseudonitzschia sp.</i>	X			+
<i>Rhizosolenia setigera</i>	X			
<i>Skeletonema costatum</i>	X	X	X	+
<i>Thalassiosira gravida/rotula</i>	X			+
Chlorophyceae				
<i>Tetraselmis sp.</i>		X	X	+
Cryptophyceae				
<i>Cryptophytes spp.</i>	X			+
Dinophyceae				
<i>Ceratium furca</i>	X			+
<i>Gymnodinium sp.</i>		X	X	+
<i>Heterocapsa triquetra</i>	X			+
Euglenophyceae				
<i>Euglena sp.</i>		X		

Growth under the conditions applied in the MPN assay has been confirmed for 87% of the algal species identified in the inlet water (Table 6.5). The decrease in primary production of 99.9-100% during treatment in the BWMS confirmed that the treatment resulted in an immediate impact on the algal photosynthesis.

UV irradiation causes damage of the DNA in the cells and it may take several days before the cell membrane is disrupted and the enzyme activity stops (Stehouwer et al., 2010, Liltved et al., 2011; Liebich et al., 2012). Enumeration of algae by use of the MPN assay is directly related to growth over a certain time period. The ability of algal species to grow is the meaningful definition of viability in an evaluation, of which the target is to determine the efficiency of treatment to reduce the potential of species in ballast water to proliferate and survive in the natural environment. For UV treatment systems, the MPN assay is considered the best available methodology for evaluation of viable algae. Primary production analyses provide a measure for algal photosynthesis by determining amounts of ^{14}C fixed by photosynthesis. Neither the MPN assay nor primary production analyses are limited to the ≥ 10 and $< 50 \mu\text{m}$ size class; on the contrary, these parameters include planktonic algae without reference to size.

6.2.3 Bacteria

For shipboard testing, there are no requirements in the IMO G8 guidelines in relation to the density of bacteria in the inlet water or the control discharge water.

Table 6.6 Average bacterial concentrations. Specific data are provided in Appendix B.

Test cycle	Water type	<i>E. coli</i> (CFU/100 mL)	Enterococci (CFU/100 mL)	<i>Vibrio cholerae</i> (CFU/100 mL)
CB75-Test#1	Inlet water	25	35	<1
	Control discharge water	19	22	<1
	Treated discharge water	<10	<10	<1
CB75-Test#2	Inlet water	43	<10	<1
	Control discharge water	39	<10	<1
	Treated discharge water	<10	<10	<1
CB75-Test#3	Inlet water	72	<10	<1
	Control discharge water	21	<10	<1
	Treated discharge water	<10	<10	<1
IMO G8	Inlet water	-	-	-
	Control discharge water	-	-	-
	Treated discharge water	<250	<100	<1

CFU Colony-forming units

The contents of *E. coli* and enterococci in the inlet water and control discharge water were generally low compared with the IMO D-2 threshold values. In the treated water, the contents of *E. coli* and enterococci were below the detection limit in all three test cycles. *Vibrio cholerae* was not identified in any of the test cycles.

7 References

IMO (2004). Adoption of the final act and any instruments, recommendations and resolutions from the work of the conference. International convention for the control and management of ships' ballast water (BWM/CONF/36)

IMO (2008). Guidelines for approval of ballast water management systems (G8). Resolution MEPC.174(58).

Liebich, V., Stehouwer, P.P. & Veldhuis, M. (2012). Re-growth of potential invasive phytoplankton following UV-based ballast water treatment. *Aquatic Invasions*, Volume 7 (1), 2012 . Proceedings of the 17th International Conference on Aquatic Invasive Species (in press).

Liltved, H., Tobiesen, A., Delacroix, S., Heiaas, H. & Tryland, I. (2011). Filtration and UV-irradiation for ballast water management – dose requirements and water quality challenges. *International Ultraviolet Association News*, Vol. 13 (1). April 2011.

Stehouwer, P.P.V., Fuhr, F. & Veldhuis, M.J.W. (2010). A novel approach to determine ballast water vitality and viability after treatment. In: Bellefontaine N, Haag F, Linden O, Matheickal J (eds) (2010) *Proceedings of the IMO-WMU Research and Development Forum 2010 Malmö, Sweden*, pp 233–240.

A P P E N D I X A

Data logging from the shipboard testing with CrystalBallast®75

Table A.1.1 Test cycle data logging; treated water

Subject	Results		Comments
Client treatment system	Auramarine CB75 (3×75 m ³ /h)		Filter: FilterSafe BSF-100H; 40µm
Salinity (PSU)	19		
Ballast tank No.	Pairs 7 & 8		
Test cycle No.	#1		
Location for intake	Hundested		
Date and time intake start	2011.11.08	12:20	
Date and time intake stop	2011.11.08	14:05	
Flow during intake	225 m ³ /h		
Treated volume during intake	394 m ³		
Location for discharge	Hundested		
Date and time discharge start	2011.11.09	09:06	
Date and time discharge stop	2011.11.09	10:34	
Flow during discharge	218 m ³ /h		
Treated volume during discharge	320 m ³		

Table A.1.2 Test cycle data logging; control water

Subject	Results		Comments
Salinity (PSU)	19		
Ballast tank No.	Pair 3		
Date and time intake start	2011.11.08	11:10	
Date and time intake stop	2011.11.08	12:10	
Flow during intake	225 m ³ /h		
Volume during intake	225 m ³		
Date and time discharge start	2011.11.09	11:10	
Date and time discharge stop	2011.11.09	11:59	
Flow during discharge	225 m ³ /h		
Treated volume during discharge	184 m ³		

Table A.1.3 Test cycle data logging; onsite measurements

Water type	Dissolved oxygen (%)	Salinity (PSU)	Temperature (°C)	pH	UVT (%)	UV intensity (mW/cm ²)
Inlet water (control)	92 (±0.55)*	19.3 (±0.09)	9.5 (±0.05)	7.9 (±0.05)	86 (-)	-
Inlet water (treated)	95 (±0.58)	19.2 (±0.17)	9.6 (±0.06)	7.9 (±0.06)	86 (-)	321**: 0.87 (±0.06) 322**: 1.2 (±0.06) 323**: 0.50 (-)
Control discharge	96 (±0.58)	19.3 (-)	9.6 (±0.06)	8.0 (-)	86 (-)	-
Treated discharge	94 (±0.55)	19.2 (-)	9.8 (±0.05)	8.0 (±0.05)	87 (-)	321**: 0.86 (±0.05) 322**: 1.1 (-) 323**: 0.52 (±0.11)

* Standard deviations in parentheses

** CB75 UV reactor number

PSU Practical salinity units

UVT UV transmittance

Table A.2.1 Test cycle data logging; treated water

Subject	Results		Comments
Client treatment system	Auramarine CB75 (3×75 m ³ /h)		Filter: FilterSafe BSF-100H; 40µm
Salinity (PSU)	28		
Ballast tank No.	Pairs 7 & 8		
Test cycle No.	#2		
Location for intake	Skagen		
Date and time intake start	2012.06.25	11:39	
Date and time intake stop	2012.06.25	13:11	
Flow during intake	228 m ³ /h		
Treated volume during intake	350 m ³		
Location for discharge	Skagen		
Date and time discharge start	2012.06.26	07:32	
Date and time discharge stop	2012.06.26	08:35	
Flow during discharge	217 m ³ /h		
Treated volume during discharge	228 m ³		

Table A.2.2 Test cycle data logging; control water

Subject	Results		Comments
Salinity (PSU)	28		
Ballast tank No.	Pair 3		
Date and time intake start	2012.06.25	10:01	
Date and time intake stop	2012.06.25	10:42	
Flow during intake	230 m ³ /h		
Volume during intake	157 m ³		
Date and time discharge start	2012.06.26	09:11	
Date and time discharge stop	2012.06.26	09:44	
Flow during discharge	229 m ³ /h		
Volume during discharge	126 m ³		

Table A.2.3 Test cycle data logging; onsite measurements

Water type	Dissolved oxygen (%)	Salinity (PSU)	Temperature (°C)	pH	Turbidity (NTU)	UVT (%)	UV intensity (W/m ²)
Inlet water (control)	91 (±4.0)*	27.4 (±0.78)	13.5 (±0.10)	8.2 (±0.01)	5 (±1.5)	93 (-)	-
Inlet water (treated)	86 (±3.1)	27.7 (±0.17)	13.5 (-)	8.2 (-)	3 (±0.58)	93 (-)	321**: 10.3 (±0.06) 322**: 12.9 (±0.11) 323**: 11.6 (±0.10)
Control discharge	87 (±0.58)	27.6 (-)	14.1 (±0.06)	8.1 (±0.04)	2 (-)	93 (-)	-
Treated discharge	87 (±0.58)	27.3 (±0.06)	13.8 (±0.06)	8.2 (±0.01)	4 (±0.58)	93 (-)	321**: 9.1 (±0.14) 322**: 11.4 (±0.14) 323**: 10.2 (±0.14)

* Standard deviations in parentheses

** CB75 UV reactor number

PSU Practical salinity units

NTU Nephelometric turbidity unit

UVT UV transmittance

Table A.3.1 Test cycle data logging; treated water

Subject	Results		Comments
Client treatment system	Auramarine CB75 (3×75 m ³ /h)		Filter: FilterSafe BSF-100H; 40µm
Salinity (PSU)	27		
Ballast tank No.	Pairs 7 & 8		
Test cycle No.	#3		
Location for intake	Skagen		
Date and time intake start	2012.06.26	13:14	
Date and time intake stop	2012.06.26	14:50	
Flow during intake	218 m ³ /h		
Treated volume during intake	349 m ³		
Location for discharge	Skagen		
Date and time discharge start	2012.06.27	08:06	
Date and time discharge stop	2012.06.27	09:08	
Flow during discharge	225 m ³ /h		
Treated volume during discharge	233 m ³		

Table A.3.2 Test cycle data logging; control water

Subject	Results		Comments
Salinity (PSU)	26		
Ballast tank No.	Pair 3		
Date and time intake start	2012.06.26	11:40	
Date and time intake stop	2012.06.26	12:21	
Flow during intake	218 m ³ /h		
Volume during intake	149 m ³		
Date and time discharge start	2012.06.27	09:25	
Date and time discharge stop	2012.06.27	09:57	
Flow during discharge	234 m ³ /h		
Volume during discharge	125 m ³		

Table A.3.3 Test cycle data logging; onsite measurements

Water type	Dissolved oxygen (%)	Salinity (PSU)	Temperature (°C)	pH	Turbidity (NTU)	UVT (%)	UV intensity (W/m ²)
Inlet water (control)	88 (±0.058)*	26.5 (±0.21)	13.7 (±0.06)	8.2 (±0.01)	3 (±0.58)	92 (-)	-
Inlet water (treated)	87 (±0.58)	26.9 (±0.20)	13.8 (±0.06)	8.2 (-)	3 (±1.0)	92 (-)	321**: 9.5 (±0.10) 322**: 12.1 (±0.11) 323**: 10.8 (±0.05)
Control discharge	83 (±6.9)	26.9 (-)	14.4 (±0.06)	8.1 (±0.08)	1 (±0.58)	93 (-)	-
Treated discharge	85 (-)	26.6 (-)	13.6 (-)	8.2 (±0.01)	3 (±1.2)	93 (-)	321**: 9.1 (±0.10) 322**: 11.5 (±0.15) 323**: 10.3 (±0.10)

* Standard deviations in parentheses

** CB75 UV reactor number

PSU Practical salinity units

NTU Nephelometric turbidity unit

UVT UV transmittance

A P P E N D I X B

Detailed data for physical and chemical properties and biological efficacy analyses in shipboard testing of CrystalBallast®75

Physical-chemical parameters

Table B-1 Measurements of total suspended solids (TSS)

Test cycle	Water type	TSS (mg/L)				
		FR1	FR2	FR3	AVG	STD
#1	Inlet	0.77	0.76	0.88	0.80	±0.07
	Control discharge	0.78	0.81	1.2	0.93	±0.24
	Treated discharge	1.2	1.2	1.6	1.3	±0.25
#2	Inlet	0.73	1.5	1.1	1.1	±0.40
	Control discharge	0.88	0.68	0.70	0.76	±0.11
	Treated discharge	1.2	1.0	1.0	1.1	±0.12
#3	Inlet	0.83	1.0	0.93	0.93	±0.10
	Control discharge	0.73	0.78	0.73	0.75	±0.03
	Treated discharge	1.0	0.68	0.83	0.85	±0.18

FR Field replicate

AVG Average

STD Standard deviation

Table B-2 Measurements of particulate organic carbon (POC)

Test cycle	Water type	POC (mg/L)				
		FR1	FR2	FR3	AVG	STD
#1	Inlet	0.33	0.29	0.18	0.27	±0.08
	Control discharge	0.36	0.33	0.38	0.36	±0.02
	Treated discharge	0.27	0.26	0.30	0.28	±0.02
#2	Inlet	0.41	0.46	0.55	0.47	±0.07
	Control discharge	0.26	0.42	0.46	0.38	±0.01
	Treated discharge	0.50	0.48	0.48	0.49	±0.10
#3	Inlet	0.65	0.50	-*	0.58	±0.10
	Control discharge	0.51	0.81	0.60	0.64	±0.15
	Treated discharge	0.53	0.54	0.40	0.49	±0.08

FR Field replicate

AVG Average

STD Standard deviation

* Sample lost

Table B-3 Measurements of dissolved organic carbon (DOC)

Test cycle	Water type	DOC (mg/L)				
		FR1	FR2	FR3	AVG	STD
#1	Inlet	3.0	2.9	3.0	3.0	±0.05
	Control discharge	2.9	2.9	2.9	2.9	±0.01
	Treated discharge	3.0	2.9	2.9	3.0	±0.05
#2	Inlet	1.8	1.8	1.6	1.7	±0.11
	Control discharge	2.0	1.8	1.8	1.8	±0.11
	Treated discharge	1.6	1.7	1.7	1.7	±0.03
#3	Inlet	1.9	1.9	-*	1.9	±0.005
	Control discharge	1.9	1.9	1.9	1.9	±0.02
	Treated discharge	1.9	1.9	2.0	2.0	±0.07

FR Field replicate
 AVG Average
 STD Standard deviation
 * Sample lost

Organism size class $\geq 50 \mu\text{m}$

Table B-4 Enumeration of organisms $\geq 50 \mu\text{m}$ and sample volumes

Test cycle	Water type	Organisms $\geq 50 \mu\text{m}$							
		FR1		FR2		FR3		AVG	STD
		vol. m^3	org./ m^3	vol. m^3	org./ m^3	vol. m^3	org./ m^3	org./ m^3	
#1	Inlet	1.152	9,894	1.159	12,409	1.153	12,031	11,445	$\pm 1,356$
	Control discharge	1.183	9,413	1.192	8,121	1.196	9,181	8,905	± 689
	Treated discharge	3.145	1.6	3.145	0.32	3.150	0.32	0.74	± 0.73
#2	Inlet	1.080	25,894	1.065	20,659	1.097	22,268	22,941	$\pm 2,682$
	Control discharge	3.191	10,804	3.195	10,086	3.186	10,746	10,545	± 399
	Treated discharge	1.142	5.0	1.129	6.6	1.119	4.4	5.3	± 1.1
#3	Inlet	1.042	30,023	1.044	34,847	1.064	28,844	31,238	$\pm 3,180$
	Control discharge	1.139	25,296	1.138	24,974	1.144	25,271	25,180	± 179
	Treated discharge	3.205	7.2	3.195	5.6	3.185	5.0	5.9	± 1.1

FR Field replicate
 AVG Average
 STD Standard deviation

Organism size class ≥ 10 and < 50 μm

Table B-5 Enumeration of organisms ≥ 10 μm and < 50 μm by microscopy

Test cycle	Water type	Organisms/mL				
		FR1	FR2	FR3	AVG	STD
#1	Inlet	300	379	253	311	± 64
	Control discharge	316	153	268	246	± 84
#2	Inlet	161	129	187	159	± 29
	Control discharge	118	163	134	139	± 23
#3	Inlet	195	176	111	161	± 44
	Control discharge	124	137	74	111	± 33

FR Field replicate

AVG Average

STD Standard deviation

Table B-6 Determination of viable algae by the most probable number (MPN) assay

Test cycle	Water type	Viable algae (organisms/mL)									
		FR1	FR2	FR3	FR4	FR5	FR6	FR7	FR8	FR9	AVG
#1	Inlet	160	>160	>160	-	-	-	-	-	-	>160
	Control discharge	>160	>160	>160	-	-	-	-	-	-	>160
	Treated discharge	<0.18	<0.18	<0.18	<0.18	<0.18	<0.18	<0.18	<0.18	<0.18	<0.18
#2	Inlet	>160	>160	>160	-	-	-	-	-	-	>160
	Control discharge	>160	>160	>160	-	-	-	-	-	-	>160
	Treated discharge	0.18 (0.024 -1.4)	0.20 (0.028 -1.4)	<0.18	<0.18	<0.18	<0.18	<0.18	<0.18	0.20 (0.028 -1.4)	0.18
#3	Inlet	>160	>160	>160	-	-	-	-	-	-	>160
	Control discharge	>160	>160	>160	-	-	-	-	-	-	>160
	Treated discharge	0.20 (0.028 -1.4)	0.20 (0.028 -1.4)	<0.18	<0.18	<0.18	<0.18	<0.18	<0.18	<0.18	0.18

FR Field replicate

AVG Average

() 95% confidence interval

Table B-7 Measurements of primary production by planktonic algae

Test cycle	Water type	Primary production (DPM)										
		FR1	FR2	FR3	FR4	FR5	FR6	FR7	FR8	FR9	AVG	STD
#1	Inlet	1,063	1,082	1,347	-	-	-	-	-	-	1,164	±159
	Control discharge	654	837	603	-	-	-	-	-	-	698	±123
	Treated discharge	3.6	-	-	0	-	-	0	-	-	1.2	±2.1
#2	Inlet	556	599	790	-	-	-	-	-	-	648	±124
	Control discharge	25	55	46	-	-	-	-	-	-	42	±15
	Treated discharge	0	-	-	0	-	-	0	-	-	0	-
#3	Inlet	192	67	85	-	-	-	-	-	-	115	±68
	Control discharge	49	73	207	-	-	-	-	-	-	110	±85
	Treated discharge	0	-	-	0	-	-	0	-	-	0	-

DPM Disintegrations per minute
 FR Field replicate
 AVG Average
 STD Standard deviation

Bacteria

Table B-8 Enumeration of *E. coli*

Test cycle	Water type	<i>E. coli</i> (CFU/100 mL)										
		FR1	FR2	FR3	FR4	FR5	FR6	FR7	FR8	FR9	AVG	STD
#1	Inlet	11	25	39	-	-	-	-	-	-	25	±14
	Control discharge	18	22	16	-	-	-	-	-	-	19	±3.1
	Treated discharge	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	-
#2	Inlet	<10	43	76	-	-	-	-	-	-	43	±33
	Control discharge	87	10	21	-	-	-	-	-	-	39	±42
	Treated discharge	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	-
#3	Inlet	87	65	65	-	-	-	-	-	-	72	±13
	Control discharge	10	<10	43	-	-	-	-	-	-	21	±19
	Treated discharge	<10	<10	<10	10	<10	<10	<10	<10	<10	<10	-

CFU Colony-forming units

FR Field replicate

AVG Average

STD Standard deviation

Table B-9 Enumeration of enterococci

Test cycle	Water type	Enterococci (CFU/100 mL)										
		FR1	FR2	FR3	FR4	FR5	FR6	FR7	FR8	FR9	AVG	STD
#1	Inlet	44	23	37	-	-	-	-	-	-	35	±10
	Control discharge	18	28	19	-	-	-	-	-	-	22	±5.5
	Treated discharge	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	-
#2	Inlet	<10	<10	10	-	-	-	-	-	-	<10	-
	Control discharge	<10	<10	<10	-	-	-	-	-	-	<10	-
	Treated discharge	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	-
#3	Inlet	10	<10	<10	-	-	-	-	-	-	<10	-
	Control discharge	<10	<10	<10	-	-	-	-	-	-	<10	-
	Treated discharge	10	<10	<10	<10	<10	<10	<10	<10	<10	<10	-

CFU Colony-forming units

FR Field replicate

AVG Average

STD Standard deviation

Table B-10 Enumeration of *Vibrio cholerae*

Test cycle	Water type	<i>Vibrio cholerae</i> (CFU/100 mL)										
		FR1	FR2	FR3	FR4	FR5	FR6	FR7	FR8	FR9	AVG	STD
#1	Inlet	<1	<1	<1	-	-	-	-	-	-	<1	-
	Control discharge	<1	<1	<1	-	-	-	-	-	-	<1	-
	Treated discharge	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	-
#2	Inlet	<1	<1	<1	-	-	-	-	-	-	<1	-
	Control discharge	<1	<1	<1	-	-	-	-	-	-	<1	-
	Treated discharge	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	-
#3	Inlet	<1	<1	<1	-	-	-	-	-	-	<1	-
	Control discharge	<1	<1	<1	-	-	-	-	-	-	<1	-
	Treated discharge	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	-

CFU Colony-forming units
 FR Field replicate
 AVG Average
 STD Standard deviation

A P P E N D I X C

QMP and QAPP with Amendments Nos. 1-4

Quality Management Plan

Performance Evaluation of Ballast Water Management Systems

DHI Denmark

Version 2.3

Quality Management Plan
Performance Evaluation of Ballast Water
Management Systems
DHI Denmark
Version 2.3

Agern Allé 5
DK-2970 Hørsholm

Tel: +45 4516 9200
Fax: +45 4516 9292

E-mail: gip@dhigroup.com
Web: www.dhigroup.com

Project Quality Management Plan Performance Evaluation of Ballast Water Management Systems DHI Denmark Version 2.3		Project No.			
Author Gitte I. Petersen		Date 2011.09.07			
		Approved by Torben Madsen			
2.3	QMP	<i>QIP</i>	<i>TMA</i>	<i>TMA</i>	<i>7/9-11</i>
Revision	Description	By	Checked	Approved	Date
Key words		Classification <input type="checkbox"/> Open <input type="checkbox"/> Internal <input checked="" type="checkbox"/> Proprietary			

Distribution Client Certification body DHI: /EAT	No. of copies



CONTENTS

1	TERMS AND ABBREVIATIONS	1
2	INTRODUCTION	1
3	ORGANISATION	2
3.1	Head of department (Torben Madsen)	2
3.2	Business area manager (Gitte I. Petersen)	3
3.3	Project manager	3
3.4	Head of projects.....	4
3.5	Laboratory manager.....	4
4	PERFORMANCE OF PROJECT.....	5
4.1	Agreement	5
4.2	Quality Assurance Project Plan (QAPP).....	5
4.3	Services	6
4.3.1	Laboratory tests	6
4.3.2	Pilot tests	6
4.3.3	Land-based tests	6
4.3.4	Shipboard tests.....	6
4.4	Reports	6
4.4.1	Performance evaluation of BWMS under the IMO convention.....	7
5	QUALITY MANAGEMENT PROCESSES	7
5.1	DHI Quality Assurance.....	7
5.2	Document and record control.....	7
5.3	Internal audits	8
5.4	Complaint management.....	8
5.5	Subcontractor management.....	8
5.6	Staff competence management	8
5.7	Facility management.....	8
5.8	Management review.....	9
6	REFERENCES	9

APPENDICES

A	Standard Operating Procedures (SOPs)
B	Overview of lists
C	Template for Amendments to QAPP
D	Template for Deviations to QAPP



1 TERMS AND ABBREVIATIONS

Terms/Abbreviations	Definitions and comments
Active substance	A substance which has a general or specific action on aquatic organisms or bacteria (pathogens)
Ballast Water Management System (BWMS)	A system which removes, renders harmless or avoids uptake or discharge of aquatic organisms and bacteria (pathogens) with ballast water and sediments by mechanical, physical, chemical or biological means acting individually or in combination
Certification Body	Body to certify facilities to conduct performance evaluation of BWMS according to the IMO Convention
Client	The party requesting a performance evaluation of a technology.
Convention	The IMO convention on ballast water
International Maritime Organization (IMO)	United Nations specialized agency with responsibility for the safety and security of shipping and the prevention of marine pollution by ships Comment: IMO has adopted the International Convention for the Control and Management of Ship's Ballast Water and Sediments
Quality Assurance Project Plan (QAPP)	Project-specific technical document describing the BWMS to be tested, the test facility and other conditions affecting the actual design and implementation of the required experiments
Quality Management Plan (QMP)	Generic document describing the quality control management structure and policies of the testing body (including subcontractors and outside laboratories)
Services	The performance evaluation of maritime technologies by laboratory, land-based or shipboard tests or a combination hereof
Standard Operation Procedure (SOP)	Generic document providing rules, guidelines or characteristics for tests or analyses Comment: In-house methods may be used in the absence of a recognized standard, if they are commonly accepted for testing of BWMS or scientifically documented

2 INTRODUCTION

The International Maritime Organization (IMO) has adopted the International Convention for the Control and Management of Ship's Ballast Water and Sediments /1/ to reduce the risk of spreading of harmful aquatic organisms and pathogens released with ballast water.

The Convention requires that all ships comply with specified water quality requirements (D2) before ballast water is released into the environment.

The performance evaluation of ballast water management systems (BWMS) aims at documenting compliance with the requirements stated in international guidelines, e.g.:

- Guideline for approval of ballast water management systems - G8 /2/



- Procedure for approval of ballast water management systems that make use of active substances - G9 /3/.

DHI provides services in relation to performance evaluation of maritime technologies and particularly BWMS within the DHI Ballast Water Centre which includes test facilities and laboratories in Denmark and Singapore.

The DHI Ballast Water Centre is organized with a Ballast Water Facility Board including two members from the management in DHI Denmark and two members from the management in DHI Singapore. The object of the Board is to coordinate the development and marketing of services related to the performance evaluation of BWMS within the DHI Group.

The services addressed with the present Quality Management Plan (QMP) include:

- Laboratory tests conducted at the DHI environmental laboratory in Hørsholm, Denmark, aiming at proof-of-concept or technology optimisation
- Pilot-tests conducted at the DHI Maritime Technology Evaluation Facility (hereafter referred to as the “test facility”) in Hundested, Denmark, aiming at technology optimisation
- Land-based tests conducted at the test facility according to international guidelines
- Shipboard tests conducted by DHI Denmark according to international guidelines at vessels, on which the technology is installed

The above activities are collectively referred to as the “services” whereas individual activities are referred to as “projects”.

The aim of the services is to provide independent, third party documentation for the performance of maritime technologies. High quality of the services is ensured through extensive quality management and use of skilled staff.

3 ORGANISATION

3.1 Head of department (Torben Madsen)

The head of department, business strategy, for DHI’s Department of Environment and Toxicology, has the overall responsibility for the services and the test facility. This includes the following tasks:

- Co-ordination of joint business development between DHI Denmark and DHI Singapore via participation in the Ballast Water Facility Board
- Negotiation of agreements (i.e. service contracts) with clients
- Responsibility for overall co-ordination, planning and costs as required to ensure that the appropriate human resources, facilities and equipment are available for the services
- Appointment of the business area manager, the project manager and task leaders for cross-cutting functions (e.g. production of test water and test facility technical operations)
- Maintenance of the QMP with updated versions as appropriate



- Approval of the Quality Assurance Project Plan (QAPP) and Standard Operation Procedures (SOPs)
- Quality control and approval of test reports (provided that the head of department has not contributed to the technical solution of the project)
- Documentation in relation to
 - Staff training and experience
 - Facilities and their maintenance
 - Records of complaints

3.2 Business area manager (Gitte I. Petersen)

The business area manager is responsible for the scientific and technical quality of the services in co-ordination with the head of department. This includes the following managerial tasks:

- Business development and marketing
- Maintenance of generic standards that can serve as formats for drafting the QAPPs and approval of the methods applied in land-based and shipboard tests
- Dialogue with task leaders for cross-cutting functions, e.g. production of test water and test facility technical operations
- Contributions to data interpretation and reporting of land-based and shipboard tests in collaboration with the project manager
- Participation in discussions with the Certification Body on important matters, particularly draft and final reports, together with the project manager
- Co-ordination of the services with the aim to ensure feasibility of parallel projects conducted at the test facility, including decisions related to the functioning of the test facility (e.g. piping and pumps)
- Maintenance of the test facility, connection piping between the test facility and the client's technology, and dialogue with academic and technical staff in order to fulfil DHIs responsibility for operating the test facility during testing
- Quality control of test reports (provided that the business area manager has not contributed to the technical solution of the project)

3.3 Project manager

The project manager is responsible for the management and efficient performance of the project in accordance with the contract between the client and DHI, the QMP and the QAPP.

The project manager's tasks include:

- Organisation and management of the project
- Periodic meetings and other communication with the client to ensure that all necessary information is available in due time
- Preparation of the draft and final QAPP with detailed description of the project, including time schedule and quality assurance of deliverables



- Facilitation of the process for comments and responses to the draft QAPP in dialogue with the client and the Certification Body
- Preparation of amendments and deviations to the QAPP, if any
- Communication of the project time schedule to the Certification Body to enable external audit
- Communication of the QAPP and project time schedule to the internal auditor identified in the QAPP to enable internal audit
- Participation in discussions with the Certification Body on important matters, particularly draft and final reports, together with the business area manager
- Co-ordination and dialogue with the business area manager in relation to safe conditions of work, logistics and technical operations at the test facility
- Co-ordination and dialogue with the laboratory manager in relation to the practical organisation of work involving laboratory technicians; the project manager shall in due time inform the laboratory manager on the types of tests and the required capacity to enable laboratory capacity planning
- Agreements with subcontractors as appropriate for meeting the project deliverables (e.g. chemical analytical laboratory)
- Approval of initiation of the test cycles and interruption of test cycles, e.g. in case of irregularity
- Preparation of reports

3.4 Head of projects

The academic staff (with exception of the business area manager, project manager, task leaders for cross-cutting functions and test co-ordinators) and the secretaries are appointed by the head of projects via dialogue with the business area manager or the project manager as appropriate.

3.5 Laboratory manager

The laboratory manager appoints laboratory technicians for a specific project and allocates tasks to them as part of the laboratory capacity planning. Furthermore, the laboratory manager appoints one or more test co-ordinators among the laboratory technicians or the academic staff for on-site co-ordination of land-based test cycles.

3.5.1.1 Academic staff, laboratory technicians and secretaries

The tasks of the academic staff, the laboratory technicians and the secretaries include:

- Contributions to the QMP, QAPP and SOPs
- Test co-ordinator function, i.e. co-ordination and keeping timely records of the activities at the test facility during land-based tests
- Sampling at the test facility
- Monitoring of test water quality
- Maintenance of materials and equipment
- Analysis and data processing
- Contributions to test reports



- Archiving of documents and raw data

4 PERFORMANCE OF PROJECT

4.1 Agreement

An agreement between the client and DHI is negotiated and signed according to the DHI manual for project management.

4.2 Quality Assurance Project Plan (QAPP)

The QAPP is a project specific document describing the technology to be tested, the test facility, and other conditions affecting the actual design and implementation of the study. The QAPP is only required for performance evaluation of BWMS in land-based or shipboard tests conducted according to international guidelines.

The QAPP is

- Prepared by the project manager
- Signed by the project manager, the head of department and the internal auditor from the DHI Quality Assurance Unit
- Forwarded to the Certification Body for review and comments
- Forwarded to the client for review, acceptance and signature.

The QAPP typically includes the following titles:

1. Objective
2. Client (including client's monitor, if any)
3. Administration
4. DHI Ballast Water Centre
5. Subcontractors
6. Project management
7. System description
8. Safety handling of active substances
9. Test design (including, for **land-based test**, test cycles, test water, sampling and analyses, and, for **shipboard test**, trial period and locations, sampling and analyses)
10. Validity criteria
11. Pass criteria
12. Time schedule
13. Quality assurance
14. Report
15. Archiving
16. Amendments and deviations, if any
17. References

The QAPP refers to a number of SOPs (see Appendix A).



Amendments and deviations to the QAPP are approved and signed by the project manager. Amendments describe planned changes whereas deviations describe unplanned changes to the QAPP.

The QAPP is subject to internal audit in accordance with the procedures for internal audit of the DHI Quality Management System.

4.3 Services

The project will be conducted as described in the QAPP and subsequent amendments and deviations or, alternatively, as described in the agreement between the client and DHI for projects, for which no QAPP is prepared.

4.3.1 Laboratory tests

Laboratory tests can be initiated when the BWMS technology is ready for testing and DHI's deliverables are defined. Initiation of testing is decided by the project manager in agreement with the client.

4.3.2 Pilot tests

Pilot tests can be initiated when the BWMS technology is installed and ready for operation. Initiation of testing is decided in consensus by and between the business area manager and the project manager in agreement with the client.

4.3.3 Land-based tests

Land-based tests can be initiated when the BWMS technology is installed and ready for operation. Initiation of testing is decided in consensus by and between the business area manager and the project manager in agreement with the client.

The project manager decides when a test cycle in the land-based test is completed and valid, when appropriate by reference to the G8 guidelines /2/, G9 guidelines /3/ or other standards (e.g. US requirements). If required, the project manager can decide to interrupt a test cycle due to technical malfunctioning of the test facility or the BWMS, insufficient state of biological or physical parameters or for other reasons related to the quality of the test water.

4.3.4 Shipboard tests

Shipboard testing can be initiated when the BWMS technology is installed on the vessel and ready for operation. Initiation of testing is decided by the project manager in agreement with the client.

The project manager decides when a test cycle in the shipboard test is completed and valid by reference to the criteria in G8 /2/ or, if appropriate, to criteria in other standards (e.g. US requirements). If required, the project manager can decide to interrupt a test cycle due to technical malfunctioning of the BWMS, insufficient state of biological or physical parameters or for other reasons related to the water quality.

4.4 Reports

Reports are prepared with the details, format and language described in the agreement between the client and DHI.



4.4.1 Performance evaluation of BWMS under the IMO convention

For land-based or shipboard tests of BWMS conducted as part of the IMO approval process, the report is typically structured by use of the appropriate headings in the QAPP and shall include a summary of any amendments and deviations to the QAPP.

The report shall include all relevant technical and analytical data and will contain at least the following items:

- Name and address of the client (and monitor, if any)
- Name and address of the testing facility and the dates, on which the test was initiated and completed
- Objectives and procedures stated in the approved QAPP including any changes made to the QAPP
- Results obtained, presented in summarizing tables and as raw data
- Any unforeseen circumstances which may have affected the quality or integrity of the land-based/shipboard testing
- Storage locations of all raw data, the signed QAPP and report
- Descriptions of operations, calculations and transformations performed on the presented data
- Quality assurance statement

The report shall be signed by the project manager, the internal auditor from the DHI Quality Assurance Unit and the head of department.

The final report will be prepared in English and forwarded to the client.

5 QUALITY MANAGEMENT PROCESSES

5.1 DHI Quality Assurance

The services are conducted in accordance with the principles of ISO 9001 by using the DHI Quality Manual and the procedures in this QMP. The Quality Management System of DHI is found compliant with ISO 9001 as part of the ISO 17025 accreditation of the DHI environmental laboratory.

The DHI quality manager is responsible for assigning a trained internal auditor from DHI's Quality Assurance Unit to each project in accordance with the procedures for internal audit of the DHI Quality Management System.

The internal auditor is identified in the QAPP. The internal auditor shall receive the QAPP from the project manager in order to plan and execute internal audit of the project.

5.2 Document and record control

The DHI Quality Manual includes a procedure describing the process of drafting, revising and approving documentation. Standard operation procedures are controlled as described in SOP 30/944.



SOPs 30/921 and 30/937 describe how records of the test are stored, transferred, maintained and controlled in order to ensure data integrity for a period defined in the QAPP, but not shorter than 5 years from completion of the verification.

5.3 Internal audits

Procedure 3 in the DHI Quality System Manual on audit and evaluation and SOP 30/943 describe the process of periodic internal auditing of projects and activities including audit responsibilities and planning, auditor training and competences and audit reporting.

Procedure 4 in DHI Quality System Manual on non-conformities and corrective actions describes how deviations identified during operation and auditing are corrected (corrective actions) and how future occurrence of the same deviations is prevented by improving the quality manual including the process descriptions and working methods (preventive actions).

5.4 Complaint management

Procedure 5 in the DHI Project Management Manual on Complaints describes how complaints are recorded, resolved and reported. If not resolved, complaints are referred to the Certification Body for resolving.

5.5 Subcontractor management

Procedure 4 in the DHI Project Management Manual on subcontractors describes how it is ensured that subcontractors follow quality requirements.

In addition, analytical laboratories providing analyses of any kind should:

- Maintain an ISO 17025 accreditation with the quality management system required herein.
- Apply accredited analytical methods when available.
- Apply other methods according to either international standard methods or in-house methods that are in all cases validated as required for accredited methods.

SOP 30/700 furthermore describes how it is ensured that purchased items such as chemicals and glassware are controlled, accepted and calibrated.

5.6 Staff competence management

Procedure 3 on appraisal interview, post qualifying education and experience in the DHI Employee Conditions Handbook describes how it is ensured that the projects are conducted by staff with adequate competences and knowledge. This is done by maintaining a list of functions in the test process with competence requirements and responsibilities. The list is supported by reference to staff files in the DHI CV database.

5.7 Facility management

SOP 30/945 describes how it is ensured that facilities and equipment are available and fit for the purposes.



5.8 Management review

Procedure 3 of the Quality System Manual on audit and evaluation describes how the DHI management is ensuring that the test centre is working according to this quality manual through mechanisms such as e.g. an annual management review process.

The Quality Manager is responsible for maintenance and development of the quality system and for the internal auditing of all aspects of the system – with daily reference to the Director, Group R&D and Quality Management. The DHI Quality Manual contains rules for reviews of the quality system.

6 REFERENCES

- /1/ IMO (2005): International Convention for the Control and Management of Ships Ballast Water and Sediments. London. International Maritime Organization.
- /2/ MEPC. Guidelines for approval of ballast water management systems (G8). resolution MEPC.174(58). Adopted 10th October 2008.
- /3/ MEPC. Procedure for approval of ballast water management systems that make use of active substances (G9). MEPC.126(53) Adopted 22nd July 2005.



A P P E N D I X A

BMWS testing-specific Standard Operating Procedures (SOPs)



SUBJECT/SUBSUBJECT	NO.
ANALYTICAL METHOD ZOOPLANKTON ANALYSIS	30/1700:04
ANALYTICAL METHOD MICROSCOPIC ENUMERATION AND IDENTIFICATION OF MICROALGAE (LUGOL AND CMFDA/FDA)	30/1701:02
ANALYTICAL METHOD DETERMINING PRIMARY PRODUCTION OF MICROALGAE	30/1702:03
ANALYTICAL METHOD DETERMINING DIVERSITY OF MICROALGAL COMMUNITIES BY HPLC ANALYSIS OF PIGMENTS	30/1703:03
ANALYTICAL METHOD DETERMINATION OF VIABLE ALGAE BY MPN	30/1704:02
MICROBIOLOGICAL TESTS DETERMINATION OF TOTAL NUMBER OF BACTERIA BY EPIFLUORESCENCE MICROSCOPY	30/1705:03
MICROBIOLOGICAL TESTS DETERMINATION OF HETEROTROPHIC PLATE COUNT	30/1706:03
MICROBIOLOGICAL TESTS DETERMINATION OF <i>VIBRIO CHOLERA</i> E IN WATER	30/1707:02
MICROBIOLOGICAL TESTS DETERMINATION OF TOTAL COLIFORM, <i>E. COLI</i> AND ENTEROCOCCI Colilert*-18 AND Enterolert-E	30/1708:02
MEASUREMENT METHOD OZONE MEASUREMENT IN WATER	30/1730:02
MEASUREMENT METHOD OZONE MEASUREMENT IN AIR	30/1731:02
MEASUREMENT METHOD TRO MEASUREMENT IN WATER	30/1732:02
HARVESTING, CULTURING AND ADDITION OF ORGANISMS	30/1734:03
COLLECTION OF SEAWATER	30/1735:02
COLLECTION OF FRESH WATER	30/1736:02
CHEMICAL CRITERIA FOR TEST WATER ADDITION OF DOC, POC AND MM	30/1737:02
SAMPLING BIOLOGICAL AND WATER QUALITY PARAMETERS	30/1738:02
SAMPLING WET TEST	30/1739:02
SAMPLING DBP ANALYSIS	30/1740:02
STATISTICS STATISTICAL SURVEILLANCE OF BIOLOGICAL DATA OBTAINED AT TESTS OF BWMSs	30/1760:01
LABELLING SAMPLES COLLECTED AT TEST SITE	30/1761:01
OPERATION OF THE DHI MTEF	30/1762:02
CLEANING RETENTION TANKS, PIPINGS AND OTHER EQUIPMENT AT TEST SITE	30/1763:02
MEASUREMENT METHOD ON-LINE MONITORING OF PRESSURE, TEMPERATURE AND FLOW RATES AT TEST SITE	30/1764:01
MEASUREMENT METHOD FLUORESCENCE	30/1765:02



SUBJECT/SUBSUBJECT	NO.
MEASUREMENT METHOD TURBIDITY	30/1766:03
HEALTH AND SAFETY ENSURING WORKER HEALTH AND SAFETY AT TEST SITE	30/1767:02
MEASUREMENT METHOD DETERMINATION OF TSS	30/1768:02
MEASUREMENT METHOD DETERMINATION OF DOC AND POC	30/1769:02



A P P E N D I X B

Overview of lists



Overview of lists

The lists mentioned below are kept together with the rest of quality documentation.

Certification Body

DHI holds a statement describing the Certification Body that has certified the DHI Maritime Technology Evaluation Facility.

List of sub-contractors

DHI keeps a list of sub-contractors used during the test. The list contains information on name of company, address, contact person, e-mail, telephone number and deliveries.

List of staff approved for functions at the test facility

DHI keeps a list of persons working at the test facility. The list contains information on the person's activities, responsibility and documentation for training. The person's competence is documented in an available CV.

List of Standard Operation Procedures

DHI keeps a list of SOPs, including those used in relation to projects conducted at the test facility.



A P P E N D I X C

Template for amendments to QAPP



AMENDMENT

QAPP DOCUMENT TITLE AND DATE:

AMENDMENT NUMBER:

DATE OF AMENDMENT:

AMENDMENT CONTENTS:

REASON FOR AMENDMENT:

IMPACT OF AMMENDMENT:

PREVENTATIVE ACTION:

If relevant, action to prevent that the same cause of amendment will reoccur in the future.

ORIGINATED BY:

SIGNED BY:

Project manager

DATE

Copy to be sent to the client, the Certification Body and the DHI Quality Assurance Unit.



A P P E N D I X D

Template for amendments to QAPP



DEVIATION

QAPP DOCUMENT TITLE AND DATE:

DEVIATION NUMBER:

DATE OF DEVIATION:

DESCRIPTION OF DEVIATION:

REASON FOR DEVIATION:

IMPACT OF DEVIATION:

CORRECTIVE ACTION:

If required, actions to be taken to prevent consequences of deviation

ORIGINATED BY:

SIGNED BY:

Project manager

DATE

Copy to be sent to the client, the Certification Body and the DHI Quality Assurance Unit.

Quality Assurance Project Plan

Shipboard Test of Auramarine's Crystal Ballast 250 Ballast Water Management System

October 2011

Quality Assurance Project Plan

Shipboard Test of Auramarine's Crystal Ballast 250 Ballast Water Management System

Agern Allé 5
DK-2970 Hørsholm
Denmark

Tel: +45 4516 9200
Fax: +45 4516 9292
dhi@dhigroup.com
www.dhigroup.com

Client	Client's representative
Auramarine Ltd.	Jukka Suvanto

Project		Project No			
Shipboard Test of Auramarine's Crystal Ballast 250 Ballast Water Management System		11811494			
Authors		Date:			
Michael Andersen		2011-10-21			
		Approved by			
		Torben Madsen			
		MDA	LSC	TMA	
1	First draft	MJA	LSC	TMA	2011.10.21
Revision	Description	By	Checked	Approved	Date
Key words		Classification			
		<input type="checkbox"/> Open <input type="checkbox"/> Internal <input checked="" type="checkbox"/> Proprietary			

Distribution Auramarine Ltd. DNV DHI	No of copies
	Electronic



CONTENTS

1	OBJECTIVE	1
2	CLIENT	1
3	CERTIFICATION BODY	1
4	DHI BALLAST WATER CENTRE	1
5	SUBCONTRACTORS	1
6	PROJECT MANAGEMENT	2
7	SYSTEM DESCRIPTION	2
8	SAFETY HANDLING OF ACTIVE SUBSTANCES	2
9	TEST DESIGN	2
9.1	Trial period and locations	2
9.2	Test cycles	2
9.3	Sampling	3
9.3.1	Sample overview	3
9.3.2	Samples for enumeration of organisms $\geq 50 \mu\text{m}$	4
9.3.3	Samples for enumeration of organisms $\geq 10 \mu\text{m}$ and $< 50 \mu\text{m}$	4
9.3.4	Samples for enumeration of bacteria	4
9.4	Analyses	4
9.4.1	Analysis overview	4
9.4.2	Temperature and salinity	5
9.4.3	Organism size class $\geq 50 \mu\text{m}$	5
9.4.4	Organism size class $\geq 10 \mu\text{m}$ and $< 50 \mu\text{m}$	5
9.4.5	Bacteria	6
9.4.6	DOC, POC and TSS	6
10	VALIDITY CRITERIA	6
11	PASS CRITERIA	7
12	TIME SCHEDULE	7
13	QUALITY ASSURANCE	7
14	REPORTS	8
15	ARCHIVING	8



16	AMENDMENTS AND DEVIATIONS.....	8
17	REFERENCES	8

APPENDICES

A	Description of the ballast water management system as given by the client
---	---



1 OBJECTIVE

For an application for final approval, the IMO Convention requires an approval of Ballast Water Management Systems (BWMS) according to the principles laid down in Resolution MEPC.174(58) (G8) /1/ to assure that BWMS approved by administrations are capable of meeting the standard regulation D-2 (MEPC G8) in land-based and shipboard evaluations and do not cause unacceptable harm to the vessel, crew, environment or public health.

The objective is to conduct a shipboard test of the Auramarine Crystal Ballast 250 BWMS (hereafter CB250) according to Resolution MEPC.174(58), Guidelines for approval of ballast water management systems (G8) (hereafter designated as the 'G8 guidelines').

2 CLIENT

Auramarine Ltd.
P.O. Box 849
FIN-20101 Turku
Finland

Contact person: Jukka Suvanto

3 CERTIFICATION BODY

Det Norske Veritas AS
Veritasveien 1
N-1363 Høvik, Oslo
Norway

4 DHI BALLAST WATER CENTRE

DHI
Agern Allé 5
DK-2970 Hørsholm
Denmark

Contact Person: Michael Jakob Andersen

5 SUBCONTRACTORS

The shipboard test will be conducted by DHI, and, with the possible exception of verification of *Vibrio cholerae* (according to SOP 30/1707), subcontractors will not be involved.



6 PROJECT MANAGEMENT

The project manager for the study is Michael Jakob Andersen.

7 SYSTEM DESCRIPTION

The description of the CB250, provided in Appendix A, is identical to the description received from the client.

8 SAFETY HANDLING OF ACTIVE SUBSTANCES

No active substances are applied by the BWMS, CB250.

9 TEST DESIGN

9.1 Trial period and locations

The shipboard test will be conducted during at least two separate campaigns on board the vessel M/S Ahtela, IMO 8911736, DNV ID 16627. The campaigns will be conducted within a trial period with a time span of not less than six months.

The first campaign (Campaign 1) will include two test cycles, one by use of a Boll&Kirch 6.18.2 filter and one by use of a FilterSafe BSF-100H filter which are connected to the BWMS (as described in Appendix A). Campaign 1 is scheduled to be conducted in Hundested, Denmark, between 28.10.2011 and 08.11.2011. The time of arrival of M/S Ahtela in Hundested shall be communicated to DNV and DHI by email from Auramarine. The testing locations are due to change if the densities of phytoplankton in the sea in Hundested are below the validity criteria for inlet water described in section 10.

The second campaign (Campaign 2) will include two test cycles by use of one of the above-mentioned filters, which will be selected after Campaign 1. Campaign 2 will be conducted in April-May 2012 or later. Details on dates and locations for ballasting and deballasting activities will be provided as amendments to the Quality Assurance Project Plan when this information is available.

9.2 Test cycles

The BWMS will be operated by Auramarine during all the test cycles. Each test cycle consists of sampling and analyses of:

Inlet water (the physico-chemical and biological parameters in the inlet water will be considered as sufficiently stable during the ballasting; unless the local conditions indicate that the parameters in the inlet water vary with time, only one set of samples and analyses will be used to represent the control tank and the ballast tank);



Discharge control water (stored without treatment from the time of ballasting to discharge);

Discharge treated water (treated and stored from the time of ballasting to discharge).

9.3 Sampling

9.3.1 Sample overview

	Samples	Sample volumes per replicate
Inlet water	3 replicates	Organisms $\geq 50 \mu\text{m}$: $>1 \text{ m}^3$ *
		Organisms 10-50 μm : $>1 \text{ L}$ **
		Bacteria: $>0.5 \text{ L}$ **
		DOC + POC: approx. 0.5 L **
		TSS: approx. 2 L **
Discharge control water	3 replicates	Organisms $\geq 50 \mu\text{m}$: $>1 \text{ m}^3$ *
		Organisms 10-50 μm : $>1 \text{ L}$ **
		Bacteria: $>0.5 \text{ L}$ **
		DOC + POC: approx. 0.5 L **
		TSS: approx. 2 L **
Discharge treated water	3 replicates	Organisms $\geq 50 \mu\text{m}$: $>3 \text{ m}^3$ *
	3 x 3 replicates	Organisms 10-50 μm : $>1 \text{ L}$ **
	3 x 3 replicates	Bacteria: $>0.5 \text{ L}$ **
	3 replicates	DOC + POC: approx. 0.5 L **
	3 replicates	TSS: approx. 2 L **

*, collected by continuous flow during the entire period of intake or discharge; this continuous sampling of 3 replicates, each with a volume of at $>3 \text{ m}^3$, provides the same statistical basis for counting as the sampling 3 x 3 replicates of $>1 \text{ m}^3$ which is recommended in the G8 guidelines; **, grab samples collected over the period of intake or discharge (e.g. start, middle and end).



9.3.2 Samples for enumeration of organisms $\geq 50 \mu\text{m}$

Three replicates will be collected by parallel continuous sampling during the entire periods of intake and discharge. The samples will be gently filtered through a net with a mesh size of $35 \mu\text{m}$ and a reservoir (cod-end) at the bottom of the net for collecting the zooplankton. Each replicate will be concentrated in 1-L glass bottles. The total volume of the filtered sample will be determined by a flow meter.

9.3.3 Samples for enumeration of organisms $\geq 10 \mu\text{m}$ and $< 50 \mu\text{m}$

Grab samples (3 replicates of the inlet water, 3 replicates of the control discharge water, and 3 x 3 replicates of the treated discharge water) with a volume of at least 1 L will be collected in appropriate containers.

9.3.4 Samples for enumeration of bacteria

Grab samples (3 replicates of the inlet water, 3 replicates of the control discharge water, and 3 x 3 replicates of the treated discharge water) with a volume of at least 0.5 L will be collected in appropriate sterile containers.

9.4 Analyses

9.4.1 Analysis overview

	Temperature	Salinity	$\geq 50 \mu\text{m}$	10-50 μm , Lugol's	10-50 μm , MPN	10-50 μm , Primary production	Bacteria	DOC + POC	TSS
	Replicates								
Inlet water									
Replicate 1 (start)	1	1	Three replicates	1	1	1	1	1	1
Replicate 2 (mid)	2	2		2	2	2	2	2	2
Replicate 3 (end)	3	3		3	3	3	3	3	3
Control discharge water									
Replicate 1 (start)	1	1	Three replicates		1	1	1	1	1
Replicate 2 (mid)	2	2			2	2	2	2	2
Replicate 3 (end)	3	3			3	3	3	3	3
Treated discharge water									
Replicate 1-3 (start)	1	1	Three replicates		1-3	1	1-3	1	1
Replicate 4-6 (mid)	4	4			4-6	4	4-6	4	4
Replicate 7-9 (end)	7	7			7-9	7	7-9	7	7

The samples for all analyses will be kept cool from the time of collection, and the samples will be analysed within shortest possible time period. The following sections use the wording “work on location” to describe activities carried out on-board the vessel. In the case that the shipboard test is conducted on M/S Ahtela alongside the pier in Hun-



dested, it may be convenient to collect samples on-board and perform the analyses in DHI's laboratory in Hørsholm (approx. 1 hour drive from Hundested). "Work on location" will in this situation have no meaning as all analyses will be conducted in the laboratory.

9.4.2 Temperature and salinity

Temperature and salinity will be measured by use of portable multi parameter instrument equipped with electrodes. Measurements will be conducted at regular intervals throughout the inlet and discharge operations.

9.4.3 Organism size class $\geq 50 \mu\text{m}$

The concentrations of viable organisms $\geq 50 \mu\text{m}$ in the samples will be determined by using a stereo microscope and a counting chamber according to SOP 30/1700. Viable organisms will be determined on the basis of mobility and morphology and by using the vital stain Neutral Red. The viable organisms will be characterized according to broad taxonomic groups such as rotifers, crustaceans, molluscs, worms, etc. The analyses will be completed on location.

9.4.4 Organism size class $\geq 10 \mu\text{m}$ and $< 50 \mu\text{m}$

Work on location. *Inlet water samples* will be treated with Lugol's solution to enable determination of the concentrations of organisms in the size class ≥ 10 and $< 50 \mu\text{m}$. The container with the inlet water sample (approx. 10 L) will be shaken gently (upside down 5 times); two subsamples (approx. 100 mL) per replicate will be transferred immediately to brown 100-mL glass bottles and added Lugol's solution to achieve 2% final concentration according to SOP 30/1701.

The concentrations of viable algae in the *inlet and discharge water samples* will be analyzed by use of the most probable number (MPN) assay. The container with the total sample (approx. 10 L) will be shaken gently (upside down 5 times). For the MPN assay, dilution series of the inlet water, control discharge water and treated discharge water will be prepared by adding aliquots of sample to test tubes with liquid medium to a total volume of 6 mL, including controls containing only 6 mL of medium, as described in SOP 30/1704. All test tubes will be kept at ambient temperature without direct exposure to the sun, where after the incubation will be continued upon arrival to the laboratory.

For measuring the primary production of algae in *inlet and discharge water samples*, two representative subsamples of each replicate will be transferred to 60 mL bottles and incubated for approx. 2 hours under light from a light-panel. After incubation, the samples will be filtered onto GF/D filters and the filters will be transferred to glass vials as described in SOP 30/1702.

Work in laboratory. The concentrations of viable organisms in the size class ≥ 10 and $< 50 \mu\text{m}$ in the inlet water will be determined by *inverted microscopy* of samples preserved with Lugol's solution according to SOP 30/1701. The analyses comprise detailed examination of the algal chloroplasts to confirm that the phytoplankton were alive and classification of the algae in major taxonomic groups.

Most probable number (MPN) assay. Upon arrival to the laboratory, the fluorescence of the test tubes will be determined immediately. The MPN test tubes will be incubated for



14 days at room temperature as described in SOP 30/1704. The concentrations of viable algae in the inlet water, control discharge water and treated discharge water will be determined by measuring of the fluorescence in the MPN test tubes according to SOP 30/1704.

Primary production will be determined by measuring the amounts of ^{14}C fixed by photosynthesis by liquid scintillation counting according to SOP 30/1702.

9.4.5 Bacteria

Work on location. The concentrations of *E. coli* and enterococci will be determined according to SOP 30/1708 with appropriate modifications for shipboard test. The analyses of *E. coli* and enterococci will be completed on location when the sampling time allows sufficient time for incubation and enumeration. If there is not time to complete the analyses on location, one sample (volume approx. 100 mL) per replicate will be transferred to sterile containers which will be kept in the dark at 1-4 °C until the arrival at the DHI laboratory.

Samples for detection of *Vibrio cholerae* will be filtered through a 0.45 µm-filter, where after the filter will be placed in a sterile container which will be kept in the dark at 1-4 °C until the arrival at the DHI laboratory.

Work in laboratory. Analyses of *E. coli* and enterococci that were not completed on location will be conducted in the laboratory according to SOP 30/1708.

The possible occurrence of *Vibrio cholerae* will be analysed according to SOP 30/1707 with appropriate modifications for shipboard test.

9.4.6 DOC, POC and TSS

Work on location. For determination of dissolved organic carbon (DOC) and particulate organic carbon (POC), an appropriate sample volume is treated as described in SOP 30/1769.

For determination of total suspended solids (TSS) an appropriate sample volume is filtered through a glass fibre filter which has already been weighed in the laboratory.

Work in laboratory. Determination of DOC and POC according to SOP 30/1769. Determination of TSS according to SOP 30/1768.

10 VALIDITY CRITERIA

Valid test cycles are test cycles in which:

- the concentrations of viable organisms in the inlet water are at least 10 times higher than the maximum permitted values in regulation D-2.1 on discharge (excepted from the requirements to bacteria);
- the concentrations of viable organisms in the discharge control water exceed the maximum permitted values in regulation D-2.1 on discharge (excepted from the requirements to bacteria).



Organism size class	IMO D-2.1 requirements on discharge
Organisms $\geq 50 \mu\text{m}$	<10 viable organisms/ m^3
Organism size: $\geq 10 \mu\text{m}$ - $< 50 \mu\text{m}$	<10 viable organisms/mL

11 **PASS CRITERIA**

The G8 guidelines prescribe that the performance evaluation in the shipboard test may be considered successful, if the BWMS has passed the criteria below in three consecutive test cycles, including ballasting and deballasting operations, conducted on board a vessel during a trial period of not less than six months.

The pass criteria for the shipboard test cycles are:

1. The test cycle shall be valid according to the validity criteria
2. The average density of organisms larger than or equal to $50 \mu\text{m}$ in minimum diameter in the replicate samples shall be less than 10 viable organisms per m^3 at discharge
3. The average density of organisms smaller than $50 \mu\text{m}$ and larger than or equal to $10 \mu\text{m}$ in minimum diameter in the replicate samples shall be less than 10 viable organisms per mL at discharge
4. The average density of *Vibrio cholerae* (serotypes O1 and O139) shall be less than 1 CFU per 100 mL at discharge
5. The average density of *E. coli* in the replicate samples shall be less than 250 CFU per 100 mL at discharge
6. The average density of intestinal enterococci in the replicate samples shall be less than 100 CFU per 100 mL at discharge

12 **TIME SCHEDULE**

October-November 2011	First campaign of test cycles conducted on board
April-May 2012	Second campaign of test cycles conducted on board
May-June 2012	Draft and final reporting. Final report submitted one month after completion of Campaign 2

13 **QUALITY ASSURANCE**

The DHI Quality Assurance Unit will review this Quality Assurance Project Plan and conduct inspections of the laboratory analyses and the raw data.

The final report will be audited.

Inspection and audit will be carried out by Quality Assurance personnel independent of the staff involved in the shipboard test.



14 *REPORTS*

The following reports will be prepared:

An interim report compiling the data for the first campaign of test cycles

A draft final report compiling all relevant data from the test cycles, data interpretation and conclusion

A final report

15 *ARCHIVING*

All data generated and all other records and information relevant to the quality and integrity of the land-based testing will be retained according to the DHI Quality Manual Plan /2/. The data will be filed in the archives of DHI and retained for a period of five years after issue of the final report.

16 *AMENDMENTS AND DEVIATIONS*

Amendments are planned changes of the Quality Assurance Project Plan. Deviations are unplanned changes. Amendments and deviations will be signed by the project manager and documented in the file and the final report.

17 *REFERENCES*

- /1/ Resolution MEPC.174(58). Adopted on 10 October 2008. Guidelines for approval of ballast water management systems (G8).
- /2/ Quality Management Plan (QMP) for DHI Maritime Technology Evaluation Facility (MTEF). 2010.



APPROVAL OF QUALITY ASSURANCE PROJECT PLAN

DHI Ballast Water Centre

Project management  Date: 21/10-11
Michael Jakob Andersen

DHI management  Date: 21/10-11
Torben Madsen

Quality Assurance Unit  Date: 21/10-11
Louise Schlüter

This QAPP is accepted and my signature authorises the study to proceed as described in this document.

Client _____ Date:
Jukka Suvanto
Auramarine Ltd.



A P P E N D I X A

Description of the ballast water management system as given by the client

SHIPBOARD TEST PLAN ver.1.2
CrystalBallast® CB75/250
BALLAST WATER TREATMENT SYSTEM
ONBOARD M/S AHTELA, IMO 8911736, DNV ID 16627
AURAMARINE




Document Revision 1.0

Dated: 14/10/2011

Jukka Suvanto

Auramarine has a ballast water treatment system called CrystalBallast. Auramarine will perform shipboard tests according to IMO G8 in ship called Ahtela. Testing will be done for two sizes of CrystalBallast 75m³/h (CB75) and 250m³/h (CB250). Testing period will be for CB250 6 months of discharge fulfilling the G8 recommendations, and it includes a 3 month period where the intake and discharge are fulfilling the G8 recommendations. As in the timeline below.

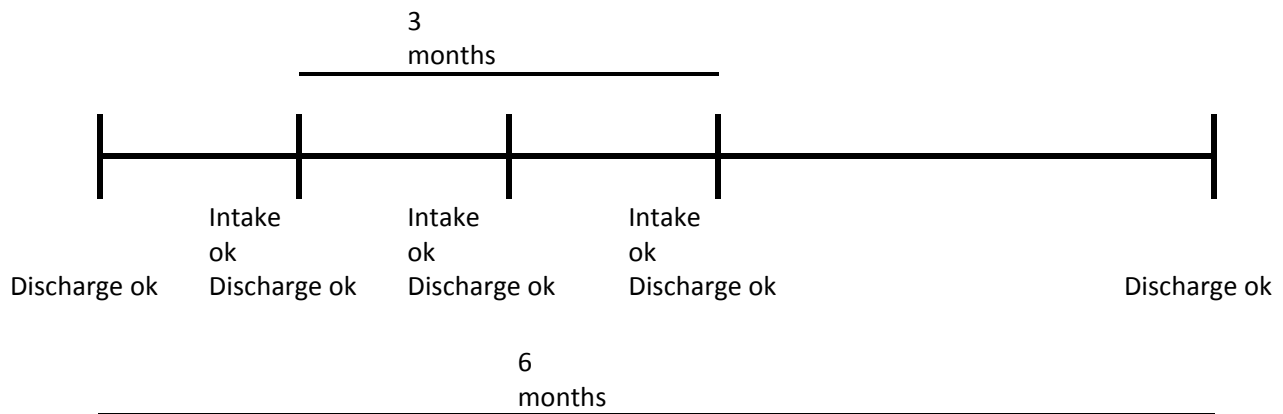


The CB75 unit will be tested for 3 months where the intake and discharge will fulfill the G8 recommendations.

The ship Ahtela is not in any regular route. The G8 is recommending that the ship should be in normal operation. Because Ahtela is not in any regular route she will simulate a normal operation by ballasting/deballasting 3-4 times per week every other week. Also the ship will sail between two ports between the ballasting/deballasting. The ports can be any ports in the world. This is considered as normal operation. If Ahtela will have some 'sold' routes during the 6 month period, this will be considered as normal operation.

CrystalBallast® CB 75/250 Combo for testing purposes onboard M/S AHTELA

Auramarine Ltd manufactures for testing purposes a combined 75 m³/h + 250 m³/h CrystalBallast® ballast water treatment (BWT-) unit, which will be installed in two 20' containers; BWT filter units and UV-reactors in one container and the power and control units in another container, ref. Auramarine's drawing nr 308421. The unit includes one Boll&Kirch 6.18.2 filter and one FilterSafe BSF-100H (BSFc-H/V-16) filter. The two filters are installed to the same unit to ensure Auramarine can achieve the Type Approval. Auramarine has had some problems with the Boll&Kirch filter. If the problems continue Auramarine will perform the tests with the FilterSafe filter.


The unit also has two different kinds of UV-reactors. For CB250 there is one piece of CR-A250 reactor and for CB75 there is three pieces of CR-A75 reactors. There is three pieces of reactors to meet the pump capacity of the Ahtela's ballast pumps. Basically Auramarine will perform two tests with 225m³/h (3*75m³/h) and 250m³/h. The units PI is in the appendix 1.

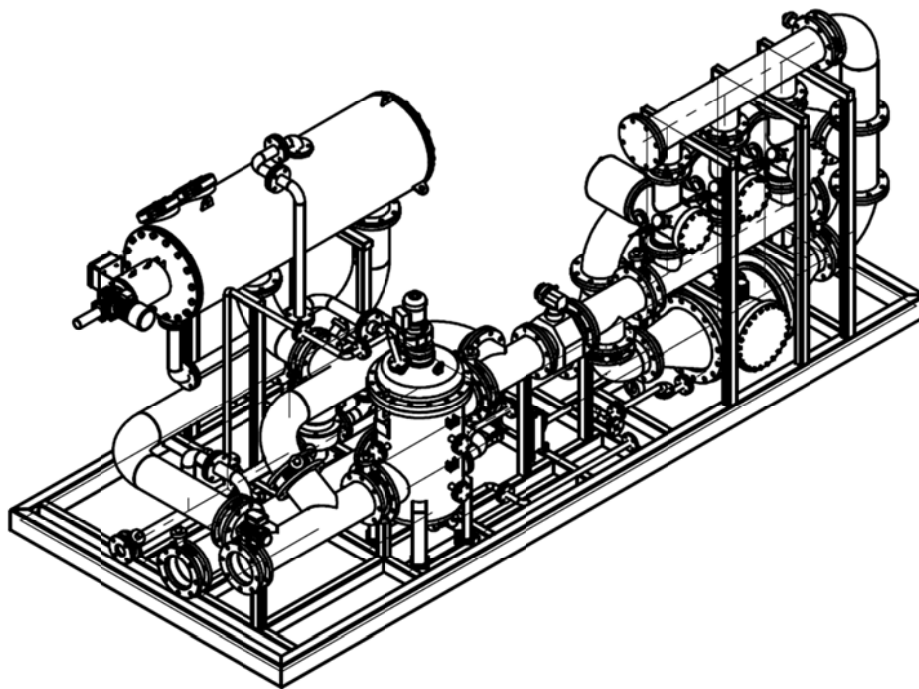

Picture 1: GA of the unit

Arrangement of installation

The containers will be installed in ship's lower hold, aft part in the vicinity and corner of ramp and aft bulkhead towards engine room, see drawing nr 308457 A "CrystalBallast CB75/250 Arrangement on M/S AHTELA".

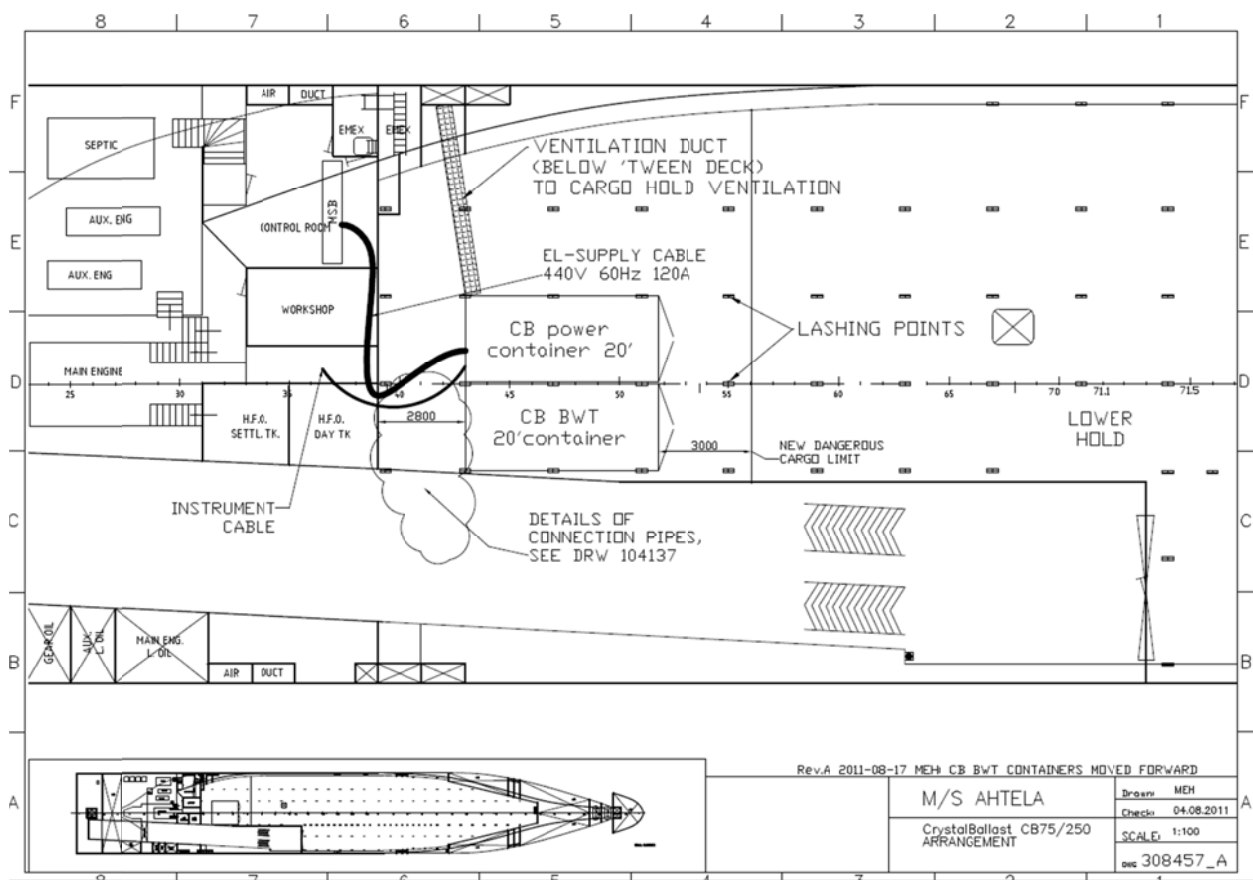


Picture 2: position of containers



Picture 3: view of the aft lower cargo hold

Connection to existing ballast system

Connections to ships bilge- and ballast system will be done according to rev.D3 of diagram 1-051-0016 D3_(BILGE AND BALLAST SYSTEM)

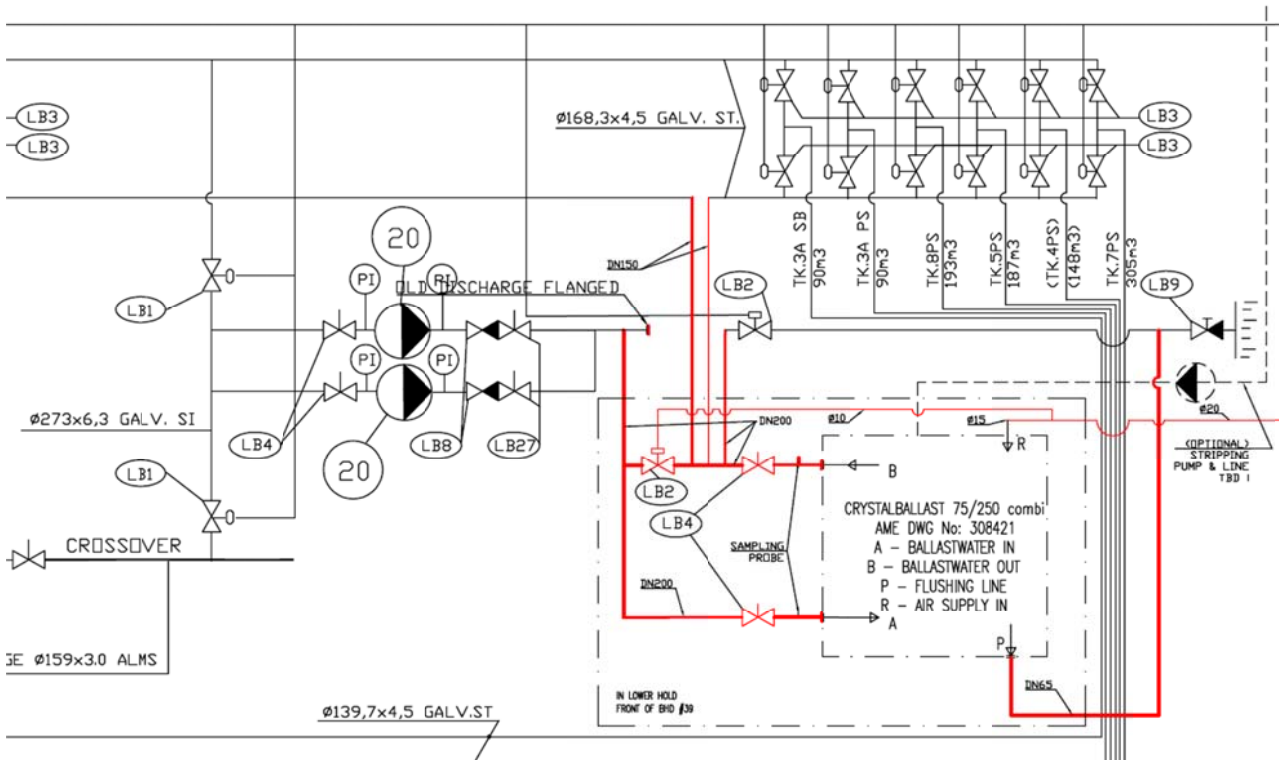

Picture 4: PI of the ship ballasting system

Sample water overflow from BWT-unit will be led by using movable hoses to lower hold bilge well, S-side aft corner, and further to (cargo hold) bilge discharge.

In the diagram there is shown an optional change of stripping system; this change will not be applied in this phase, yet, and the existing ejector system remains onboard. Thus requirements stated in DNV Pt.6 Ch.18 Sec.4 B206 will not be fulfilled, but it does not effect on test equipment's performance or testing procedures. From the ship's point of view, the changes on the stripping system become actual when the IMO BW-Code comes in to force.

The following changes and additions on ship's piping will be made:

1. Remote controlled system by-pass valve DN200; "LB2"
2. Closing of old ballast discharge line with flange, moving of remote operated discharge valve and connection to new discharge line from BWT unit
3. new connection pipes to BWT unit (ZnSt), DN 200 and to ballast system DN150; through bulkhead #39
4. 2 x manually operated closing valves DN200 between BWT unit and ship's BW system (to be open normally)
5. Flushing line pipe DN65 from BWT-unit to existing side discharge valve. During the filter back flush valve LB2 is closed. This prevents the untreated water to enter the tanks.
6. Control air supply pipe, dia 18mm, from ship's instrument air dryer

7. Sampling pipes, see drawing 308456, in cargo space between the containers and machinery space, in order to make the sampling & testing easy.
8. During ballasting the valve LB2 on the ballast discharge line will be closed. By closing this valve the system will avoid the possibility of filter back flush to be returned to main line.

Sampling points


On the system inlet and outlet there will be sample points which are recommended in the G2 and G8. There will be 3 pieces of sample points on the system inlet and outlet, totally 6 pieces of sampling points. To have multiple sampling points Auramarine wants to confirm that there will be enough samples and that the sample volumes are large enough.

The sample points are in the same cargo space as the containers which include the unit. This is because there is not space for sampling equipment in the engine room. The sample points are as in picture 5. The sampling points are located in the pipeline before and after the unit as in picture 6.


DNV comment: For the sampling points, please note that placing the 2 sample outlets as proposed may influence the samples of the 2nd outlet, depending on the direction of the flow. The QAPP for shipboard tests should indicate how the samples will be taken and from which outlet. In any case, it will be an interesting study to see if turbulence caused by the first sampling outlet will affect the sampling results from the 2nd sampling outlet.

Testing plan

Auramarine is aiming to perform the tests starting on October 2011 and ending on April 2012. For the shipboard tests Ahtela will be sailed to the seas where there will be enough of phytoplankton to meet the G8 recommendations. This will probably be in North Sea outside of Holland etc. If there will not be enough phytoplankton, Ahtela will sail more South. Auramarine will perform the CB75 and CB250 tests at the same time. Only difference is that the tests for CB75 will last at least 3 months and for CB250 tests will last at least 6 months.

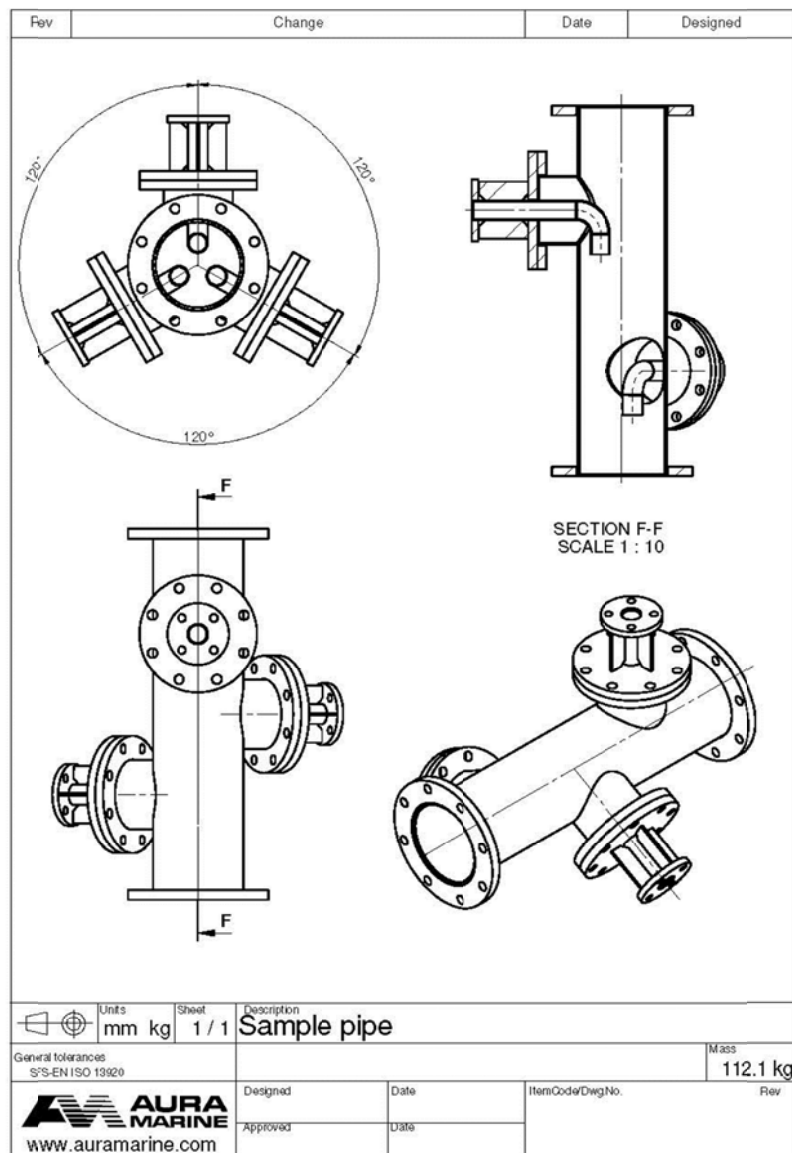

Picture 5: Sample pipe

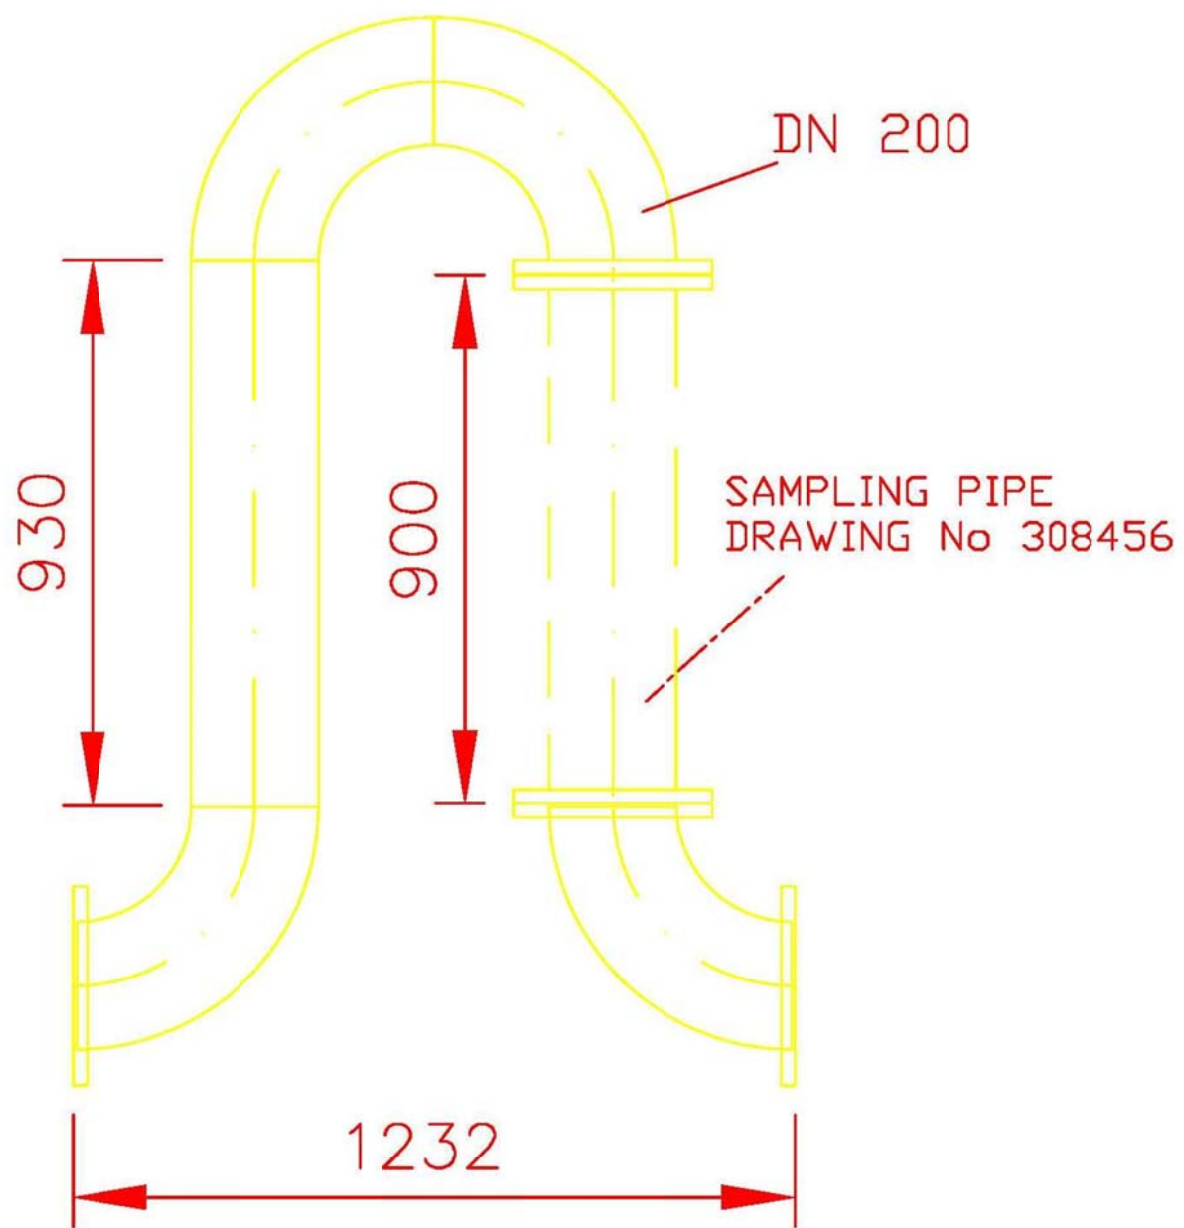

Picture 6: Pipeline on the sampling points

By performing the shipboard tests according to this document Auramarine will have conducted shipboard tests required by the G8 Guidelines and BWM.2/Circ.33 as part of Type Approval.

The Type Approval is given to CrystalBallast models CB75 and CB250. The Type Approval also allows Auramarine to build units with bigger flows by installing a filter which can handle bigger flow and installing the UV-reactors in parallel.

Other shipboard tests will also be continued in MS Pasila. In Pasila the test continues on CB500 and CB1000. If the 6 month shipboard test will be conducted earlier in Pasila than Ahtela, this will give Type Approval for CB250, CB500 and/or CB1000.

If then again the 6 month test period will be conducted first in Ahtela on CB250. Then other models CB75, CB500 ja CB1000 will be tested for 3 months.

Appendix 1.

AMENDMENT

Quality Assurance Project Plan

Shipboard Test of Auramarine's Crystal Ballast 250 Ballast Water Management System. October 2011.

Amendment number 1

2011.10.28

Amendment Comments

The CrystalBallast® CB75/250 Combo

The QAPP in general applies for the shipboard testing of the Auramarine CrystalBallast® CB75/250 combo ballast water treatment unit and not only the CB250 as described in the QAPP. The descriptions in the QAPP are also valid for the CB75. The test design and analyses will be exactly the same for the CB75 and the CB250.

The first campaign (Campaign 1) with the CB75 will include two test cycles, one by use of a Boll&Kirch 6.18.2 filter and one by use of a FilterSafe BSF-100H. Campaign 1 is scheduled to be conducted in Hundested, Denmark, between 05.11.2011 and 09.11.2011. The M/S Ahtela is currently situated in Hundested. The testing location is due to change if the densities of phytoplankton in the sea in Hundested are below the validity criteria for inlet water described in section 10 of the QAPP.

Amendment to section 9.4.1 Analysis overview.

Enumeration and characterization of organisms in the $\geq 10 \mu\text{m}$ and $< 50 \mu\text{m}$ size range by inverted microscopy will also be conducted for control discharge water samples fixed with Lugol solution. This will be conducted in addition to MPN assays for discharge control water. The methodology will be the same as described for inlet water control samples in section 9.4.4 of the QAPP.

Reason for Amendment

Due to the potential favourable conditions for shipboard testing in Hundested, Denmark Auramarine Ltd. has requested to initiate testing with the CB75 during the planned testing campaign for the CB250 in October-November 2011.

The addition to section 9.4.1 analysis overview of the QAPP was made according to a request from DNV.

Impact of Amendment

The trial period of at least three months for the CB75 described in Appendix A of the QAPP is planned to be initiated on the 5th of November 2011.

Preventive Action

Not relevant.

Michael Andersen

A handwritten signature in blue ink that reads 'Michael Andersen'. The signature is written in a cursive, flowing style.

Project manager

2011.10.28

Date

Copy to be sent to the client, the Certification Body and the DHI Quality Assurance Unit.

AMENDMENT

Quality Assurance Project Plan

Shipboard Test of Auramarine's Crystal Ballast 250 Ballast Water Management System. March 2012.

Amendment number 2

09.03.2012

Amendment Comments

The second campaign (Campaign 2) with the CrystalBallast75 (CB75) will include two test cycles with a Boll&Kirch 6.18.2 filter. Campaign 2 is scheduled to be conducted in Hundested, Denmark, between 12.03.2012 and 16.03.2012. The M/S Ahtela is scheduled for arrival in Hundested 11.03.2012. The testing location is due to change if the densities of phytoplankton in the sea in Hundested are below the validity criteria for inlet water described in section 10 of the QAPP.

Reason for Amendment

Planned amendment with details on locations and dates for Campaign 2 as described in section 9.1 of the QAPP.

Impact of Amendment

The trial period of the CB75 will be completed by the 16.03.2012.

Preventive Action

Not relevant.

Michael Andersen

A handwritten signature in blue ink that reads 'Michael Andersen'.

Project manager

09.03.2012

Date

Copy to be sent to the client, the Certification Body and the DHI Quality Assurance Unit.

AMENDMENT NO. 3

Quality Assurance Project Plan

Shipboard Test of Auramarine's Crystal Ballast 250 Ballast Water Management System

April 2012

Date

18.04.2012

Amendment

The second campaign (Campaign 2) with the CrystalBallast250 (CB250) will include two test cycles; one with a FilterSafe BSF-100H filter and one with a Boll&Kirch 6.18.2 filter. Campaign 2 is scheduled to be conducted in Hundested, Denmark, between 28.04.2012 and 01.05.2012. The testing location is due to change if the densities of phytoplankton in the sea in Hundested are below the validity criteria for inlet water described in section 10 of the QAPP.

Reason for Amendment

Planned amendment with details on locations and dates for Campaign 2 with the CB250 as described in section 9.1 of the QAPP.

Impact of Amendment

The trial period of the CB250 will be completed by the 01.05.2012.

Preventive Action

Not relevant.

A handwritten signature in blue ink that reads 'Michael Andersen'.

Michael Andersen, Project manager

Copy to be sent to the client, the Certification Body and the DHI Quality Assurance Unit.

AMENDMENT NO. 4

Quality Assurance Project Plan

Shipboard Test of Auramarine's Crystal Ballast 250 Ballast Water Management System

June 2012

Date

2012.06.22

Amendment Comments

A third campaign comprising additional testing with the CrystalBallast75 (CB75) has been requested by Auramarine Ltd. Campaign 3 with the CB75 will include two test cycles with a FilterSafe BSF-100H filter (40-µm mesh). One test cycle was conducted previously with the FilterSafe BSF-100H filter. Campaign 3 is scheduled to be conducted in Skagen Harbour, Denmark, between 2012.06.25 and 2012.06.27. The testing location is due to change if the densities of phytoplankton in the sea at Skagen are below the validity criteria for inlet water described in Chapter 10 of the QAPP.

Reason for Amendment

Amendment with details on locations and dates for Campaign 3 as described in Section 9.1 of the QAPP.

Impact of Amendment

The trial period of the CB75 with the FilterSafe BSF-100H filter will be completed by the 2012.06.27.

Preventive Action

Not relevant.

A handwritten signature in blue ink, reading 'Michael Andersen'.

Michael Andersen
Project manager

2012.06.22

Date

Copy to be sent to the client, the Certification Body and the DHI Quality Assurance Unit.

A P P E N D I X D

Certificate of compliance, ISO 9001 certificate, accreditation and GLP
authorisation

COPY

Certificate no:

DS/I093222-A

Page 1 of 1



Certificate of Compliance

Office: **Lloyd's Register EMEA**
Copenhagen Design Support Centre, Statutory Section
Strandvejen 104A, 2nd floor
DK-2900 Hellerup
Denmark

Date: **09 May 2012**

This certificate is issued to **DHI Ballast Water Centre, Denmark**

DHI Ballast Water Centre, Denmark

The Document(s) listed in paragraph 1 of the appendix have been examined for compliance with:

- Resolution MEPC.174(58), Annex part 2

and are found to comply from quality assurance and quality control aspects subject to the following:

- 1.1. It is required to maintain full and accurate log files in order to demonstrate correct quality measures
- 1.2. The Quality Assurance Project Plan is a project specific document and should as such be subject to review and commenting prior to each project start-up.
- 1.3. This design appraisal document is to be kept together with quality management plan.
- 1.4. Subject certificate is valid until 15 June 2015.

1. The documents listed below have been examined


Drawing No.	Rev.	Title	Status	Date
Date: 07 Sep 2011	2.3	Quality Management Plan	B	09 May 2012

2. The documents listed below have been considered together with the submitted documents in the appraisal

Drawing No.	Rev.	Title
11810704	02	Quality Assurance Project Plan

Appraisal Status Key

B Examined and found to comply with §2.2, Part 2 of the annex of IMO Resolution MEPC 174 (58)


Martin Schabert
Statutory Department
Copenhagen Design Support Centre
Surveyor to Lloyd's Register EMEA

A member of the Lloyd's Register Group



Lloyd's Register, its affiliates and subsidiaries and their respective officers, employees or agents are, individually and collectively, referred to in this clause as the 'Lloyd's Register Group'. The Lloyd's Register Group assumes no responsibility and shall not be liable to any person for any loss, damage or expense caused by reliance on the information or advice in this document or howsoever provided, unless that person has signed a contract with the relevant Lloyd's Register Group entity for the provision of this information or advice and in that case any responsibility or liability is exclusively on the terms and conditions set out in that contract.



DET NORSKE VERITAS

MANAGEMENT SYSTEM CERTIFICATE

Certificate No. 109333-2012-AQ-DEN-DANAK

This is to certify that

DHI Group

has been found to conform to the management system standard:

DS/EN ISO 9001:2008

This certificate is valid for the following product or service ranges:

**Consulting, software, research & development and laboratory testing, analysis & products
within the area of water, environment & health**

Locations included in the certification will appear in the appendix.

This certificate is valid until:

2015-01-10

*The audit has been performed under the
supervision of:*

Jan Carsten Schmidt
Lead Auditor



Place and date:

Hellerup, 2012-01-10

**DET NORSKE VERITAS,
BUSINESS ASSURANCE, DANMARK A/S**

Jens Peter Høiseth
Managing Director

Lack of fulfilment of conditions as set out in the Certification Agreement may render this certificate invalid.



DET NORSKE VERITAS

APPENDIX TO CERTIFICATE

This appendix refers to certificate no. 109333-2012-AQ-DEN-DANAK

DHI Group

Locations included in the certification are as follows:

Site Address	Scope:
Agern Allé 5 2970 Hørsholm, Denmark	Consulting, MIKE© by DHI Software Development, Sales & Support, Solutions Software Development, Research, Development & Innovation and Laboratory Analysis, Testing & Products
INCUBA Science Park, Gustav Wieds Vej 10 8000 Århus, Denmark	Consulting, Solutions Software Development and Research, Development & Innovation

This certificate is valid until:

2015-01-10

The audit has been performed under the supervision of:

Jan Carsten Schmidt
Lead Auditor



DANAK
SYSTEM Reg.nr. 5001

Place and date:

Hellerup, 2012-01-10

DET NORSKE VERITAS,
BUSINESS ASSURANCE, DANMARK A/S

Jens Peter Høiseth
Managing Director

Lack of fulfilment of conditions as set out in the Certification Agreement may render this certificate invalid.



Company: **DHI**
Agern Allé 5
DK-2970 Hørsholm
Registration number: **26**
Valid: **04-07-2011 to 31-07-2015**

Scope:

Testing

Product

- **Biological items for testing**
- **Chemicals, chemical products, cosmetics, fertilizers, paints**
- **Environmental samples: Air, water, soil, waste**
- **Construction products**


Test Type


- **Biological, biochemical testing**
- **Chemical testing, Analytical chemical testing**
- **Radiochemistry, radiation**
- **Sampling, laboratories accredited for sampling**

Testing is performed according to the current list of test methods approved by DANAK.

The company complies with the criteria in EN ISO/IEC 17025:2005 – General requirements for the competence of testing and calibration laboratories and demonstrates technical competence for the defined scope and the operation of a quality management system (refer joint ISO-ILAC-IAF Communiqué dated January 2009, www.danak.dk).

Issued July 4th 2011


Jesper Høy


Kirsten Jebjerg Andersen

GOOD LABORATORY PRACTICE

STATEMENT OF COMPLIANCE

Laboratory inspection and study audits for compliance with the OECD Principles for Good Laboratory Practice were carried out at

Laboratory: DHI

on

Dates: 21st and 22nd October 2011

The laboratory inspection and study audits have been carried out in accordance with the regulation settled in Order No. 906 of 14th September 2009 from the Danish Ministry of Environment. The laboratory has been monitored for GLP Compliance within the following scope:

Type of products:

- *Industrial chemicals*
- *Pesticides*
- *Biocides*


Type of tests:

- *Environmental toxicity studies on aquatic and terrestrial organisms.*
- *Studies of behaviour in water, soil and air, bioaccumulation*

The laboratory was found to be operating in compliance with the OECD Principles of Good Laboratory Practice.

Date: 08 August 2012


Jesper Høy
Managing director, DANAK

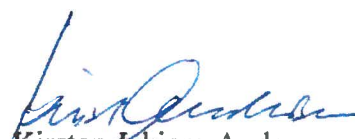
Kirsten Jøbjerg Andersen
GLP inspector, DANAK