

## EXTERIOR REMEDIATION

## EXTERIOR REMEDIATION

PCB-01	Remove existing exterior caulking at all masonry openings for disposal as PCB Waste >1 PPM <50 PPM. Note caulking also contains asbestos.
PCB-02	Remove and dispose of non-porous window & door assemblies including glass, glazing compounds, panels, insulation, etc. as PCB Waste >1 PPM <50 PPM. Note glazing also contains asbestos.
PCB-03	Remove existing exterior expansion joint caulk for disposal as PCB Waste >1 PPM <50 PPM. Note caulking also contains asbestos.
PCB-04	Remove existing exterior through wall flashing caulk for disposal as PCB Waste >1 PPM <50 PPM. Note caulking also contains asbestos.
PCB-05	Remove existing black fill material and dispose of as PCB Waste >1 PPM <50 PPM.
PCB-06	Remove existing exterior caulk from the chimney locations and dispose of as PCB waste >1 PPM <50 PPM.

## INTERIOR REMEDIATION

PCB-07	Remove existing interior metal/metal to black caulk and existing interior non-glazed porous underlayment a minimum of one full block from both sides of the metal column and dispose of as PCB Bulk Product Waste >50 PPM. Note that black moisture barrier is present on the back sides of the blocks which is asbestos containing and PCB containing >50 PPM. Note the caulk is also asbestos containing.
PCB-08	Remove existing interior caulk & existing interior non-glazed porous underlayment a minimum of one full block from both sides of the corner and dispose of as PCB Bulk Product Waste >50 PPM. Note caulk contains asbestos. Note that black moisture barrier is present on the back sides of the outer wall blocks. This material is asbestos containing and is >50 PPM PCB containing.
PCB-09	Remove and dispose of interior wood and ceramic flooring system and mastic and dispose of as PCB Waste >1 PPM <50 PPM. Note the mastic under the wood flooring system is asbestos containing.
PCB-10	Remove existing floor slab under the wood and ceramic floor system shall be head bashed to remove all remnants of the mastic/paper barrier. Waste generated shall be disposed of as PCB Waste >1 PPM <50 PPM. Note the mastic under the wood flooring system is asbestos containing.
PCB-11	Remove existing interior ventilators and dispose of as PCB Bulk Product Waste >50 PPM.
PCB-12	Remove existing interior hall door caulk for disposal as PCB Waste >1 PPM <50 PPM. Note caulking also contains asbestos.
PCB-13	Remove and dispose of non-porous door assemblies including glass, glazing compounds, panels, insulation, etc. as PCB Waste <50 PPM.
PCB-14	Remove existing interior masonry at door opening jams a minimum of one full underlayment for disposal as PCB Waste <50 PPM.
PCB-15	Remove existing interior exit door caulk for disposal as PCB Waste >1 PPM <50 PPM. Note caulk contains asbestos



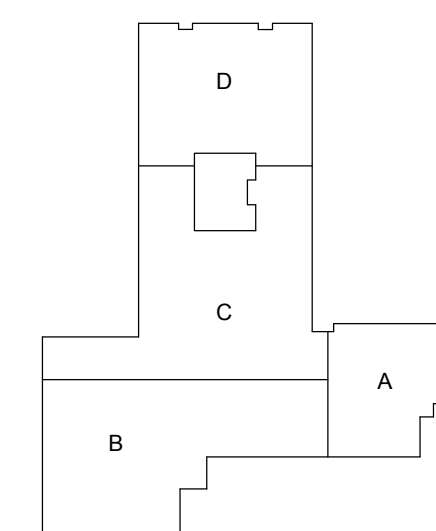
**FLETCHERTHOMPSON**  
ELEVATING DESIGN | SHAPING SOLUTIONS

ARCHITECTURE   ENGINEERING   INTERIOR DESIGN	
SHELTON, CONNECTICUT	203-225-6500
HARTFORD, CONNECTICUT	860-249-0880
SOMERSET, NEW JERSEY	732-907-6800
NEW YORK, NEW YORK	212-695-4761
NAPLES, FLORIDA	239-687-1220
BOSTON, MASSACHUSETTS	617-524-5200

CONSULTANT

THIS DRAWING AND DETAIL ON IT, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF FLETCHER THOMPSON AND MAY BE USED FOR THIS SPECIFIC PROJECT AND SHALL NOT BE LOANED, COPIED OR REPRODUCED WITHOUT WRITTEN CONSENT OF FLETCHER THOMPSON.

**KEY PLAN:**

[illegible]

PRINCIPAL IN CHARGE:	DC
PROJECT MANAGER:	AC
DESIGNER:	MB
PROJECT ARCHITECT / ENGINEER	BS / GCC
DRAWN BY:	Author
PROJECT:	

JOSEPH A. DEPAOLO MIDDLE  
SCHOOL

385 PLEASANT STREET  
SOUTHINGTON, CT 06489  
STATE PROJECT NO. 131-0127 EA/RR/PS

DRAWING TITLE:

EXTERIOR GROUND  
PCB ABATEMENT

DATE: December 14, 2012

SCALE:  $1/16" = 1'-0"$

PROJECT NUMBER	CT 1211
----------------	---------

DRAWING NO.: HA-005D