



BASEMENT LOBBY ELEVATION - ELEVATOR NO. 6, 19 & 34
SUB-BASEMENT LOBBY ELEVATION - ELEVATOR NO. 34

SCALE: NONE

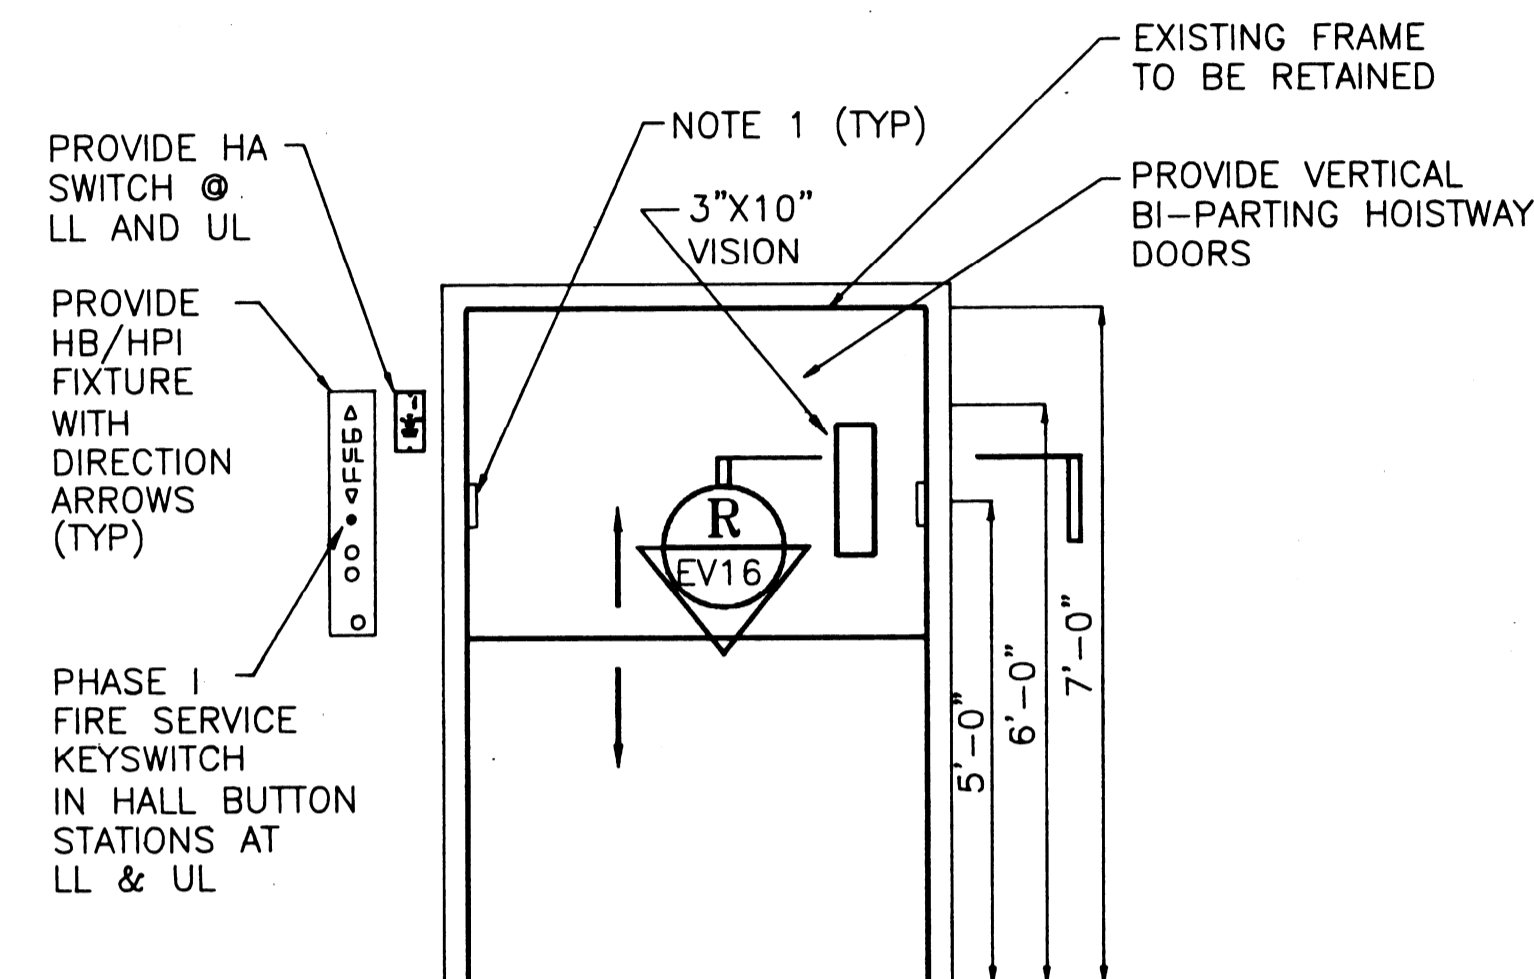


TYPICAL LOBBY ELEVATION - ELEVATOR NO. 36

SCALE: 1/2" = 1'-0"

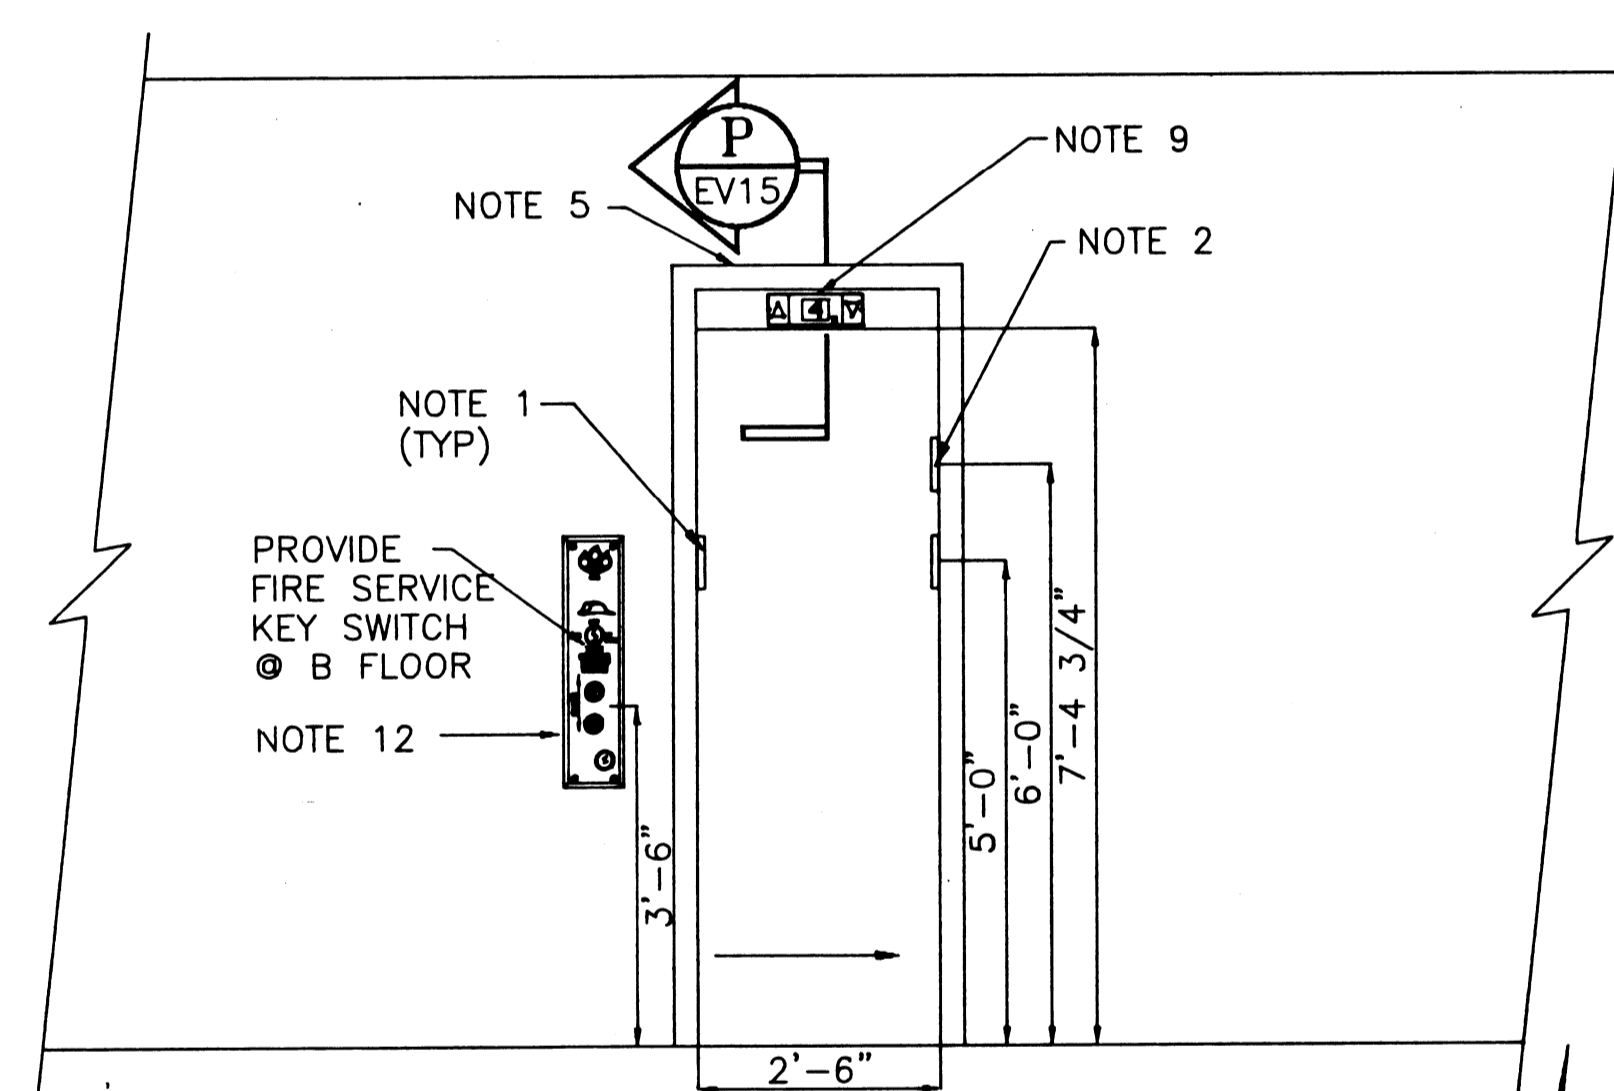


TYPICAL LOBBY ELEVATION
PRISONER ELEVATOR NO. 33

SCALE: NONE

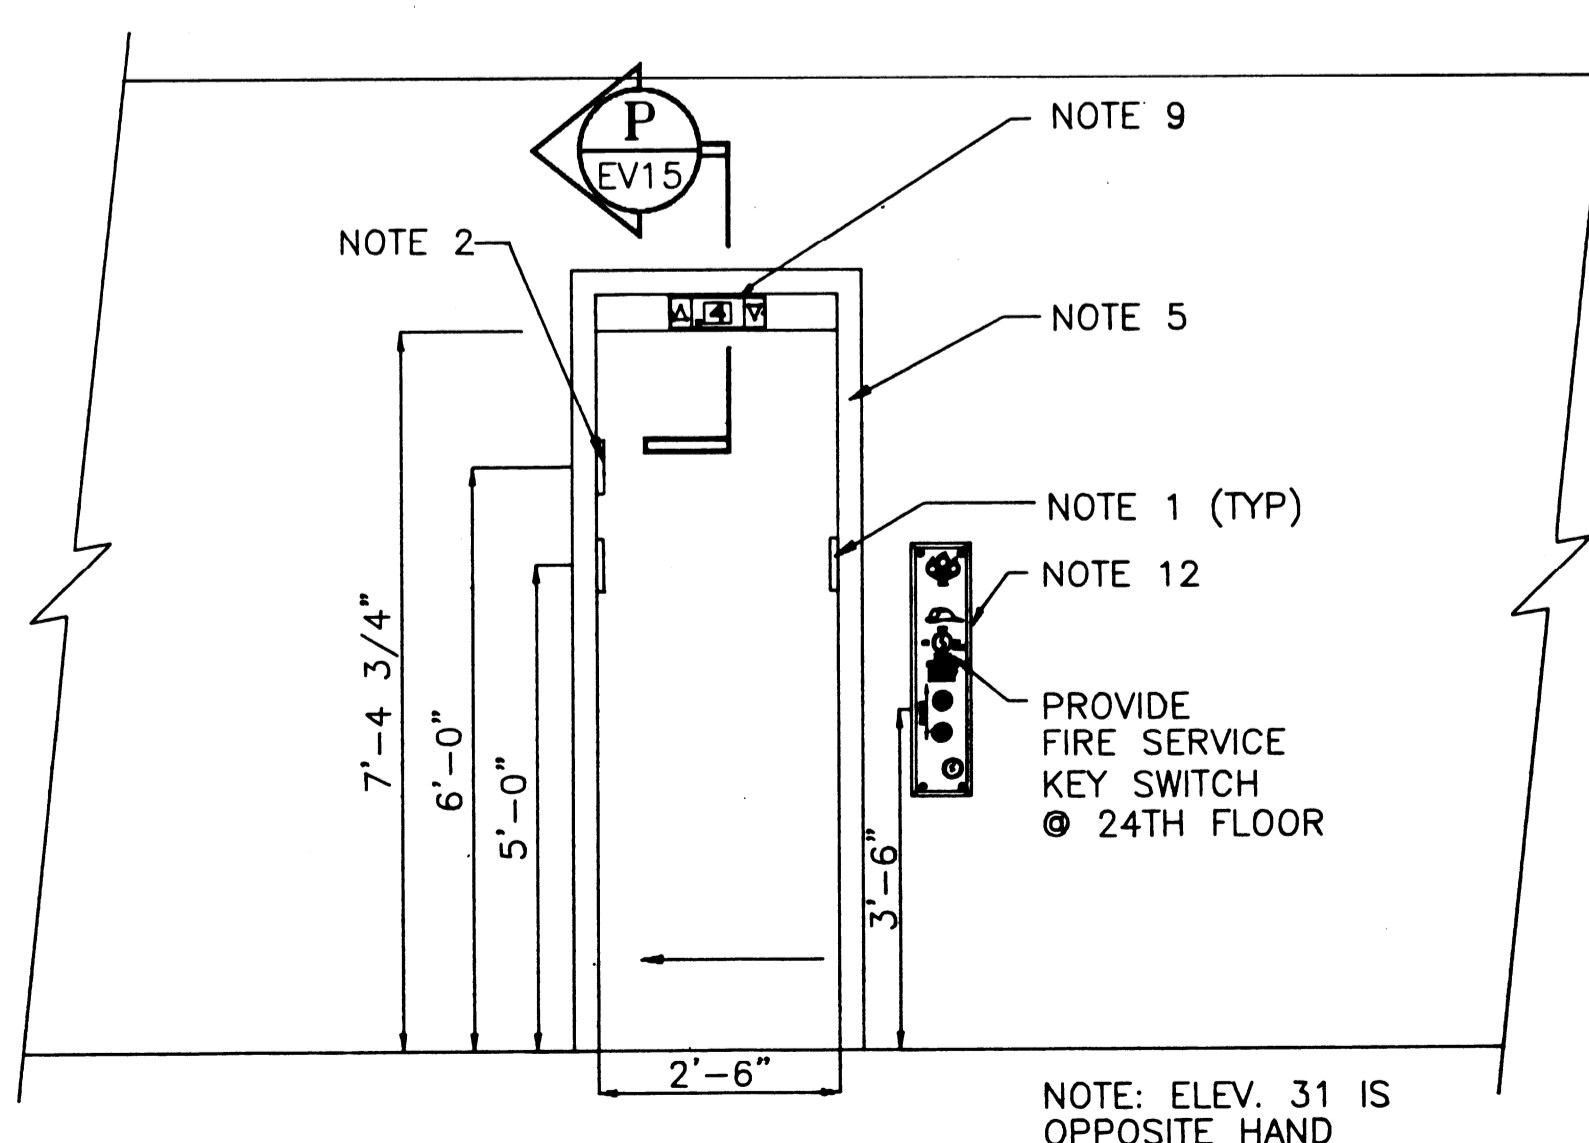


TYPICAL LOBBY ELEVATION
PRISONER ELEVATORS NO. 30, 31 & 32

SCALE: NONE

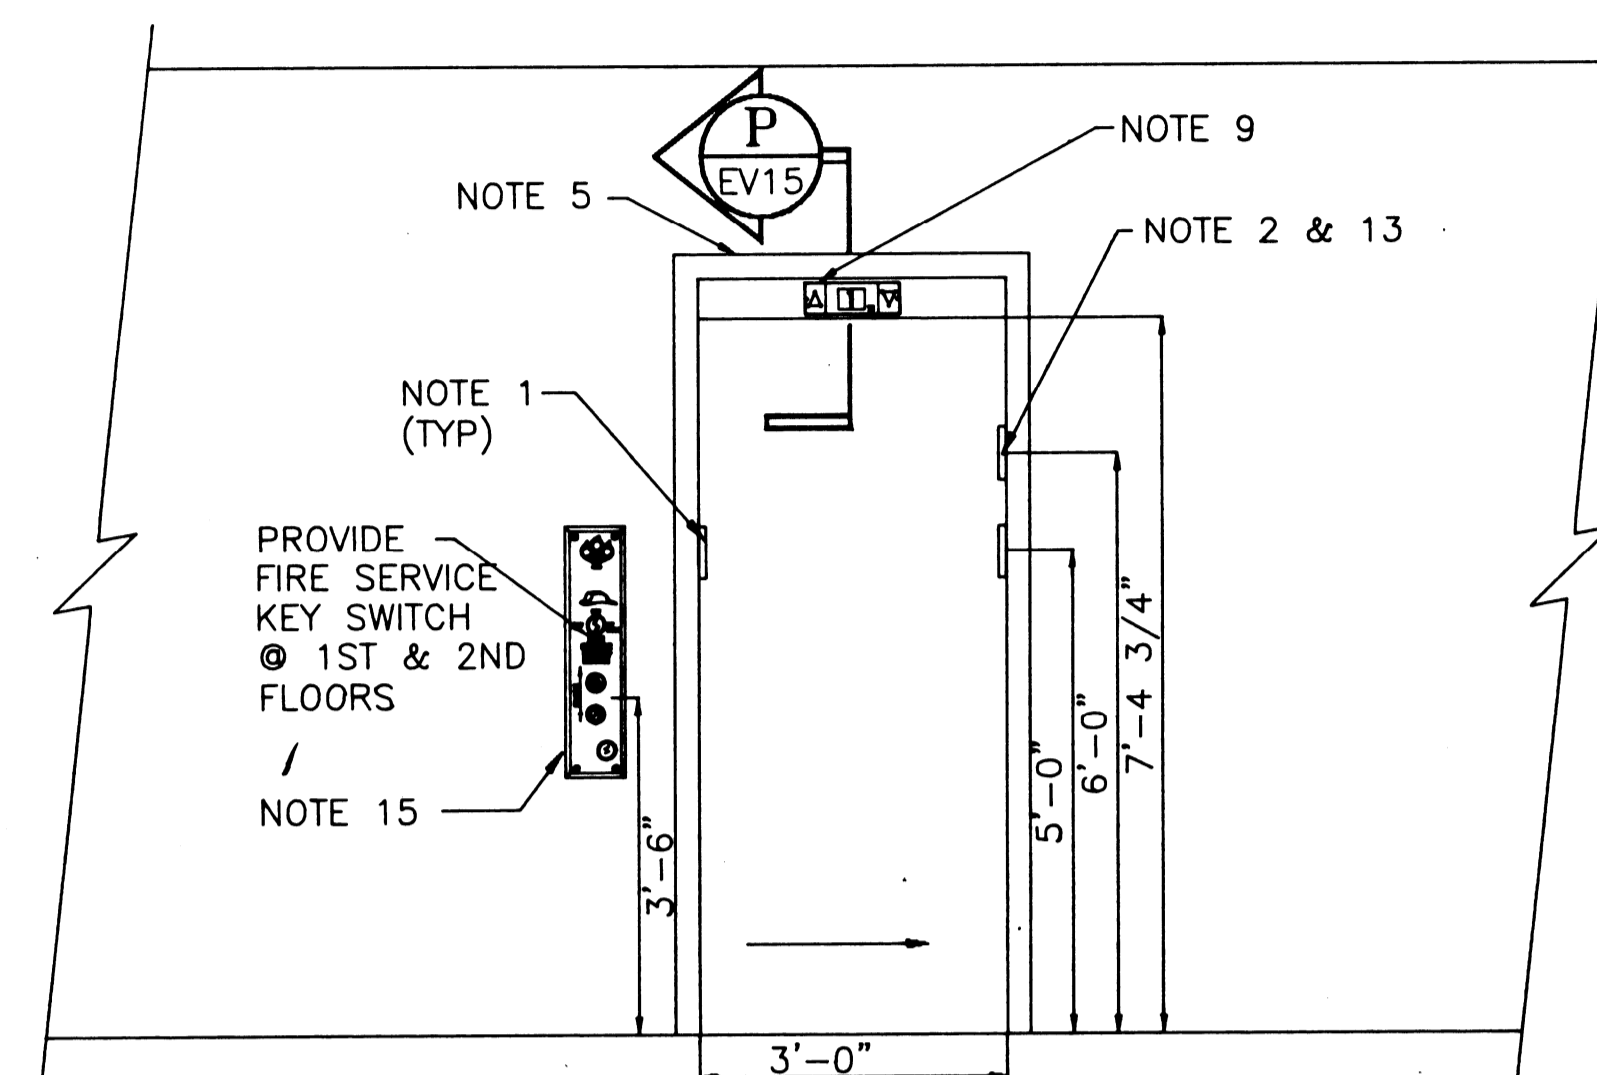


TYPICAL LOBBY ELEVATION
JUDGES ELEVATOR NO. 27

SCALE: NONE

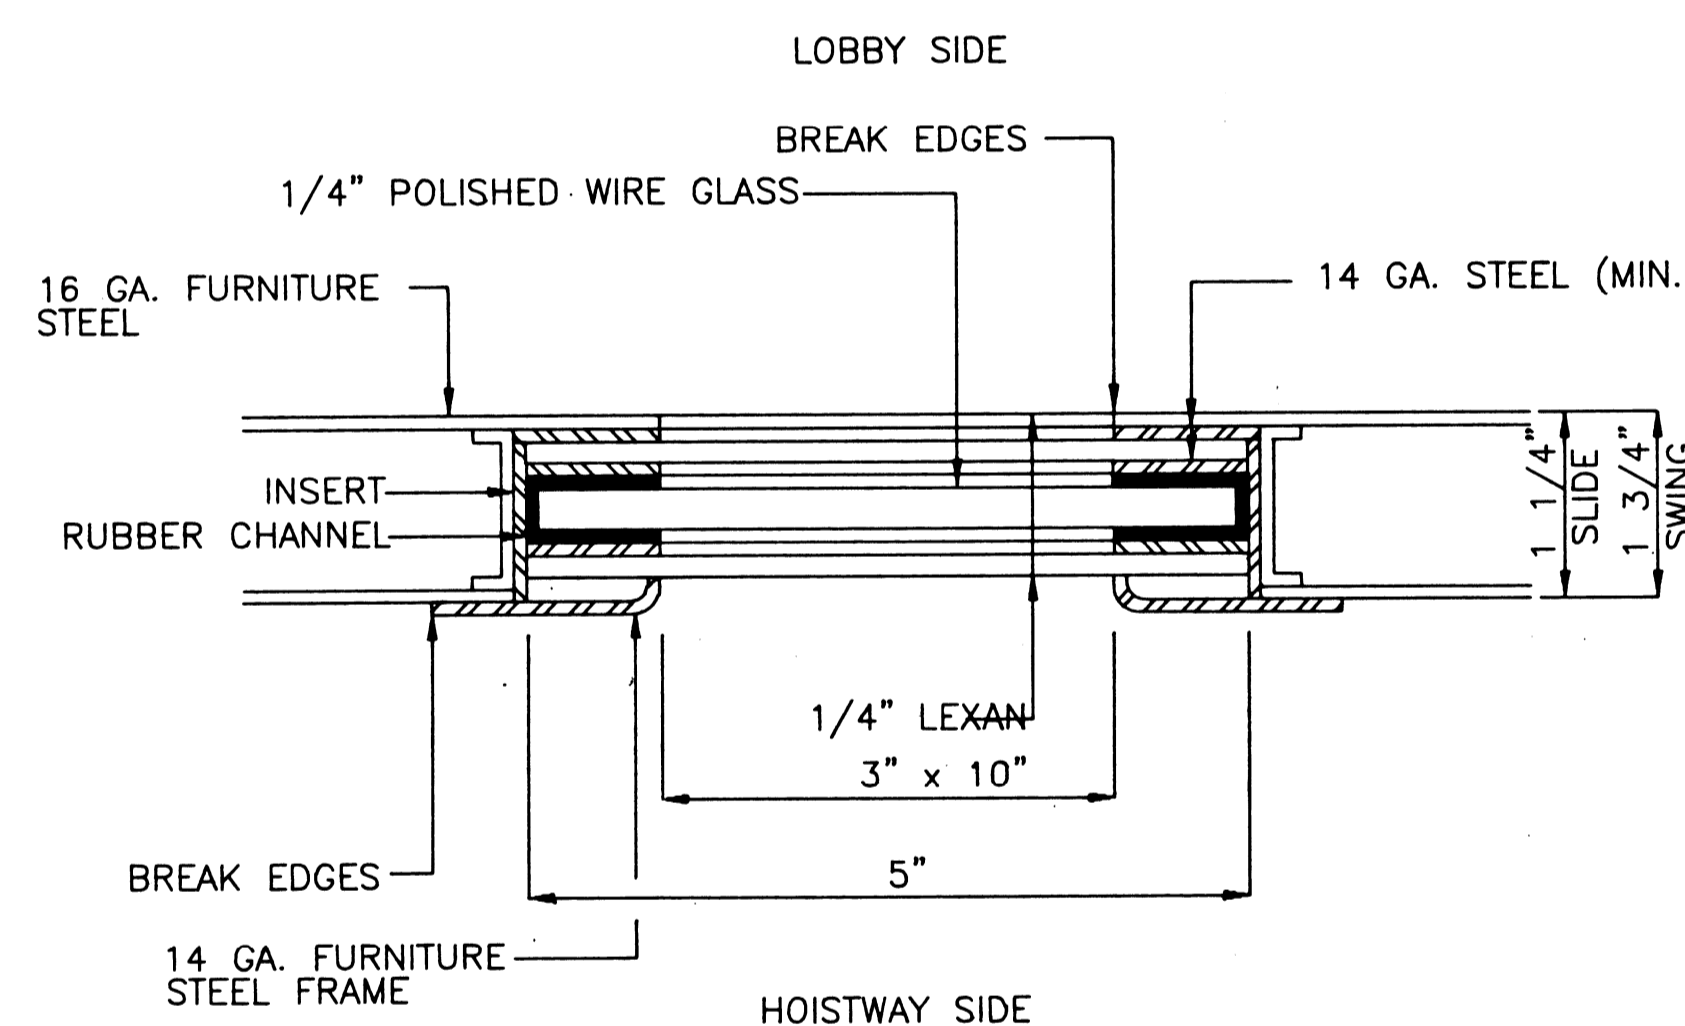


HOISTWAY DOOR VISION PANEL DETAIL

SCALE: NONE

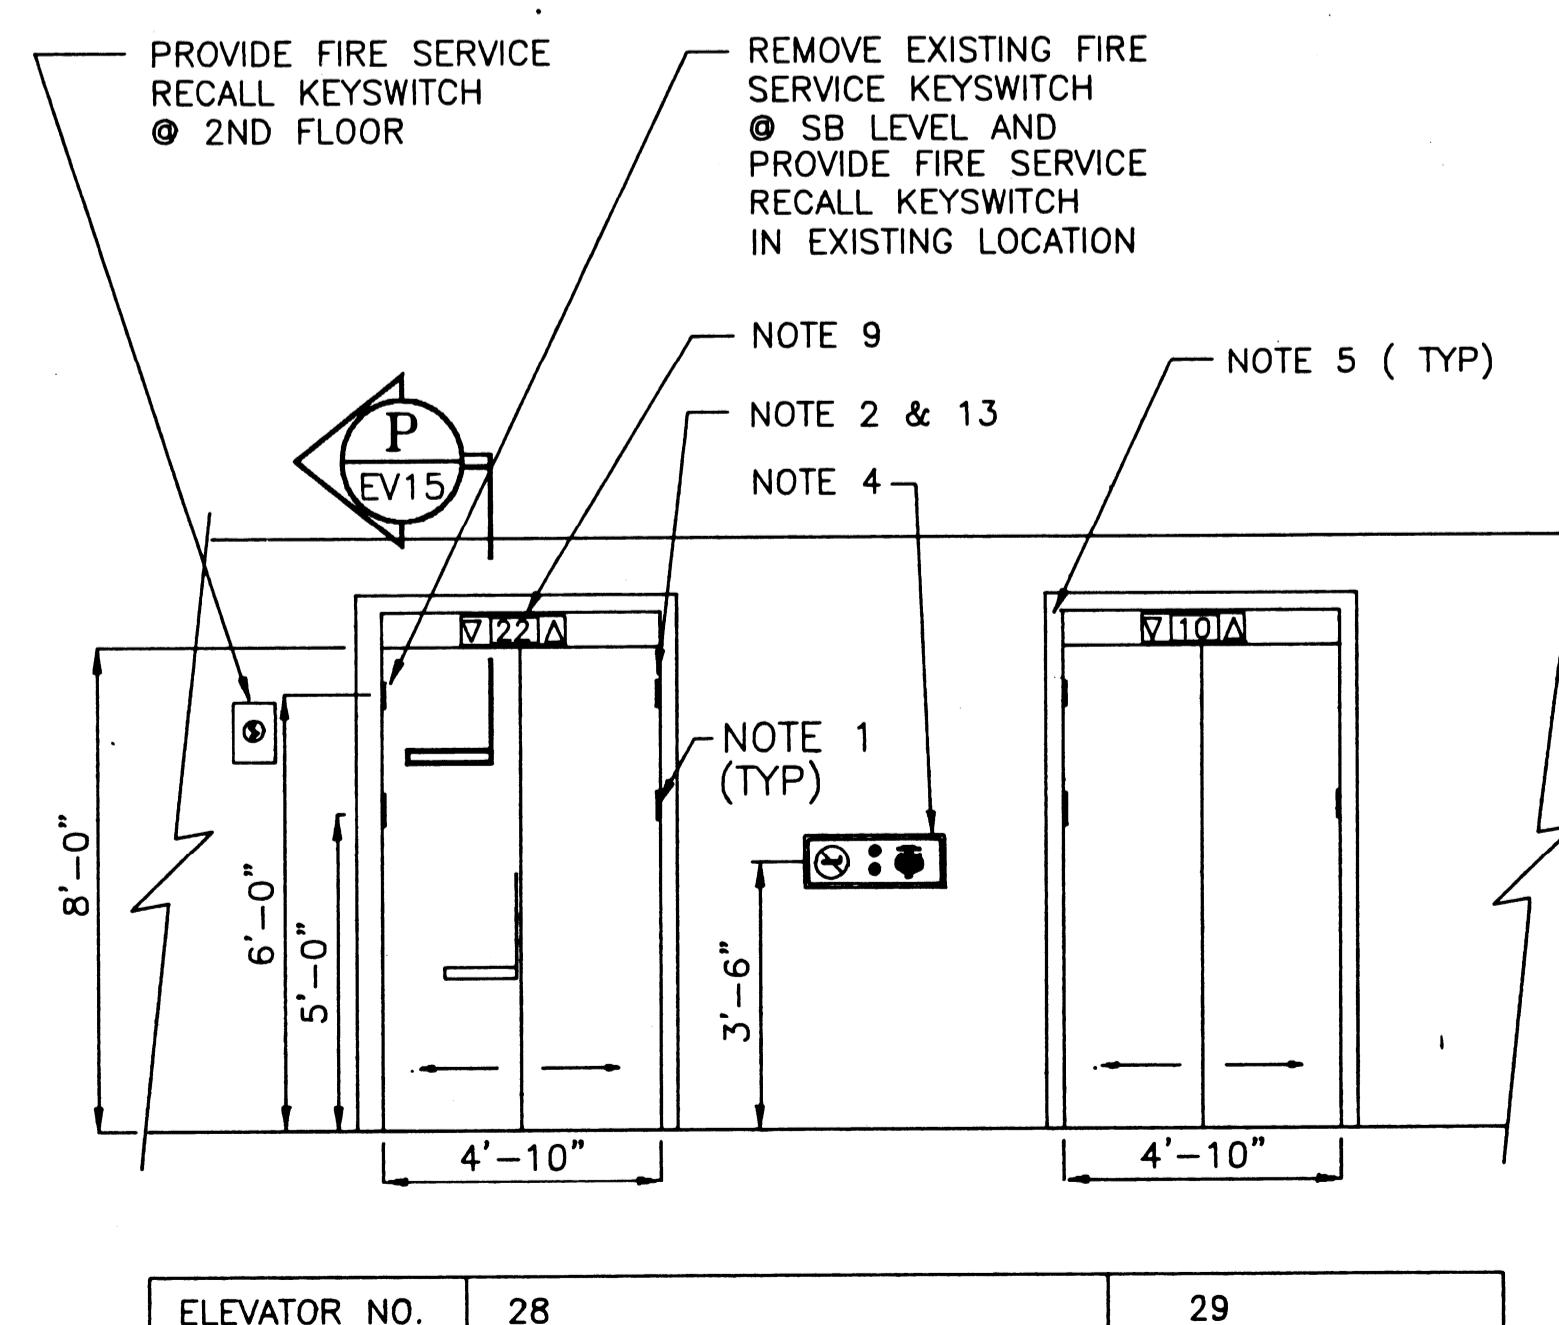


TYPICAL LOBBY ELEVATION - ELEVATOR NOS. 28 & 29

SCALE: NONE

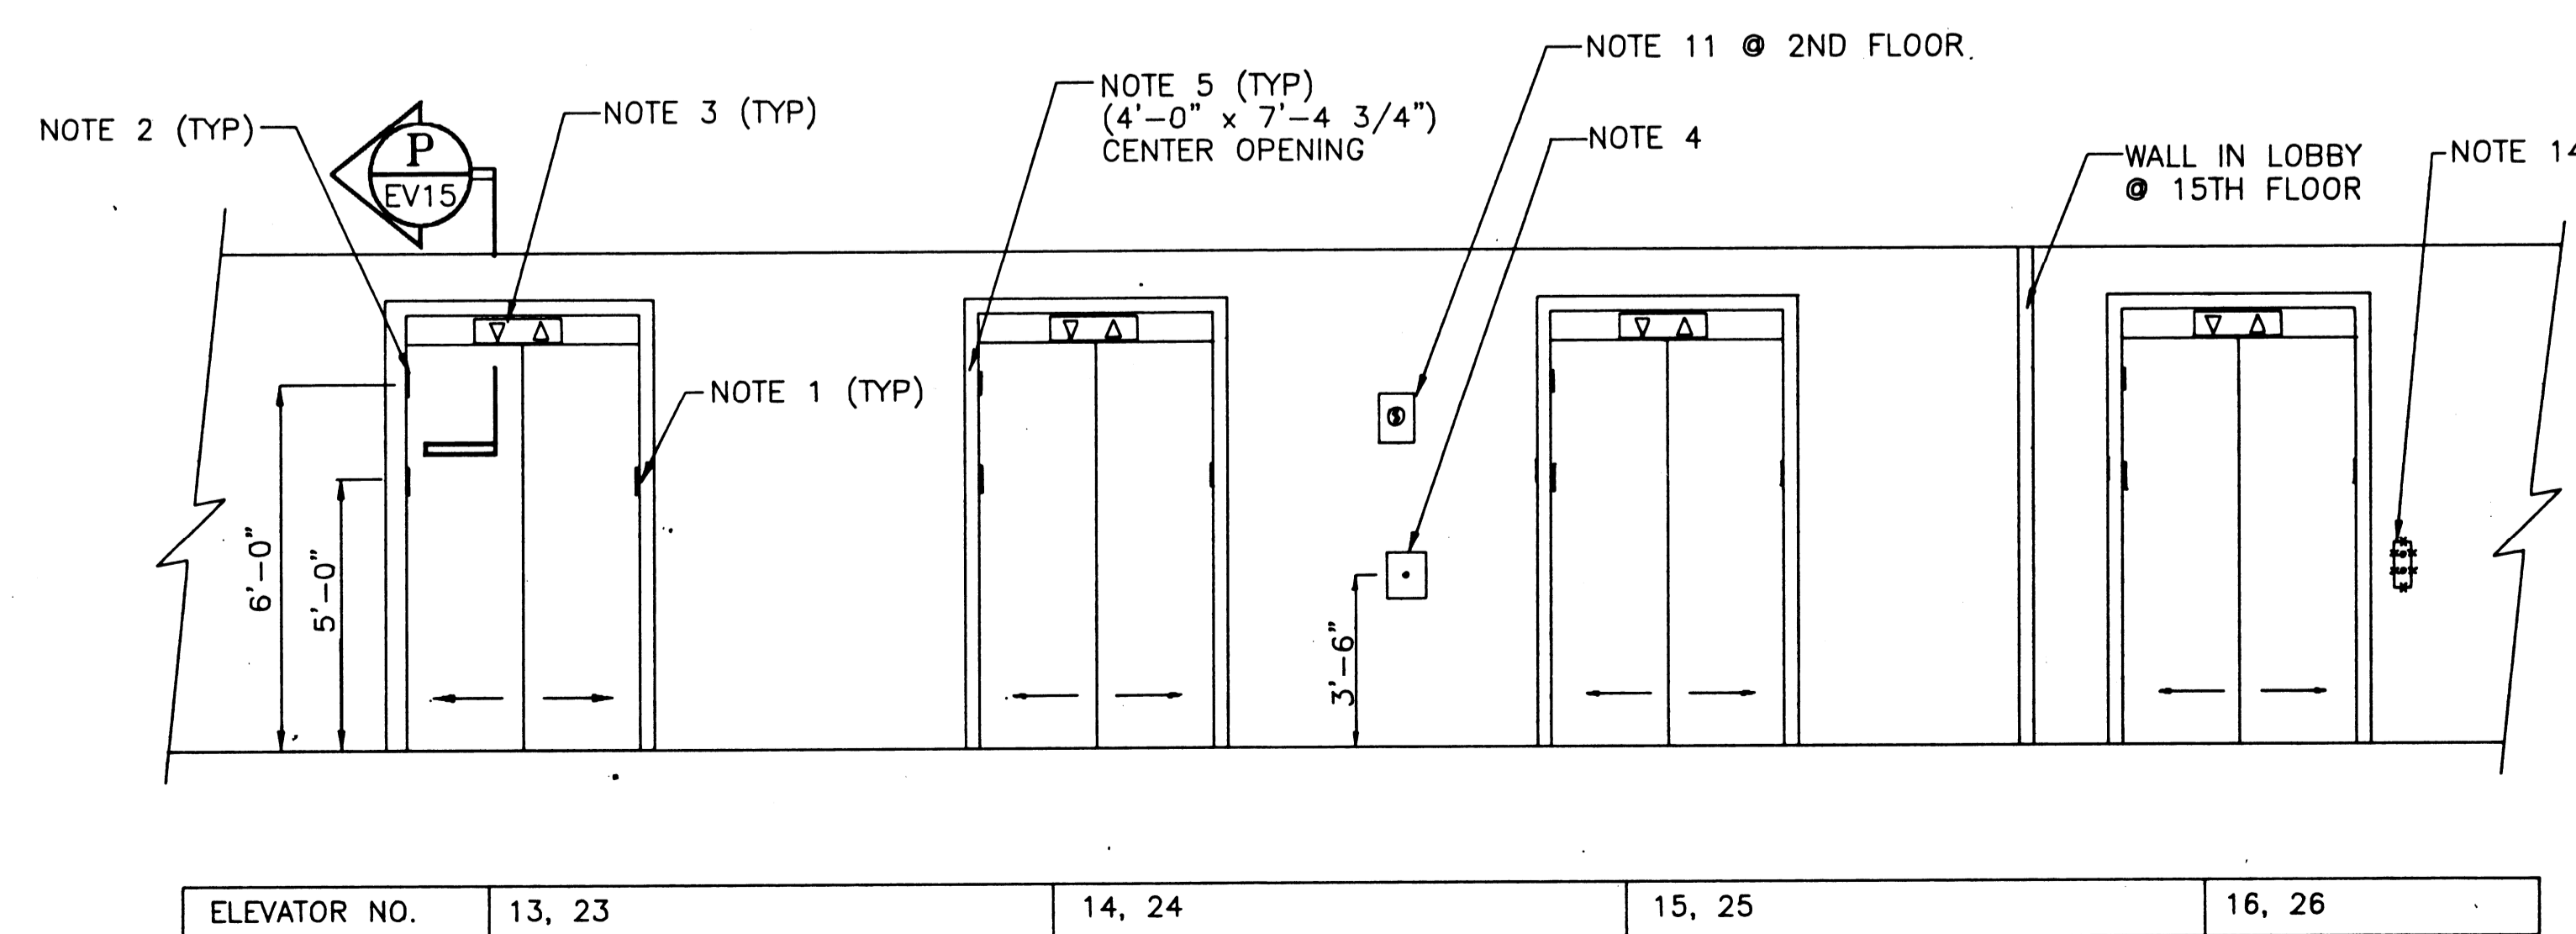


TYPICAL LOBBY ELEVATION - PASSENGER ELEVATOR NOS. 13 THRU 16
ELEVATOR NOS. 23 THRU 26 ARE SIMILAR

SCALE: NONE

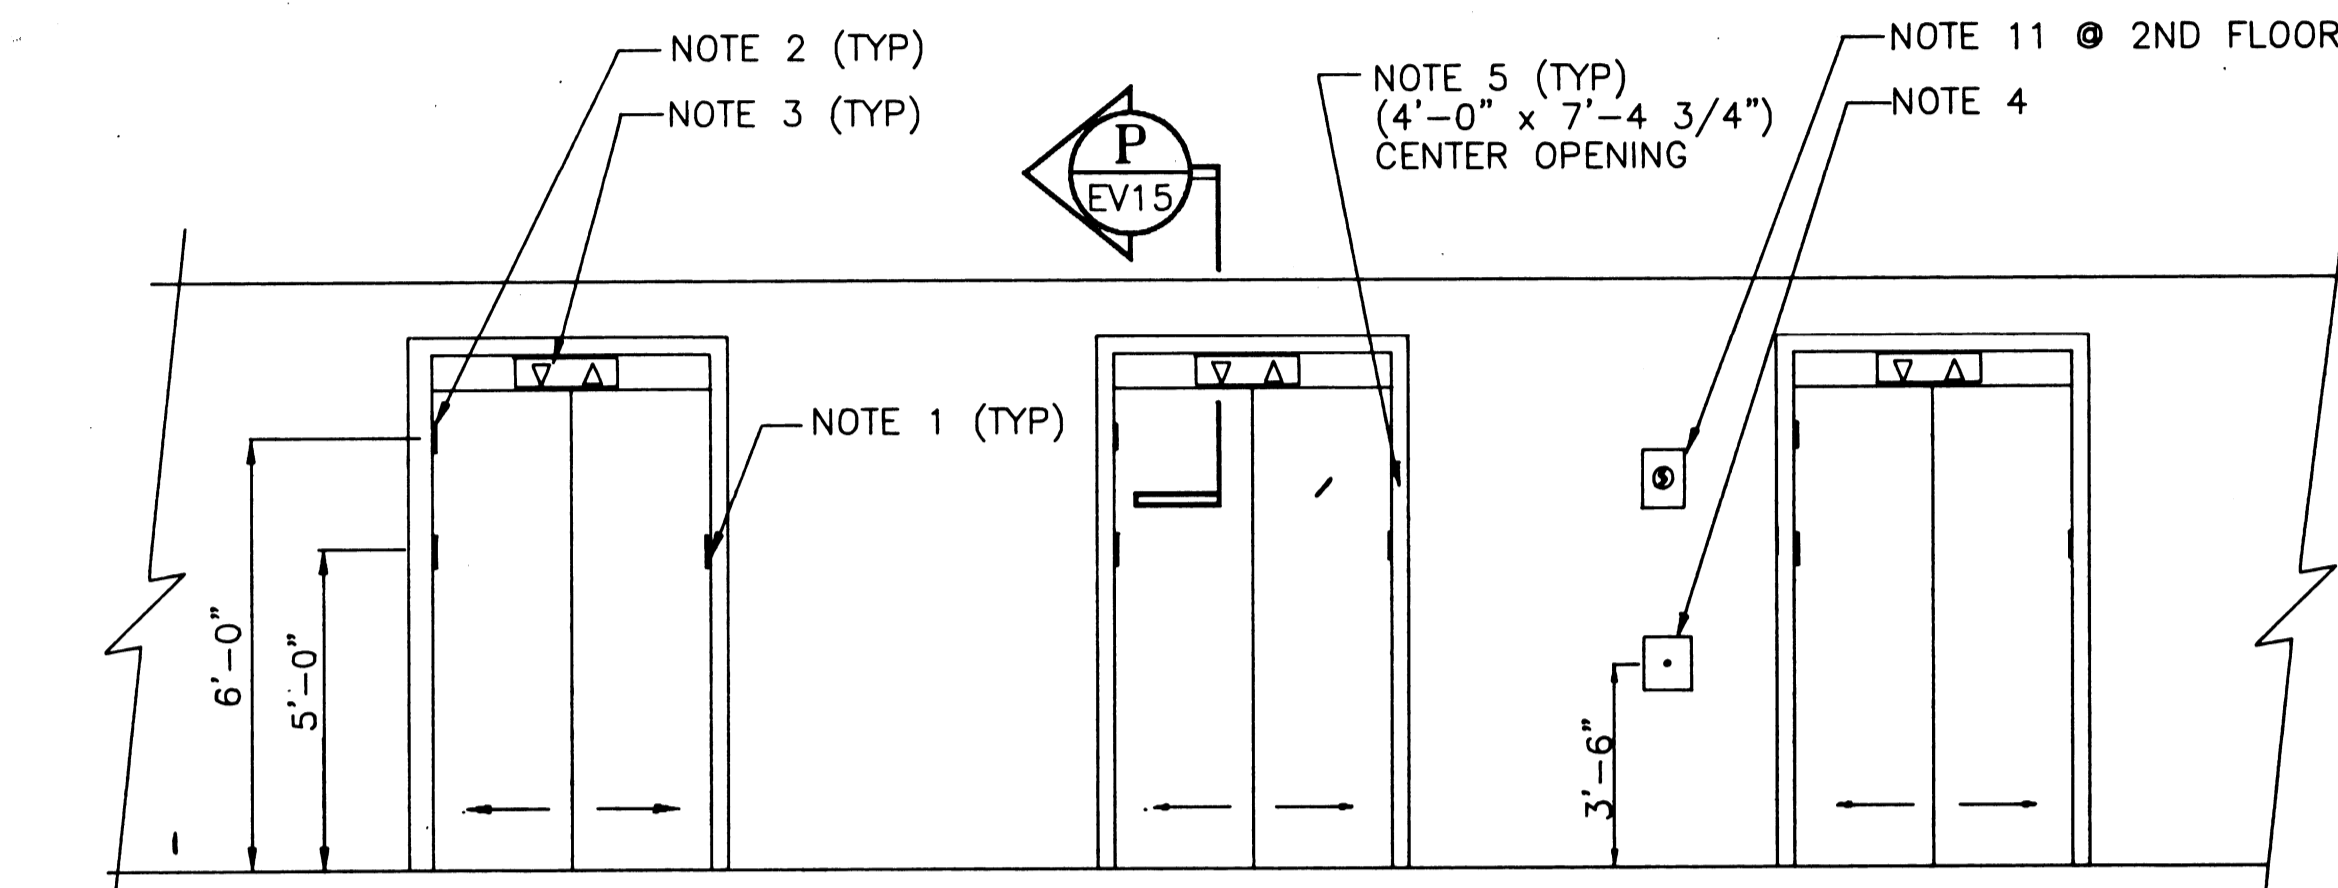

TYPICAL LOBBY ELEVATION - PASSENGER ELEVATOR NOS. 1, 2, & 3
ELEVATOR NOS. 4, 5 & 6 ARE SIMILAR
ELEVATOR NOS. 17, 18 & 19 ARE SIMILAR

SCALE: NONE

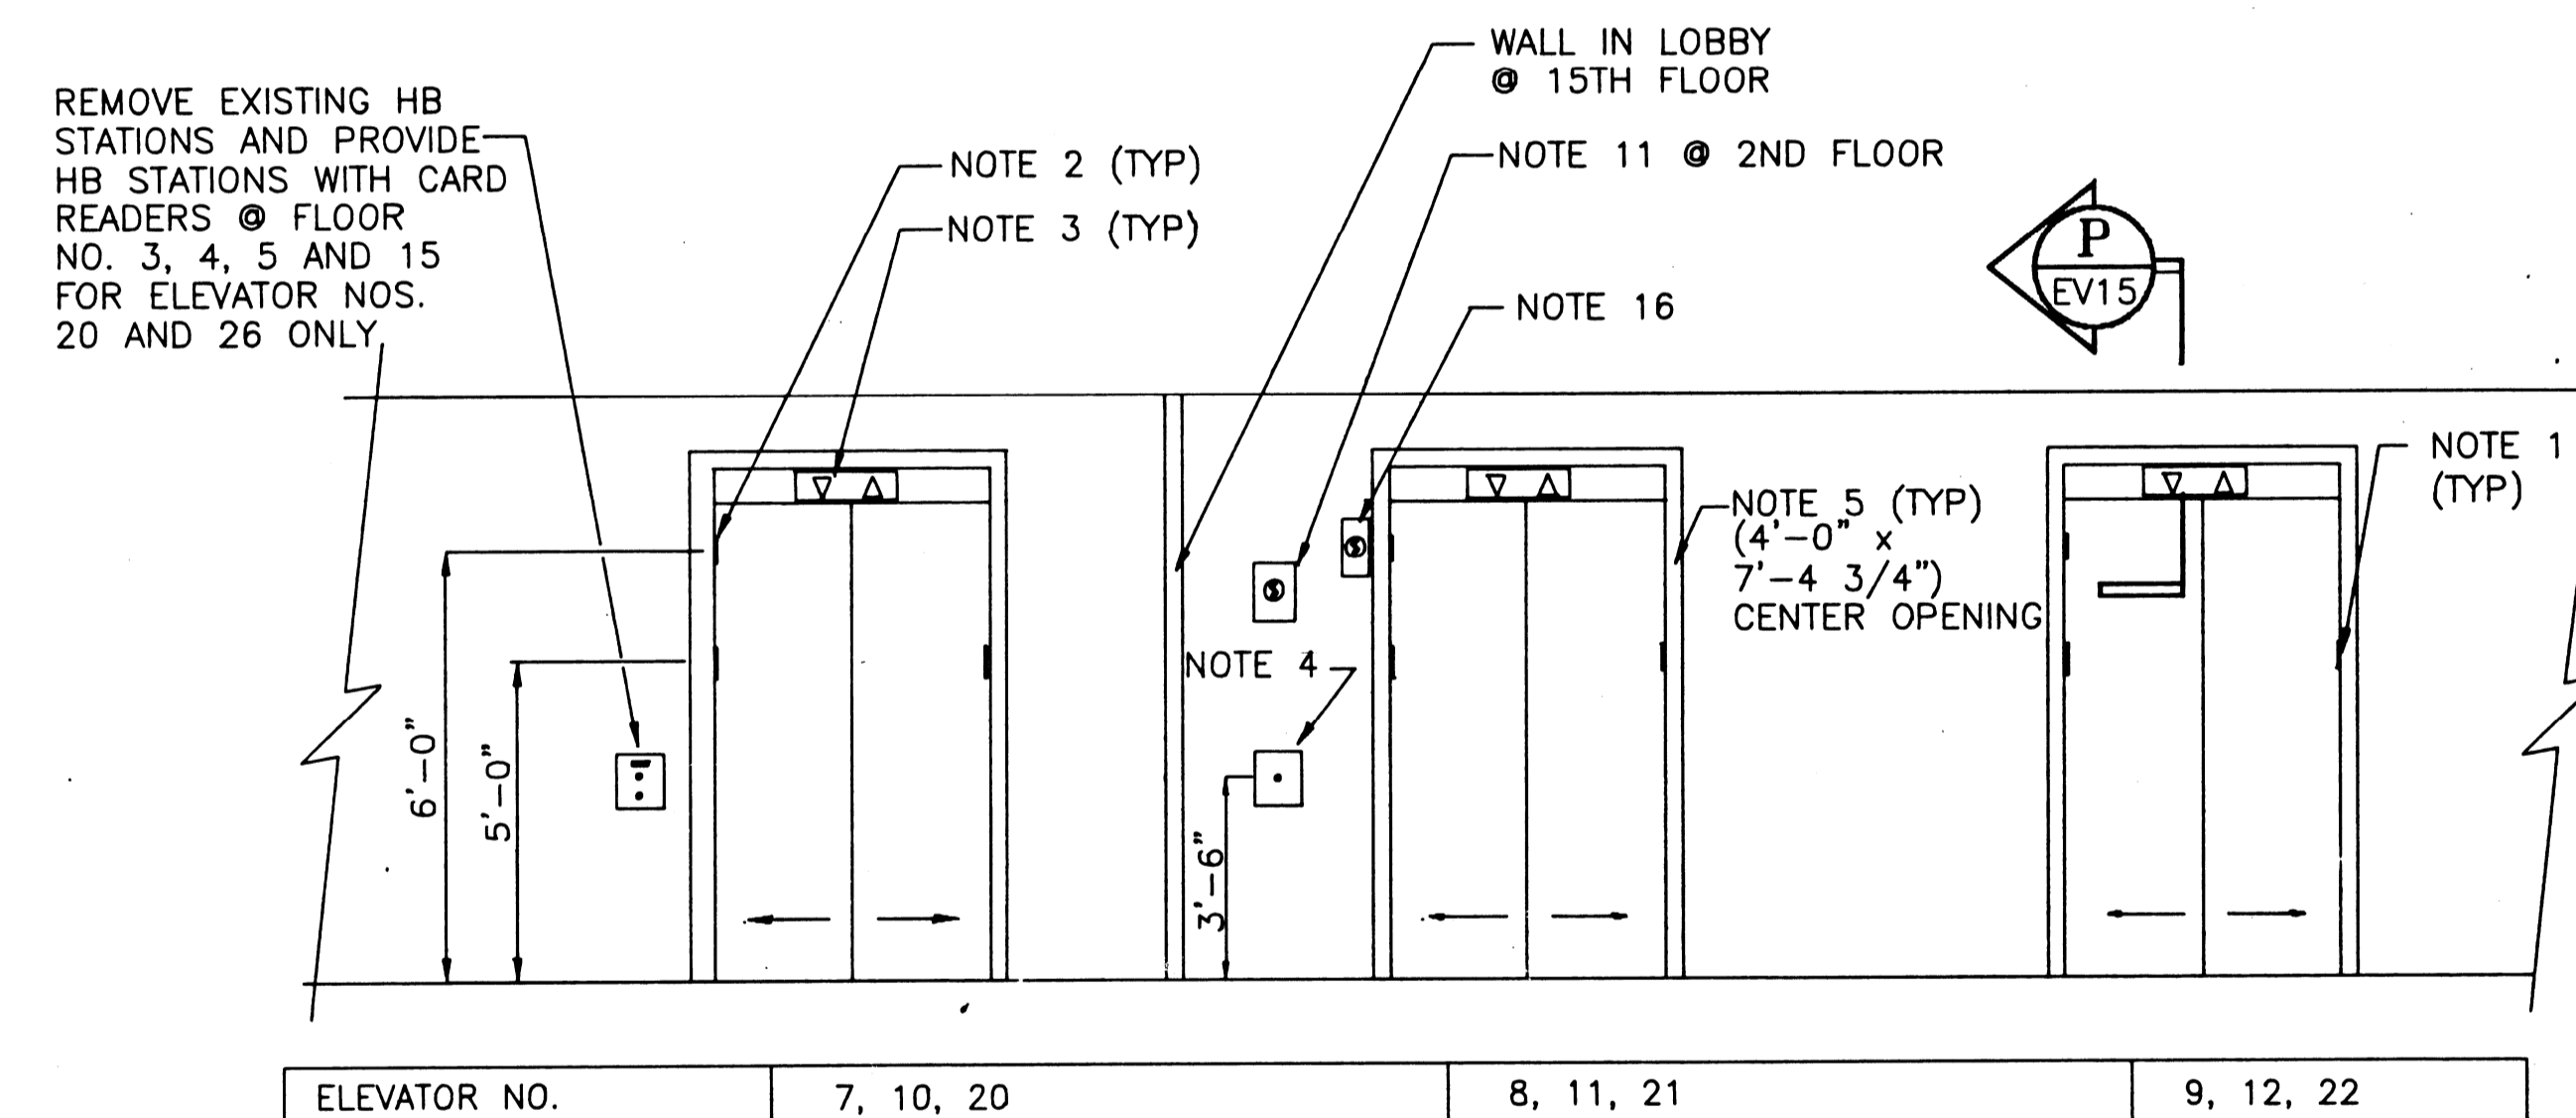

TYPICAL LOBBY ELEVATION - PASSENGER ELEVATOR NOS. 7, 8 & 9
ELEVATOR NOS. 10, 11 & 12 ARE SIMILAR
ELEVATOR NOS. 20, 21 & 22 ARE SIMILAR

SCALE: NONE

NOTES:

1. REMOVE EXISTING JAMB MOUNTED BRAILLE PLATES AND PROVIDE BRAILLE PLATES IN JAMBS WITH CENTER 5'-0" AFF (MEETS ADA REQUIREMENTS).
2. REMOVE EXISTING HA FIXTURE @ TOP LANDING AND PROVIDE HA IN EXISTING CUTOFF WITH FACEPLATE.
3. REMOVE EXISTING HL FIXTURE IN TRANSOM AND PROVIDE HL FIXTURE WITH STAINLESS STEEL FACEPLATE SURFACE MOUNTED IN STAINLESS STEEL TRANSOM.
4. REMOVE EXISTING HALL BUTTON FIXTURE AND PROVIDE HALL BUTTON FIXTURE WITH LOBBY SIGNAGE IN NEW CUTOFF. CENTER OF HALL BUTTON TO BE 3'-6" AFF (MEETS ADA REQUIREMENTS).
5. EXISTING BAKED ENAMEL HOISTWAY ENTRANCE FRAMES TO BE RETAINED AND PAINTED WITH A COLOR AS SELECTED BY THE GSA.
6. NOT USED
7. REMOVE EXISTING HB FIXTURE. PROVIDE HB FIXTURE IN CMU BLOCK WITH CALL STATION PICTOGRAPH AND CENTER HALL BUTTONS TO BE 3'-6" AFF (MEETS ADA REQUIREMENTS). EXTEND FACEPLATE UPWARD TO COVER EXISTING CUTOFF. FILL IN ABANDONED CUTOFF WITH 2 HOUR FIRE RATED MATERIAL.
8. NOT USED
9. REMOVE EXISTING HPI/HL FIXTURE IN TRANSOM AND PROVIDE HPI/HL FIXTURE WITH STAINLESS STEEL FACEPLATE SURFACE MOUNTED IN STAINLESS STEEL TRANSOM.
10. NOT USED
11. REMOVE EXISTING FIRE SERVICE RECALL KEYSWITCH AND PROVIDE FIRE SERVICE RECALL KEYSWITCH IN EXISTING LOCATION
12. REMOVE EXISTING HALL BUTTON FIXTURE. PROVIDE HALL BUTTON FIXTURE WITH CALL STATION PICTOGRAPH AND "JAILER'S TYPE" KEYSWITCH. CENTER OF HALL BUTTON TO BE 3'-6" AFF.
13. REMOVE EXISTING HA FIXTURE AT BOTTOM LANDING AND PROVIDE HA IN EXISTING CUTOFF WITH FACEPLATE.
14. REMOVE EXISTING HB STATIONS AT 3, 4, 5 AND 15. PATCH, FILL IN WITH FIRE RATED MATERIAL AND SAND SMOOTH WITH FINISHED WALL.
15. PROVIDE HB WITH DISAPPEARING "OUT OF SERVICE INDICATOR" AND KEYSWITCH. REMOVE EXISTING HB AND OVERSIZE FACE PLATE TO COVER ABANDONED CUTOFF.
16. REMOVE EXISTING KEYSWITCH AT 24TH FLOOR. PROVIDE SPECIAL SERVICE KEY SWITCH AND FACEPLATE FOR ELEVATOR NO. 21 ONLY

	FINAL	2/23/96
NO.	REVISION	DATE

ENVIRONMENTAL SYSTEMS DESIGN
CONSULTING ENGINEERS
MECHANICAL - ELECTRICAL
55 EAST MONROE ST. - SUITE 1660
CHICAGO, ILLINOIS 60603
(312) 372-1200

J. MARTIN ASSOCIATES
Elevator Consultants
Williamsburg Commons
4 Auer Court
East Brunswick, N.J. 08816-5828
908-613-9800 FAX 908-613-9898

GENERAL SERVICES ADMINISTRATION
PUBLIC BUILDING SERVICE
CHICAGO, ILLINOIS

BUILDING	NAME	E. M. DIRKSEN BUILDING
	ADDRESS	219 S. DEARBORN ST. CHICAGO, IL
	NUMBER	
PROJECT	DESCRIPTION	ELEVATOR IMPROVEMENT FOR EMD BLDG
	NUMBER	1194004
DRAWING	DRAWN BY	KP CKD BY LP DATE 2/23/96
	TITLE	ELEVATIONS: TYPICAL
	TYPE	
	NUMBER	3 EV 16
	TYPE	SERIES SEQUENCE