


**MACHINE ROOM PLAN
@16th FLOOR
ELEVATOR NOS. 1 THRU 6**
SCALE: 1/4" = 1'-0"

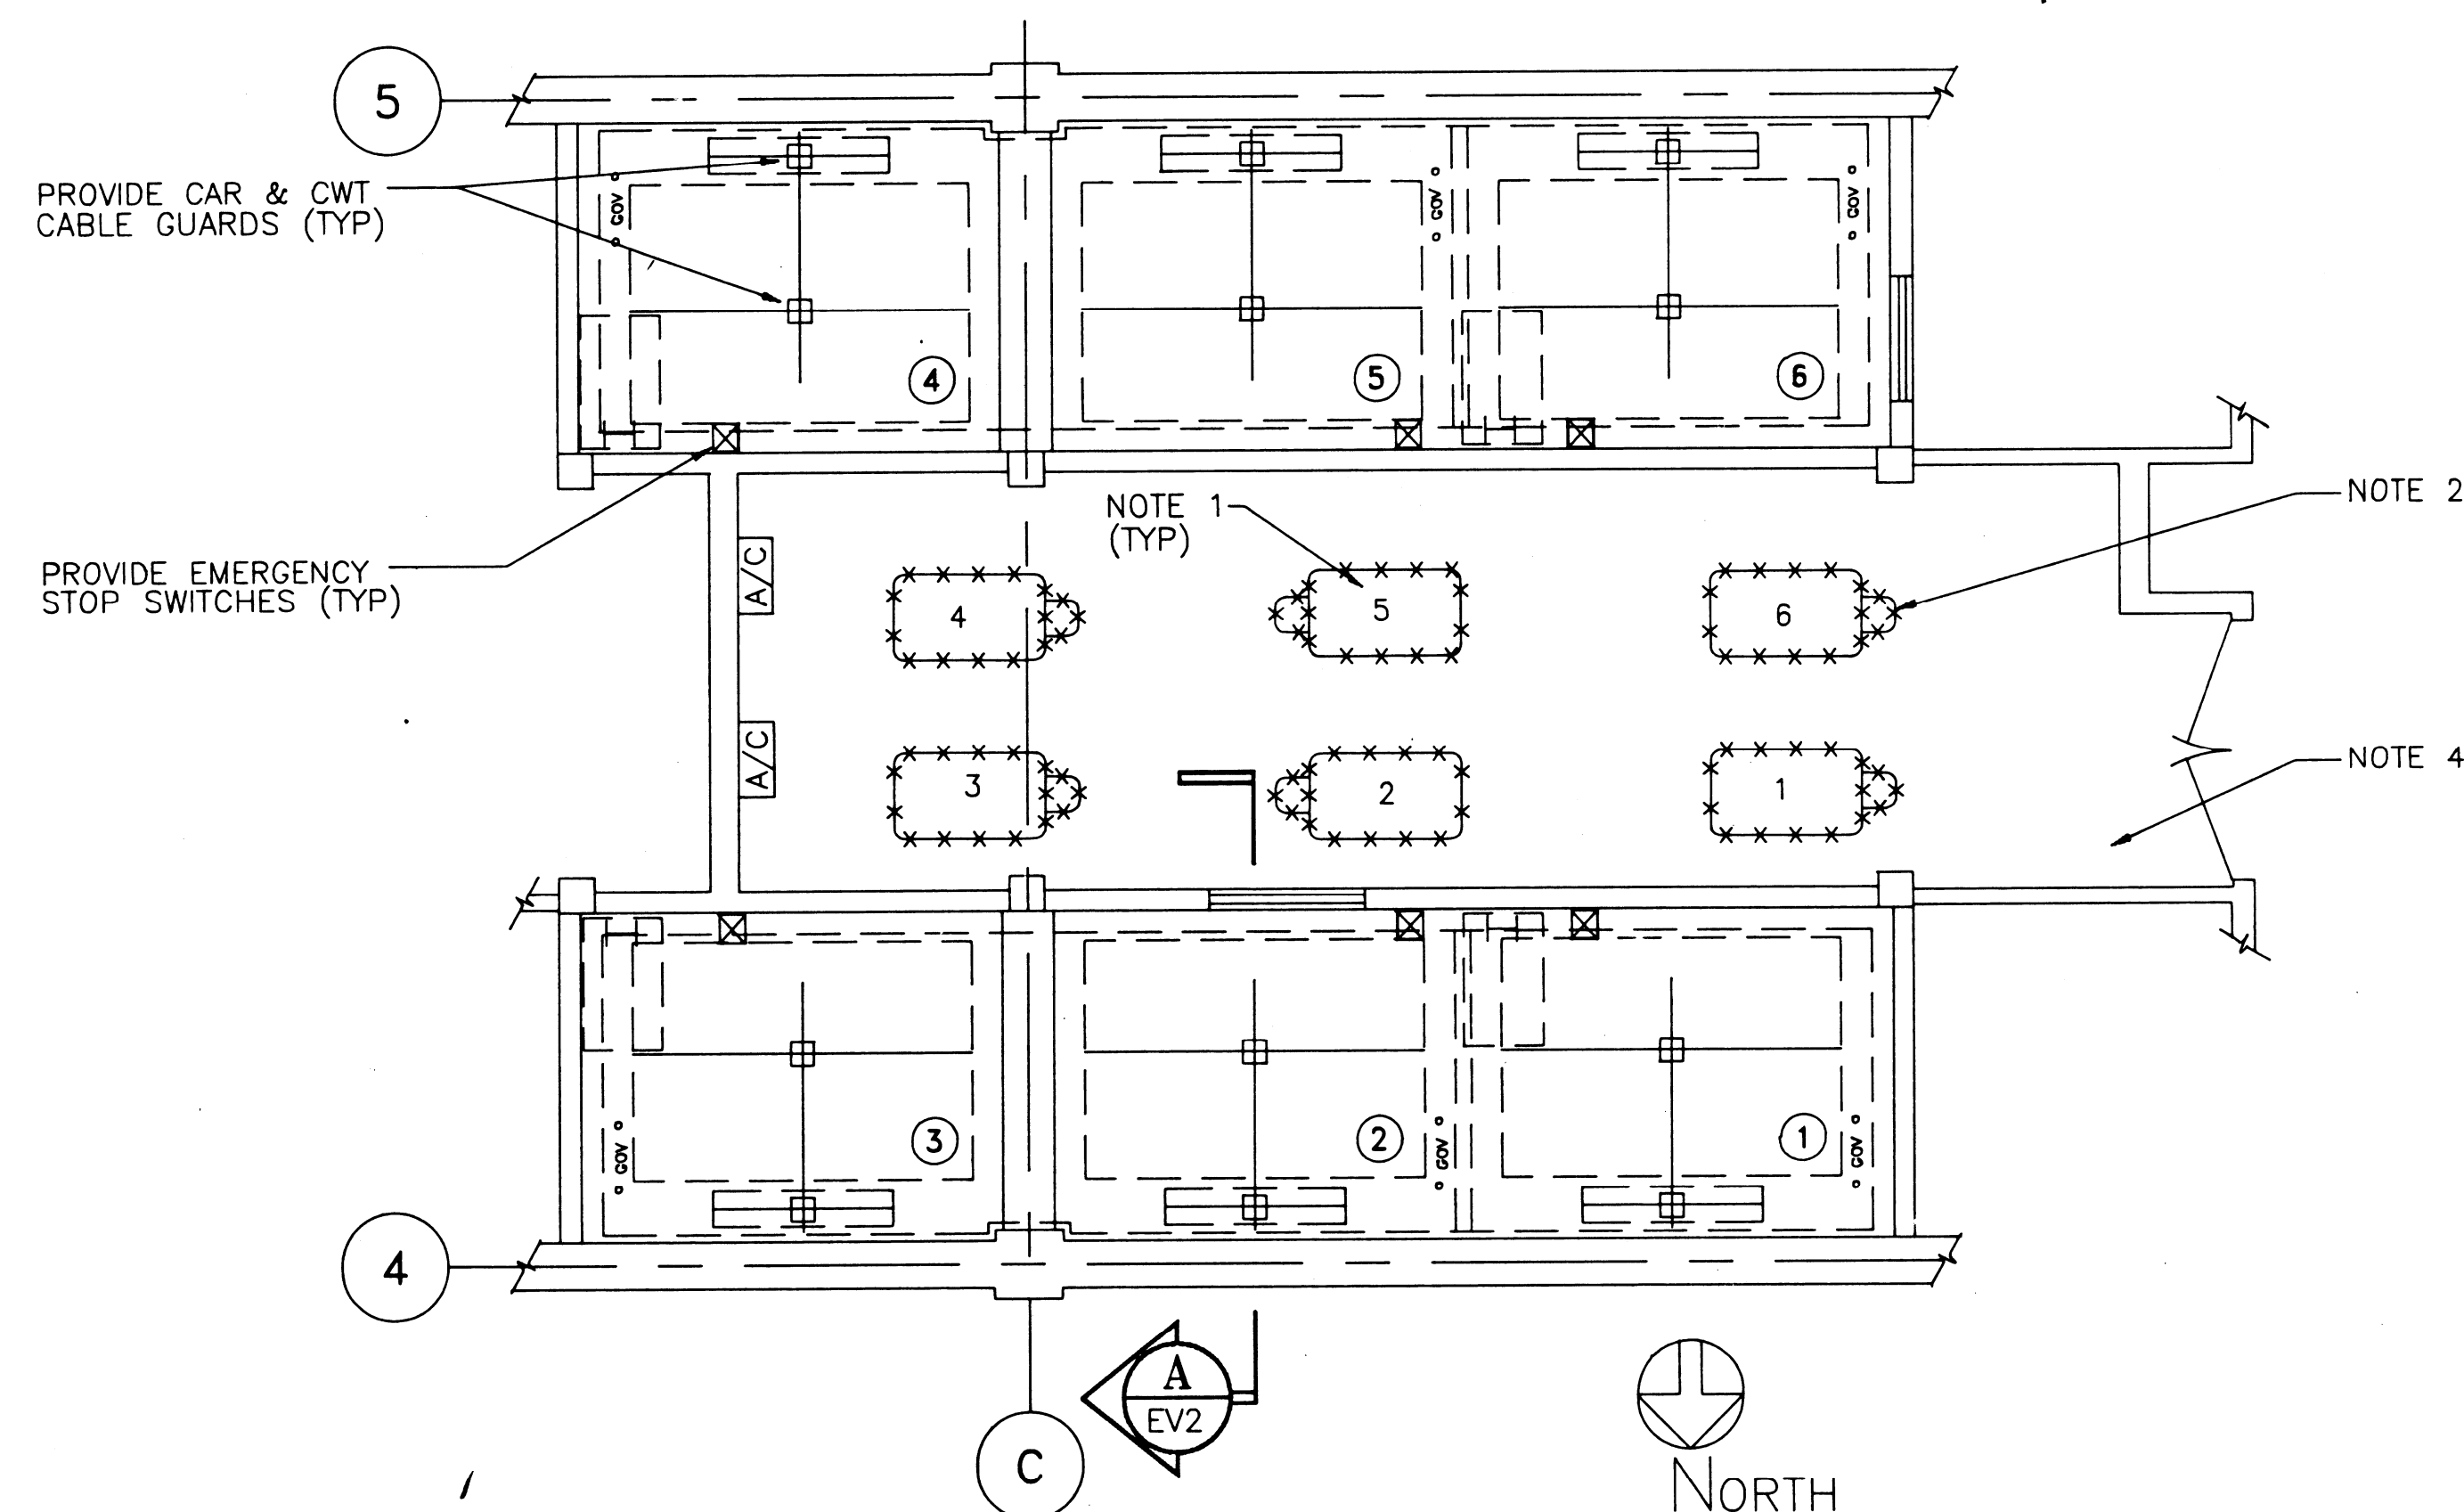

SECONDARY LEVEL PLAN @ 5'-2\"/>

NOTES:

1. ALL EXISTING CONTROLLERS, MOTOR, GENERATOR SETS, SELECTORS AND DISPATCHERS TO BE REMOVED IN PHASED CONSTRUCTION.
2. ALL EXISTING ELEVATOR EQUIPMENT IN THE MOTOR GENERATOR ROOM SHALL BE REMOVED IN ITS ENTIRETY INCLUDING GENERATORS, STARTERS AND ASSOCIATED ELECTRICAL WIRING AND CONDUIT. WALLS AND FLOORS SHALL BE REPAIRED, PATCHED LEVEL WITH EXISTING FLOOR AND WALL SURFACES PAINTED IN A COLOR AS SELECTED BY GSA.
3. EXISTING EMERGENCY TRANSFER SWITCHES AND AUTOMATIC TRANSFER SWITCHES TO REMAIN. RELOCATE AS REQUIRED TO SUIT NEW CONTROL EQUIPMENT.
4. PATCH AND REPAIR EXISTING MACHINE AND MG ROOM FLOORS TO MATCH EXISTING (SQUARE RUBBER TILES)

	FINAL	2/23/96
NO.	REVISION	DATE

ENVIRONMENTAL SYSTEMS DESIGN



55 EAST MONROE ST. - SUITE 1660
CHICAGO, ILLINOIS 60603
(312) 372-1200

J. MARTIN ASSOCIATES
Elevator Consultants
Williamsburg Commons
4 Auer Court
East Brunswick, N.J. 08816-5826
908-613-9600 FAX 908-613-9696

GENERAL SERVICES ADMINISTRATION
PUBLIC BUILDING SERVICE
CHICAGO, ILLINOIS

BUILDING	NAME	E. M. DIRKSEN BUILDING		
	ADDRESS	219 S. DEARBORN ST. CHICAGO IL		
PRODUCT	DESCRIPTION	ELEVATOR IMPROVEMENT FOR EMD BLDG		
	NUMBER	JIL94004		
DRAWINGS	DRAWN BY	KP	CKD BY	LP
	TITLE	MACH RM PLANS: ELEV. 1 - 6		
NUMBER	3	EV	3	
	TYPE	SERIES	SEQUENCE	