

ASSUMPTIONS AND LIMITATIONS

- 3 LOCATIONS AND FREQUENCY OF SAMPLING WAS BASED IMPTION THAT LIKE MATERIALS IN THE SAME AREA ARE
- NO PROCESS EQUIPMENT WAS INSPECTED AS PART OF THIS BUILDING SURVEY. PROCESS EQUIPMENT MAY CONTAIN ASBESTOS.
- NO ELECTRICAL EQUIPMENT, WIRING, OR OTHER ELECTRICAL COMPONENTS WERE INSPECTED AS THE BUILDING POWER WAS LIVE AT THE TIME OF THE SURVEY. THESE SYSTEMS MAY CONTAIN ASBESTOS.

 THE INSIDE OF DUCT WORK, PIPING, BOILERS, AND OTHER BUILDING MECHANICAL SY WERE NOT INSPECTED AS THESE SYSTEMS ARE OPERATIONAL AND INACCESSIBLE AN COMPLETE DESTRUCTION OR DISASSEMBLY IS REQUIRED TO GAIN ACCESS. THESE ITE CONTAIN ASBESTOS.


- OR OTHER USER IS ADVISED TO PHYSICALLY INSPECT THE AREAS TO BE REMOVED, TO BE BID FOR REMOVAL, OR FOR ANY OTHER PURPOSE.

 FLOOR LEVELERS, SEAM SEALERS, ADHESIVES, CONCRETE SEALERS AND OTHER MATERIALS BELOW FLOORING LAYERS MAY EXIST. THE LIMITED DESTRUCTIVE NATURE OF SAMPLING MAY NOT HAVE DISCOVERED THESE MATERIALS AS ONLY SMALL ARRAS OF LARGE EXPANSES OF FLOORING ARE ACCESSED. THE REMOVAL OF FLOORING AND MASTICS IS TO INCLUDE THE REMOVAL OF THESE MATERIALS AS WELL AND ALL OTHER MATERIALS DOWN TO THE CONCRETE SUBSTRATE.

 VERMICULTE INSULATION WAS FOUND IN AN AREA OF THE PLANT AS IDENTIFIED ON THE ATTACHED DRAWINGS. THESE SPORADICALLY APPLIED IN SUCH AREAS AS THE INSUDE OF CHASES, INSIDE THE CAVITIES OF BLOCK WALLS, DUCT PENETRATIONS, OR OTHER AREAS. CURRENILY, THERE IS NO APPROVED ANALYTICAL METHODOLOGY TO CONFIRM VERMICULTE AS NON ASBESTOS, THEREFORE IT AUTOMATICALLY HAS TO BE CONSIDERED TO BE CONTAMINATED WITH ASBESTOS IN NEW YORK STATE, AND IF ENCOUNTERED DURING DEMOLITION MUST BE HANDLED AS AN ASBESTOS CONTAINING MATERIAL.

 THERE ARE SOME AREAS OF THE PLANT THAT WERE INACCESSIBLE TO THE INSPECTION TAKEN TO DENTIFY CONCEALED, INACCESSIBLE AREAS THAT MAY CONTAIN ASBESTOS MATERIALS SUCH AS WET WALLS, VULLTS, ETC.

 ALL ASBESTOS LOCATIONS ON DRAWINGS ARE APPROXIMATE AND ALL QUANTITIES ARE ESTIMATED. ANY CONTRACTOR OR OTHER USER OF THIS REPORT IS REQUIRED TO PHYSICALLY CONFIRM THE QUANTITIES OF MATERIALS TO BE REMOVED, TO BE BID FOR REMOVAL, OR FOR ANY OTHER PURPOSE. CONTRACTORS ARE RESPONSIBLE TO PHYSICALLY VISIT THE SITE AND CONFIRM ALL QUANTITIES FOR BIDDING PURPOSES. ICH AS FLOOR TILE IS LOCATED UNDER ING, OR OTHER MATERIALS. THE CONTRACTOR INSPECT THE AREAS TO BE REMOVED, TO BE BID

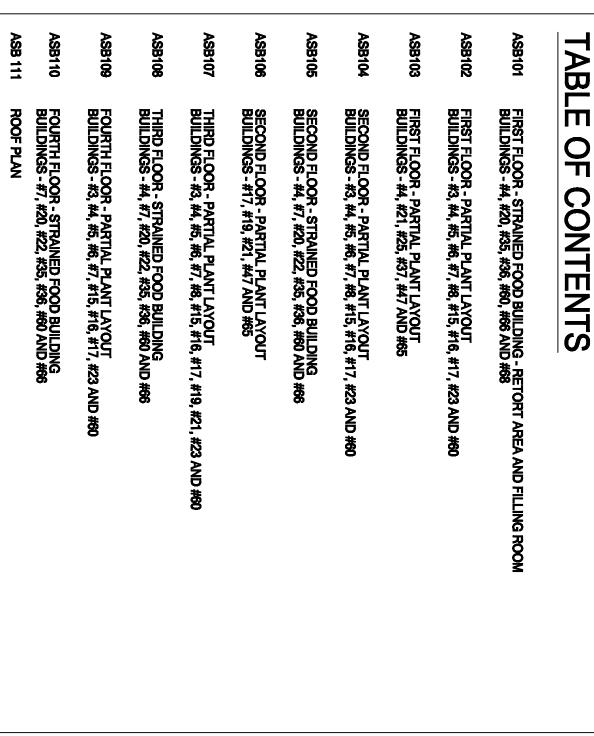



DWG. NO. **REVISIONS ASB100 COMMENTS** BY AS NOTED 111110AA JANUARY 2012

ASBESTOS PRE-DEMOLITION SURVEY FOR BEECH-NUT NUTRITION CORPORATION CANAJOHARIE, NEW YORK

