46

DRAFT
GROUNDWATER MONITORING
DATA SUMMARY REPORT
FIRST QUARTER 1994

DOUGLAS AIRCRAFT COMPANY C-6 FACILITY
TORRANCE, CALIFORNIA

K/J 924010.01

MARCH 1994

Kennedy/Jenks Consultants

DRAFT
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER, 1994

DOUGLAS AIRCRAFT COMPANY C-6 FACILITY
TORRANCE, CALIFORNIA
(K/J 924010.01)

TABLE OF CONTENTS

SECTION	TITLE	PAGE
1.0	INTRODUCTION	1
2.0	QUARTERLY MONITORING PROGRAM	1
	2.1 Groundwater Sampling Procedures	1
	2.2 Field QA/QC Procedures	2
3.0	EVALUATION OF ANALYTICAL RESULTS	2
	3.1 Groundwater Gradient	2
	3.2 Analytical Data	3

LIST OF TABLES

TABLE	TITLE
1	Observation Well Construction Details
2	Cumulative Summary of Observation Well Data (EPA Method 8240/8260)
3	Cumulative Summary of Observation Well Data (EPA Method 8240/8260), Minor Constituents
4	Summary of Groundwater Elevation Data

TABLE OF CONTENTS (continued)

LIST OF FIGURES

FIGURE	TITLE
1	Site Vicinity Map
2	Groundwater Observation Well Locations
3	Observation Well Detected Chemical Concentrations, November 1993 Sampling Event
4	Estimated Groundwater Elevation Contour Map, Shallow Zone, November 1993 Sampling Event

APPENDICES

APPENDIX	TITLE
A	Laboratory Data Sheets
B	Laboratory/Field Quality Control Data Sheets
C	Groundwater Purge and Sample Forms
D	Chain-of-Custody Records

1.0 INTRODUCTION

The Douglas Aircraft Company (DAC) C-6 Facility is located at 19503 South Normandie Avenue, Torrance, California (Figure 1). Quarterly groundwater sampling is being conducted in response to the California Regional Water Quality Control Board -Los Angeles Region correspondence to DAC, dated 7 April 1992. This report summarizes laboratory analytical data generated through the chemical analysis of groundwater samples collected during the period of 23 and 24 February 1994, First Quarter 1994.

2.0 QUARTERLY MONITORING PROGRAM

First Quarter 1994 groundwater sampling was performed in accordance with standard sampling procedures. Static water level depths were measured on 23 February 1994 prior to initiating purging of groundwater from any observation wells. Static water depths on monitoring wells (MW-9, MW-18 and MW-19) located in the southern portion of DAC property installed for the Montrose Chemical Corporation Remedial Investigation were not measured for this quarter.

Groundwater samples were collected from the following fifteen wells (Figure 2) and chemically analyzed for volatile organic compounds (VOCs) by EPA Method 8240/8260 for the First Quarter 1994.

> WCC-1S, WCC-2S, WCC-3S, WCC-4S, WCC-5S, WCC-6S, WCC-7S, WCC-8S, WCC-9S, WCC-10S, WCC-11S, WCC-12S, WCC-1D, WCC-3D, and DAC-P1.

Table 1 summarizes observation well construction details. Tables 2 and 3 summarize the results of chemical analysis of groundwater samples and duplicates for major and minor constituents at the C-6 facility, respectively. Chemicals detected in samples from each observation well are shown on Figure 3. Table 4 summarizes available measured groundwater elevations to date. Estimated groundwater elevation contours for the First Quarter are presented on Figure 4. Copies of laboratory data sheets, laboratory/field Quality Control data sheets, groundwater purge and sample forms, and Chain-of-Custody records are included in Appendices A, B, C, and D respectively.

2.1 Groundwater Sampling Procedures

Prior to collecting groundwater samples from each well, groundwater was purged using an electrical submersible pump that was temporarily installed in the observation well. Observation well WCC-1S was purged with a bailer since the 2-inch casing size would not accommodate a pump. After lowering the pump to the approximate mid-point of the saturated well screen, approximately three to five wetted casing volumes of groundwater were purged from the well until the following groundwater monitoring parameters had stabilized to within 10% of preceding values: pH, electrical conductivity, temperature and clarity. Purged groundwater was stored onsite in DOT approved 55 gallon barrels pending the results of laboratory analysis of samples.

BOE-C6-0136850

Following groundwater purging, the submersible pump was removed from the well and a representative groundwater sample was collected using a steam-cleaned stainless steel point-source bailer equipped with top and bottom ball-check valves. The bailer was lowered to the approximate mid-point of the saturated well screen interval and retrieved to ground surface. The contents of the bailer were drained into three labelled 40-ml capacity vials, preserved with HCL.

2.2 Field QA/QC Procedures

Duplicate groundwater samples were collected for the sampling rounds on 23 and 24 February 1994 for quality control purposes. The duplicates were collected in three HCL-preserved vials each and identified by inserting the collection date after "DW-" (DW-022394 and DW-022494). No further sample identification was provided to the laboratory. Samples DW-022394 and DW-022494 were taken from observation wells WCC-3D and WCC-12S, respectively.

Following decontamination of the bailer by steam-cleaning, and prior to collection of groundwater samples from the successive well, equipment rinsate blanks were prepared for laboratory analysis. The equipment rinsate blanks were prepared by pouring Reagent Grade II water, prepared by the analytical laboratory, through the bailer and discharge spigot and collecting the rinsate in one 40-ml vial preserved with HCL. The blanks were identified following a similar protocol to that used for duplicate water samples and are identified as "FB-022394" and "FB-022494". The wells sampled before and after rinsate blank preparation were recorded. FB-022394 was collected after sampling WCC-10S, the last well sampled that day. FB-022494 was collected after sampling well WCC-9S and prior to sampling well WCC-1D. Trip blanks were also analyzed for both days sampling and shipping and are identified by TB-022394 and TB-022494.

All groundwater duplicate and field blank samples were transported in ice-cooled chests to Terra Tech Labs, Inc., Irvine, California using U.S. EPA-recommended Chain-of-Custody procedures.

3.0 EVALUATION OF ANALYTICAL RESULTS

3.1 Groundwater Gradient

Groundwater levels were measured prior to sampling on 23 February 1994 (Table 4 and Appendix B). The groundwater elevations over the C-6 facility range from 17.88 feet below mean sea level (MSL) to 19.93 feet below MSL. An estimated potentiometric surface map for the shallow zone as measured on this day is presented as Figure 4. Water level measurements show a rise of approximately 0.4 feet over the DAC C-6 facility since the August quarterly monitoring. The groundwater gradient in the shallow zone was generally south-southeast with a southerly trough-like depression in the vicinity of observation wells WCC-7S and WCC-12S.

BOE-C6-0136851

Insufficient data (two wells) are available to define the groundwater gradient in the deeper zone. Groundwater elevation in the two wells (WCC-1D and WCC-3D) is approximately -19.92 and -19.71 feet below MSL, respectively.

3.2 Analytical Data

The results of chemical analysis of groundwater and duplicate samples are summarized in Tables 2 and 3. Table 2 lists major constituents and Table 3 lists additional minor constituents of samples tested. The duplicate groundwater samples are indicated by an asterisk and are presented with the "original" groundwater samples. These tables include cumulative analytical data for all monitoring wells and detection limits (where available) for the listed chemicals.

The following observations are noted:

- Data for groundwater samples collected from well DAC-P1, located at the upgradient property boundary, indicate a TCE concentration of 20,000 micrograms per liter (µg/L) coming onto DAC's property. This test result is consistent with prior sampling events. DAC-P1 is screened in the shallow zone.

- Background concentrations of TCE and 1,1-DCE in the shallow zone upgradient or cross gradient wells WCC-10S, WCC-2S, and WCC-11S remain in the range of 100 µg/L and tens of µg/L for TCE and 1,1-DCE, respectively.

- Groundwater elevation data (Figure 4) and chemical concentration data (Figure 3) indicate that chemical transport in the shallow zone is in a generally southerly to southeasterly direction in the vicinity of buildings 36 and 41. Chemical concentration data from the eastern boundary observation wells (WCC-5S, and WCC-9S) are within the same range or lower than upgradient or cross gradient "background level" wells (WCC-10S, WCC-2S and WCC-11S).

- Analytical data from the equipment rinsate blanks, sample duplicates, and laboratory spike and duplicates are indicative of reliable data.

- Well WCC-6S showed significant increases in several chemicals while well WCC-3S showed significant decreases in these same chemicals, specifically 1,1 DCE, 1,1,1 TCA, TCE and MIBK. Well WCC-3S is upgradient of well WCC-6S indicating that a higher concentration slug of these chemicals may be moving downgradient. Additional sampling will allow for an assessment of a trend.

- Chemical concentration variances within all observation wells (other than WCC-6S and WCC-3S discussed above) were within historical ranges.

BOE-C6-0136852

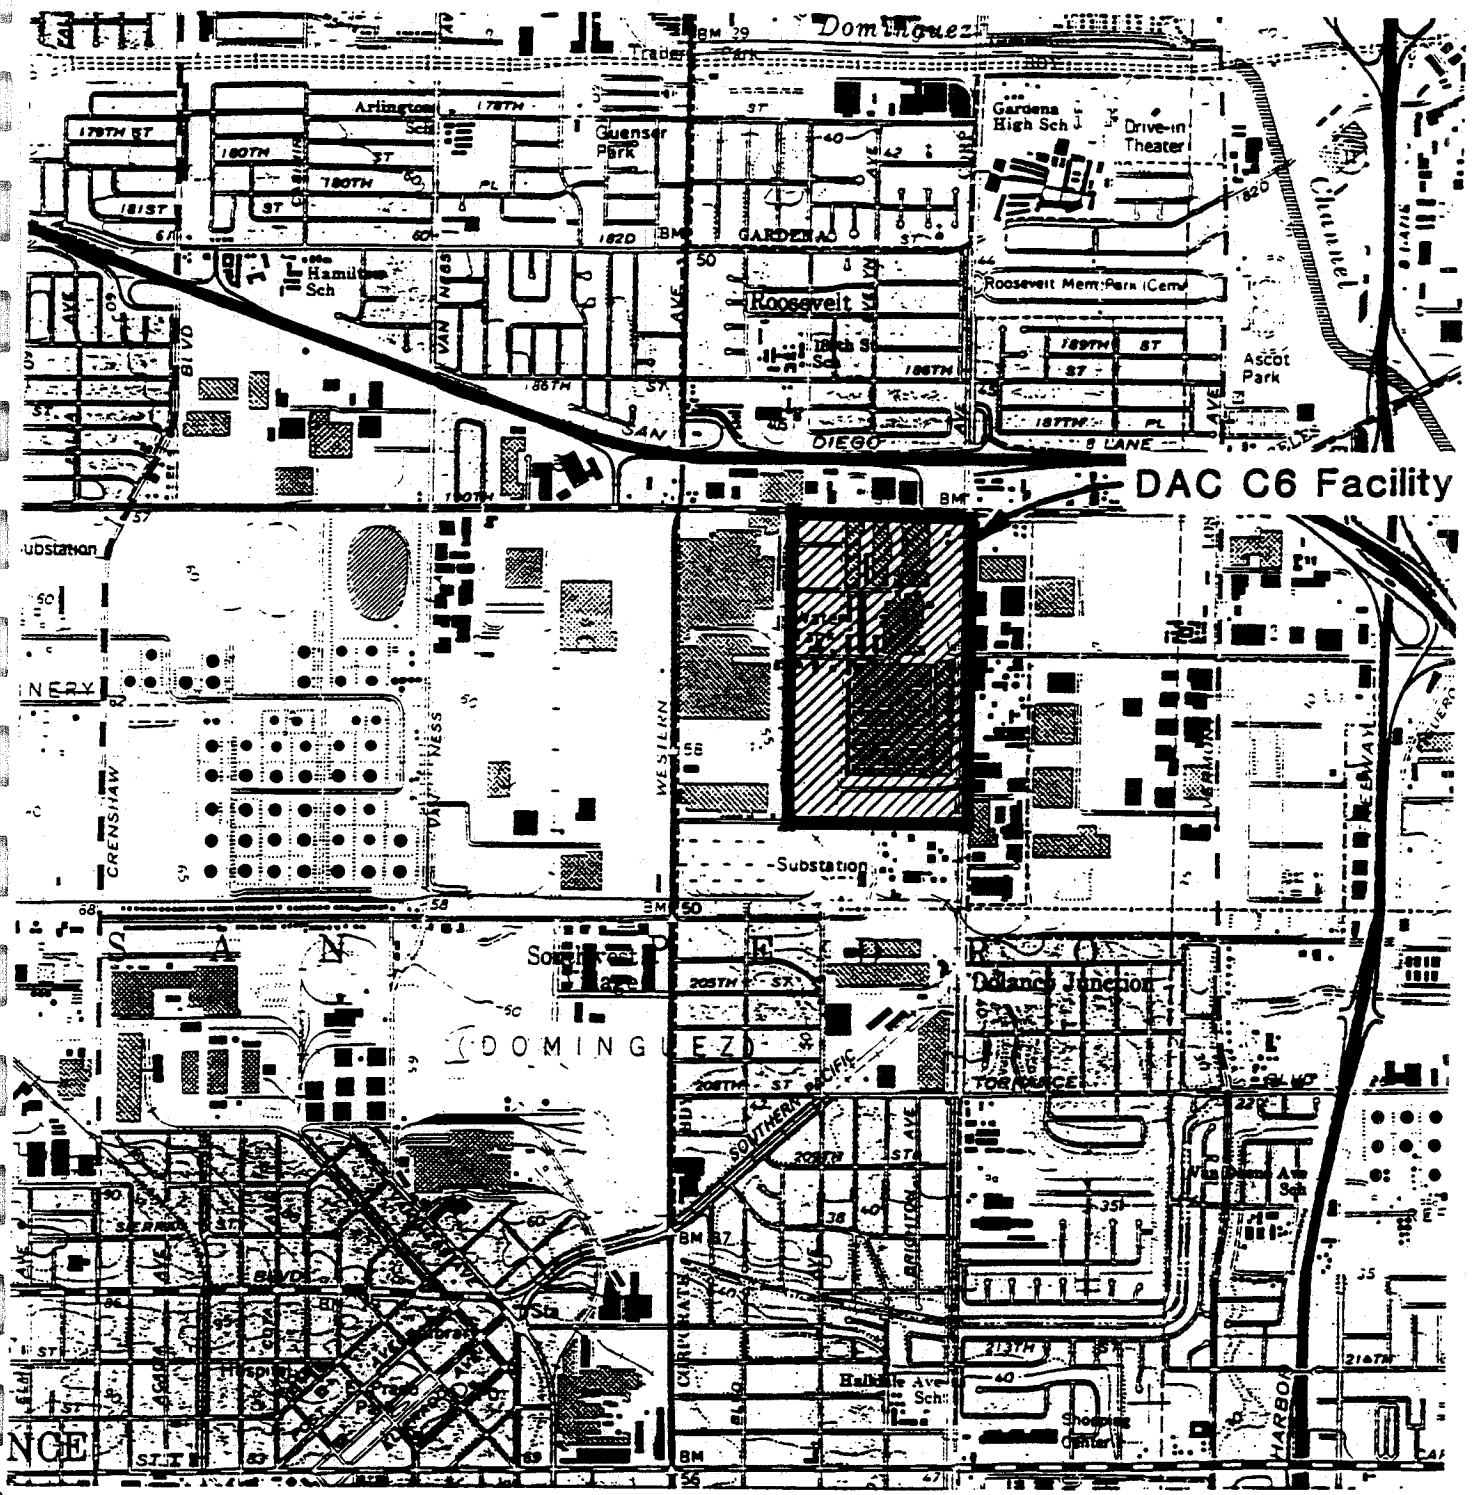

0 1,000 2,000 FEET

Base Map: U.S.G.S. 7.5 Minute Topographic Map, Torrance, California Quadrangle, 1981.

Kennedy/Jenks Consultants

Douglas Aircraft Company
C6 Facility

Site Vicinity Map

March 1994
K/J 924010.01

Figure 1

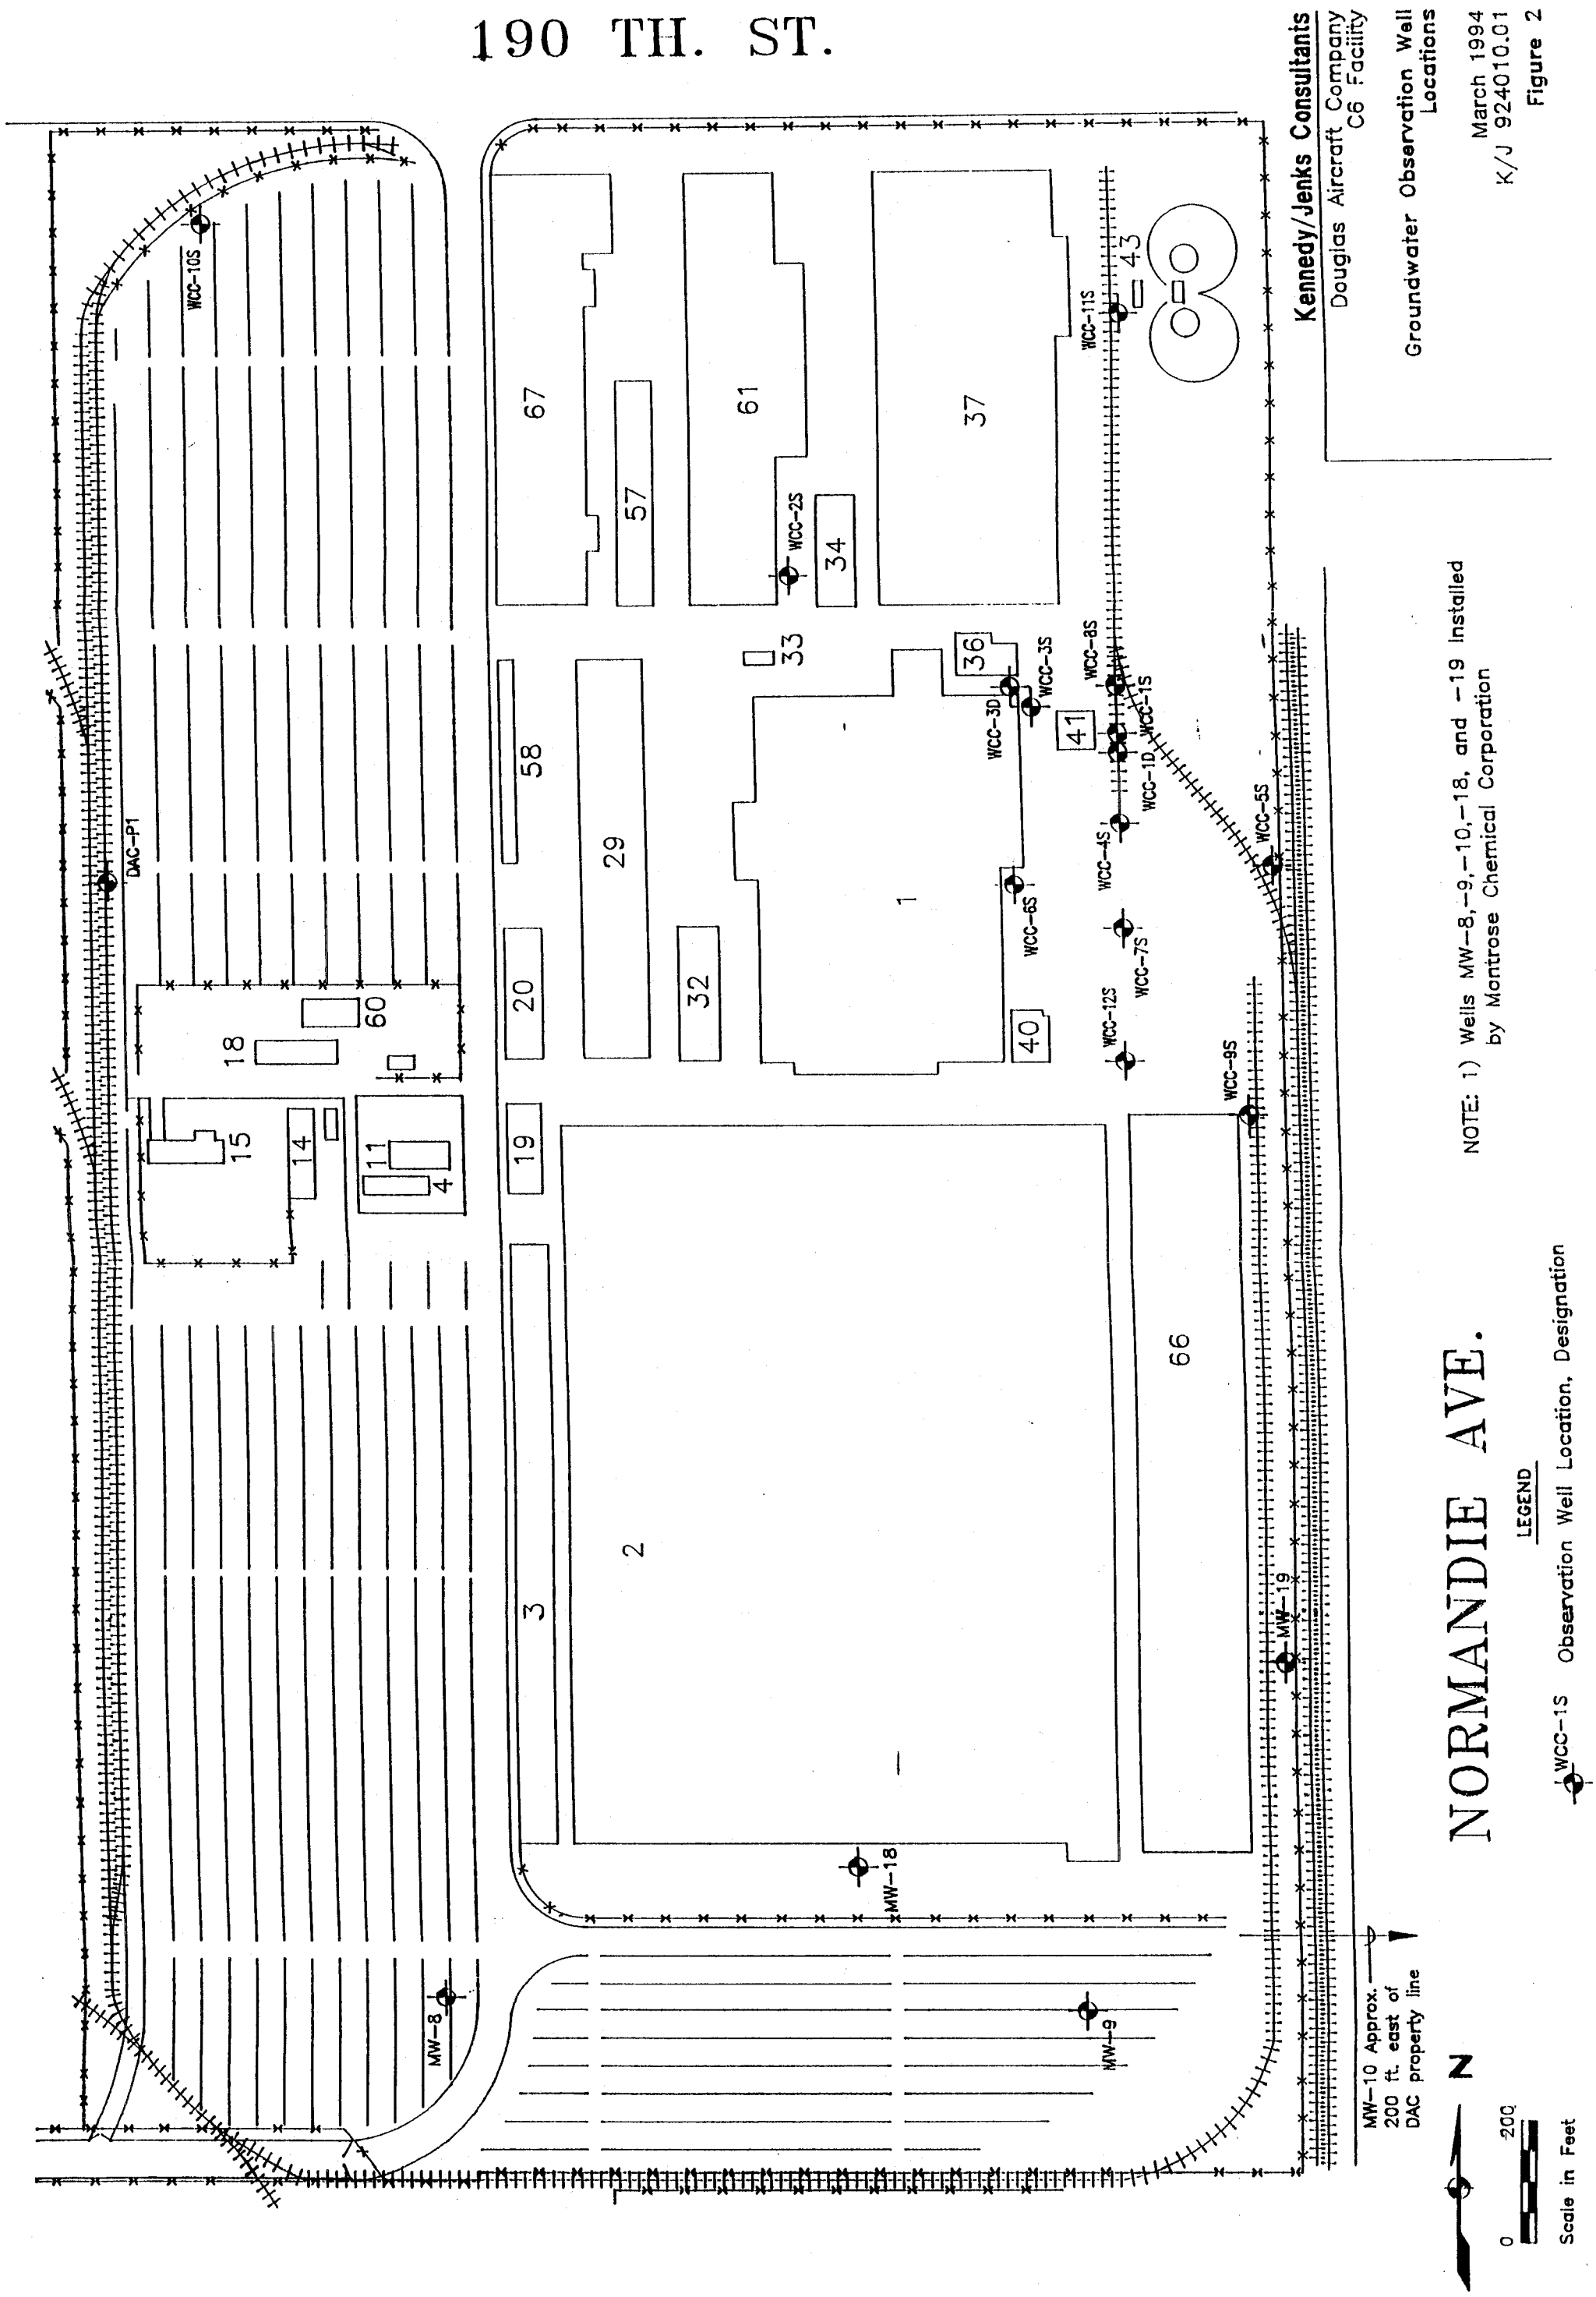
190 TH. ST.
NORMANDIE AVE.
Kennedy/Jenks Consultants
Douglas Aircraft Company
C6 Facility
Groundwater Observation Well Locations
March 1994
K/J 924010.01
Figure 2
NOTE: 1) Wells MW-8,-9,-10,-18, and -19 installed by Montrose Chemical Corporation
LEGEND
WCC-1S Observation Well Location, Designation
MW-10 Approx. 200 ft. east of DAC property line
N
0
200
Scale in Feet
WCC-10S
DAC-P1
WCC-2S
WCC-11S
WCC-3D
WCC-3S
WCC-8S
WCC-1S
WCC-1D
WCC-4S
WCC-5S
WCC-6S
WCC-7S
WCC-12S
WCC-9S
MW-19
MW-18
MW-9
MW-8
67
57
61
37
43
34
33
36
41
58
29
1
20
32
40
60
18
15
14
11
4
19
2
66
3

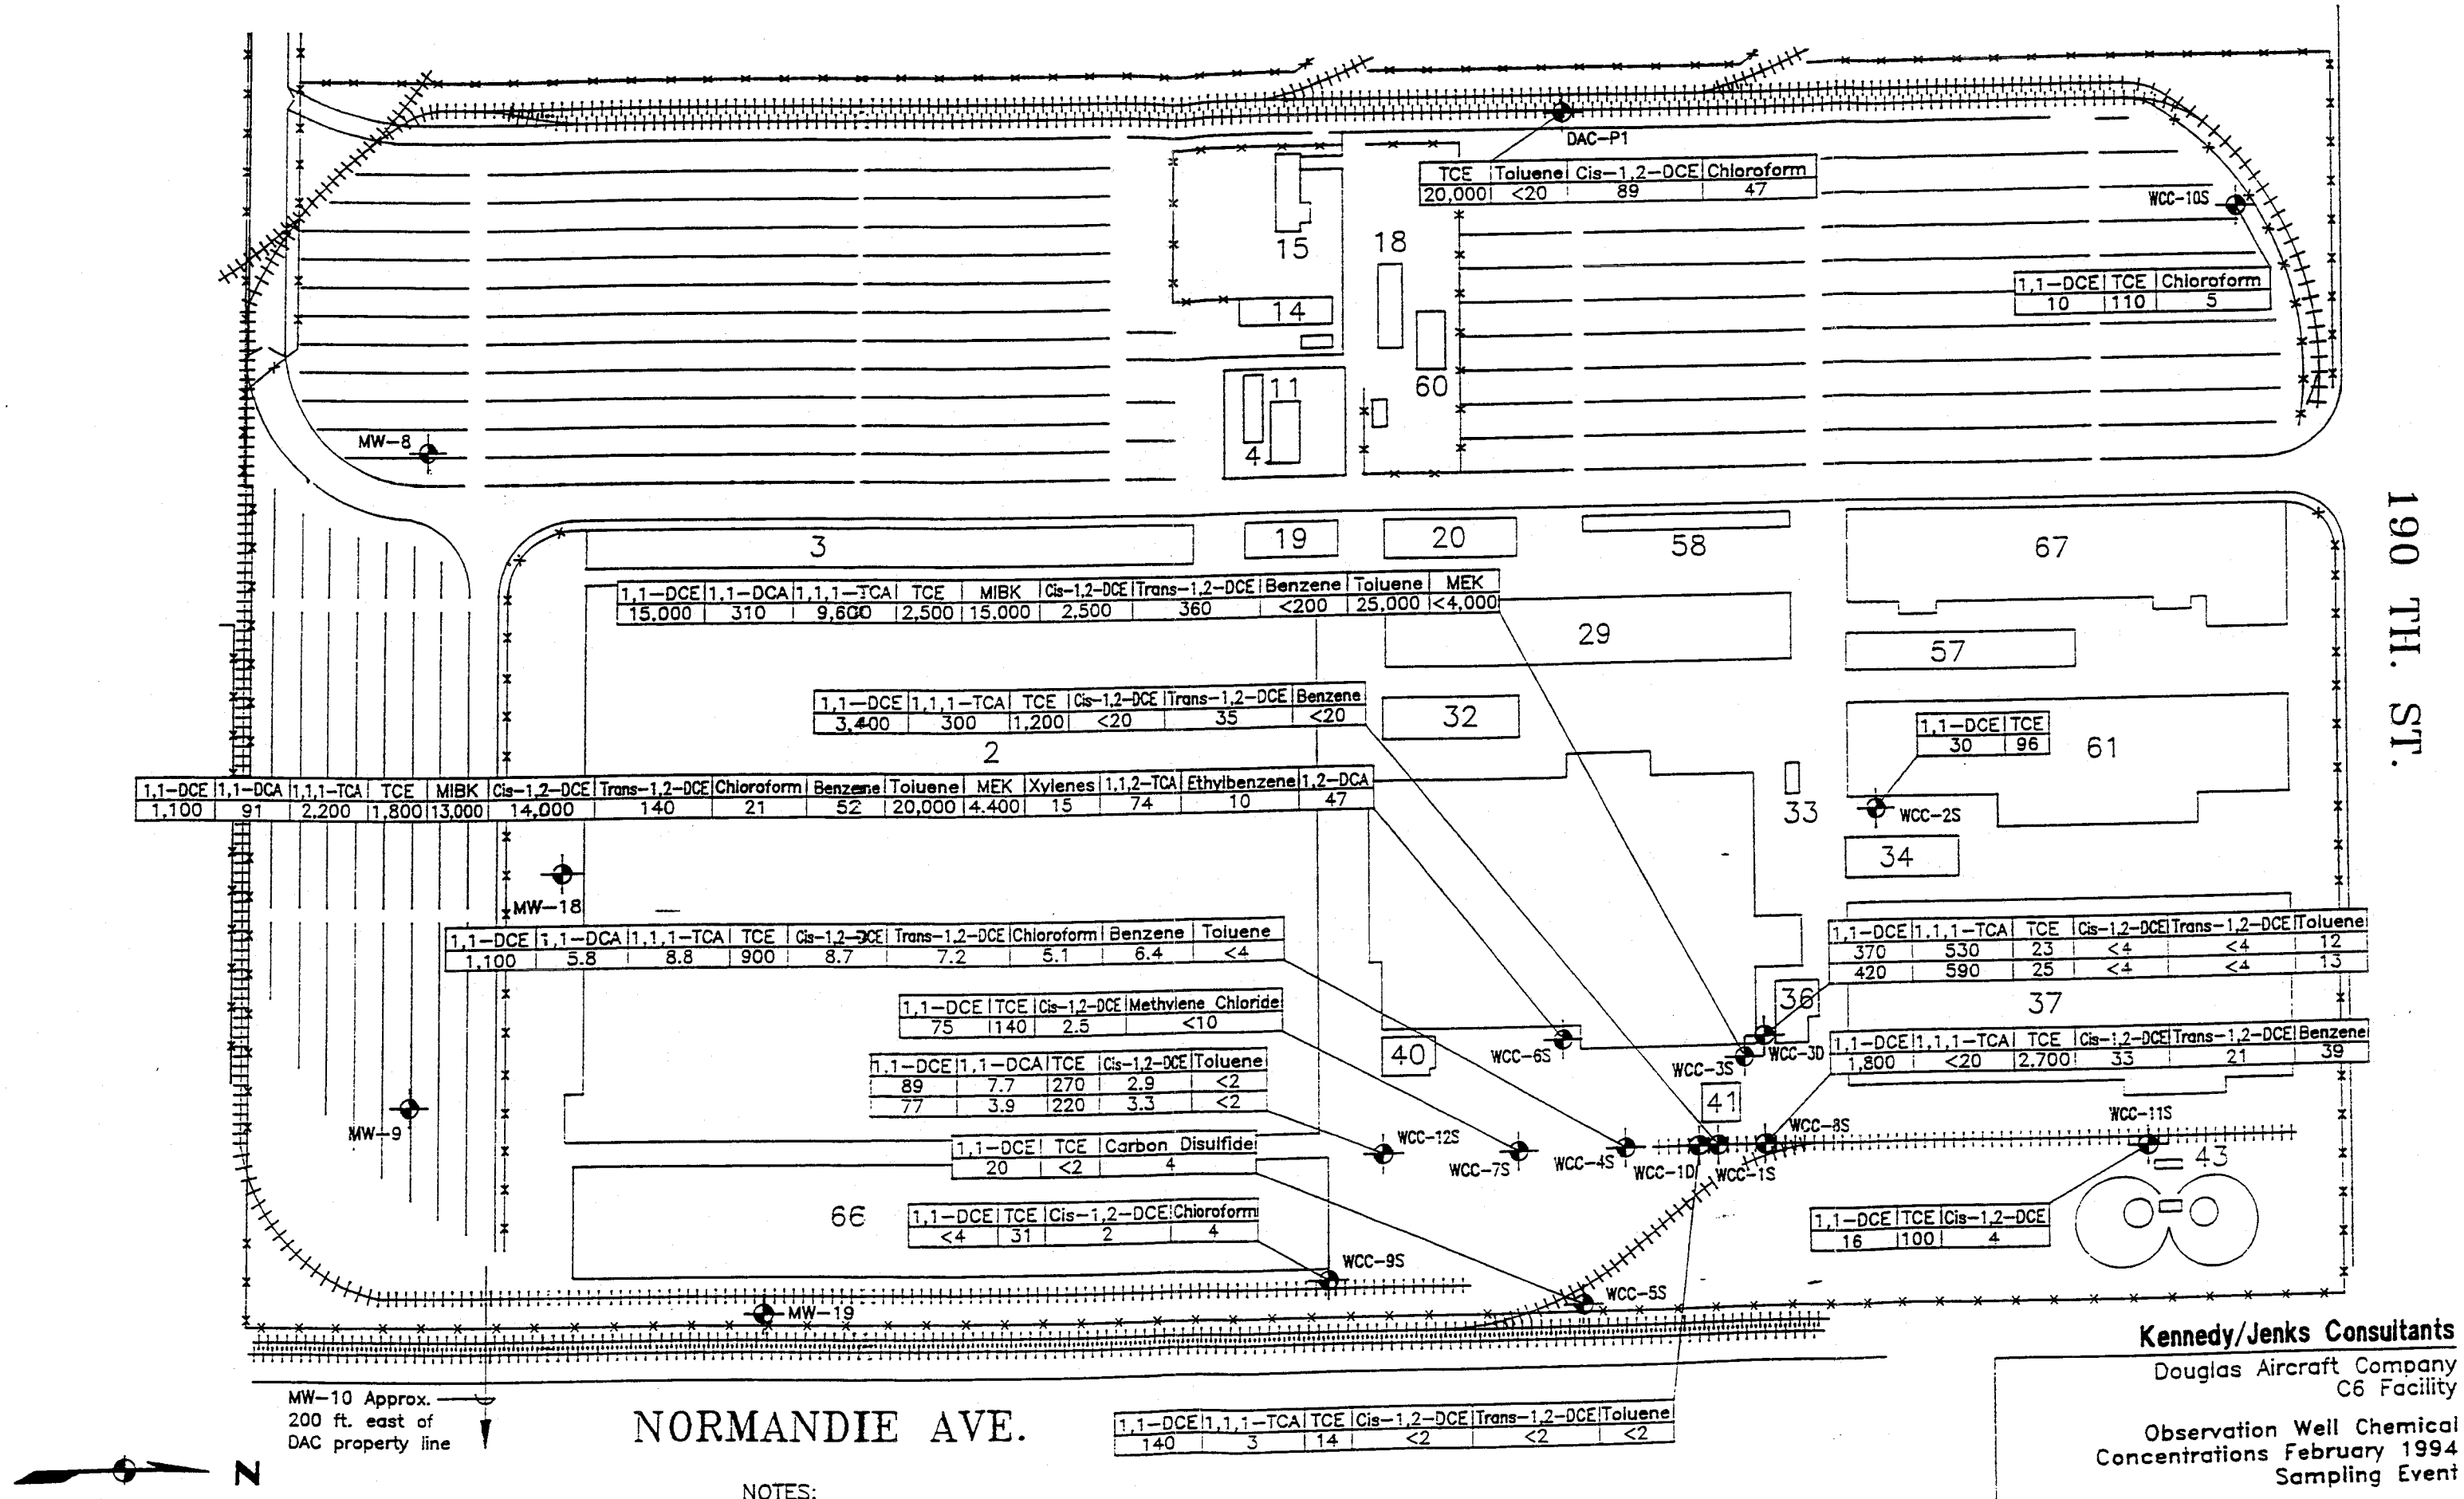

NOTES:

1. Samples Analyzed by EPA Method 8240/8260
2. All Results Reported in ug/l (ppb)
3. Wells MW-8,-9,-10,-18 and -19 Installed by Montrose Chemical Corporation and are not sampled by Douglas Aircraft Co.
4. Duplicate samples were analyzed for well WCC-12S and WCC-3D.
5. <2=compound not detected at a quantitation limit of 2 ug/l. Nondetects posted only for VOCs detected in the well in the previous sample round.

Kennedy/Jenks Consultants

Douglas Aircraft Company
C6 Facility

Observation Well Chemical Concentrations February 1994 Sampling Event

March 1994
K/J 924010.01
Figure 3

BOE-C6-0136855

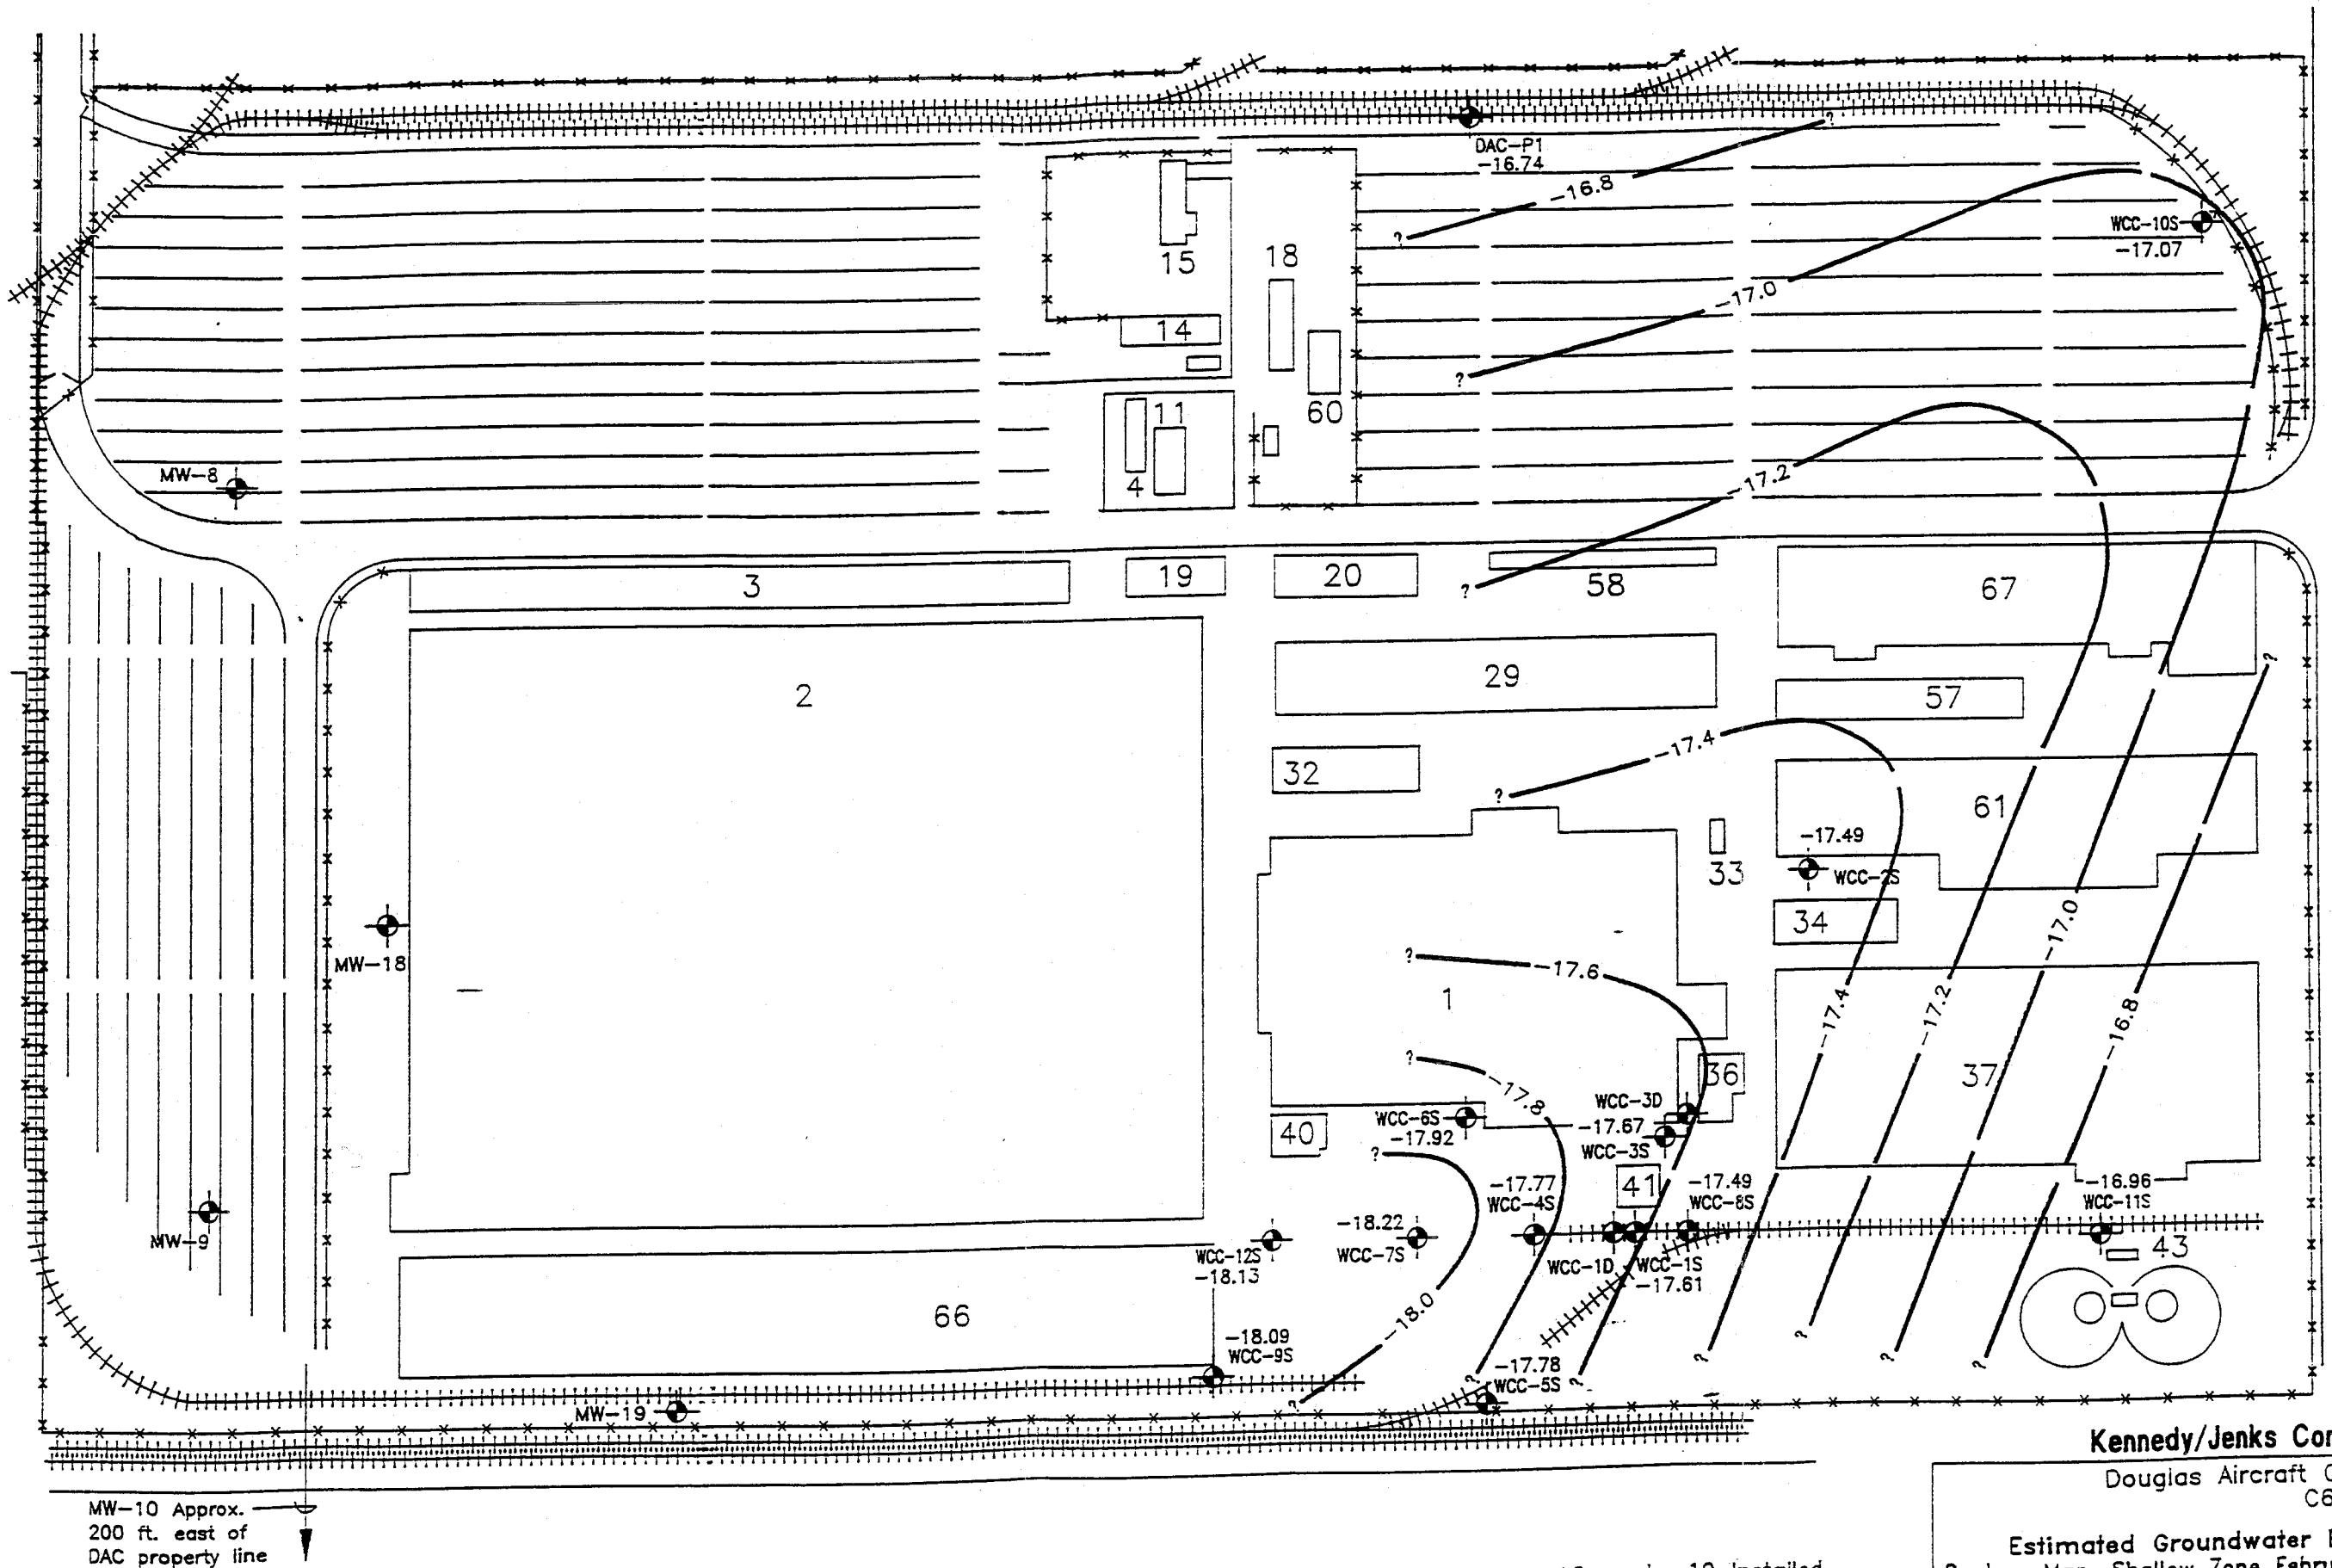

NOTE: 1) Wells MW-8,-9,-10,-18, and -19 installed by Montrose Chemical Corporation

2) Contour Interval = 0.2 feet

LEGEND

WCC-1S / -18.00 — Observation Well Location, Designation and groundwater elevation, feet MSL.

Kennedy/Jenks Consultants

Douglas Aircraft Company
C6 Facility

Estimated Groundwater Elevation Contour Map, Shallow Zone February 1994

March 1994
K/J 924010.01

Figure 4

190 TH. ST.

BOE-C6-0136856

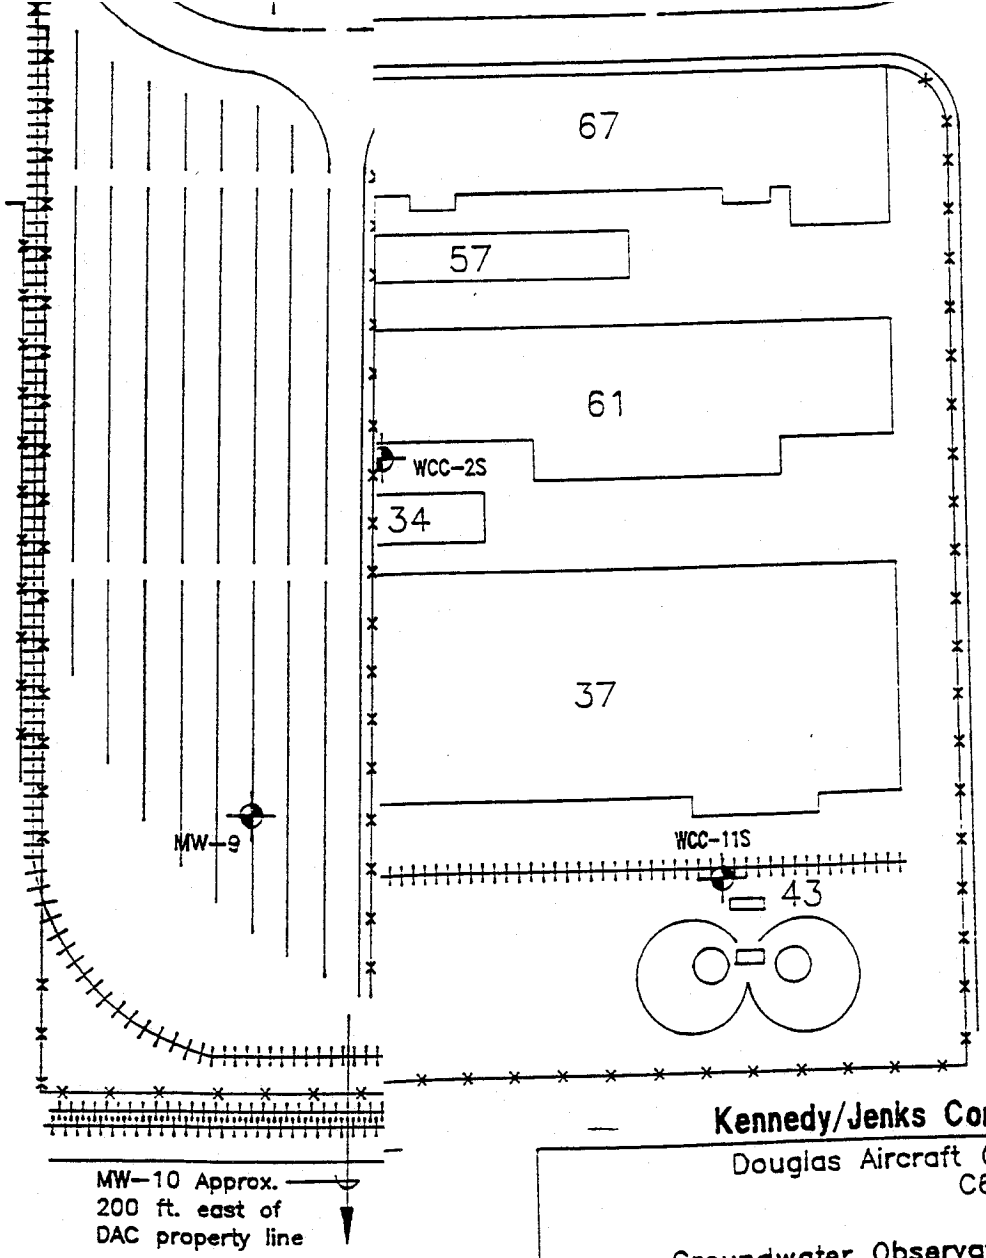

Kennedy/Jenks Consultants

Douglas Aircraft Company
C6 Facility

Groundwater Observation Well Locations

March 1994
K/J 924010.01

Figure 2

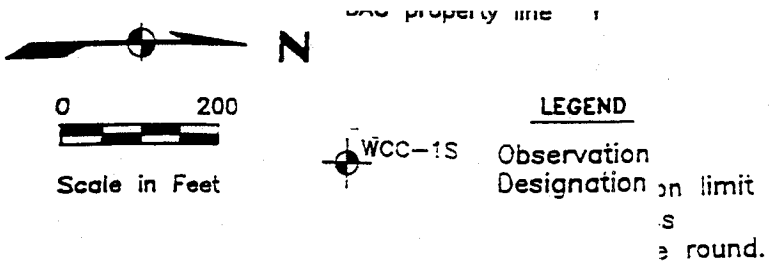

Observation Well Chemical Concentrations February 1994 Sampling Event

March 1994
K/J 924010.01

Figure 3

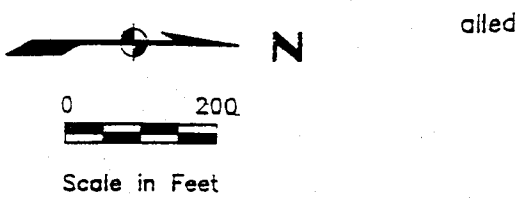

Estimated Groundwater Elevation Contour Map, Shallow Zone February 1994

March 1994
K/J 924010.01

Figure 4

APPENDIX A

LABORATORY DATA SHEE

TERRA TECH LABS

Corporate Office
1920 E. Deere Ave., Suite 130 ▲ Santa Ana, California 92705
Tel 714 757 7022 ▲ Fax 714 757.7274

Arizona Office
3902 E. University Drive, Suite 4 ▲ Phoenix, Arizona 85034
Tel 602 437 9367 ▲ Fax 602.437 9362

LABORATORY REPORT

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Contact:	Sarah Bartling		
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Received:	2/24/94
		Date Analyzed:	2/25/94-2/28/94
		Physical State:	Liquid

Quality Assurance/Quality Control Summary

Parameter (Method)	QC Type	MS Percent Recovery	MSD Percent Recovery	Acceptable Range	Relative Percent Difference	Acceptable Range
1,1, Dichloroethene (EPA 8240/8260)	M	94	98	50-127	5	0-22
Benzene (EPA 8240/8260)	M	94	103	64-137	9	0-15
Trichloroethene (EPA 8240/8260)	M	86	99	80-121	14	0-15
Toluene (EPA 8240/8260)	M	86	97	82-118	12	0-12
Chlorobenzene (EPA 8240/8260)	M	95	103	85-119	8	0-12

M = Matrix Spike / Matrix Spike Duplicate

L = Laboratory Control Sample Spike / Spike Duplicate

Reviewed

Approved

The samples were received by TERRA TECH LABS, Inc. in a chilled state, intact and accompanied by the Chain-of-Custody Record.
Acceptance of samples by Terra Tech Labs, Inc. is not an indication of condition upon receipt.
Laboratory Results apply only to the sample matrix analyzed and may not apply to an apparently identical or similar sample.
The Laboratory Report is the property of the client to whom it is addressed.
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136859

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC2S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	ND	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	ND	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	ND	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	30	4.0
cis-1,2-Dichloroethene	156-59-2	ND	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136860

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC2S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	ND	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	96	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND: Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC12S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	ND	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	ND	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	7.7	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	89	4.0
cis-1,2-Dichloroethene	156-59-2	2.9	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC12S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	ND	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	270	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC7S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	ND	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	ND	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	ND	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	75	4.0
cis-1,2-Dichloroethene	156-59-2	2.5	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid
Sample ID:	WCC7S-8		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	ND	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	140	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC4S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	80
Benzene	71-43-2	6.4	4.0
Bromobenzene	108-86-1	ND	4.0
Bromochloromethane	74-97-5	ND	8.0
Bromodichloromethane	75-27-4	ND	4.0
Bromoform	75-25-2	ND	4.0
Bromomethane	74-83-9	ND	8.0
2-Butanone	78-93-3	ND	80
n-Butylbenzene	104-51-8	ND	4.0
sec-Butylbenzene	135-98-8	ND	4.0
tert-Butylbenzene	98-06-6	ND	4.0
Carbon tetrachloride	56-23-5	ND	4.0
Carbon disulfide	75-15-0	ND	4.0
Chlorobenzene	108-90-7	ND	4.0
Chloroethane	75-00-3	ND	8.0
Chloroform	67-66-3	5.1	4.0
Chloromethane	74-87-3	ND	8.0
2-Chlorotoluene	95-49-8	ND	4.0
4-Chlorotoluene	106-43-4	ND	4.0
Dibromochloromethane	124-48-01	ND	4.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	8.0
Dibromomethane	74-95-3	ND	4.0
1,2-Dibromoethane	106-93-4	ND	4.0
1,2-Dichlorobenzene	95-50-1	ND	4.0
1,3-Dichlorobenzene	541-73-1	ND	4.0
1,4-Dichlorobenzene	106-46-7	ND	4.0
Dichlorodifluoromethane	75-71-8	ND	4.0
1,1-Dichloroethane	75-34-3	5.8	4.0
1,2-Dichloroethane	107-06-2	ND	4.0
1,1-Dichloroethene	75-35-4	1,100	20
cis-1,2-Dichloroethene	156-59-2	8.7	4.0
trans-1,2-Dichloroethene	156-60-5	7.2	4.0

ND: Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136866

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC4S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	4.0
1,3-Dichloropropane	142-28-9	ND	4.0
2,2-Dichloropropane	594-20-7	ND	4.0
1,1-Dichloropropene	563-58-6	ND	4.0
cis-1,3-Dichloropropene	10061-01-5	ND	4.0
trans-1,3-Dichloropropene	10061-02-6	ND	4.0
Ethylbenzene	100-41-4	ND	4.0
Hexachlorobutadiene	87-68-3	ND	8.0
2-Hexanone	591-78-6	ND	40
Isopropylbenzene	98-82-8	ND	4.0
p-Isopropyltoluene	99-87-6	ND	4.0
Methylene chloride	75-09-2	ND	20
4-Methyl-2-pentanone	108-10-1	ND	40
Naphthalene	91-20-3	ND	4.0
n-Propylbenzene	103-65-1	ND	4.0
Styrene	100-42-5	ND	4.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	4.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	4.0
Tetrachloroethene	127-18-4	ND	4.0
Toluene	108-88-3	ND	4.0
1,2,3-Trichlorobenzene	87-61-6	ND	4.0
1,2,4-Trichlorobenzene	120-82-1	ND	4.0
1,1,1-Trichloroethane	71-55-6	8.8	4.0
1,1,2-Trichloroethane	79-00-5	ND	8.0
Trichloroethene	79-01-6	980	10
Trichlorofluoromethane	75-69-4	ND	4.0
1,2,3-Trichloropropane	96-18-4	ND	4.0
1,2,4-Trimethylbenzene	95-63-6	ND	4.0
1,3,5-Trimethylbenzene	108-67-8	ND	4.0
Vinyl chloride	75-01-4	ND	8.0
o-Xylene	95-47-6	ND	4.0
p,m-Xylene	108-38-3, 106-42-3	ND	4.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC6S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	230	200
Benzene	71-43-2	52	10
Bromobenzene	108-86-1	ND	10
Bromochloromethane	74-97-5	ND	20
Bromodichloromethane	75-27-4	ND	10
Bromoform	75-25-2	ND	10
Bromomethane	74-83-9	ND	20
2-Butanone	78-93-3	4,400	200
n-Butylbenzene	104-51-8	ND	10
sec-Butylbenzene	135-98-8	ND	10
tert-Butylbenzene	98-06-6	ND	10
Carbon tetrachloride	56-23-5	ND	10
Carbon disulfide	75-15-0	ND	10
Chlorobenzene	108-90-7	ND	10
Chloroethane	75-00-3	ND	20
Chloroform	67-66-3	21	10
Chloromethane	74-87-3	ND	20
2-Chlorotoluene	95-49-8	ND	10
4-Chlorotoluene	106-43-4	ND	10
Dibromochloromethane	124-48-01	ND	10
1,2-Dibromo-3-chloropropane	96-12-8	ND	20
Dibromomethane	74-95-3	ND	10
1,2-Dibromoethane	106-93-4	ND	10
1,2-Dichlorobenzene	95-50-1	ND	10
1,3-Dichlorobenzene	541-73-1	ND	10
1,4-Dichlorobenzene	106-46-7	ND	10
Dichlorodifluoromethane	75-71-8	ND	10
1,1-Dichloroethane	75-34-3	91	10
1,2-Dichloroethane	107-06-2	47	10
1,1-Dichloroethene	75-35-4	11,000	200
cis-1,2-Dichloroethene	156-59-2	1,400	10
trans-1,2-Dichloroethene	156-60-5	140	10

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136868

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid
Sample ID:	WCC6S-8		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	10
1,3-Dichloropropane	142-28-9	ND	10
2,2-Dichloropropane	594-20-7	ND	10
1,1-Dichloropropene	563-58-6	ND	10
cis-1,3-Dichloropropene	10061-01-5	ND	10
trans-1,3-Dichloropropene	10061-02-6	ND	10
Ethylbenzene	100-41-4	10	10
Hexachlorobutadiene	87-68-3	ND	20
2-Hexanone	591-78-6	ND	100
Isopropylbenzene	98-82-8	ND	10
p-Isopropyltoluene	99-87-6	ND	10
Methylene chloride	75-09-2	ND	50
4-Methyl-2-pentanone	108-10-1	13,000	400
Naphthalene	91-20-3	ND	10
n-Propylbenzene	103-65-1	ND	10
Styrene	100-42-5	ND	10
1,1,1,2-Tetrachloroethane	630-20-6	ND	10
1,1,2,2-Tetrachloroethane	79-34-5	ND	10
Tetrachloroethene	127-18-4	ND	10
Toluene	108-88-3	20,000	100
1,2,3-Trichlorobenzene	87-61-6	ND	10
1,2,4-Trichlorobenzene	120-82-1	ND	10
1,1,1-Trichloroethane	71-55-6	2,200	40
1,1,2-Trichloroethane	79-00-5	74	20
Trichloroethene	79-01-6	1,800	10
Trichlorofluoromethane	75-69-4	ND	10
1,2,3-Trichloropropane	96-18-4	ND	10
1,2,4-Trimethylbenzene	95-63-6	ND	10
1,3,5-Trimethylbenzene	108-67-8	ND	10
Vinyl chloride	75-01-4	ND	20
o-Xylene	95-47-6	15	10
p,m-Xylene	108-38-3, 106-42-3	43	10

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136869

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/28/94
		Physical State:	Liquid

Sample ID: WCC8S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	400
Benzene	71-43-2	39	20
Bromobenzene	108-86-1	ND	20
Bromochloromethane	74-97-5	ND	40
Bromodichloromethane	75-27-4	ND	20
Bromoform	75-25-2	ND	20
Bromomethane	74-83-9	ND	40
2-Butanone	78-93-3	ND	400
n-Butylbenzene	104-51-8	ND	20
sec-Butylbenzene	135-98-8	ND	20
tert-Butylbenzene	98-06-6	ND	20
Carbon tetrachloride	56-23-5	ND	20
Carbon disulfide	75-15-0	ND	20
Chlorobenzene	108-90-7	ND	20
Chloroethane	75-00-3	ND	40
Chloroform	67-66-3	ND	20
Chloromethane	74-87-3	ND	40
2-Chlorotoluene	95-49-8	ND	20
4-Chlorotoluene	106-43-4	ND	20
Dibromochloromethane	124-48-01	ND	20
1,2-Dibromo-3-chloropropane	96-12-8	ND	40
Dibromomethane	74-95-3	ND	20
1,2-Dibromoethane	106-93-4	ND	20
1,2-Dichlorobenzene	95-50-1	ND	20
1,3-Dichlorobenzene	541-73-1	ND	20
1,4-Dichlorobenzene	106-46-7	ND	20
Dichlorodifluoromethane	75-71-8	ND	20
1,1-Dichloroethane	75-34-3	ND	20
1,2-Dichloroethane	107-06-2	ND	20
1,1-Dichloroethene	75-35-4	1,800	40
cis-1,2-Dichloroethene	156-59-2	33	20
trans-1,2-Dichloroethene	156-60-5	21	20

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/28/94
		Physical State:	Liquid
Sample ID:	WCC8S-8		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	20
1,3-Dichloropropane	142-28-9	ND	20
2,2-Dichloropropane	594-20-7	ND	20
1,1-Dichloropropene	563-58-6	ND	20
cis-1,3-Dichloropropene	10061-01-5	ND	20
trans-1,3-Dichloropropene	10061-02-6	ND	20
Ethylbenzene	100-41-4	ND	20
Hexachlorobutadiene	87-68-3	ND	40
2-Hexanone	591-78-6	ND	200
Isopropylbenzene	98-82-8	ND	20
p-Isopropyltoluene	99-87-6	ND	20
Methylene chloride	75-09-2	ND	100
4-Methyl-2-pentanone	108-10-1	ND	200
Naphthalene	91-20-3	ND	20
n-Propylbenzene	103-65-1	ND	20
Styrene	100-42-5	ND	20
1,1,1,2-Tetrachloroethane	630-20-6	ND	20
1,1,2,2-Tetrachloroethane	79-34-5	ND	20
Tetrachloroethene	127-18-4	ND	20
Toluene	108-88-3	ND	20
1,2,3-Trichlorobenzene	87-61-6	ND	20
1,2,4-Trichlorobenzene	120-82-1	ND	20
1,1,1-Trichloroethane	71-55-6	ND	20
1,1,2-Trichloroethane	79-00-5	ND	40
Trichloroethene	79-01-6	2,700	20
Trichlorofluoromethane	75-69-4	ND	20
1,2,3-Trichloropropane	96-18-4	ND	20
1,2,4-Trimethylbenzene	95-63-6	ND	20
1,3,5-Trimethylbenzene	108-67-8	ND	20
Vinyl chloride	75-01-4	ND	40
o-Xylene	95-47-6	ND	20
p,m-Xylene	108-38-3, 106-42-3	ND	20

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC1S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	400
Benzene	71-43-2	ND	20
Bromobenzene	108-86-1	ND	20
Bromochloromethane	74-97-5	ND	40
Bromodichloromethane	75-27-4	ND	20
Bromoform	75-25-2	ND	20
Bromomethane	74-83-9	ND	40
2-Butanone	78-93-3	ND	400
n-Butylbenzene	104-51-8	ND	20
sec-Butylbenzene	135-98-8	ND	20
tert-Butylbenzene	98-06-6	ND	20
Carbon tetrachloride	56-23-5	ND	20
Carbon disulfide	75-15-0	ND	20
Chlorobenzene	108-90-7	ND	20
Chloroethane	75-00-3	ND	40
Chloroform	67-66-3	ND	20
Chloromethane	74-87-3	ND	40
2-Chlorotoluene	95-49-8	ND	20
4-Chlorotoluene	106-43-4	ND	20
Dibromochloromethane	124-48-01	ND	20
1,2-Dibromo-3-chloropropane	96-12-8	ND	40
Dibromomethane	74-95-3	ND	20
1,2-Dibromoethane	106-93-4	ND	20
1,2-Dichlorobenzene	95-50-1	ND	20
1,3-Dichlorobenzene	541-73-1	ND	20
1,4-Dichlorobenzene	106-46-7	ND	20
Dichlorodifluoromethane	75-71-8	ND	20
1,1-Dichloroethane	75-34-3	ND	20
1,2-Dichloroethane	107-06-2	ND	20
1,1-Dichloroethene	75-35-4	3,400	40
cis-1,2-Dichloroethene	156-59-2	ND	20
trans-1,2-Dichloroethene	156-60-5	35	20

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC1S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	20
1,3-Dichloropropane	142-28-9	ND	20
2,2-Dichloropropane	594-20-7	ND	20
1,1-Dichloropropene	563-58-6	ND	20
cis-1,3-Dichloropropene	10061-01-5	ND	20
trans-1,3-Dichloropropene	10061-02-6	ND	20
Ethylbenzene	100-41-4	ND	20
Hexachlorobutadiene	87-68-3	ND	40
2-Hexanone	591-78-6	ND	200
Isopropylbenzene	98-82-8	ND	20
p-Isopropyltoluene	99-87-6	ND	20
Methylene chloride	75-09-2	ND	100
4-Methyl-2-pentanone	108-10-1	ND	200
Naphthalene	91-20-3	ND	20
n-Propylbenzene	103-65-1	ND	20
Styrene	100-42-5	ND	20
1,1,1,2-Tetrachloroethane	630-20-6	ND	20
1,1,2,2-Tetrachloroethane	79-34-5	ND	20
Tetrachloroethene	127-18-4	ND	20
Toluene	108-88-3	ND	20
1,2,3-Trichlorobenzene	87-61-6	ND	20
1,2,4-Trichlorobenzene	120-82-1	ND	20
1,1,1-Trichloroethane	71-55-6	300	20
1,1,2-Trichloroethane	79-00-5	ND	40
Trichloroethene	79-01-6	1,200	20
Trichlorofluoromethane	75-69-4	ND	20
1,2,3-Trichloropropane	96-18-4	ND	20
1,2,4-Trimethylbenzene	95-63-6	ND	20
1,3,5-Trimethylbenzene	108-67-8	ND	20
Vinyl chloride	75-01-4	ND	40
o-Xylene	95-47-6	ND	20
p,m-Xylene	108-38-3, 106-42-3	ND	20

ND: Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC3S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	4,000
Benzene	71-43-2	ND	200
Bromobenzene	108-86-1	ND	200
Bromochloromethane	74-97-5	ND	400
Bromodichloromethane	75-27-4	ND	200
Bromoform	75-25-2	ND	200
Bromomethane	74-83-9	ND	400
2-Butanone	78-93-3	ND	4,000
n-Butylbenzene	104-51-8	ND	200
sec-Butylbenzene	135-98-8	ND	200
tert-Butylbenzene	98-06-6	ND	200
Carbon tetrachloride	56-23-5	ND	200
Carbon disulfide	75-15-0	ND	200
Chlorobenzene	108-90-7	ND	200
Chloroethane	75-00-3	ND	400
Chloroform	67-66-3	ND	200
Chloromethane	74-87-3	ND	400
2-Chlorotoluene	95-49-8	ND	200
4-Chlorotoluene	106-43-4	ND	200
Dibromochloromethane	124-48-01	ND	200
1,2-Dibromo-3-chloropropane	96-12-8	ND	400
Dibromomethane	74-95-3	ND	200
1,2-Dibromoethane	106-93-4	ND	200
1;2-Dichlorobenzene	95-50-1	ND	200
1,3-Dichlorobenzene	541-73-1	ND	200
1,4-Dichlorobenzene	106-46-7	ND	200
Dichlorodifluoromethane	75-71-8	ND	200
1,1-Dichloroethane	75-34-3	310	200
1,2-Dichloroethane	107-06-2	ND	200
1,1-Dichloroethene	75-35-4	15,000	400
cis-1,2-Dichloroethene	156-59-2	2,500	200
trans-1,2-Dichloroethene	156-60-5	360	200

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid
Sample ID:	WCC3S-8		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	200
1,3-Dichloropropane	142-28-9	ND	200
2,2-Dichloropropane	594-20-7	ND	200
1,1-Dichloropropene	563-58-6	ND	200
cis-1,3-Dichloropropene	10061-01-5	ND	200
trans-1,3-Dichloropropene	10061-02-6	ND	200
Ethylbenzene	100-41-4	ND	200
Hexachlorobutadiene	87-68-3	ND	400
2-Hexanone	591-78-6	ND	2,000
Isopropylbenzene	98-82-8	ND	200
p-Isopropyltoluene	99-87-6	ND	200
Methylene chloride	75-09-2	ND	1,000
4-Methyl-2-pentanone	108-10-1	15,000	2,000
Naphthalene	91-20-3	ND	200
n-Propylbenzene	103-65-1	ND	200
Styrene	100-42-5	ND	200
1,1,1,2-Tetrachloroethane	630-20-6	ND	200
1,1,2,2-Tetrachloroethane	79-34-5	ND	200
Tetrachloroethene	127-18-4	ND	200
Toluene	108-88-3	25,000	200
1,2,3-Trichlorobenzene	87-61-6	ND	200
1,2,4-Trichlorobenzene	120-82-1	ND	200
1,1,1-Trichloroethane	71-55-6	9,600	200
1,1,2-Trichloroethane	79-00-5	ND	400
Trichloroethene	79-01-6	2,500	200
Trichlorofluoromethane	75-69-4	ND	200
1,2,3-Trichloropropane	96-18-4	ND	200
1,2,4-Trimethylbenzene	95-63-6	ND	200
1,3,5-Trimethylbenzene	108-67-8	ND	200
Vinyl chloride	75-01-4	ND	400
o-Xylene	95-47-6	ND	200
p,m-Xylene	108-38-3, 106-42-3	ND	200

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/28/94
		Physical State:	Liquid
Sample ID:	DAC P1-8		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	400
Benzene	71-43-2	ND	20
Bromobenzene	108-86-1	ND	20
Bromochloromethane	74-97-5	ND	40
Bromodichloromethane	75-27-4	ND	20
Bromoform	75-25-2	ND	20
Bromomethane	74-83-9	ND	40
2-Butanone	78-93-3	ND	400
n-Butylbenzene	104-51-8	ND	20
sec-Butylbenzene	135-98-8	ND	20
tert-Butylbenzene	98-06-6	ND	20
Carbon tetrachloride	56-23-5	ND	20
Carbon disulfide	75-15-0	ND	20
Chlorobenzene	108-90-7	ND	20
Chloroethane	75-00-3	ND	40
Chloroform	67-66-3	47	20
Chloromethane	74-87-3	ND	40
2-Chlorotoluene	95-49-8	ND	20
4-Chlorotoluene	106-43-4	ND	20
Dibromochloromethane	124-48-01	ND	20
1,2-Dibromo-3-chloropropane	96-12-8	ND	40
Dibromomethane	74-95-3	ND	20
1,2-Dibromoethane	106-93-4	ND	20
1,2-Dichlorobenzene	95-50-1	ND	20
1,3-Dichlorobenzene	541-73-1	ND	20
1,4-Dichlorobenzene	106-46-7	ND	20
Dichlorodifluoromethane	75-71-8	ND	20
1,1-Dichloroethane	75-34-3	ND	20
1,2-Dichloroethane	107-06-2	ND	20
1,1-Dichloroethene	75-35-4	ND	40
cis-1,2-Dichloroethene	156-59-2	89	20
trans-1,2-Dichloroethene	156-60-5	ND	20

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/28/94
		Physical State:	Liquid
Sample ID:	DAC P1-8		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	20
1,3-Dichloropropane	142-28-9	ND	20
2,2-Dichloropropane	594-20-7	ND	20
1,1-Dichloropropene	563-58-6	ND	20
cis-1,3-Dichloropropene	10061-01-5	ND	20
trans-1,3-Dichloropropene	10061-02-6	ND	20
Ethylbenzene	100-41-4	ND	20
Hexachlorobutadiene	87-68-3	ND	40
2-Hexanone	591-78-6	ND	200
Isopropylbenzene	98-82-8	ND	20
p-Isopropyltoluene	99-87-6	ND	20
Methylene chloride	75-09-2	ND	100
4-Methyl-2-pentanone	108-10-1	ND	200
Naphthalene	91-20-3	ND	20
n-Propylbenzene	103-65-1	ND	20
Styrene	100-42-5	ND	20
1,1,1,2-Tetrachloroethane	630-20-6	ND	20
1,1,2,2-Tetrachloroethane	79-34-5	ND	20
Tetrachloroethene	127-18-4	ND	20
Toluene	108-88-3	ND	20
1,2,3-Trichlorobenzene	87-61-6	ND	20
1,2,4-Trichlorobenzene	120-82-1	ND	20
1,1,1-Trichloroethane	71-55-6	ND	20
1,1,2-Trichloroethane	79-00-5	ND	40
Trichloroethene	79-01-6	20,000	200
Trichlorofluoromethane	75-69-4	ND	20
1,2,3-Trichloropropane	96-18-4	ND	20
1,2,4-Trimethylbenzene	95-63-6	ND	20
1,3,5-Trimethylbenzene	108-67-8	ND	20
Vinyl chloride	75-01-4	ND	40
o-Xylene	95-47-6	ND	20
p,m-Xylene	108-38-3, 106-42-3	ND	20

ND: Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: DW022494 DUPLICATE SAMPLE WCL-12S

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	ND	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	ND	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	3.9	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	77	4.0
cis-1,2-Dichloroethene	156-59-2	3.3	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: DW022494 Duplicate Sample WCC-12S

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	ND	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	220	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid
Sample ID:	FB022494		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	ND	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	ND	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	ND	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	ND	4.0
cis-1,2-Dichloroethene	156-59-2	ND	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND: Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: FB022494

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	ND	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	ND	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: TB022494

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	ND	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	ND	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	ND	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	ND	4.0
cis-1,2-Dichloroethene	156-59-2	ND	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	3/2/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6476
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/24/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid
Sample ID:	TB022494		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	ND	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	ND	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

APPENDIX B

LABORATORY/FIELD QUALITY CONTROL DATA SHEETS

TERRA TECH LABS

[illegible]
[illegible]

[illegible]
[illegible]

LABORATORY REPORT

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Contact:	Sarah Bartling		
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Received:	2/23/94
		Date Analyzed:	2/24/94-2/25/94
		Physical State:	Liquid

Quality Assurance/Quality Control Summary

Parameter (Method)	QC Type	Percent Recovery	Duplicate Percent Recovery	Acceptable Range	Relative Percent Difference	Acceptable Range
1,1, Dichloroethene (EPA 8240/8260)	M	79	83	50-127	5	0-22
Trichloroethene (EPA 8240/8260)	M	98	88	64-137	11	0-15
Benzene (EPA 8240/8260)	M	96	93	80-121	4	0-15
Toluene (EPA 8240/8260)	M	102	95	82-118	7	0-12
Chlorobenzene (EPA 8240/8260)	M	97	95	85-119	2	0-12

M = Matrix Spike / Matrix Spike Duplicate

L = Laboratory Control Sample Spike / Spike Duplicate

Reviewed

Approved

The samples were received by TERRA TECH LABS, Inc. in a chilled state, intact and accompanied by the Chain-of-Custody Record.

Acceptance of samples by Terra Tech Labs, Inc. is not an indication of condition upon receipt.

Laboratory Results apply only to the sample matrix analyzed and may not apply to an apparently identical or similar sample.

The Laboratory Report is the property of the client to whom it is addressed.

The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136885

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid

Sample ID: WCC3D-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	80
Benzene	71-43-2	ND	4.0
Bromobenzene	108-86-1	ND	4.0
Bromochloromethane	74-97-5	ND	8.0
Bromodichloromethane	75-27-4	ND	4.0
Bromoform	75-25-2	ND	4.0
Bromomethane	74-83-9	ND	8.0
2-Butanone	78-93-3	ND	80
n-Butylbenzene	104-51-8	ND	4.0
sec-Butylbenzene	135-98-8	ND	4.0
tert-Butylbenzene	98-06-6	ND	4.0
Carbon tetrachloride	56-23-5	ND	4.0
Carbon disulfide	75-15-0	ND	4.0
Chlorobenzene	108-90-7	ND	4.0
Chloroethane	75-00-3	ND	8.0
Chloroform	67-66-3	ND	4.0
Chloromethane	74-87-3	ND	8.0
2-Chlorotoluene	95-49-8	ND	4.0
4-Chlorotoluene	106-43-4	ND	4.0
Dibromochloromethane	124-48-01	ND	4.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	8.0
Dibromomethane	74-95-3	ND	4.0
1,2-Dibromoethane	106-93-4	ND	4.0
1,2-Dichlorobenzene	95-50-1	ND	4.0
1,3-Dichlorobenzene	541-73-1	ND	4.0
1,4-Dichlorobenzene	106-46-7	ND	4.0
Dichlorodifluoromethane	75-71-8	ND	4.0
1,1-Dichloroethane	75-34-3	ND	4.0
1,2-Dichloroethane	107-06-2	ND	4.0
1,1-Dichloroethene	75-35-4	370	8.0
cis-1,2-Dichloroethene	156-59-2	ND	4.0
trans-1,2-Dichloroethene	156-60-5	ND	4.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136886

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid
Sample ID:	WCC3D-8		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	4.0
1,3-Dichloropropane	142-28-9	ND	4.0
2,2-Dichloropropane	594-20-7	ND	4.0
1,1-Dichloropropene	563-58-6	ND	4.0
cis-1,3-Dichloropropene	10061-01-5	ND	4.0
trans-1,3-Dichloropropene	10061-02-6	ND	4.0
Ethylbenzene	100-41-4	ND	4.0
Hexachlorobutadiene	87-68-3	ND	8.0
2-Hexanone	591-78-6	ND	40
Isopropylbenzene	98-82-8	ND	4.0
p-Isopropyltoluene	99-87-6	ND	4.0
Methylene chloride	75-09-2	ND	20
4-Methyl-2-pentanone	108-10-1	ND	40
Naphthalene	91-20-3	ND	4.0
n-Propylbenzene	103-65-1	ND	4.0
Styrene	100-42-5	ND	4.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	4.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	4.0
Tetrachloroethene	127-18-4	ND	4.0
Toluene	108-88-3	12	4.0
1,2,3-Trichlorobenzene	87-61-6	ND	4.0
1,2,4-Trichlorobenzene	120-82-1	ND	4.0
1,1,1-Trichloroethane	71-55-6	530	4.0
1,1,2-Trichloroethane	79-00-5	ND	8.0
Trichloroethene	79-01-6	23	4.0
Trichlorofluoromethane	75-69-4	ND	4.0
1,2,3-Trichloropropane	96-18-4	ND	4.0
1,2,4-Trimethylbenzene	95-63-6	ND	4.0
1,3,5-Trimethylbenzene	108-67-8	ND	4.0
Vinyl chloride	75-01-4	ND	8.0
o-Xylene	95-47-6	ND	4.0
p,m-Xylene	108-38-3, 106-42-3	ND	4.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid
Sample ID:	WCC5S-8		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	4.0	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	ND	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	ND	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	20	4.0
cis-1,2-Dichloroethene	156-59-2	ND	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136888

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid
Sample ID:	WCC5S-8		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	ND	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	4.0	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136889

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid
Sample ID:	WCC9S-8		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	ND	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	4.0	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	ND	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	ND	4.0
cis-1,2-Dichloroethene	156-59-2	2.0	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND: Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136890

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid

Sample ID: WCC9S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	ND	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	31	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND: Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC1D-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	ND	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	ND	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	ND	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	140	4.0
cis-1,2-Dichloroethene	156-59-2	ND	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/25/94
		Physical State:	Liquid

Sample ID: WCC1D-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	3.0	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	14	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136893

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid
Sample ID:	WCC11S-8		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	ND	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	ND	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	ND	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	16	4.0
cis-1,2-Dichloroethene	156-59-2	4.0	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid
Sample ID:	WCC11S-8		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	ND	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	100	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid

Sample ID: WCC10S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	ND	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	5.0	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	ND	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	10	4.0
cis-1,2-Dichloroethene	156-59-2	ND	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136896

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid

Sample ID: WCC10S-8

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	ND	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	110	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid
Sample ID:	FB022394		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	ND	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	ND	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	ND	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	ND	4.0
cis-1,2-Dichloroethene	156-59-2	ND	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND: Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136898

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid
Sample ID:	FB022394		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	ND	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	ND	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136899

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid

Sample ID: DW022394 DUPLICATE Sample - WCC-3D

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	80
Benzene	71-43-2	ND	4.0
Bromobenzene	108-86-1	ND	4.0
Bromochloromethane	74-97-5	ND	8.0
Bromodichloromethane	75-27-4	ND	4.0
Bromoform	75-25-2	ND	4.0
Bromomethane	74-83-9	ND	8.0
2-Butanone	78-93-3	ND	80
n-Butylbenzene	104-51-8	ND	4.0
sec-Butylbenzene	135-98-8	ND	4.0
tert-Butylbenzene	98-06-6	ND	4.0
Carbon tetrachloride	56-23-5	ND	4.0
Carbon disulfide	75-15-0	ND	4.0
Chlorobenzene	108-90-7	ND	4.0
Chloroethane	75-00-3	ND	8.0
Chloroform	67-66-3	ND	4.0
Chloromethane	74-87-3	ND	8.0
2-Chlorotoluene	95-49-8	ND	4.0
4-Chlorotoluene	106-43-4	ND	4.0
Dibromochloromethane	124-48-01	ND	4.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	8.0
Dibromomethane	74-95-3	ND	4.0
1,2-Dibromoethane	106-93-4	ND	4.0
1,2-Dichlorobenzene	95-50-1	ND	4.0
1,3-Dichlorobenzene	541-73-1	ND	4.0
1,4-Dichlorobenzene	106-46-7	ND	4.0
Dichlorodifluoromethane	75-71-8	ND	4.0
1,1-Dichloroethane	75-34-3	ND	4.0
1,2-Dichloroethane	107-06-2	ND	4.0
1,1-Dichloroethene	75-35-4	420	8.0
cis-1,2-Dichloroethene	156-59-2	ND	4.0
trans-1,2-Dichloroethene	156-60-5	ND	4.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

BOE-C6-0136900

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid

Sample ID: DW022394 Duplicate Sample - WCC-3D

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	4.0
1,3-Dichloropropane	142-28-9	ND	4.0
2,2-Dichloropropane	594-20-7	ND	4.0
1,1-Dichloropropene	563-58-6	ND	4.0
cis-1,3-Dichloropropene	10061-01-5	ND	4.0
trans-1,3-Dichloropropene	10061-02-6	ND	4.0
Ethylbenzene	100-41-4	ND	4.0
Hexachlorobutadiene	87-68-3	ND	8.0
2-Hexanone	591-78-6	ND	40
Isopropylbenzene	98-82-8	ND	4.0
p-Isopropytoluene	99-87-6	ND	4.0
Methylene chloride	75-09-2	ND	20
4-Methyl-2-pentanone	108-10-1	ND	40
Naphthalene	91-20-3	ND	4.0
n-Propylbenzene	103-65-1	ND	4.0
Styrene	100-42-5	ND	4.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	4.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	4.0
Tetrachloroethene	127-18-4	ND	4.0
Toluene	108-88-3	13	4.0
1,2,3-Trichlorobenzene	87-61-6	ND	4.0
1,2,4-Trichlorobenzene	120-82-1	ND	4.0
1,1,1-Trichloroethane	71-55-6	590	4.0
1,1,2-Trichloroethane	79-00-5	ND	8.0
Trichloroethene	79-01-6	25	4.0
Trichlorofluoromethane	75-69-4	ND	4.0
1,2,3-Trichloropropane	96-18-4	ND	4.0
1,2,4-Trimethylbenzene	95-63-6	ND	4.0
1,3,5-Trimethylbenzene	108-67-8	ND	4.0
Vinyl chloride	75-01-4	ND	8.0
o-Xylene	95-47-6	ND	4.0
p,m-Xylene	108-38-3, 106-42-3	ND	4.0

ND: Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid
Sample ID:	TB022394		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
Acetone	67-64-1	ND	40
Benzene	71-43-2	ND	2.0
Bromobenzene	108-86-1	ND	2.0
Bromochloromethane	74-97-5	ND	4.0
Bromodichloromethane	75-27-4	ND	2.0
Bromoform	75-25-2	ND	2.0
Bromomethane	74-83-9	ND	4.0
2-Butanone	78-93-3	ND	40
n-Butylbenzene	104-51-8	ND	2.0
sec-Butylbenzene	135-98-8	ND	2.0
tert-Butylbenzene	98-06-6	ND	2.0
Carbon tetrachloride	56-23-5	ND	2.0
Carbon disulfide	75-15-0	ND	2.0
Chlorobenzene	108-90-7	ND	2.0
Chloroethane	75-00-3	ND	4.0
Chloroform	67-66-3	ND	2.0
Chloromethane	74-87-3	ND	4.0
2-Chlorotoluene	95-49-8	ND	2.0
4-Chlorotoluene	106-43-4	ND	2.0
Dibromochloromethane	124-48-01	ND	2.0
1,2-Dibromo-3-chloropropane	96-12-8	ND	4.0
Dibromomethane	74-95-3	ND	2.0
1,2-Dibromoethane	106-93-4	ND	2.0
1,2-Dichlorobenzene	95-50-1	ND	2.0
1,3-Dichlorobenzene	541-73-1	ND	2.0
1,4-Dichlorobenzene	106-46-7	ND	2.0
Dichlorodifluoromethane	75-71-8	ND	2.0
1,1-Dichloroethane	75-34-3	ND	2.0
1,2-Dichloroethane	107-06-2	ND	2.0
1,1-Dichloroethene	75-35-4	ND	4.0
cis-1,2-Dichloroethene	156-59-2	ND	2.0
trans-1,2-Dichloroethene	156-60-5	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

LABORATORY RESULTS

Client:	Kennedy/Jenks Consultants	Report Date:	2/28/94
Client Address:	17310 Red Hill Avenue, Suite 220 Irvine, CA 92714	Lab P.N.:	6470
		Client P.N.:	924010.01
Project Name:	Douglas Aircraft Company	Date Sampled:	2/23/94
Project Address:	N/A	Date Analyzed:	2/24/94
		Physical State:	Liquid
Sample ID:	TB022394		

Volatile Organic Compounds, EPA 8240/8260

Parameter	CAS #	Conc. µg/l	Quantitation limit µg/l
1,2-Dichloropropane	78-87-5	ND	2.0
1,3-Dichloropropane	142-28-9	ND	2.0
2,2-Dichloropropane	594-20-7	ND	2.0
1,1-Dichloropropene	563-58-6	ND	2.0
cis-1,3-Dichloropropene	10061-01-5	ND	2.0
trans-1,3-Dichloropropene	10061-02-6	ND	2.0
Ethylbenzene	100-41-4	ND	2.0
Hexachlorobutadiene	87-68-3	ND	4.0
2-Hexanone	591-78-6	ND	20
Isopropylbenzene	98-82-8	ND	2.0
p-Isopropyltoluene	99-87-6	ND	2.0
Methylene chloride	75-09-2	ND	10
4-Methyl-2-pentanone	108-10-1	ND	20
Naphthalene	91-20-3	ND	2.0
n-Propylbenzene	103-65-1	ND	2.0
Styrene	100-42-5	ND	2.0
1,1,1,2-Tetrachloroethane	630-20-6	ND	2.0
1,1,2,2-Tetrachloroethane	79-34-5	ND	2.0
Tetrachloroethene	127-18-4	ND	2.0
Toluene	108-88-3	ND	2.0
1,2,3-Trichlorobenzene	87-61-6	ND	2.0
1,2,4-Trichlorobenzene	120-82-1	ND	2.0
1,1,1-Trichloroethane	71-55-6	ND	2.0
1,1,2-Trichloroethane	79-00-5	ND	4.0
Trichloroethene	79-01-6	ND	2.0
Trichlorofluoromethane	75-69-4	ND	2.0
1,2,3-Trichloropropane	96-18-4	ND	2.0
1,2,4-Trimethylbenzene	95-63-6	ND	2.0
1,3,5-Trimethylbenzene	108-67-8	ND	2.0
Vinyl chloride	75-01-4	ND	4.0
o-Xylene	95-47-6	ND	2.0
p,m-Xylene	108-38-3, 106-42-3	ND	2.0

ND; Not Detectable
The Laboratory Results are only a portion of the Laboratory Report.

APPENDIX C

GROUNDWATER PURGE AND SAMPLE FORMS

Groundwater Purge and Sample Form Date: 2/24/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC

WELL NUMBER: WCC-1 S

PROJECT NUMBER: 924010.01

PERSONNEL: Shane Scrimshire

STATIC WATER LEVEL (FT): 68.31

MEASURING POINT DESCRIPTION: Top of casing (north)

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos thru stainless

TIME START PURGE: 1150

PURGE DEPTH (FT) 76'

TIME END PURGE: 1159

TIME SAMPLED: 1202

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	30 CASING VOLUME (GAL)
	83.55		68.31		15.24		0.16	0.64	1.44		10

TIME	1152	1154	1156	1158			
VOLUME PURGED (GAL)	10 gpm	20 gpm	30	40			
PURGE RATE (GPM)	5gpm	5 gpm	5gpm	5gpm			
TEMPERATURE (°C)	80.4	77.9	77.9	77.9			
pH	7.45	7.49	7.40	7.39			
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	15.89	1493.	1445.	1445.			
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	Clear	Clear	Clear	Clear			
ODOR	NO	NO	NO	NO			
DEPTH OF PURGE INTAKE (FT)	76'	76'	76'	76'			
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/24/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC

WELL NUMBER: WCC-25

PROJECT NUMBER: 924010.01

PERSONNEL: Shane Scrimshire

STATIC WATER LEVEL (FT): 68.07

MEASURING POINT DESCRIPTION: Top of casing (North)

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos thru stainless pipe

TIME START PURGE: 810

PURGE DEPTH (FT) 78'

TIME END PURGE: 819

TIME SAMPLED: 828

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	42 CASING VOLUME (GAL)
	88.80		68.07		20.73		0.16	0.64	1.44		14

TIME	811	813	815	817	819		
VOLUME PURGED (GAL)	10 gal	20 gal.	30 gal	40 gal	50 gal.		
PURGE RATE (GPM)	5 gpm	5 gpm	5 gpm	5 gpm	5 gpm		
TEMPERATURE (°C)	68.1	69.7	70.2	70.5	70.6		
pH	7.40	7.26	7.27	7.26	7.27		
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	1131.	1,034.	1046.	1058.	1058.		
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	slightly turbid	slightly turbid	slightly turbid	slightly turbid	clear		
ODOR	NO	NO	NO	NO	NO		
DEPTH OF PURGE INTAKE (FT)	78'	78'	78'	78'	78'		
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/24/94 **Kennedy/Jenks Consultants**

PROJECT NAME: OAC

WELL NUMBER: WCC-3S

PROJECT NUMBER: 924010.01

PERSONNEL: Shane Scrimshire

STATIC WATER LEVEL (FT): 68.86

MEASURING POINT DESCRIPTION: Top of casing (North)

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos thru stainless

TIME START PURGE: 1223

PURGE DEPTH (FT) 78'

TIME END PURGE: 1232

TIME SAMPLED: 1236

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	39 CASING VOLUME (GAL)
	88.10		68.86		19.24		0.16	0.64	1.44		13

TIME	1225	1227	1229	1230	1231		
VOLUME PURGED (GAL)	10 gal	20	30	35	40		
PURGE RATE (GPM)	5	5	5	5	5		
TEMPERATURE (°C)	77.9	77.1	76.7	76.5	76.4		
pH	7.56	7.09	6.97	6.93	6.92		
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	1952.	1934	1763.	1676.	1675.		
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	Clear	Clear	clear	Clear	clear		
ODOR	NO	slight sour hydrocarbon odor →					
DEPTH OF PURGE INTAKE (FT)	78'	78'	78'	78'	78'		
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/24/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC

WELL NUMBER: WCC-4S

PROJECT NUMBER: 924010.01

PERSONNEL: Shane Scrimshire

STATIC WATER LEVEL (FT): 67.46

MEASURING POINT DESCRIPTION: WCC-4S

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos thru stainless pipe

TIME START PURGE: 953

PURGE DEPTH (FT) 79'

TIME END PURGE: 1006

TIME SAMPLED: 1008

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	42 CASING VOLUME (GAL)
	91.60		67.46		24.14		0.16	0.64	1.44		14

TIME	955	957	959	1001	1003	1005	
VOLUME PURGED (GAL)	10 gal	20 gal	30 gal	40 gal	45 gal	50 gal	
PURGE RATE (GPM)	5gpm	5gpm	5gpm	5gpm	5gpm	5gpm	
TEMPERATURE (~~°C~~ °F	74.2	74.4	74.8	75.6	75.5	75.5	
pH	7.51	7.43	7.38	7.36	7.35	7.35	
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	1,424.	1,362.	1,262.	1,237	1,215.	1,216	
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	Clear	Clear	Clear	Clear	Clear	Clear	
ODOR	NO	NO	NO	NO	NO	NO	
DEPTH OF PURGE INTAKE (FT)	79'	79'	79'	79'	79'	79'	
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/23/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC

WELL NUMBER: WCC-5S

PROJECT NUMBER: 924010.01

PERSONNEL: Shane Scrimshire

STATIC WATER LEVEL (FT): 66.00

MEASURING POINT DESCRIPTION: Top of casing (Nord

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos thru s.s. pipe

TIME START PURGE: 1312

PURGE DEPTH (FT) 78'

TIME END PURGE: 1321

TIME SAMPLED: 1330

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	50 CASING VOLUME (GAL)
	89.50		66.00		23.50		0.16	0.64	1.44		15.36

TIME	1314	1317	1319	1320			
VOLUME PURGED (GAL)	10gal	35gal	45gal	50gal			
PURGE RATE (GPM)	5gpm	5gpm	5gpm	5gpm			
TEMPERATURE (°C)	77.4	77.5	75.9	75.9			
pH	723	7.05	7.01	7.01			
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	1,593.	1,539.	1,482.	1483			
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	Clear	Clear	Clear	Clear			
ODOR	NO	NO	NO	NO			
DEPTH OF PURGE INTAKE (FT)	78'	78'	78'	78'			
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/24/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC

WELL NUMBER: WCC-6S

PROJECT NUMBER: 924010.01

PERSONNEL: Shane Scrimshire

STATIC WATER LEVEL (FT): 68.87

MEASURING POINT DESCRIPTION: Top of casing (North)

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos thru stainless pipe

TIME START PURGE: 1024

PURGE DEPTH (FT) 79'

TIME END PURGE: 1034

TIME SAMPLED: 1040

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	39 CASING VOLUME (GAL)
	89.15		68.87		20.28		0.16	0.64	1.44		12.80

TIME	1026	1028	1030	1031	1032	1034	
VOLUME PURGED (GAL)	10 gal	20 gal	30 gal ~~25 gal~~	35 gal	40 gal	50 gal	
PURGE RATE (GPM)	5 gpm	5 gpm	5 gpm	5 gpm	5 gpm	5 gpm	
TEMPERATURE (°C)	77.0	75.6	75.9	75.4	75.1	75.2	
pH	7.78	7.27	7.18	7.15	7.15	7.15	
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	1409. ~~7.78~~	1438.	1443	1453	1450	1450	
DISSOLVED OXYGEN (mg/L)	~~1409~~						
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	Clear	Clear	Clear	Clear	Clear	Clear	
ODOR	Sour Hydroc. ~~NO~~	Slight ~~NO~~ odor	NO	NO	NO	NO	
DEPTH OF PURGE INTAKE (FT)	79'	79'	79'	79'	79'	79'	
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/24/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC

WELL NUMBER: WCC-7S

PROJECT NUMBER: 924010.01

PERSONNEL: Shane Scrimshire

STATIC WATER LEVEL (FT): 66.51

MEASURING POINT DESCRIPTION: Top of casing (North)

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos thru stainless pipe

TIME START PURGE: 923

PURGE DEPTH (FT) 78'

TIME END PURGE: ~~935~~ ~~1000~~ 933

TIME SAMPLED: ~~1004~~ 940

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	45 CASING VOLUME (GAL)
	88.95		66.51		22.44		0.16	0.64	1.44		15

TIME	~~8~~ 925	927	929	931 ~~1000~~	933 ~~1003~~		
VOLUME PURGED (GAL)	10 gal.	20 gal	30 gal	40	45 gal		
PURGE RATE (GPM)	5 gpm	5 gpm	5 gpm	5 gpm	5 gpm		
TEMPERATURE (°C)	73.8	74.2	74.2	74.6	74.6		
pH	7.45	7.27	7.26	7.26	7.25		
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	1035.	1016.	1018.	1019.	1019.		
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	clear	clear	clear	clear	clear		
ODOR	NO	NO	NO	NO	NO		
DEPTH OF PURGE INTAKE (FT)	78'	78'	78'	78'	78'		
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/24/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC

WELL NUMBER: WCC-8S

PROJECT NUMBER: 924010.01

PERSONNEL: Shane Scrimshine

STATIC WATER LEVEL (FT): 68.05

MEASURING POINT DESCRIPTION: Top of casing (North)

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos thru stainless pipe

TIME START PURGE: 1059

PURGE DEPTH (FT) 78'

TIME END PURGE: 1134

TIME SAMPLED: 1135

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	CASING VOLUME (GAL)
	89.10		68.05		21.05		0.16	0.64	1.44		3gal

TIME	1110	1121	1125	1129	1133		
VOLUME PURGED (GAL)	2gal	6gal	8gal	9gal	10gal.		
PURGE RATE (GPM)							
TEMPERATURE (°C)	78.9	78.8	78.1	77.9	77.9		
pH	7.35	7.30	7.26	7.25	7.28		
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	1756.	1742.	1732.	1728.	1727		
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	slightly turbid						
ODOR	NO	NO	NO	NO	NO		
DEPTH OF PURGE INTAKE (FT)							
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/23/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC

WELL NUMBER: WCC-9S

PROJECT NUMBER: 924010.01

PERSONNEL: Shane Scrimshine

STATIC WATER LEVEL (FT): 65.10

MEASURING POINT DESCRIPTION: Top of casing North

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos thru SS pipe

TIME START PURGE: 1350

PURGE DEPTH (FT) 78'

TIME END PURGE: 1400

TIME SAMPLED:

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	42 CASING VOLUME (GAL)
	86.10		65.10		21.00		0.16	0.64	1.44		~~13~~ 13.44

TIME	1352						
VOLUME PURGED (GAL)	10	23	40	45	50		
PURGE RATE (GPM)	5gpm	5gpm	5gpm	5gpm	5gpm		
TEMPERATURE ~~(°C)~~ °F	76.2	75.4	74.5	73.6	73.7		
pH	7.28	7.11	7.13	7.15	7.15		
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	963.	966.	983.	986.	985.		
DISSOLVED OXYGEN (mg/L)	~~963.~~						
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	Clear	Clear	Clear	Clear	Clear		
ODOR	NO	NO	NO	NO	NO		
DEPTH OF PURGE INTAKE (FT)							
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/23/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC

WELL NUMBER: WCC10.5

PROJECT NUMBER: 724010.01

PERSONNEL: Shane Scrimshire

STATIC WATER LEVEL (FT): 68.20

MEASURING POINT DESCRIPTION:

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos thru Stainless pipe

TIME START PURGE: 1610

PURGE DEPTH (FT) 78.30

TIME END PURGE: 1620

TIME SAMPLED: 1620

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	39 CASING VOLUME (GAL)
	88.40		68.20		20.20		0.16	0.64	1.44		12.80

TIME	1612	1615	1617	1619			
VOLUME PURGED (GAL)	10 ~~10gpm~~	25	35	40			
PURGE RATE (GPM)	5gpm	5gpm	5gpm	5gpm			
TEMPERATURE (°C)	68.8	70.7	71.3	71.1			
pH	7.57	7.46	7.21	7.22			
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	955.	966.	968 ~~971~~	968.			
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	Clear	Clear	Clear	Clear			
ODOR	NONE	NONE	NONE	NONE			
DEPTH OF PURGE INTAKE (FT)							
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/23/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC WELL NUMBER: WCC11 S

PROJECT NUMBER: 924010.01 PERSONNEL: Shane Scrimshire

STATIC WATER LEVEL (FT): 66.93 MEASURING POINT DESCRIPTION: Top of casing North

WATER LEVEL MEASUREMENT METHOD: Electric Probe PURGE METHOD: Grundfos thru SS pipe

TIME START PURGE: 1527 PURGE DEPTH (FT) 78'

TIME END PURGE: 1538

TIME SAMPLED: 1541

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	45 CASING VOLUME (GAL)
	89.20		66.93		22.27		0.16	0.64	1.44		15

TIME	1529	1533	1535	1537			
VOLUME PURGED (GAL)	10gal	30gal	40gal	50gal			
PURGE RATE (GPM)	5gpm	5gpm	5gpm	5gpm			
TEMPERATURE (°C)	73.7	71.0	70.9	70.9			
pH	7.63	7.56	7.55	7.55			
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	1567.	1519.	1476.	1476.			
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	slight Turb.	clear	clear	clear			
ODOR	NONE	NONE	NONE	NONE			
DEPTH OF PURGE INTAKE (FT)							
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/24/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC

WELL NUMBER: WCC-12S

PROJECT NUMBER: 924010.01

PERSONNEL: Shane Scrimshire

STATIC WATER LEVEL (FT): 65.05

MEASURING POINT DESCRIPTION: Top of casing (North

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos thru stainless pipe

TIME START PURGE: 851

PURGE DEPTH (FT) 77'

TIME END PURGE: ~~[illegible]~~ 902

TIME SAMPLED: 908

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	48 CASING VOLUME (GAL)
	90.05		65.05		25.00		0.16	0.64	1.44		16

TIME	853	855	857	859	901		
VOLUME PURGED (GAL)	10 gal	20 gal	30 gal	40	50		
PURGE RATE (GPM)	5gpm	5gpm	5gpm	5gpm	5gpm		
TEMPERATURE (°C)	68.7	70.7	72.1	72.9	72.9		
pH	7.46	7.16	7.16	7.17	7.17		
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	1161.	1115.	1151.	1171.	1172.		
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	semi clear	clear	clear	clear	Clear		
ODOR	NONE	NONE	NONE	NONE	NONE		
DEPTH OF PURGE INTAKE (FT)	77'	77'	77'	77'	77'		
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/24/94 **Kennedy/Jenks Consultants**

PROJECT NAME: ~~92~~ DAC

WELL NUMBER: DAC-P1

PROJECT NUMBER: 924010.01

PERSONNEL: Shane Scrimshine

STATIC WATER LEVEL (FT): 69.18

MEASURING POINT DESCRIPTION: Top of casing (North)

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos stainless pipe

TIME START PURGE: 1305

PURGE DEPTH (FT) 78'

TIME END PURGE: 1400

TIME SAMPLED: ~~1410~~ 1413

COMMENTS: Well would dewater at a purge rate of 5gpm so we slowed rate to about 1gpm. We lowered pump about 5' & it maintained 5gpm.

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	CASING VOLUME (GAL)
	89.90		69.18		20.72		0.16	0.64	1.44		14

TIME	1317	1327	1331	1341	1400		
VOLUME PURGED (GAL)	10 gal	20	30	40	45		
PURGE RATE (GPM)	~~5~~ 1 gpm	~~5~~ 1 gpm	~~5~~ 1 gpm	~~5~~ 1 gpm	~~5~~ 1 gpm		
TEMPERATURE (°C)	76.8	78.7	76.8	78.1	78.0		
pH	6.90	6.91	7.24	7.34	7.35		
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	2510.	1960	2160.	2000.	2010.		
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	semi clear	semi clear	semi clear	semi clear	clear		
ODOR	NO	NO	NO	NO	NO		
DEPTH OF PURGE INTAKE (FT)	78'	78'	78'	78'	78'		
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/23/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC

WELL NUMBER: WCC 10

PROJECT NUMBER: 924010.01

PERSONNEL: Shane Scrimshire

STATIC WATER LEVEL (FT): 68.28

MEASURING POINT DESCRIPTION: Top of casing

WATER LEVEL MEASUREMENT METHOD: Electric Probe

PURGE METHOD: Grundfos thru SS. pipe

TIME START PURGE: 1438

PURGE DEPTH (FT) 91'

TIME END PURGE: 1452

TIME SAMPLED: ~~[illegible]~~ 1500

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	(29. CASING VOLUME (GAL)
	135.75		68.28		67.42		0.16	0.64	1.44		43

TIME	1440	1443	1447	1449	1450	1451	
VOLUME PURGED (GAL)	20	55 gal.	95	110	120	130	
PURGE RATE (GPM)	10gpm	~~[illegible]~~	10gpm	10gpm	10gpm	10gpm	
TEMPERATURE (°C)	74.5	74.8	74.9	~~74~~ 75.1	74.7	74.7	
pH	7.80	7.49	7.57	7.57	7.59	7.60	
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	791.	763.	740.	742	741	740	
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	Clear	Clear	Clear	Clear	Clear	Clear	
ODOR	NONE	None	None	NONE	None	None	
DEPTH OF PURGE INTAKE (FT)							
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

Groundwater Purge and Sample Form Date: 2/23/94 **Kennedy/Jenks Consultants**

PROJECT NAME: DAC WELL NUMBER: WCC 3D

PROJECT NUMBER: ~~94-924010.1001~~ 924010.01 PERSONNEL: Shane Scrimshire

STATIC WATER LEVEL (FT): 68.90 MEASURING POINT DESCRIPTION: Top of casing (North

WATER LEVEL MEASUREMENT METHOD: Electric Probe PURGE METHOD: Grundfos thru SS. pipe

TIME START PURGE: 1140 PURGE DEPTH (FT) 103'

TIME END PURGE: 1213

TIME SAMPLED: 1225

COMMENTS:

WELL VOLUME CALCULATION (FILL IN BEFORE PURGING)	TOTAL DEPTH (FT)	-	DEPTH TO WATER (FT)	=	WATER COLUMN (FT)	X	MULTIPLIER FOR CASING DIAMETER (IN) 2	4	6	=	135 CASING VOLUME (GAL)
	138.70		68.90		70		0.16	0.64	1.44		44.80

TIME	~~1140~~ 1142	1144	1152	1204	1211		
VOLUME PURGED (GAL)	10 gal	22 gal	55 gal.	95	135		
PURGE RATE (GPM)	6gpm	6gpm	6gpm	5gpm	5gpm		
TEMPERATURE (°C)	75.5	74.7	76.2	72.0	73.0		
pH	7.42	7.40 ~~7.25~~	7.46	7.46 ~~7.39~~	7.46		
SPECIFIC CONDUCTIVITY (micromhos/cm) (uncorrected)	795.	762.	769.	742.	743.		
DISSOLVED OXYGEN (mg/L)							
eH(MV)Pt-AgCl ref.							
TURBIDITY/COLOR	Clear	Clear	Clear	Clear	Clear		
ODOR	NO	NO	NO	NO	NO		
DEPTH OF PURGE INTAKE (FT)	103'	103'	103'	103	103'		
DEPTH TO WATER DURING PURGE (FT)							
NUMBER OF CASING VOLUMES REMOVED							
DEWATERED?							

WATER LEVEL DATA SHEET

Well No.	Date Mo./Day/Yr	Time	Well Elevation	Depth To Water	Water Elevation	Meas.	Comments	
WCC-3D	2/23/94			68.90		SCS	H2O in BOK	138.70
WCC-5S				66.00				89.50
WCC-9S				65.10				86.10
WCC-1D				~~69.00~~ 65.25			H2O in BOK	135.75 ~~54.60~~
WCC-11S				66.93				59.20
WCC-10S				68.20				58.40
WCC-2S				68.07				58.80
WCC-12S				65.05				90.05
WCC-7S				66.51				88.95
WCC-4S				67.46				91.60
WCC-6S				68.87				89.15
WCC-8S				~~89.15~~ 68.05				59.10
WCC-1S				68.31				63.55
WCC-3S				68.86			H2O in BOK	
DAC-P1				69.08				89.90

Job No. 924010.01 Facility DAC C-6 Facility

APPENDIX D

CHAIN-OF-CUSTODY RECORDS

KENNEDY/JENKS CONSULTANTS

SAMPLE CHAIN-OF-CUSTODY ANALYSIS REQUEST

☐ 200 New Stine Rd., #115, Bakersfield, CA 93309
☐ 530 South 336th St., Federal Way, WA 98003
☒ 17310 Red Hill Ave., #220, Irvine, CA 92714
☐ 2191 East Bayshore Rd., #200, Palo Alto, CA 94303
☐ 5190 Neil Road, #300, Reno, NV 89502
☐ 3336 Bradshaw Rd., #140, Sacramento, CA 95827
☐ 303 Second St., San Francisco, CA 94107
☐ 1000 Hill Rd., #200, Ventura, CA 93003

POSSIBLE HAZARDS:

Date 2/23/94
Source of Samples DAC
Sampler Name Shane Scrimshire
Phone 714-261-1577
Project No. 924010.01

Report To Sarah Bartling
Company Kennedy/Jenks
Address 17310 Red Hill Ave. #220
Irvine CA 92714
Phone 714-261-1577

Lab Destination
Address
Phone
Carrier/Way Bill No.

(1) Lab ID No.	(1) Client ID No.	COLLECTION Date	COLLECTION Time	(2) Type	Depth	(3) Comp.	(4) Pres.	Turn-around	(5) ANALYSES REQUESTED: 8240/8260	EPA 8240/60						Comment/Conditions (Container type, container number, etc.)
ID11408	WCC3D-8	2/23/94	1225	W			HCl	standard	X							3-40 mL VOA's
ID11409	WCC5S-8		1330	W					X							"
ID11410	WCC9S-8		1400	W					X							"
ID11411	WCC1D-8		1500	W					X							"
ID11412	WCC11S-8		1541	W					X							"
ID11413	WCC10S-8		1620	W					X							"
ID11414	FB022394		1605	W						X						1-40 mL VOA
ID11415	DW022394		—	W					X							3-40 mL VOA's
ID11416	TB022394		—	W						X						1-40 mL VOA

(1) Write only one sample number in each space.
(2) Specify type of sample(s): Water (W), Solid (S), or indicate type.
(3) Mark each sample which should be composited in Laboratory as follows: Place an "A" in box for each sample that should be composited into one sample; use sequential letter for additional groups.
(4) Preservation of sample.
(5) Write each analyses requested across top. Place an "X" in appropriate column to indicate type of analysis needed for each sample.

SAMPLE RELINQUISHED BY:

Print Name	Signature	Company	Date	Time
Shane Scrimshire	[signature]	K/J	2/23/94	1755

SAMPLE RECEIVED BY:

Print Name	Signature	Company	Date	Time
JEFF FREEMAN	[signature]	TTL	2/23	1755

\MISC\CUSTODY2.FRM

000065.06

BOE-C6-0136922

KENNEDY/JENKS CONSULTANTS

SAMPLE CHAIN-OF-CUSTODY ANALYSIS REQUEST

- ☐ 200 New Stine Rd., #115, Bakersfield, CA 93309
- ☐ 530 South 336th St., Federal Way, WA 98003
- ☒ 17310 Red Hill Ave., #220, Irvine, CA 92714
- ☐ 2191 East Bayshore Rd., #200, Palo Alto, CA 94303
- ☐ 5190 Neil Road, #300, Reno, NV 89502
- ☐ 3336 Bradshaw Rd., #140, Sacramento, CA 95827
- ☐ 303 Second St., San Francisco, CA 94107
- ☐ 1000 Hill Rd., #200, Ventura, CA 93003

POSSIBLE HAZARDS:

Date 2/24/94 Report To Sarah Bartling

Source of Samples DAC Company Kennedy/Jenks

Sampler Name Shane Scrimshire Address 17310 Red Hill Ave #220

Phone (714) 261-1577 Irvine CA 92714

Project No. 924010.01 Phone (714)-261-1577

Lab Destination

Address

Phone

Carrier/Way Bill No.

(1) Lab ID No.	(1) Client ID No.	COLLECTION Date	COLLECTION Time	(2) Type	Depth	(3) Comp.	(4) Pres.	Turn-around	(5) ANALYSES REQUESTED: 8240/8260								Comment/Conditions (Container type, container number, etc.)
ID11424	WCC 2S-8	2/24/94	828	W			HCl	Normal	X								3-40mL VOAs
ID11425	WCC 12S-8	↓	908	↓			↓	↓	X								
ID11426	WCC 7S-8		940						X								
ID11427	WCC 4S-8		1008						X								
ID11428	WCC 6S-8		1040						X								
ID11429	WCC 8S-8		1135						X								
ID11430	WCC 1S-8		1202						X								
ID11431	WCC 3S-8		1236						X								
ID11432	DAC P1-8	↓	1413	↓			↓	↓	X								

(1) Write only one sample number in each space.
(2) Specify type of sample(s): Water (W), Solid (S), or indicate type.
(3) Mark each sample which should be composited in Laboratory as follows: Place an "A" in box for each sample that should be composited into one sample; use sequential letter for additional groups.
(4) Preservation of sample.
(5) Write each analyses requested across top. Place an "X" in appropriate column to indicate type of analysis needed for each sample.

SAMPLE RELINQUISHED BY:

Print Name	Signature	Company	Date	Time
Shane Scrimshire	[signature]	K/J	2/24/94	

SAMPLE RECEIVED BY:

Print Name	Signature	Company	Date	Time
NICHOLS	[signature]	TTL	2/24	13:3

\MISC\CUSTODY2.FRM

000065.08

BOE-C6-0136923

KENNEDY/JENKS CONSULTANTS

☐ 200 New Stine Rd., #115, Bakersfield, CA 93309
☐ 530 South 336th St., Federal Way, WA 98003
☒ 17310 Red Hill Ave., #220, Irvine, CA 92714
☐ 2191 East Bayshore Rd., #200, Palo Alto, CA 94303
☐ 5190 Neil Road, #300, Reno, NV 89502
☐ 3336 Bradshaw Rd., #140, Sacramento, CA 95827
☐ 303 Second St., San Francisco, CA 94107
☐ 1000 Hill Rd., #200, Ventura, CA 93003

SAMPLE CHAIN-OF-CUSTODY ANALYSIS REQUEST

POSSIBLE HAZARDS:

Date 2/24/94 | Report To Sarah Bartling | Lab Destination

Source of Samples DAC | Company Kennedy/Jenks | Address

Sampler Name Shane Scrimshire | Address 17310 Red Hill Ave #220 Irvine CA 92714 | Phone

Phone (714) 261-1577 | Project No. 924010.01 | Phone (714) 261-1577 | Carrier/Way Bill No.

(1) Lab ID No.	(1) Client ID No.	COLLECTION Date	COLLECTION Time	(2) Type	Depth	(3) Comp.	(4) Pres.	Turn-around	(5) ANALYSES REQUESTED: 8240/8260	624 - 8240/1,2 DCA, 1,1,2 TCA, 1,1,2,2 TCE							Comment/Conditions (Container type, container number, etc.)
ID11433	DW022494	2/24/94	—	W			HCl	Normal	X								3 - 40 mL VOAs
ID11434	FB022494	|	1305	|			|	|		X							1 - 40 mL VOA
ID11435	TB022494	|	—	|			|	|		X							"

(1) Write only one sample number in each space.
(2) Specify type of sample(s): Water (W), Solid (S), or indicate type.
(3) Mark each sample which should be composited in Laboratory as follows: Place an "A" in box for each sample that should be composited into one sample; use sequential letter for additional groups.
(4) Preservation of sample.
(5) Write each analyses requested across top. Place an "X" in appropriate column to indicate type of analysis needed for each sample.

SAMPLE RELINQUISHED BY:

Print Name	Signature	Company	Date	Time
Shane Scrimshire	Shane Scrimshire	K/J	2/24/94	

SAMPLE RECEIVED BY:

Print Name	Signature	Company	Date	Time
NICHOLS	C. Nichols	TTL	2/24/94	15:3

\MISC\CUSTODY2.FRM

000066.06

BOE-C6-0136924

TABLE 3
SUMMARY OF GROUNDWATER ANALYTICAL DATA - MINOR CONSTITUENTS
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CA

COMPOUNDS DETECTED BY EPA METHOD 8240 OR EPA METHOD 8240/8260 - All results in ug/l.

WELL I.D.	SAMPLE DATE	Acetone	Total Xylenes	Trichloro-fluoromethane	Methylene Chloride	Carbon Tetra-Chloride	1,1,2-TCA	PCE	Carbon Disulfide	Ethyl-Benzene	1,2-DCA
WCC-1D	07/25/89	-	-	-	-	-	-	-	-	-	-
	08/23/89	-	-	-	-	-	-	-	-	-	-
	11/15/91	-	-	-	-	-	-	-	-	-	-
	*06/15/92	<50/<50	-	-	-	-	-	-	-	-	-
	09/22/92	<5	<1	4	11	<1	<1	<1	<1	<1	<1
	*12/07/92	<5/<5	<1/<1	<1/<1	2/2	<1/<1	<1/<1	<1/<1	<1/<1	<1/<1	<1/<1
	03/16/93	<10	<2	<5	<10	<5	<2	<2	<5	<2	<2
	*06/08/93	<200/<80	<10/<4	<10/<4	<20/<10	<10/<4	<20/<8	<10/<4	<10/<4	<10/<4	<10/<4
	08/24/93	<40	<2	<2	<4	<2	<4	<2	<2	<2	<2
	11/18/93	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
	2/23/94	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
WCC-3D	07/25/89	-	-	-	-	-	-	-	-	-	-
	08/23/89	-	-	-	-	-	-	-	-	-	-
	11/14/91	-	-	-	-	-	-	-	-	-	-
	06/16/92	<30	-	-	-	-	-	-	-	-	-
	09/22/92	<5	<1	1	8	<1	<1	<1	<1	<1	<1
	12/07/92	<5	<1	<1	1	<1	<1	<1	<1	<1	<1
	*03/16/93	<10/<10	<2/<2	<5/<5	<10/<10	<5/<5	<2/<2	<2/<2	<5/<5	<2/<2	<2/<2
	06/08/93	<40	<2	<2	<4	<2	<4	<2	<2	<2	<2
	08/24/93	<40	<2	<2	<4	<2	<4	<2	<2	<2	<2
	*11/18/93	<40/<80	<2/<4	<2/<4	<10/<20	<2/<4	<4/<8	<2/<4	<2/<4	<2/<4	<2/<4
	2/23/94	<80	<4	<4	<20	<4	<8	<4	<4	<4	<4

1 * Duplicate sample also analyzed.
2 - Not Detected (Detection Limit not specified)

TABLE 4

SUMMARY OF GROUNDWATER ELEVATION DATA
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CALIFORNIA
K/J 924010.01

Observation Well	Reference Point[1] Elevation (Feet Above MSL)[2]	Water Level Elevation (Feet Above Mean Sea Level)					
		01/05/93	04/09/93	06/07/93	08/24/93	11/18/93	2/23/94
WCC-1S	50.70	-19.34	-18.79	-18.75	-18.25	-18.00	-17.61
WCC-2S	50.59	-19.51	-18.64	-18.63	-18.15	-17.87	-17.49
WCC-3S	51.19	-19.73	-18.83	-18.82	-18.36	-18.01	-17.67
WCC-4S	49.69	-19.34	-18.86	-18.78	-18.37	-18.16	-17.77
WCC-5S	48.22	-19.32	-18.83	-18.78	-18.38	-18.13	-17.78
WCC-6S	50.95	-19.50	-19.03	-18.97	-18.55	-18.32	-17.92
WCC-7S	48.29	-19.76	-19.30	-19.23	-18.83	-18.60	-18.22
WCC-8S	50.56	-19.19	-18.69	-18.61	-18.19	-17.89	-17.49
WCC-9S	47.01	-19.56	-19.09	-19.09	-18.69	-18.42	-18.09
WCC-10S	51.12	-19.10	-18.42	-18.33	-17.83	-17.54	-17.07
WCC-11S	49.97	-18.69	-18.13	-18.04	-17.60	-17.36	-16.69
WCC-12S	46.92	-19.74	-19.26	-19.20	-18.78	-18.58	-18.13
DAC-P1	52.44	-18.02	-17.46	-17.38	-17.03	-16.76	-16.74
WCC-1D	50.45	-19.61	-19.10	-19.00	-18.53	-18.34	-17.83
WCC-3D	51.18	-20.52	-18.87	-18.85	-18.40	-18.18	-18.00
MW-8[6]	49.09	NA[5]	NA	NA	NA	NA	NA
MW-9[6]	48.67	NA	NA	-20.58	NA	NA	NA
MW-18[6]	50.29	NA	NA	-20.88	NA	NA	NA
MW-19[6]	46.55	NA	NA	-20.13	NA	NA	NA

TABLE 4

SUMMARY OF GROUNDWATER ELEVATION DATA
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CALIFORNIA
K/J 924010.01

Observation Well	Reference Point[1] Elevation (Feet Above MSL)[2]	Water Level Elevation (Feet Above Mean Sea Level)			
		11/13/87[3]	10/18/89[4]	06/15/92	09/21/92
WCC-1S	50.70	-21.63	-19.48	-19.20	-19.42
WCC-2S	50.59	-19.72	-19.06	-19.15	-19.41
WCC-3S	51.19	-21.56	-19.42	-19.24	-19.52
WCC-4S	49.69	-21.77	-19.59	-19.22	-19.49
WCC-5S	48.22	NA[5]	-19.70	-19.13	-19.42
WCC-6S	50.95	NA	-19.70	-19.40	-19.64
WCC-7S	48.29	NA	-20.07	-19.63	-19.93
WCC-8S	50.56	NA	-19.35	-19.11	-19.34
WCC-9S	47.01	NA	-20.07	-19.44	-19.66
WCC-10S	51.12	NA	-18.42	-18.94	-19.33
WCC-11S	49.97	NA	NA	-17.62	-18.81
WCC-12S	46.92	NA	NA	-19.60	-19.90
DAC-P1	52.44	NA	NA	-17.76	-17.88
WCC-1D	50.45	NA	-19.51	-19.55	-19.92
WCC-3D	51.18	NA	-19.38	-19.39	-19.71
MW-8[6]	49.09	NA	NA	NA	NA
MW-9[6]	48.67	NA	NA	NA	NA
MW-18[6]	50.29	NA	NA	NA	NA
MW-19[6]	46.55	NA	NA	NA	NA

Notes:

1. Reference point is north side, top of well casing
2. Reference point elevation measured by Hargis + Associates, Inc.
3. Data taken from Woodward-Clyde Consultants Phase II Report, May 1988.
4. Data taken from Woodward-Clyde Consultants Phase III Report, March 1990.
5. N/A - Not Available - No access to offsite wells.
6. Installed by Hargis + Associates, Inc. for Montrose Chemical Corporation

TABLE 1
OBSERVATION WELL CONSTRUCTION DETAILS
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER, 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CALIFORNIA
K/J 924010.01

Well	Date Constructed	Well Diameter (Inches)	Total Depth of Borehole (Feet)	Depth of Screened Interval (Feet)	Depth to top of Sand Filter Pack (Feet)	Well Casing Material and Slot Size	Hydrogeologic Unit Screened
WCC-1S[1]	03-26-87	2	91	78-88	72	Schedule 40 PVC 0.020-Inch Slots	Shallow
WCC-2S[1]	10-28-87	4	90.5	70-90	63	Schedule 40 PVC 0.010-Inch Slots	Shallow
WCC-3S[1]	10-26-87	4	92.0	69-89	64	Schedule 40 PVC 0.010-Inch Slots	Shallow
WCC-4S[1]	10-27-87	4	91.5	70.5-90.5	65	Schedule 40 PVC 0.010-Inch Slots	Shallow
WCC-5S[1]	11-24-87	4	91	60.5-91	58.5	Schedule 40 PVC 0.010-Inch Slots	Shallow
WCC-6S[2]	09-22-89	4	91	60-90	N/A[3]	Schedule 40 PVC 0.010-Inch Slots	Shallow
WCC-7S[2]	06-08-89	4	90.5	60-90	54	Schedule 40 PVC 0.010-Inch Slots	Shallow
WCC-8S[2]	06-12-89	4	90	59.5-89.5	54	Schedule 40 PVC 0.010-Inch Slots	Shallow
WCC-9S[2]	09/21/89	4	91.5	60-90	55	Schedule 40 PVC 0.010-Inch Slots	Shallow
WCC-10S[2]	06-07-89	4	90.8	60-90	54	Schedule 40 PVC 0.010-Inch Slots	Shallow
WCC-11S	N/A	4	N/A	60-90(?)	N/A	Schedule 40 PVC 0.010-Inch Slots	Shallow
WCC-12S	N/A	4	N/A	60-90(?)	N/A	Schedule 40 PVC 0.010-Inch Slots	Shallow
DAC-P1	09-25-89	4	N/A	60-90(?)	N/A	Schedule 40 PVC 0.010-Inch Slots	Shallow
WCC-1D[2]	06-30-89	4	140	120-140	115	Schedule 40 PVC 0.010-Inch Slots	Deeper
WCC-3D[2]	06-27-89	4	140	120-140	114	Schedule 40 PVC 0.010-Inch Slots	Deeper

TABLE 1 (Continued)
OBSERVATION WELL CONSTRUCTION DETAILS
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER, 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CALIFORNIA
K/J 924010.01

Well	Date Constructed	Well Diameter (Inches)	Total Depth of Borehole (Feet)	Depth of Screened Interval (Feet)	Depth to top of Sand Filter Pack (Feet)	Well Casing Material and Slot Size	Hydrogeologic Unit Screened
MW-8[4]	05/10/89	4	85	65-80	62	PVC blank and 316 Stainless Steel 0.020-inch Slot Screen	Shallow
MW-9[4]	05/09/89	4	85	66-81	61	PVC blank and 316 Stainless Steel 0.020-inch Slot Screen	Shallow
MW-18[4]	03/29/90	4	84	68-83	67	PVC blank and 316 Stainless Steel 0.020-inch Slot Screen	Shallow
MW-19[4]	03/30/90	4	80	63-79	62	PVC blank and 316 Stainless Steel 0.020-inch Slot Screen	Shallow

Notes:
1. Data from Woodward-Clyde Consultants Phase II Report, May 1988
2. Data from Woodward-Clyde Consultants Phase III Report, March 1990
3. N/A = Not Available
4. Data from Hargis + Associates, Final Draft, Remedial Investigation, Montrose Site, Torrance, Ca, October 1992

TABLE 2
SUMMARY OF GROUNDWATER ANALYTICAL DATA
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CA

COMPOUNDS DETECTED BY EPA METHOD 8240 OR EPA METHOD 8240/8260 - All results in ug/l.

WELL I.D.	SAMPLE DATE	1,1-DCE	1,1,-DCA	1,1,1-TCA	TCE	MIBK	cis-1,2-DCE	trans-1,2-DCE	CHLOROFORM	BENZENE	TOLUENE	MEK
WCC-1S	03/27/87	2800	-	300	4,600	-	-	-	-	85	-	-
	*04/13/87	3,700/2,500	-/-	260/120	5,500/3,600	-/-	-/-	-/-	-/-	110	-/-	-/-
	11/12/87	3,000	23	160	5,200	-	-	75	39	160	-	-
	07/13/89	900	<20	67	2,400	<100	<20	<20	<20	<20	<20	-
	08/23/89	1,500	30	<30	2,800	<100	41	<30	<30	<30	<30	-
	11/18/91	1,300	-	-	3,700	-	-	-	-	-	-	-
	06/17/92	1,700	<50	<50	3,800	<100	<5	<50	<50	<50	<50	<100
	09/23/92	1,500	13	16	3,400	<5	<1	14	13	37	1	<5
	12/09/92	1,500	<30	<30	3,100	<100	<30	<30	<30	30	<30	<100
	03/18/93	1,000	13	15	2,100	<5	27	15	14	33	<2	<10
	06/08/93	1,200	<20	<20	2,400	<200	27	<20	<20	35	<20	<400
	08/25/93	1,700	<20	<20	3,300	<200	27	<20	<20	42	<20	<400
	11/19/93	1,600	<20	<20	2,600	<200	25	<20	<20	38	<20	<400
	2/24/94	3,400	<20	300	1,200	<200	<20	35	<20	<20	<20	<400
WCC-2S	11/02/87	5	-	5	14	-	-	-	-	-	6	-
	11/12/87	2	-	1	4	-	-	-	-	-	1	-
	7/13/89	<1	<1	<1	5	<5	<1	<1	<1	<1	<1	-
	8/23/89	<1	<1	<1	3	<5	<1	<1	<1	<1	<1	-
	11/19/91	30	-	8	110	-	-	-	-	-	75	-
	06/16/92	30	<5	<5	100	<10	<5	<5	<5	<5	<5	<10
	*09/22/92	18/19	<1/<1	<1/<1	110/97	<5/<5	<1/<1	<1/<1	<1/<1	<1/<1	1/1	<5/<5
	*12/08/92	49/27	<1/<1	2/2	140/99	<5/<5	<1/<1	<1/<1	<1/2	<1/<1	<1/<1	<5/<5
	*03/17/93	32/33	<2/<2	<2/<2	110/100	<5/<5	<2/<2	<2/<2	<2/<2	<2/<2	<2/<2	<10/<10
	06/07/93	48	<2	<2	150	<20	<2	<2	<2	<2	<2	<40
	08/24/93	16	<2	<2	90	<20	<2	<2	<2	<2	<2	<40
	11/19/93	41	<2	<2	94	<20	<2	<2	<2	<2	<2	<40
	2/24/94	30	<2	<2	96	<20	<2	<2	<2	<2	<2	<40
WCC-3S	11/02/87	38,000	-	110,000	10,000	54,000	-	-	-	-	80,000	-
	11/12/87	88,000	1,000	54,000	11,000	70,000	-	1,000	-	-	140,000	-
	07/13/89	18,000	<500	56,000	7,700	<3000	<500	660	<500	<500	32,000	-
	08/23/89	56,000	<1,000	78,000	6,000	<5000	<1,000	<1,000	<1,000	<1,000	56,000	-
	11/14/91	12,000	400	6,900	7,900	70,000	550	550	250	-	27,000	12,000
	06/17/92	25,000	<5,000	13,000	13,000	100,000	<5,000	<5,000	<5,000	<,5000	51,000	<10,000
	09/23/92	22,000	<500	7,800	12,000	82,000	<500	<500	<500	<500	52,000	<3,000
	12/09/92	21,000	<500	5,600	11,000	90,000	700	600	<500	<500	44,000	4,000
	*03/18/93	20,000/20,000	650/510	21,000/22,000	8,800/8,800	44,000/45,000	650/640	640/670	120/110	240/260	42,000/42,000	<50/<50
	06/08/93	16,000	420	5,900	8,600	79,000	520	480	<100	210	37,000	<2,000
	*08/25/93	21,000/20,000	500/560	10,000/9,500	11,000/9,700	50,000/49,000	670/700	680/710	<400/<10	<400/250	46,000/40,000	<8,000/660
	11/19/93	26,000	690	19,000	10,000	47,000	1,100	840	<200	280	50,000	<4,000
	2/24/94	15,000	310	9,600	2,500	15,000	2,500	360	<200	<200	25,000	<4,000

1 * Duplicate sample also analyzed.
2 - Not Detected (Detection Limit not specified)

TABLE 2
SUMMARY OF GROUNDWATER ANALYTICAL DATA
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CA

COMPOUNDS DETECTED BY EPA METHOD 8240 OR EPA METHOD 8240/8260 - All results in ug/l.

WELL I.D.	SAMPLE DATE	1,1-DCE	1,1,-DCA	1,1,1-TCA	TCE	MIBK	cis-1,2-DCE	trans-1,2-DCE	CHLOROFORM	BENZENE	TOLUENE	MEK
WCC-4S	11/02/87	360	-	14	700	-	-	2	2	-	-	-
	11/12/87	1,200	-	35	690	-	-	-	-	-	-	-
	7/13/89	170	<3	11	270	-	10	<3	<3	<3	<3	-
	08/23/89	360	<5	7	410	<20	15	<5	<5	<5	<5	-
	11/18/91	1,000		20	2,200	<30	-	-	-	-	-	-
	06/17/92	920	<25	<25	1,500	<50	<25	<25	<25	<25	<25	<50
	09/23/92	1,400	<10	20	1,900	<50	<10	<10	10	<10	<10	<50
	12/08/92	1,000	<10	20	1,600	<50	10	<10	10	<10	<10	<50
	03/17/93	810	8	14	1,200	<5	8	5	5	6	<2	<10
	06/08/93	1,300	<10	12	1,800	<100	10	<10	<10	<10	<10	<200
	08/25/93	1,100	<10	<10	1,400	<100	<10	<10	<10	<10	<10	<200
	11/19/93	610	17	8	700	<40	6	5	<4	4	9	<80
	2/24/94	1,100	5.8	8.8	980	<40	8.7	7.2	5.1	6.4	<4	<80
WCC-5S	11/30/87	7	-	1	-	-	-	-	-	-	1	-
	01/08/88	4	-	10	-	-	-	-	-	-	-	-
	*07/13/89	3/3	<1/<1	13/12	<5/<5	<1/<1	6/6	<1/<1	<1/<1	<1/<1	<1/<1	-
	08/23/89	<1	<1	12	<5	<1	4	<1	<1	<1	<1	-
	11/19/91	20	-	-	8	-	-	-	-	-	7	-
	06/15/92	28	<5	<5	7	<10	<5	<5	<5	<5	<5	<10
	09/21/92	21	<1	<1	5	<5	<1	<1	<1	<1	<1	<5
	12/07/92	21	<1	<1	5	<5	<1	<1	<1	<1	<1	<5
	03/16/93	18	<2	<2	4	<5	<2	<2	<2	<2	<2	<10
	06/07/93	22	<2	<2	4	<20	<2	<2	<2	<2	<2	<40
	08/24/93	23	<2	<2	5	<20	<2	<2	<2	<2	<2	<40
	11/18/93	21	<2	<2	3	<20	<2	<2	<2	<2	<2	<40
	2/23/94	20	<2	<2	<2	<20	<2	<2	<2	<2	<2	<40
WCC-6S	10/06/89	210	4	130	140	<5	12	7	<1	<1	<1	-
	11/16/91	5,800		5,000	3,000	17,000	-	-	-	-	35,000	21,000
	06/17/92	5,400	<500	2,100	3,000	7,600	<500	<500	<500	<500	15,000	6,300
	09/23/92	5,900	94	1,300	3,100	7,500	200	170	20	67	10,000	3,600
	*12/09/92	3,700/5,600	80/<100	680/1,400	2,700/3,200	3,400/<500	200/200	100/200	<50/<100	80/<100	5,000/10,000	3,000/5,000
	03/17/93	3,200	50	1,200	1,400	3,900/<500	<10	80	15	40	10,000	3,800
	06/08/93	5,500	<100	1,900	2,100	13,000	260	120	<100	<100	21,000	7,800
	08/25/93	5,400	<100	2,100	1,900	11,000	630	130	<100	<100	19,000	7,600
	11/19/93	2,200	42	440	670	4,700	480	57	<10	24	4,900	3,100
	2/24/94	11,000	91	2,200	1,800	13,000	14,000	140	21	52	20,000	4,400

1 * Duplicate sample also analyzed.
2 - Not Detected (Detection Limit not specified)

TABLE 2
SUMMARY OF GROUNDWATER ANALYTICAL DATA
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CA

COMPOUNDS DETECTED BY EPA METHOD 8240 OR EPA METHOD 8240/8260 - All results in ug/l.

WELL I.D.	SAMPLE DATE	1,1-DCE	1,1,-DCA	1,1,1-TCA	TCE	MIBK	cis-1,2-DCE	trans-1,2-DCE	CHLOROFORM	BENZENE	TOLUENE	MEK
WCC-7S	07/13/89	850	<10	110	1,300	<50	26	11	<10	<10	<10	-
	08/23/89	1,100	<30	66	1,400	<100	31	<30	<30	<30	<30	-
	11/18/91	390	-	-	1,200	-	-	-	-	-	-	-
	06/17/92	230	<5	<5	560	<10	<5	<5	<5	<5	<5	<10
	09/23/92	140	<5	<5	570	<30	<5	<5	<5	<5	<5	<30
	12/08/92	140	<5	<5	430	<30	<5	<5	<5	<5	<5	<30
	03/17/93	77	<2	<2	200	<5	4	<2	<2	<2	<2	<10
	06/07/93	120	<2	<2	330	<20	4	<2	<2	<2	<2	<40
	08/25/93	70	<4	<4	210	<40	4	<4	<4	<4	<4	<80
	11/19/93	56	<2	<2	130	<20	<2	<2	<2	<2	<2	<40
	2/24/94	75	<2	<2	140	<20	2.5	<2	<2	<2	<2	<40
WCC-8S	07/13/89	430	<5	160	240	<30	7	9	<5	<5	<5	-
	08/23/89	820	<5	130	430	<30	7	<5	<5	<5	<5	-
	11/15/91	2,600	-	400	3,000	-	40	40	25	-	120	-
	*06/17/92	2,200/2,300	<25/<50	180/180	2,400/2,600	<50/<100	<25/<50	<25/<50	<25/<50	<25/<50	<25/<50	<50/<100
	09/23/92	2,800	<20	200	3,100	<100	<20	20	20	<20	<20	<100
	12/08/92	2,000	<20	100	2,500	<100	20	30	20	20	<20	<100
	03/17/93	1,800	11	180	1,500	<5	15	26	10	15	<2	<10
	06/08/93	3,000	<20	300	2,000	<200	<20	40	<20	<20	<20	<400
	08/25/93	3,100	<20	330	2,200	<200	<20	45	<20	<20	<20	<400
	11/19/93	3,300	<20	330	2,000	<200	<20	50	<20	24	<20	<400
	2/24/94	1,800	<20	<20	2,700	<200	33	21	<20	39	<20	<400
WCC-9S	10/06/89	<1	<1	<1	15	<5	7	<1	<1	<1	<1	-
	11/19/91	-	-	-	20	-	-	-	-	-	-	-
	06/15/92	7	<5	<5	42	<10	<5	<5	<5	<5	<5	<10
	09/21/92	6	<1	<1	45	<5	2	<1	6	<1	<1	<5
	12/07/92	10	<1	<1	51	<5	<1	<1	12	<1	<1	<5
	03/16/93	6	<2	<2	23	<5	3	<2	11	<2	<2	<10
	*06/07/93	11/11	<2/<2	<2/<2	42/39	<20/<20	<2/<2	<2/<2	18/17	<2/<2	<2/<2	<40/<40
	08/24/93	5	<2	<2	26	<20	4	<2	<2	<2	<2	<40
	11/18/93	5	<2	<2	43	<20	<2	<2	7	<2	<2	<40
	2/23/94	<4	<2	<2	31	<20	2	<2	4	<2	<2	<40

1 * Duplicate sample also analyzed.
2 - Not Detected (Detection Limit not specified)

TABLE 2
SUMMARY OF GROUNDWATER ANALYTICAL DATA
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CA

COMPOUNDS DETECTED BY EPA METHOD 8240 OR EPA METHOD 8240/8260 - All results in ug/l.

WELL I.D.	SAMPLE DATE	1,1-DCE	1,1,-DCA	1,1,1-TCA	TCE	MIBK	cis-1,2-DCE	trans-1,2-DCE	CHLOROFORM	BENZENE	TOLUENE	MEK
WCC-10S	*07/13/89	2/1	<1/<1	<1/<1	86/87	<5/<5	<1/<1	<1/<1	3/3	<1/<1	<1/<1	-
	08/23/89	4	<1	<1	81	5	<1	<1	4	<1	<1	-
	11/20/91	-	-	-	87	-	-	-	-	-	-	-
	06/16/92	10	<5	<5	120	<10	<5	<5	<5	<5	<5	13
	*09/21/92	9/9	<1/<1	<1/<1	120/110	<5/<5	<1/<1	<1/<1	4/4	<1/<1	<1/<1	<5/<5
	12/8/92	8	<1	<1	110	<5	<1	<1	5	<1	<1	<5
	03/16/93	9	<2	<2	130	<5	<2	<2	6	<2	<2	<10
	06/07/93	13	<2	<2	120	<20	<2	<2	4	<2	<2	<40
	08/25/93	<4	<2	<2	120	<20	<2	<2	<2	<2	<2	<40
	11/19/93	9	<2	<2	82	<20	<2	<2	2	<2	<2	<40
	2/23/94	10	<2	<2	110	<20	<2	<2	5	<2	<2	<40
WCC-11S	11/15/91	10	-	-	80	-	-	-	-	-	-	-
	06/16/92	21	<5	<5	120	<10	<5	<5	<5	<5	<5	<10
	09/21/92	17	<1	<1	140	<5	2	<1	<1	<1	<1	<5
	12/08/92	13	<1	<1	83	<5	6	<1	<1	<1	<1	<5
	03/16/93	25	<2	<2	160	<5	4	<2	<2	<2	<2	<10
	06/07/93	16	<2	<2	110	<20	5	<2	<2	<2	<2	<40
	08/24/93	14	<2	<2	97	<20	4	<2	<2	<2	<2	<40
	*11/19/93	14/14	<2/<2	<2/<2	100/100	<20/<20	3/3	<2/<2	<2/<2	<2/<2	<2/<2	<40/<40
	2/23/94	16	<2	<2	100	<20	4	<2	<2	<2	<2	<40
WCC-12S	11/18/91	300	-	17	900	-	-	-	-	-	-	-
	*06/16/92	250/260	<5/5	<5/<5	660/710	<10/<10	<5/<5	<5/<5	<5/<5	<5/<5	<5/<5	<10/10
	09/22/92	130	7	1	500	<5	3	<1	3	<1	<1	<5
	12/08/92	160	<5	<5	550	<30	5	<5	<5	<5	<5	<30
	03/17/93	100	7	<2	410	<5	4	8	3	<2	<2	<10
	06/07/93	130	2	<2	370	<20	5	<2	<2	<2	<2	<40
	08/25/93	100	<4	<4	390	<40	<4	<4	<4	<4	9	<80
	11/19/93	45	9	<2	220	<20	<2	<2	<2	<2	<2	<40
	* 2/24/94	89/77	7.7/3.9	<2/<2	270/220	<20/<20	2.9/3.3	<2/<2	<2/<2	<2/<2	<2/<2	<40/<40
DAC-P1	10/09/89	<200	<200	<200	17,000	<1,000	<200	<200	<200	<200	<200	<1,000
	06/17/92	<5	<5	<5	21,000	<10	13	<5	10	<5	<5	<10
	*06/23/92	4/4	<1/<1	<1/<1	28,000/28,000	<5/<5	71/70	1/2	54/51	5/5	<1/<1	<5/<5
	12/09/92	<300	<500	<500	29,000	<3,000	<500	<500	<500	<500	<500	<3,000
	03/18/93	21	<2	44	21,000	7	68	2	44	5	260	<10
	06/08/93	<200	<100	<100	2,800	<1,000	<100	<100	<100	<100	130	<2,000
	08/25/93	<400	<200	<200	27,000	<2,000	<200	<200	<200	<200	300	<4,000
	11/19/93	<40	<20	<20	24,000	<200	81	<20	52	<20	<20	<400
	2/24/94	<40	<20	<20	20,000	<200	89	<20	47	<20	<20	<400

1 * Duplicate sample also analyzed.
2 - Not Detected (Detection Limit not specified)

TABLE 2
SUMMARY OF GROUNDWATER ANALYTICAL DATA
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CA

COMPOUNDS DETECTED BY EPA METHOD 8240 OR EPA METHOD 8240/8260 - All results in ug/l.

WELL I.D.	SAMPLE DATE	1,1-DCE	1,1,-DCA	1,1,1-TCA	TCE	MIBK	cis-1,2-DCE	trans-1,2-DCE	CHLOROFORM	BENZENE	TOLUENE	MEK
WCC-1D	07/25/89	<1	<1	<1	2	<5	1	<1	<1	<1	1	-
	08/23/89	<1	<1	1	2	<5	<1	<1	<1	<1	<1	-
	11/15/91	90	-	8	40	-	-	-	-	-	20	-
	*06/15/92	1,500/1,300	<25/<25	63/64	230/210	<50/<65	<25/<25	<25/<25	<25/<25	<25/<25	<25/<25	<50/<50
	09/22/92	180	<1	8	44	<5	2	<1	<1	<1	<1	<5
	*12/07/92	160/150	<1/<1	8/160	41/6	<5/<5	2/<1	<1/<1	1/1	<1/<1	<1/3	<5/<5
	03/16/93	200	<2	19	23	<5	3	<2	<2	<2	<2	<10
	*06/08/93	500/480	<10/<4	14/17	71/72	<100/<40	<10/<4	<10/<4	<10/<4	<10/<4	<10/<4	<200/<80
	08/24/93	540	<2	16	67	<20	3	2	<2	<2	2	<40
	11/18/93	880	<2	16	110	<20	3	3	<2	<2	<2	<40
	2/23/94	140	<2	3	14	<20	<2	<2	<2	<2	<2	<40
WCC-3D	07/25/89	<1	<1	49	4	<5	11	<1	<1	<1	3	-
	08/23/89	<10	<10	32	<10	<50	<10	<10	<10	<10	<10	-
	11/14/91	20	-	60	-	-	-	-	-	-	-	-
	06/16/92	510	<5	880	23	<10	<5	<5	<5	<5	8	<10
	09/22/92	21	<1	27	2	<5	<1	<1	<1	<1	<1	<5
	12/07/92	120	<1	130	5	<5	<1	<1	1	<1	3	<5
	*03/16/93	950/1,000	6/6	2,000/2,000	50/47	<5/<5	2/2	9/9	<2/<2	<2/<2	6/6	<10/<10
	06/08/93	110	<2	110	6	<20	<2	<2	<2	<2	<2	<40
	08/24/93	120	<2	100	5	<20	<2	<2	<2	<2	3	<40
	*11/18/93	610/840	<2/<4	410/640	17/23	<20/<40	<2/4	4/4	<2/<4	<2/<4	6/8	<40/<80
	*2/23/94	370/420	<4/<4	530/590	23/25	<40/<40	<4/<4	<4/<4	<4/<4	<4/<4	12/13	<80/<80

1 * Duplicate sample also analyzed.
2 - Not Detected (Detection Limit not specified)

TABLE 3
SUMMARY OF GROUNDWATER ANALYTICAL DATA - MINOR CONSTITUENTS
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CA

COMPOUNDS DETECTED BY EPA METHOD 8240 OR EPA METHOD 8240/8260 - All results in ug/l.

WELL I.D.	SAMPLE DATE	Acetone	Total Xylenes	Trichloro-fluoromethane	Methylene Chloride	Carbon Tetra-Chloride	1,1,2-TCA	PCE	Carbon Disulfide	Ethyl-Benzene	1,2-DCA
WCC-1S	03/27/87	-	-	-	-	-	-	-	-	-	-
	*04/13/87	-	-	-	-	-	-	-	-	-	-
	11/12/87	-	-	-	-	-	-	-	-	-	-
	07/13/89	-	-	-	-	-	-	-	-	-	-
	08/23/89	-	-	-	-	-	-	-	-	-	-
	11/18/91	-	-	-	-	-	-	-	-	-	-
	06/17/92	<300	-	-	-	-	-	-	-	-	-
	09/23/92	<5	<1	<1	4	<1	<1	<1	22	<1	<1
	12/09/92	<100	<30	<30	40	<30	<30	<30	<30	<30	<30
	03/18/93	<10	<2	<5	<10	<5	<2	<2	<5	<2	<2
	06/08/93	<400	<20	<20	<100	<20	<20	<20	<20	<20	<20
	08/25/93	<400	<20	<20	<40	<20	<40	<20	<20	<20	<20
	11/19/93	<400	<20	<20	<100	<20	<40	<20	<20	<20	<20
	2/24/94	<400	<20	<20	<100	<20	<40	<20	<20	<20	<20
WCC-2S	11/02/87	-	-	-	-	-	-	-	-	-	-
	11/12/87	-	-	-	-	-	-	-	-	-	-
	7/13/89	-	-	-	-	-	-	-	-	-	-
	8/23/89	-	-	-	-	-	-	-	-	-	-
	11/19/91	-	-	-	-	-	-	-	-	-	-
	06/16/92	<10	-	-	-	-	-	-	-	-	-
	*09/22/92	<5/<5	<1/<1	<1/1	11/9	<1/<1	<1/<1	<1/<1	<1/<1	<1/<1	<1/<1
	*12/08/92	6/<5	<1/<1	<1/<1	5/2	<1/<1	<1/<1	<1/<1	<1/<1	<1/<1	<1/<1
	*03/17/93	<10/<10	<2/<2	<5/<5	<10/<10	<5/<5	<2/<2	<2/<2	<5/<5	<2/<2	<2/<2
	06/07/93	<40	<2	<2	<4	<2	<4	<2	<2	<2	<2
	08/24/93	<40	<2	<2	<4	<2	<4	<2	<2	<2	<2
	11/19/93	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
	2/24/94	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
WCC-3S	11/02/87	-	-	-	-	-	-	-	-	-	-
	11/12/87	-	-	-	-	-	-	-	-	-	-
	07/13/89	-	-	-	-	-	-	-	-	-	-
	08/23/89	-	-	-	-	-	-	-	-	-	-
	11/14/91	-	-	-	-	-	-	-	-	-	-
	06/17/92	<30,000	-	-	-	-	-	-	-	-	-
	09/23/92	<3,000	<500	<500	900	<500	<500	<500	<500	<500	<500
	12/09/92	<3,000	<500	<500	<500	<500	<500	<500	<500	<500	<500
	*03/18/93	<50/<50	120/110	<25/<25	<50/<50	<25/<25	55/60	<10/<10	<25/<25	<10/<10	100/95
	06/08/93	<2,000	<100	<100	<200	<100	<200	<100	<100	<100	<100
	*08/25/93	<8,000/<200	<400/154	<400/<10	<800/<50	<400/<10	<800/52	<400/<10	<400/<10	<400/21	<400/86
	11/19/93	<4,000	<200	<200	<1,000	<200	<200	<200	<200	<200	<200
	2/24/94	<4,000	<200	<200	<1,000	<200	<200	<200	<200	<200	<200

1 * Duplicate sample also analyzed.
2 - Not Detected (Detection Limit not specified)

TABLE 3
SUMMARY OF GROUNDWATER ANALYTICAL DATA - MINOR CONSTITUENTS
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CA

COMPOUNDS DETECTED BY EPA METHOD 8240 OR EPA METHOD 8240/8260 - All results in ug/l.

WELL I.D.	SAMPLE DATE	Acetone	Total Xylenes	Trichloro-fluoromethane	Methylene Chloride	Carbon Tetra-Chloride	1,1,2-TCA	PCE	Carbon Disulfide	Ethyl-Benzene	1,2-DCA
WCC-4S	11/02/87	-	-	-	-	-	-	-	-	-	-
	11/12/87	-	-	-	-	-	-	-	-	-	-
	7/13/89	-	-	-	-	-	-	-	-	-	-
	08/23/89	-	-	-	-	-	-	-	-	-	-
	11/18/91	-	-	-	-	-	-	-	-	-	-
	06/17/92	<150	-	-	-	-	-	-	-	-	-
	09/23/92	<50	<10	<10	20	<10	<10	<10	<10	<10	<10
	12/08/92	<50	<10	<10	50	<10	<10	<10	<10	<10	<10
	03/17/93	<10	<2	<5	<10	<5	<2	<2	<5	<2	<2
	06/08/93	<200	<10	<10	<40	<10	<20	<10	<10	<10	<10
	08/25/93	<200	<10	<10	<20	<10	<20	<10	<10	<10	<10
	11/19/93	<80	<4	<4	<20	<4	<8	<4	<4	<4	<4
	2/24/94	<80	<4	<4	<20	<4	<8	<4	<4	<4	<4
WCC-5S	11/30/87	-	-	-	-	-	-	-	-	-	-
	01/08/88	-	-	-	-	-	-	-	-	-	-
	*07/13/89	-	-	-	-	-	-	-	-	-	-
	08/23/89	-	-	-	-	-	-	-	-	-	-
	11/19/91	-	-	-	-	-	-	-	-	-	-
	06/15/92	<10	-	-	-	-	-	-	-	-	-
	09/21/92	<5	<1	3	8	<1	<1	<1	<1	<1	<1
	12/07/92	<5	<1	<1	3	<1	<1	<1	<1	<1	<1
	03/16/93	<10	<2	<5	<10	<5	<2	<2	<5	<2	<2
	06/07/93	<40	<2	<2	<4	<2	<2	<4	<2	<2	<2
	08/24/93	<40	<2	<2	<4	<2	<4	<2	<2	<2	<2
	11/18/93	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
	2/23/94	<40	<2	<2	<10	<2	<4	<2	4	<2	<2
WCC-6S	10/06/89	-	-	-	-	-	-	-	-	-	-
	11/16/91	-	-	-	-	-	-	-	-	-	-
	06/17/92	<3,000	-	-	-	-	-	-	-	-	-
	09/23/92	78	26	<1	5	<1	96	<1	<1	5	5
	*12/09/92	<300/<500	<50/<100	<50/<100	100/200	<50/<100	60/<100	<50/<10	<50/<100	<50/<10	<80/<10
	03/17/93	<50	20	<25	<50	<25	<10	<10	<25	<10	50
	06/08/93	<2,000	<100	<100	<200	<100	<200	<100	<100	<100	<100
	08/25/93	<2,000	<100	<100	<200	<100	<200	<100	<100	<100	<100
	11/19/93	<200	<10	<10	<50	<10	<20	<10	<10	<10	37
	2/24/94	230	15	<10	<50	<10	74	<10	<10	10	47

1 * Duplicate sample also analyzed.
2 - Not Detected (Detection Limit not specified)

TABLE 3
SUMMARY OF GROUNDWATER ANALYTICAL DATA - MINOR CONSTITUENTS
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CA

COMPOUNDS DETECTED BY EPA METHOD 8240 OR EPA METHOD 8240/8260 - All results in ug/l.

WELL I.D.	SAMPLE DATE	Acetone	Total Xylenes	Trichloro-fluoromethane	Methylene Chloride	Carbon Tetra-Chloride	1,1,2-TCA	PCE	Carbon Disulfide	Ethyl-Benzene	1,2-DCA
WCC-10S	*07/13/89	-	-	-	-	-	-	-	-	-	-
	08/23/89	-	-	-	-	-	-	-	-	-	-
	11/20/91	-	-	-	-	-	-	-	-	-	-
	06/16/92	35	-	-	-	-	-	-	-	-	-
	*09/21/92	<5/<5	<1/<1	<1/<1	8/8	1/1	<1/<1	<1/<1	<1/<1	<1/<1	<1/<1
	12/8/92	<5	<1	<1	3	<1	<1	<1	<1	<1	<1
	03/16/93	<10	<2	<5	<10	<5	<2	<2	<5	<2	<2
	06/07/93	<40	<2	<2	<4	<2	<4	<2	<2	<2	<2
	08/25/93	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
	11/19/93	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
	2/23/94	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
WCC-11S	11/15/91	-	-	-	-	-	-	-	-	-	-
	06/16/92	<10	-	-	-	-	-	-	-	-	-
	09/21/92	<5	<1	2	9	<1	<1	<1	<1	<1	<1
	12/08/92	<5	<1	<1	4	<1	<1	<1	<1	<1	<1
	03/16/93	<10	<2	<5	<10	<5	<2	<2	<5	<2	<2
	06/07/93	<40	<2	<2	<4	<2	<4	<2	<2	<2	<2
	08/24/93	<40	<2	<2	<4	<2	<4	<2	<2	<2	<2
	*11/19/93	<40/<40	<2/<2	<2/<4	<10/<10	<2/<2	<4/<4	<2/<2	<2/<2	<2/<2	<2/<2
	2/23/94	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
WCC-12S	11/18/91	-	-	-	-	-	-	-	-	-	-
	*06/16/92	<10/<10	-	-	-	-	-	-	-	-	-
	09/22/92	<5	<1	4	7	<1	<1	<1	<1	<1	<1
	12/08/92	<30	<5	<5	20	<5	<5	<5	<5	<5	<5
	03/17/93	<10	<2	<5	<10	<5	<2	<2	<5	<2	<2
	06/07/93	<40	<2	<2	<4	<2	<4	<2	<2	<2	<2
	08/25/93	<80	<4	<4	<8	<4	<8	<4	<4	<4	<4
	11/19/93	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
	2/24/94	<40/<40	<2/<2	<2<2	<10/<10	<2/<2	<4/<4	<2/<2	<2/<2	<2/<2	<2/<2
DAC-P1	10/09/89	<1,000	-	-	-	-	-	-	-	-	-
	06/17/92	<30	-	-	-	-	-	-	-	-	-
	*06/23/92	<5/<5	<1/<1	1/1	4/4	4/4	9/9	13/13	<1/<1	<1/<1	<1/<1
	12/09/92	<3,000	<500	<500	2,000	<500	<500	<500	<500	<500	<500
	03/18/93	<10	<2	<5	<10	<5	5	10	<5	<2	<2
	06/08/93	<2,000	<100	<100	<200	<100	<200	<100	<100	<100	<100
	08/25/93	<4,000	<200	<200	<400	<200	<400	<200	<200	<200	<200
	11/19/93	<400	<20	<20	<100	<20	<40	<20	<20	<20	<20
	2/24/94	<400	<20	<20	<100	<20	<40	<20	<20	<20	<20

1 * Duplicate sample also analyzed.
2 - Not Detected (Detection Limit not specified)

TABLE 3
SUMMARY OF GROUNDWATER ANALYTICAL DATA - MINOR CONSTITUENTS
GROUNDWATER MONITORING DATA SUMMARY REPORT
FIRST QUARTER 1994
DOUGLAS AIRCRAFT C-6 FACILITY
TORRANCE, CA

COMPOUNDS DETECTED BY EPA METHOD 8240 OR EPA METHOD 8240/8260 - All results in ug/l.

WELL I.D.	SAMPLE DATE	Acetone	Total Xylenes	Trichloro-fluoromethane	Methylene Chloride	Carbon Tetra-Chloride	1,1,2-TCA	PCE	Carbon Disulfide	Ethyl-Benzene	1,2-DCA
WCC-7S	07/13/89	-	-	-	-	-	-	-	-	-	-
	08/23/89	-	-	-	-	-	-	-	-	-	-
	11/18/91	-	-	-	-	-	-	-	-	-	-
	06/17/92	<30	-	-	-	-	-	-	-	-	-
	09/23/92	<30	<5	<5	10	<5	<5	<5	<5	<5	<5
	12/08/92	<30	<5	<5	10	<5	<5	<5	<5	<5	<5
	03/17/93	<10	<5	<5	<10	<5	<2	<2	<5	<2	<2
	06/07/93	<40	<2	<2	<4	<2	<4	<2	<2	<2	<2
	08/25/93	<80	<4	<4	31	<4	<8	<4	<4	<4	<4
	11/19/93	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
	2/24/94	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
WCC-8S	07/13/89	-	-	-	-	-	-	-	-	-	-
	08/23/89	-	-	-	-	-	-	-	-	-	-
	11/15/91	-	-	-	-	-	-	-	-	-	-
	*06/17/92	<150/<300	-	-	-	-	-	-	-	-	-
	09/23/92	<100	<20	<20	40	<20	<20	<20	<20	<20	<20
	12/08/92	<100	<20	<20	30	<20	<20	<20	<20	<20	<20
	03/17/93	<10	<2	<5	<10	<5	<2	<2	<5	<2	<2
	06/08/93	<400	<20	<20	<100	<20	<40	<20	<20	<20	<20
	08/25/93	<400	<20	<20	<40	<20	<40	<20	<20	<20	<20
	11/19/93	<400	<20	<20	<100	<20	<40	<20	<20	<20	<20
	2/24/94	<400	<20	<20	<100	<20	<40	<20	<20	<20	<20
WCC-9S	10/06/89	-	-	-	-	-	-	-	-	-	-
	11/19/91	-	-	-	-	-	-	-	-	-	-
	06/15/92	<30	-	-	-	-	-	-	-	-	-
	09/21/92	<5	<1	<1	10	<1	<1	<1	<1	<1	<1
	12/07/92	<5	<1	<1	3	<1	<1	<1	<1	<1	<1
	03/16/93	<10	<2	<5	<10	<5	<2	<2	<5	<2	<2
	*06/07/93	<40/<40	<2/<2	<2/<2	<4/<4	<2/<2	<4/<4	<2/<2	<2/<2	<2/<2	<2/<2
	08/24/93	<40	<2	<2	<4	<2	<4	<2	<2	<2	<2
	11/18/93	<40	<2	<2	<10	<2	<4	<2	<2	<2	<2
	2/24/94	<40	<20	<2	<10	<2	<4	<2	<2	<2	<2

1 * Duplicate sample also analyzed.
2 - Not Detected (Detection Limit not specified)