0 0 5 6 0 0 2 0 0 0 3

Pipe line to be in quarter of section with well line

Form 1002

WELL RECORD

28591

CORPORATION COMMISSION FILED JUN 21 1924 OF OKLA.

Mail to Corporation Commission, Oklahoma City, Okla.

Company Texas Oil Company Address P.O.Box 2044, Tulsa, Okla.

County Osage Farm A.J.Lynum Sec. 3 Twp. 27 Range 8E Well No. 2

Drilling Commenced 4-17-24 19 Drilling Completed 6-12-24 19 Deepened 19

Correspondence regarding well should be sent to C.P.Dimit, Box #2044 Address Tulsa, Okla.

CASING RECORD

SHOW COMPLETE RECORD

SIZE	PUT IN WELL		PULLED OUT		LEFT IN WELL		PACKERS AND SHOES
	FT	IN.	FT.	IN.	FT.	IN.	
20	39		None		39		
15½	858		858		None		
12½	1255		1255		None		
10	1442		1442		None		
8½	2276		None		2276		
6-5/8"	2790		None		2790		
5-3/16	157		None		157		Liner set at 2922'

Character of well (oil, gas or dry hole) Oil

Oil well, initial production in barrels (per day—per hour, state which) 25 bbls. per day after shot.

Gas well, rock pressure _____ Volume _____ cu. ft. Wet or Dry Gas _____

Name of drilling contractor _____

Elevation above sea level at top of casing 1100'

Location of well in Section: 282' from the south line and 980' from the east line of the south east quarter of section 3-27-8

State whether drilled with rotary or standard tools _____

Spot Well Correctly

640 Acres

N

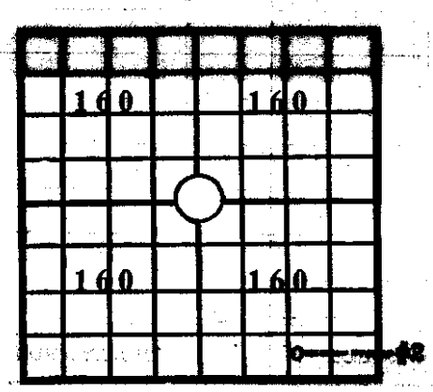

General Remarks: _____

Answer All Questions on Record.

FORMATION RECORD

Show all formations especially all sands and character and contents thereof.

Formation Record

FORMATIONS	TOP	BOTTOM	FORMATIONS	TOP	BOTTOM
Soil	0	5	Lime white	1293	1297
Red rock	5	85	Shale blue	1297	1320
Lime white	85	270	Sand white	1320	1350
Shale blue	270	290	Shale blue	1350	1410
Lime white	290	315	Sand blue H.F.W.	1410	1430
Shale blue	315	325	Lime white	1430	1450
Lime white	325	360	Shale blue	1450	1475
Shale gray	360	365	Sand white H.F.W	1475	1480
Lime white	365	390	Lime white	1480	1515
Shale blue	390	445	Shale gray	1515	1565
Lime white	445	465	Lime white	1565	1570
Shale gray	465	470	Sand white	1570	1580
Lime white	470	475	Shale blue	1580	1725
Shale blue	475	490	Lime white	1725	1733
Lime sandy brown	490	505	Shale blue	1733	1835
Shale blue	505	545	Sand white	1835	2100
Lime gray	545	570	Shale black	2100	2125
Shale	570	600	Lime gray	2125	2150
Lime white	600	660	Shale gray	2150	2160
Shale gray	660	675	Lime white	2160	2165
Lime gray	675	760	Shale gray	2165	2195
Shale blue	760	770	Lime brown	2195	2200
Lime white	770	850	Shale	2200	2225
Sand gray	850	855	Sand	2225	2265
Lime white	855	867	Lime white	2265	2285
Shale blue	867	872	Shale	2285	2525
Lime white	872	880	Lime gray	2525	2540
Shale gray	880	910	Shale gray	2540	2545
Lime	910	925	Lime	2545	2580
Shale	925	930	Shale	2580	2635
Lime white	930	950	Lime brown	2635	2655
Shale blue	950	955	Shale black	2655	2665
Lime white	955	960	Lime brown	2665	2705
Shale gray	960	970	Shale black	2705	2715
Lime white	970	1010	Lime brown	2715	2722
Shale gray	1010	1025	Shale	2722	2745
Lime gray	1025	1030	Lime	2745	2778
Sand gray	1030	1045	Shale gray	2778	2786
Shale grey	1045	1065	Lime	2786	2795
Red rock	1065	1075	Shale	2795	2810
Sand white	1075	1210	Lime	2810	2818
Shale blue	1210	1245	Shale	2818	2935
Lime gray	1245	1261	Sand oil gray	2935	2997
Shale blue	1261	1293	Total depth 2997'		

Method of shutting off water Casing Is water completely shut off? Yes

Amount of water with oil None per cent. Is oil cut? No.

I, H.M.Gray being first duly sworn on oath, state that I have knowledge of the facts and matter herein set forth and that the same are true and correct.

H M Gray
Representative of Company.

28592

Subscribed and sworn to before me this the Twentieth day of June 1924

My commission expires June 19 1926

E. E. Grant
Notary Public.