TIER 2

UNDERGROUND INJECTION CONTROL
PERMIT APPLICATION

Ute Tribal # 17-04
697' FNL & 636' FWL
Sec. 17, T5S-R3W
Duchesne County, Utah
API # 43-013-31464

July 2015

Prepared for:
Bruce Suchomel
Groundwater Program, Mail Code 8P-W-UIC
U.S. Environmental Protection Agency
1595 Wynkoop St
Denver, CO 80202-1129

Prepared by:
Petroglyph Energy, INC.
960 Broadway Avenue, Suite 500, P.O. Box 70019
Boise, Idaho 83707
(208) 685-7600
FAX (208) 685-7605

TIER 2

UNDERGROUND INJECTION CONTROL
PERMIT APPLICATION

- SUNDRY REPORTS
- CBLS FOR AOR needs
- USDW SOURCE

Ute Tribal # 17-04
697' FNL & 636' FWL
Sec. 17, T5S-R3W
Duchesne County, Utah
API # 43-013-31464

July 2015

Prepared for:
Bruce Suchomel
Groundwater Program, Mail Code 8P-W-UIC
U.S. Environmental Protection Agency
1595 Wynkoop St
Denver, CO 80202-1129

Prepared by:
Petroglyph Energy, INC.
960 Broadway Avenue, Suite 500, P.O. Box 70019
Boise, Idaho 83707
(208) 685-7600
FAX (208) 685-7605

LIST OF ATTACHMENTS

Attachment No. 1	Area Topography Map
Attachment No. 2	Site Map
Attachment No. 3	Map of the A-Marker surface
Attachment No. 4	Cross-Sections of the injection formation
Attachment No. 5	Water Analysis
Attachment No. 6	Completion data for all wells in the AOR
Attachment No. 7	CBL for the UIC well
Attachment No. 8	Open hole log for the UIC well
Attachment No. 9	List of owners and Affidavit Notification
Attachment No. 10	Well bore diagrams for the UIC well
Attachment No. 11	P&A procedure
Attachment No. 12	MIT procedure
Attachment No. 13	Surety Bond letter

SUMMARY DOCUMENT
UIC WELL APPLICATION
Ute Tribal 17-04
API # 43-013-31464

The following document contains information provided in support of the application for the conversion of the Ute Tribal 17-04 well to an injection well in the Green River formation in the Antelope Creek Field in Duchesne County, Utah.

The Antelope Creek Field falls within the Uintah and Ouray Indian reservations and is within Indian Country; therefore, for facilities located on the reservation, only EPA-issued UIC permits are necessary for compliance with UIC regulations.

The EPA has issued an Area Permit #UT20736-00000 for the Underground Injection Control for the Antelope Creek Field. This area permit allows for additional producing wells to be converted to injection wells for enhanced recovery.

(1) Petroglyph Energy, Inc. (Petroglyph) is the operator and only working interest owner of wells located in the Antelope creek Field, Duchesne County, Utah. Petroglyph's business address is provided below:

Petroglyph Energy, Inc.
960 Broadway Avenue, Suite 500
P.O. Box 70019
Boise, ID 83707

(2) Enclosed as Attachment No. 1 is a topographic map of a portion of the Antelope Creek Field, identifying all wells located in this area. The legal location for the Ute Tribal 17-04 is 697' FNL & 636' FWL NW/NW Sec. 17, T5S-R3W.

(3) Attachment No. 2 is a map of the well. This map shows a circle with a ¼ mile radius centered on the Ute Tribal 17-04 well. The ¼ mile radius encompasses the area of review, AOR, within which Petroglyph is required to investigate all wells for mechanical integrity. The ¼ mile radius also identifies mineral ownership; all lands within the AOR are leased to Petroglyph by the Ute Tribe as indicated by yellow shading. The AOR has Ute Tribal 08-14, Ute Tribal 17-03, Ute Tribal 17-05, Ute Tribal 17-05A, and Ute Tribal 18-01 well(s) located in its ¼ mile radius.

(4) Petroglyph proposes to utilize the Ute Tribal 17-04 as an injection well for enhanced recovery in the Antelope Creek Field.

(5) Injection Zone – The injection intervals are between 3728' and 5720' True Vertical Depth and located in the lower portion of the Green River Formation. The injection zone is confined within a 1992' section between the Green River "A" Lime marker bed and the top of the Basal Carbonate in the lower part of the formation. The injection zone is composed of lenticular calcareous sandstones interbedded with low permeable carbonates and calcareous shales. The lenticular sandstones vary in thickness from 1 to 30 feet.

Confining Zone – The overall confining strata above the injection zone consists of impermeable Green River calcareous shales and continuous beds of microcrystalline dolostone. The confining zone in the Ute Tribal 17-04 is 402 feet thick.

Attachment No. 3 is a structure map of the A-Marker surface.

Attachment No. 4 is a cross-section of the injection interval and confining zone.

(6) Enclosed as Attachment No. 5 are standard analyses of produced water from three batteries that currently serve as central handling facilities for all project producing wells. The analysis of the Green River formation water from the Ute Tribal 18-08 Satellite Battery is 12805 mg/L of total dissolved solids (TDS), Ute Tribal 21-11 Satellite Battery is 15659 mg/L TDS, and Ute Tribal 34-12-D3 Satellite Battery is 14590 mg/L TDS.

Injectate in the field is a mixture of produced water and fresh make-up water. The nearest injection well is the Ute Tribal 18-01, the most recent analysis of the water being injected into the Green River formation at this location is 11210 mg/L TDS. This analysis is also included in Attachment No. 5.

(7) A summary of completion data from the Ute Tribal 17-04 and offset wells in the AOR are included in Attachment No. 6

(8) The cement bond log is included in Attachment No. 7.

(9) The open hole log for the Ute Tribal 17-04 is included in Attachment No. 8.

(10) The Antelope Creek Field is operated under a Cooperative Plan of Development between the Ute Tribe and Petroglyph Energy. At the Ute Tribal 17-04 location, all mineral owners, surface owners and operators located within the AOR ¼ mile radius have been notified of the submitted EPA application to convert to injection. Attachment No. 9 is the Affidavit of Notification to all owners.

(11) Petroglyph requests a maximum surface injection pressure of **1769**psi. The EPA Area Permit No. UT20736-00000 uses the formula:

Pm = (0.88psi/ft - 0.43psi/ft(Sg)) D

Where:
Pm = Maximum surface injection pressure
0.88psi/ft = Fracture gradient
D = Top perforation depth
0.43psi/ft = Hydrostatic pressure/hydraulic head
Sg = Specific gravity of injection fluid

For the Ute Tribal 17-04:
1769psi = (0.88psi/ft - 0.43(1.00)) 3931ft

(12) Three wellbore diagrams for the Ute Tribal 17-04 are in Attachment No. 10. One diagram is for production, one for injection, and one for Plug & Abandonment (P&A).

(13) The P&A procedure for this well is shown in Attachment No. 11.

(14) Once the draft permit is issued, Petroglyph will conduct a Mechanical Integrity Test and a static bottom-hole pressure test. The MIT procedure is contained in Attachment No. 12. The conversion work will be satisfactorily completed and submitted to the EPA on Form 7520-12. A wellbore schematic will be included with this form.

(15) Petroglyph will give proof of financial responsibility by posting a surety bond for the UIC well prior to final permit approval. A copy of this letter is contained in Attachment No. 13.

(16) Petroglyph will install various gauges on the well so that the injection pressure and tubing/casing annulus pressure can be monitored. The well will be equipped with a flow meter with a cumulative volume recorder.

Ute Tribal 17-04 Well History

Well History:

Spud Well: 10/14/1994

Completed: 12/16/1995

First Production: 12/22/1995

Tops (KB):

BMSW* Found at 920'

Green River 1147'

A Marker 3728'

X Marker 4224'

Douglas Creek 4364'

B Limestone 4751'

Castle Peak 5286'

Basal Carbonate 5720'

Perf History

12/11/1995

D3	4825' to 4827
D3	4831' to 4833'
D3	4848' to 4852'
D7	4941' to 4944'

10/1/2010

GG4	3643' to 3654'
B06	3931' to 3938'
B06	3940' to 3946'
B10	4124' to 4130'
B10	4139' to 4148'
B11.1	4168' to 4174'
C05	4410' to 4414'
C05.2	4458' to 4463'
C06	4556' to 4564'
C09.2	4693' to 4697'
BP	at 4790'

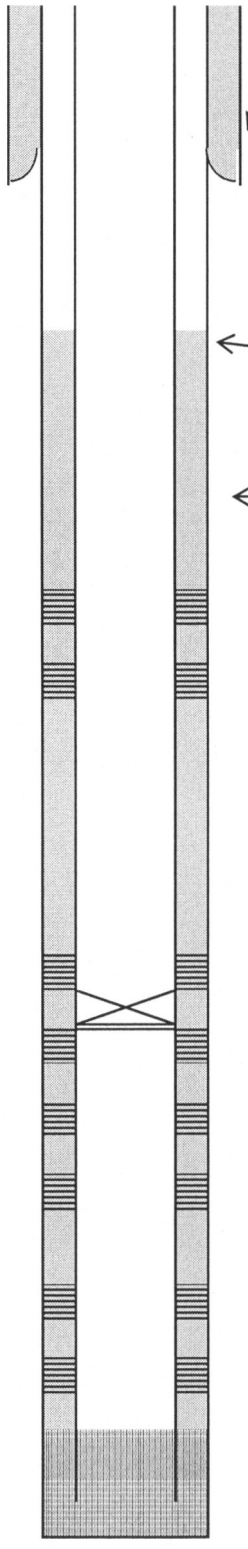

GL: 5910'

KB: 5920'

8 5/8" 24# Surface CSG @ 414' KB

cmt'd w/350 sx

Surface Hole size 12 1/4"

Cement top @ 1796'

5 1/2" 15.5# J-55 CSG @ 5822'

cmt'd w/495sx

Hole Size 7 7/8" bit

Perf's:

GG4 3643' to 3654'

B06 3931 to 3938'

B06 3940' to 3946'

B10 4124' to 4130'

B10 4139' to 4148'

B11.1 4168' to 4174'

C05 4410' to 4414'

C05.2 4458' to 4463'

C06 4556' to 4564'

C09.2 4693' to 4697'

BP @ 4790'

D3 4825' to 4827'

D3 4831' to 4833'

D3 4848' to 4852'

D7 4941' to 4944'

PBTD @ 5765' KB

TD @ 5832' KB

(Not to Scale)

Petroglyph Operating Co., Inc

Ute Tribal #17-04

(697' FNL & 636' FWL)

NW NW Section 17, 5S- 3W

Antelope Creek Field

Duchesne Co. Utah

API#: 43013314640000

*Plate 1 Utah Geological Survey Special Study 144. (2012). *BMSW Elevation Contour Map, Uinta Basin, Utah.* [map]. (CA 1:200,000)

Ute Tribal 17-04 Injection

Well History:

Spud Well: 10/14/1994

Completed: 12/16/1995

First Production: 12/22/1995

Tops (KB):

BMSW* Found at 920'

Green River 1147'

A Marker 3728'

X Marker 4224'

Douglas Creek 4364'

B Limestone 4751'

Castle Peak 5286'

Basal Carbonate 5720'

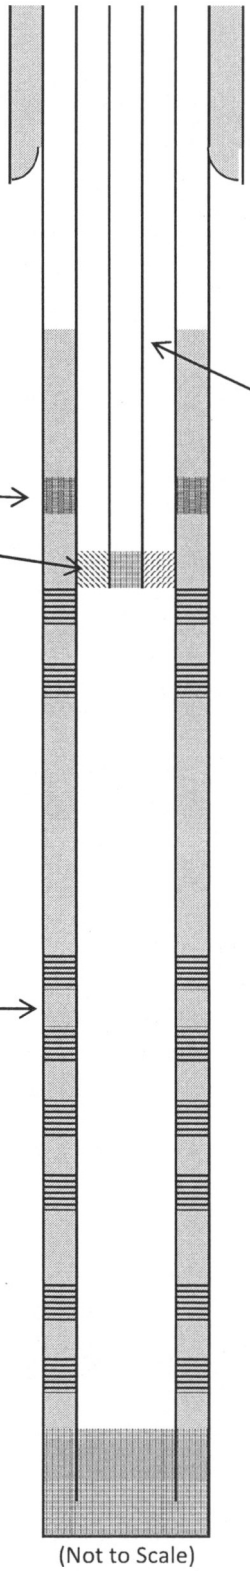

GL: 5910'

KB: 5920'

8 5/8" 24# Surface CSG @ 414' KB

cmt'd w/350 sx

Surface Hole size 12 1/4"

Cement top @ 1796'

5 1/2" 15.5# J-55 CSG @ 5822'

cmt'd w/495sx

Tubing 2 7/8" 6.5# J55

Squeeze perfs 3643' to 3654'

Injection Packer @ 3841'

Hole Size 7 7/8" bit

Perf's:

GG4 3643' to 3654'

B06 3931 to 3938'

B06 3940' to 3946'

B10 4124' to 4130'

B10 4139' to 4148'

B11.1 4168' to 4174'

C05 4410' to 4414'

C05.2 4458' to 4463'

C06 4556' to 4564'

C09.2 4693' to 4697'

D3 4825' to 4827'

Remove BP @ 4790

D3 4831' to 4833'

D3 4848' to 4852'

D7 4941' to 4944'

Petroglyph Operating Co., Inc.

Ute Tribal #17-04

(697' FNL & 636' FWL)

NW NW Section 17, 5S- 3W

Antelope Creek Field

Duchesne Co. Utah

API#: 43013314640000

*Plate 1 Utah Geological Survey Special Study 144. (2012). *BMSW Elevation Contour Map, Uinta Basin, Utah.* [map]. (CA 1:200,000)

(Not to Scale)

PBTD @ 5765' KB

TD @ 5832' KB

Ute Tribal 17-04 Plug and Abandonment

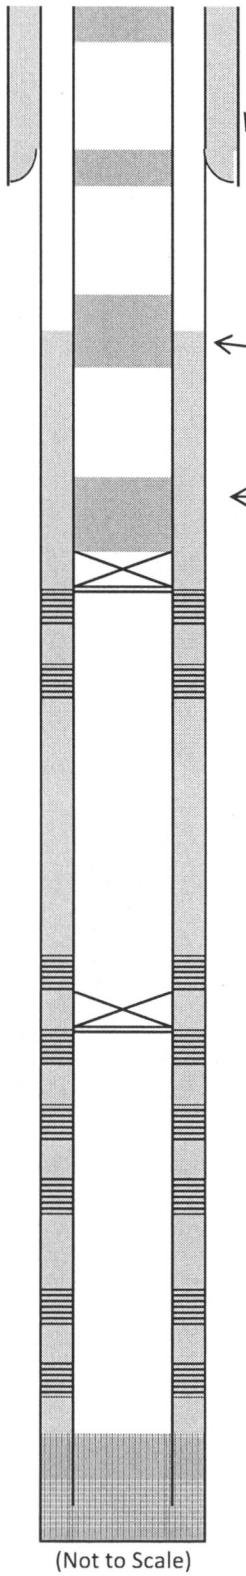

GL: 5910'
KB: 5920'

8sx Class G Cement-50' plug

8 5/8" 24# Surface CSG @ 414' KB
cmt'd w/350 sx

15sx Class G Cement-100' plug

Surface Hole size 12 1/4"

Cement top @ 1796'

30sx Class G Cement-200' plug

5 1/2" 15.5# J-55 CSG @ 5822'
cmt'd w/495sx

Hole Size 7 7/8" bit

30sx Class G Cement-200' plug
CIBP @ 3553'

Perf's:
GG4 3643' to 3654'
B06 3931 to 3938'
B06 3940' to 3946'
B10 4124' to 4130'
B10 4139' to 4148'
B11.1 4168' to 4174'
C05 4410' to 4414'
C05.2 4458' to 4463'
C06 4556' to 4564'
C09.2 4693' to 4697'
BP @ 4790'
D3 4825' to 4827'
D3 4831' to 4833'
D3 4848' to 4852'
D7 4941' to 4944'

Petroglyph Operating Co., Inc.
Ute Tribal #17-04
(697' FNL & 636' FWL)
NW NW Section 17, 5S- 3W
Antelope Creek Field
Duchesne Co. Utah
API#: 43013314640000

*Plate 1 Utah Geological Survey Special Study 144. (2012). *BMSW Elevation Contour Map, Uinta Basin, Utah.* [map]. (CA 1:200,000)

(Not to Scale)

PBTD @ 5765' KB
TD @ 5832' KB

Well Completion Data
Ute Tribal 17-04

	Surface Casing				Production Casing			
Well	**Size (inches)**	**Depth (ft KB)**	**Cement Amount (sx)**	**Cement Top**	**Size (inches)**	**Depth (ft KB)**	**Cement Amount (sx)**	**Estimated Cement Top**
Ute Tribal 17-04	**8-5/8**	**414**	**350**	**surface**	**5-1/2**	**5822**	**495**	**1796**
Ute Tribal 08-14	8-5/8	537	360	surface	5-1/2	6073	1000	surface
Ute Tribal 17-03	8-5/8	552	350	surface	5-1/2	5968	900	surface
Ute Tribal 17-05	8-5/8	402	250	surface	5-1/2	6106	355	3030
Ute Tribal 17-05A	8-5/8	522	450	surface	5-1/2	5890	790	surface
Ute Tribal 18-01	8-5/8	414	250	surface	5-1/2	6293	1450	surface

ATTACHMENT NO. 3:
Map of the "A" Lime Marker

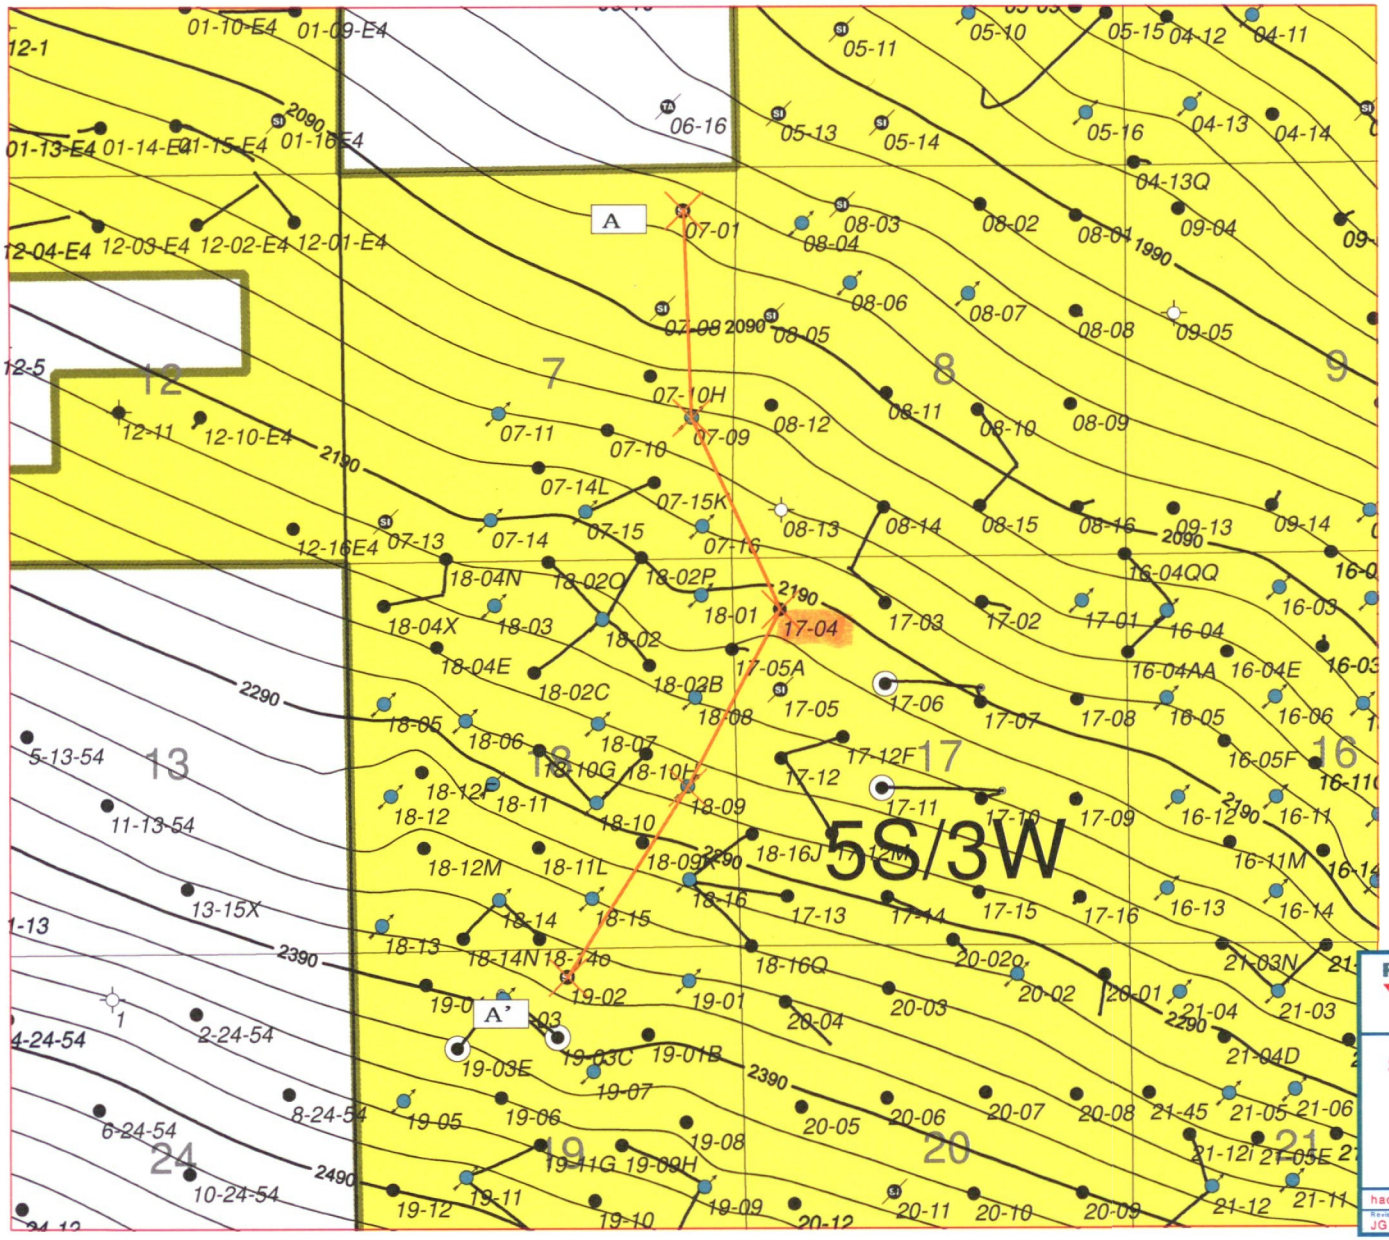

1:30000

1000 0 1000 2000 ft

1 inch = 2500 feet

- Producing Oil Well
- Injection Well
- Injection Well, waiting on water
- PTPI
- D & A
- Waiting on Completion
- TA
- Shut In
- Injector Shut In
- P & A
- Shut In Gas Well

PETROGLYPH

ANTELOPE CREEK

DUCHESNE COUNTY, UTAH

Structure Map of the "A" Lime Marker
(approximate top of Injection Zone)
in the Vicinity of the
Ute Tribal 17-04
With Line of Cross Section A to A'

hack 9-30-05

Revised by
JG 3/24/15

Petroglyph Energy, Inc., 555 S. Cole Rd., Boise, ID 83709

\\SERV\Geo\Utah Regional\CT\17-04 structure map.grp

ATTACHMENT NO. 1:
AREA MAP

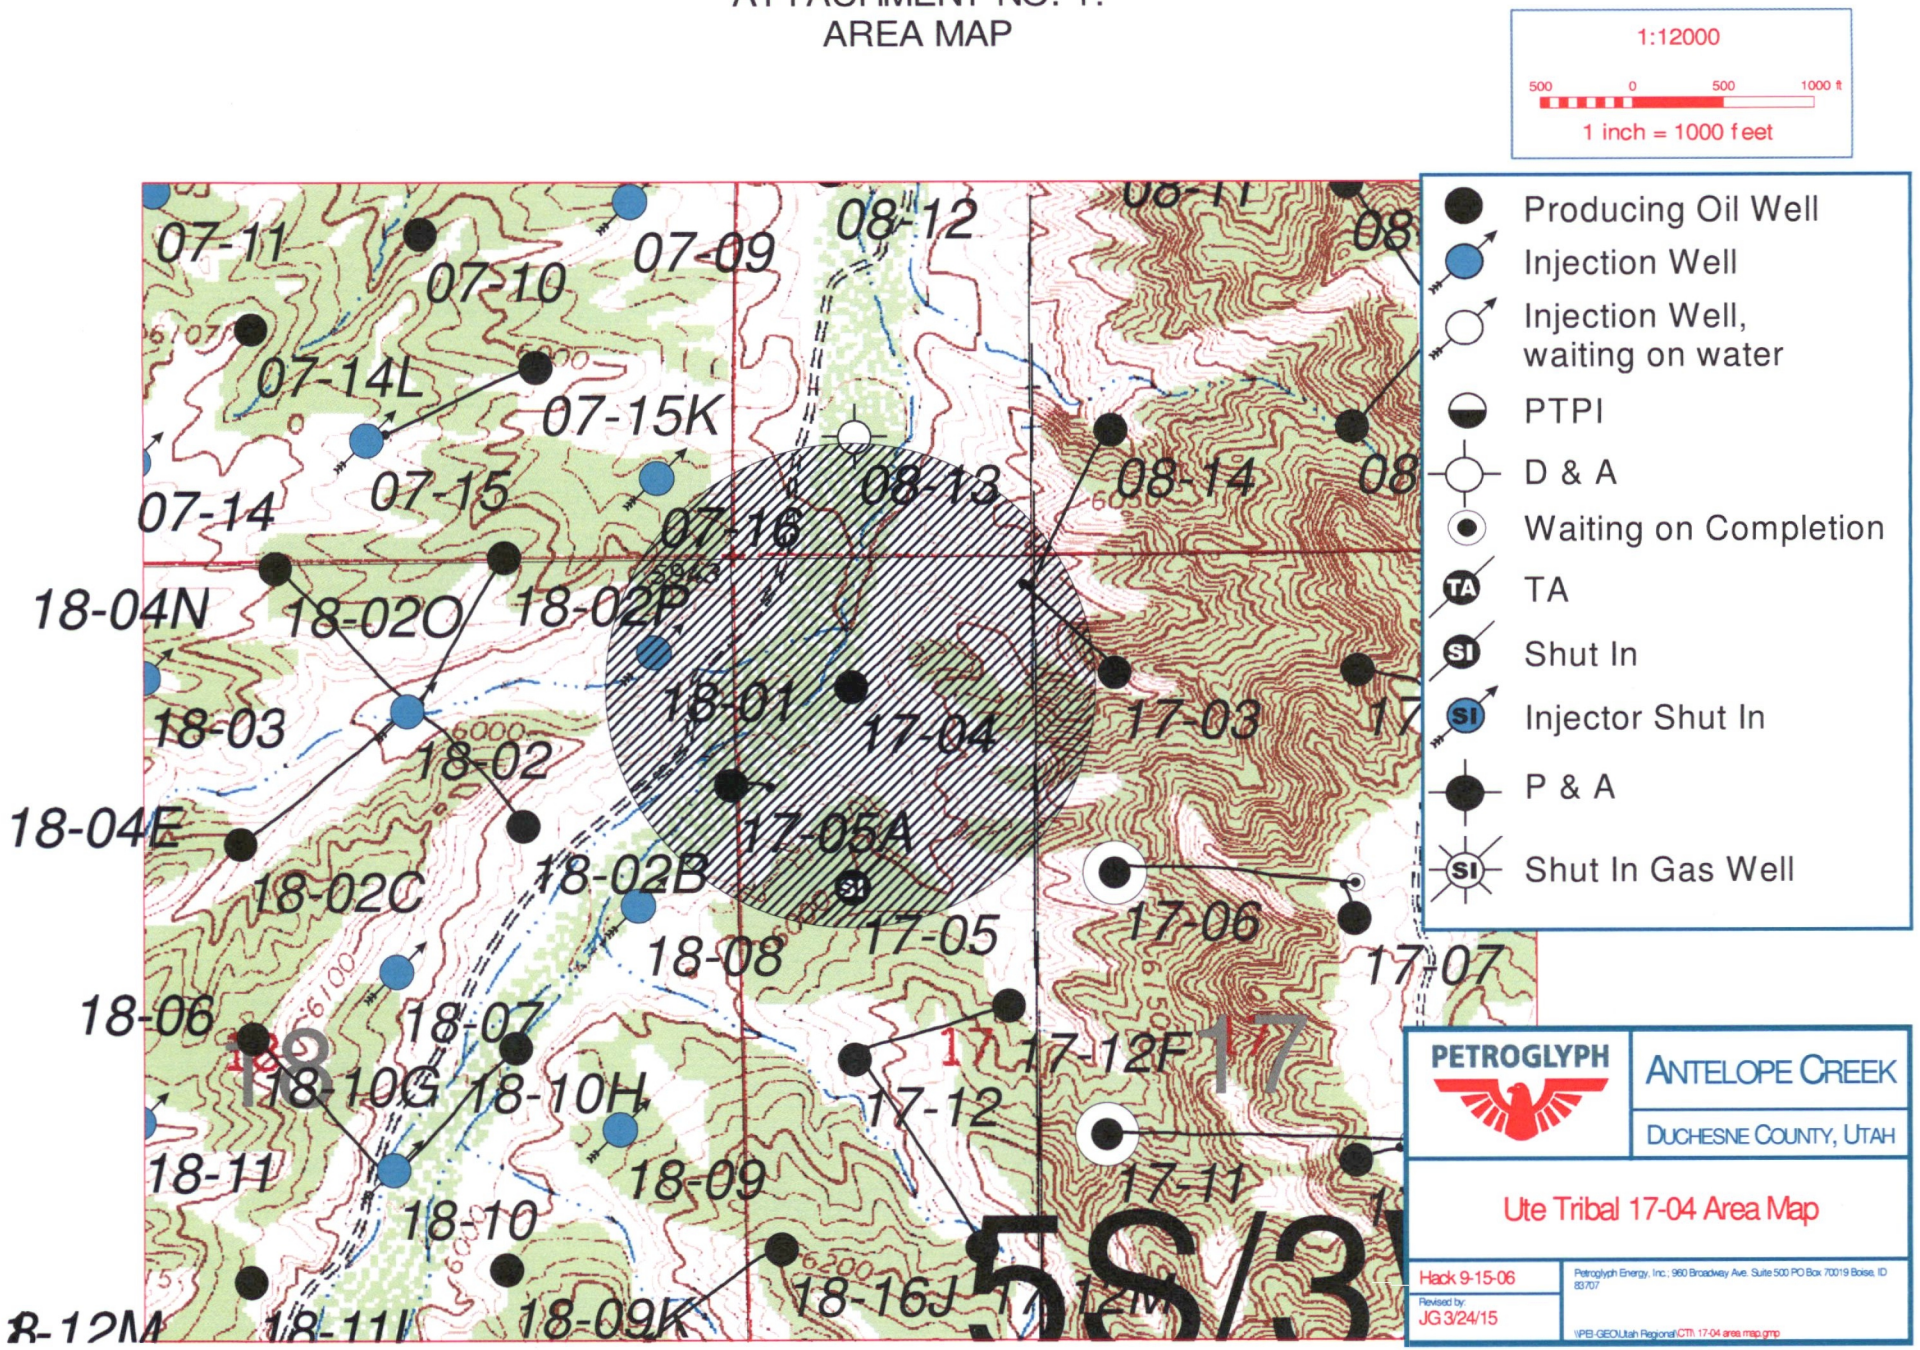

Maximum Allowable Injection Pressure (MAIP)
From Fracture Gradient

Date: 09/04/2015 *Operator:* **Petroglyph**

Well: **Ute Tribal 17-04**

Permit #:

Enter the following values:

Specific Gravity of injectate =	**1.010**	g/cc
Depth to top of injection interval =	**3,728**	feet
Fracture Gradient (F G) =	**0.880**	psi/ft

MAIP = **1,650** psig

(rounded down to nearest 5 psig)

where:

*MSIP = [FG - (0.433 * SG)] * Depth to top of injection interval =* *1650.274*

Cement Bond Index (in millivolts - mV)

Date: September 4, 2015

Operator: **Petroglyph**

Well: **Ute Tribal 17-04**

Permit :

Enter the following values:

Amplitude at 0% Bond (A-0) (in mV) = **80** *mV*

Amplitude at 100% Bond (A-100) (in mV) = **1** *mV*

Amplitude at 80% Bond (A-80) = **2.4** *mV*

[(0.2)log A0 + (0.8)log A100]

Amplitude at 90% Bond (A-90)= 1.5 *mV*

[(0.1)log A0 + (0.9)log A100]

Amplitude at 70% Bond (A-70)= 3.7 *mV*

[(0.3)log A0 + (0.7)log A100]

Amplitude at 60% Bond (A-60)= 5.8 *mV*

[(0.4)log A0 + (0.6)log A100]

~~Newfield Production~~ - Technical Review Worksheet

Permit No: UT2 Well: UT 17-04

What Needs to be Done	Information Sources	Review & Evaluation Notes
Determine name, top and base of the confining zone(s) and the injection zone(s).	☐ Geologic data submitted ☐ Well logs from area ☐ Published articles	Conf Zone: top 3492 base 3728 Inj Zone: top 3728 (Garden Gulch 2-Marker) base 5720 (top Wasatch)
Determine name, top and base of all USDWs. List base of lowermost USDW: Determine which USDWs are actually being used for water supply.	☐ Geologic data submitted ☐ nearby Water analyses ☐ nearby Well logs ☐ Water supply wells ☐ Published articles	Surface Elevation: GL: 5910; KB 5920 Pub #92 base USDW: bgs: elev: submitted base USDW bgs: 920 elev: base of Uinta / top Green River: 1147
Review and evaluate construction, casing and cementing records of proposed well. Review and evaluate construction, casing and cementing records of AOR wells that penetrate injection zone.	☐ Data submitted ☐ Completion/workover reports ☐ Contractor invoices ☐ Logs: CBL, RTS, Temp, casing inspection, etc. 80/1 80% 2.4 ≈ 80% OK	TD: 5832 PBTD: 5765 surface csg 8 5/8" 24# ft 0-414 s: long strg csg 5 1/2" 15.5# ft 0-5822 s: TOC: submitted: 1796 CBL: 1800 Wells in AOR: TD TOC C 08-14(dev. 6073 SURF 17-03(dev) 5968 SURF 17-05 6106 3030 17-05A(dev) 5890 SURF 18-01 6293 SURF
Review P&A plan for effective USDW protection, injection zone isolation and well closure.	☐ P&A plan ☐ Area geology	plug depths:
Review amount of FR - is it adequate to cover P&A costs of proposed in P&A plan?	☐ contractor bids / P&A cost histories ☐ nearby well P&A costs	FR instrument: Amount: $
Calculate the maximum allowable injection pressure (MAIP).	☐ Fracture treatments ☐ Step Rate Test results ☐ Fracture gradient	top perforation: bottom perforation: injectate specific gravity: 1.01 Frac Gradient: .88 p initial MAIP = 1650 psi
Determine which logs and tests will be performed.		

Structural Cross Section in the Vicinity of Ute Tribal 17-04

A

43013319310000	3027 ft	43013311800000	2725 ft	43013314640000	2881 ft	43013319000000	2803 ft	43013308250000
PETROGLYPH OPERATING COMPANY INC Ute Tribal 19-02 383 FNL 2328 FEL TWP: 5 S - Range: 3 W - Sec. 19		PETROGLYPH OPERATING COMPANY INC Ute Tribal 18-09 2151 FSL 667 FEL TWP: 5S - Range: 3W - Sec. 18		PETROGLYPH OPERATING COMPANY INC UTE TRIBAL 17-04 697 FNL 636 FWL TWP: 5 S - Range: 3 W - Sec. 17		PETROGLYPH OPERATING COMPANY INC Ute Tribal 07-09 1937 FSL 570 FEL TWP: 5 S - Range: 3 W - Sec. 7		PETROGLYPH OPERATING COMPANY INC Ute Tribal 07-01 567 FNL 706 FEL TWP: 5 S - Range: 3 W - Sec. 7

A'