#5

Chemical
93918

US EPA RECORDS CENTER REGION 5
475005

R. Allan Freeze

Department of Geological Sciences
University of British Columbia
Vancouver, British Columbia

John A. Cherry

Department of Earth Sciences
University of Waterloo
Waterloo, Ontario

GROUNDWATER

Prentice-Hall, Inc.
Englewood Cliffs, New Jersey 07632

Table 2.2 Range of Values of Hydraulic Conductivity and Permeability

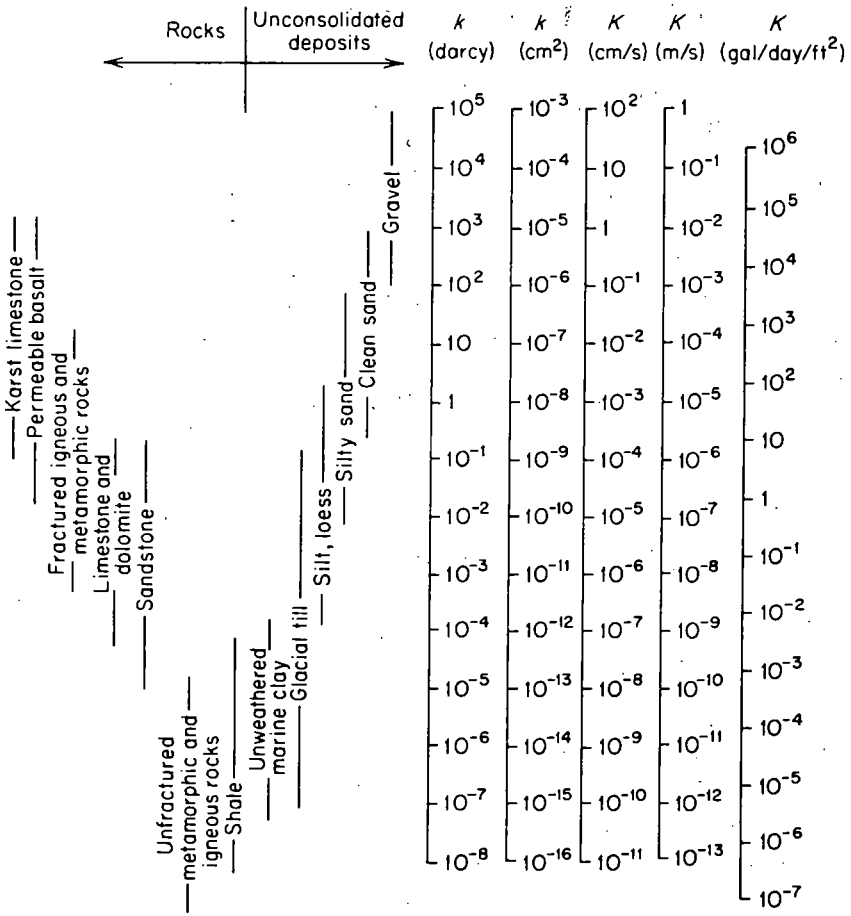

Table 2.3 Conversion Factors for Permeability and Hydraulic Conductivity Units

	Permeability, k*			Hydraulic conductivity, K		
	cm^2	ft^2	darcy	m/s	ft/s	U.S. gal/day/ft^2
cm^2	1	1.08×10^{-3}	1.01×10^{8}	9.80×10^{2}	3.22×10^{3}	1.85×10^{9}
ft^2	9.29×10^{2}	1	9.42×10^{10}	9.11×10^{5}	2.99×10^{6}	1.71×10^{12}
darcy	9.87×10^{-9}	1.06×10^{-11}	1	9.66×10^{-6}	3.17×10^{-5}	1.82×10^{1}
m/s	1.02×10^{-3}	1.10×10^{-6}	1.04×10^{5}	1	3.28	2.12×10^{6}
ft/s	3.11×10^{-4}	3.35×10^{-7}	3.15×10^{4}	3.05×10^{-1}	1	6.46×10^{5}
U.S. gal/day/ft^2	5.42×10^{-10}	5.83×10^{-13}	5.49×10^{-2}	4.72×10^{-7}	1.55×10^{-6}	1

*To obtain k in ft^2, multiply k in cm^2 by 1.08×10^{-3}.