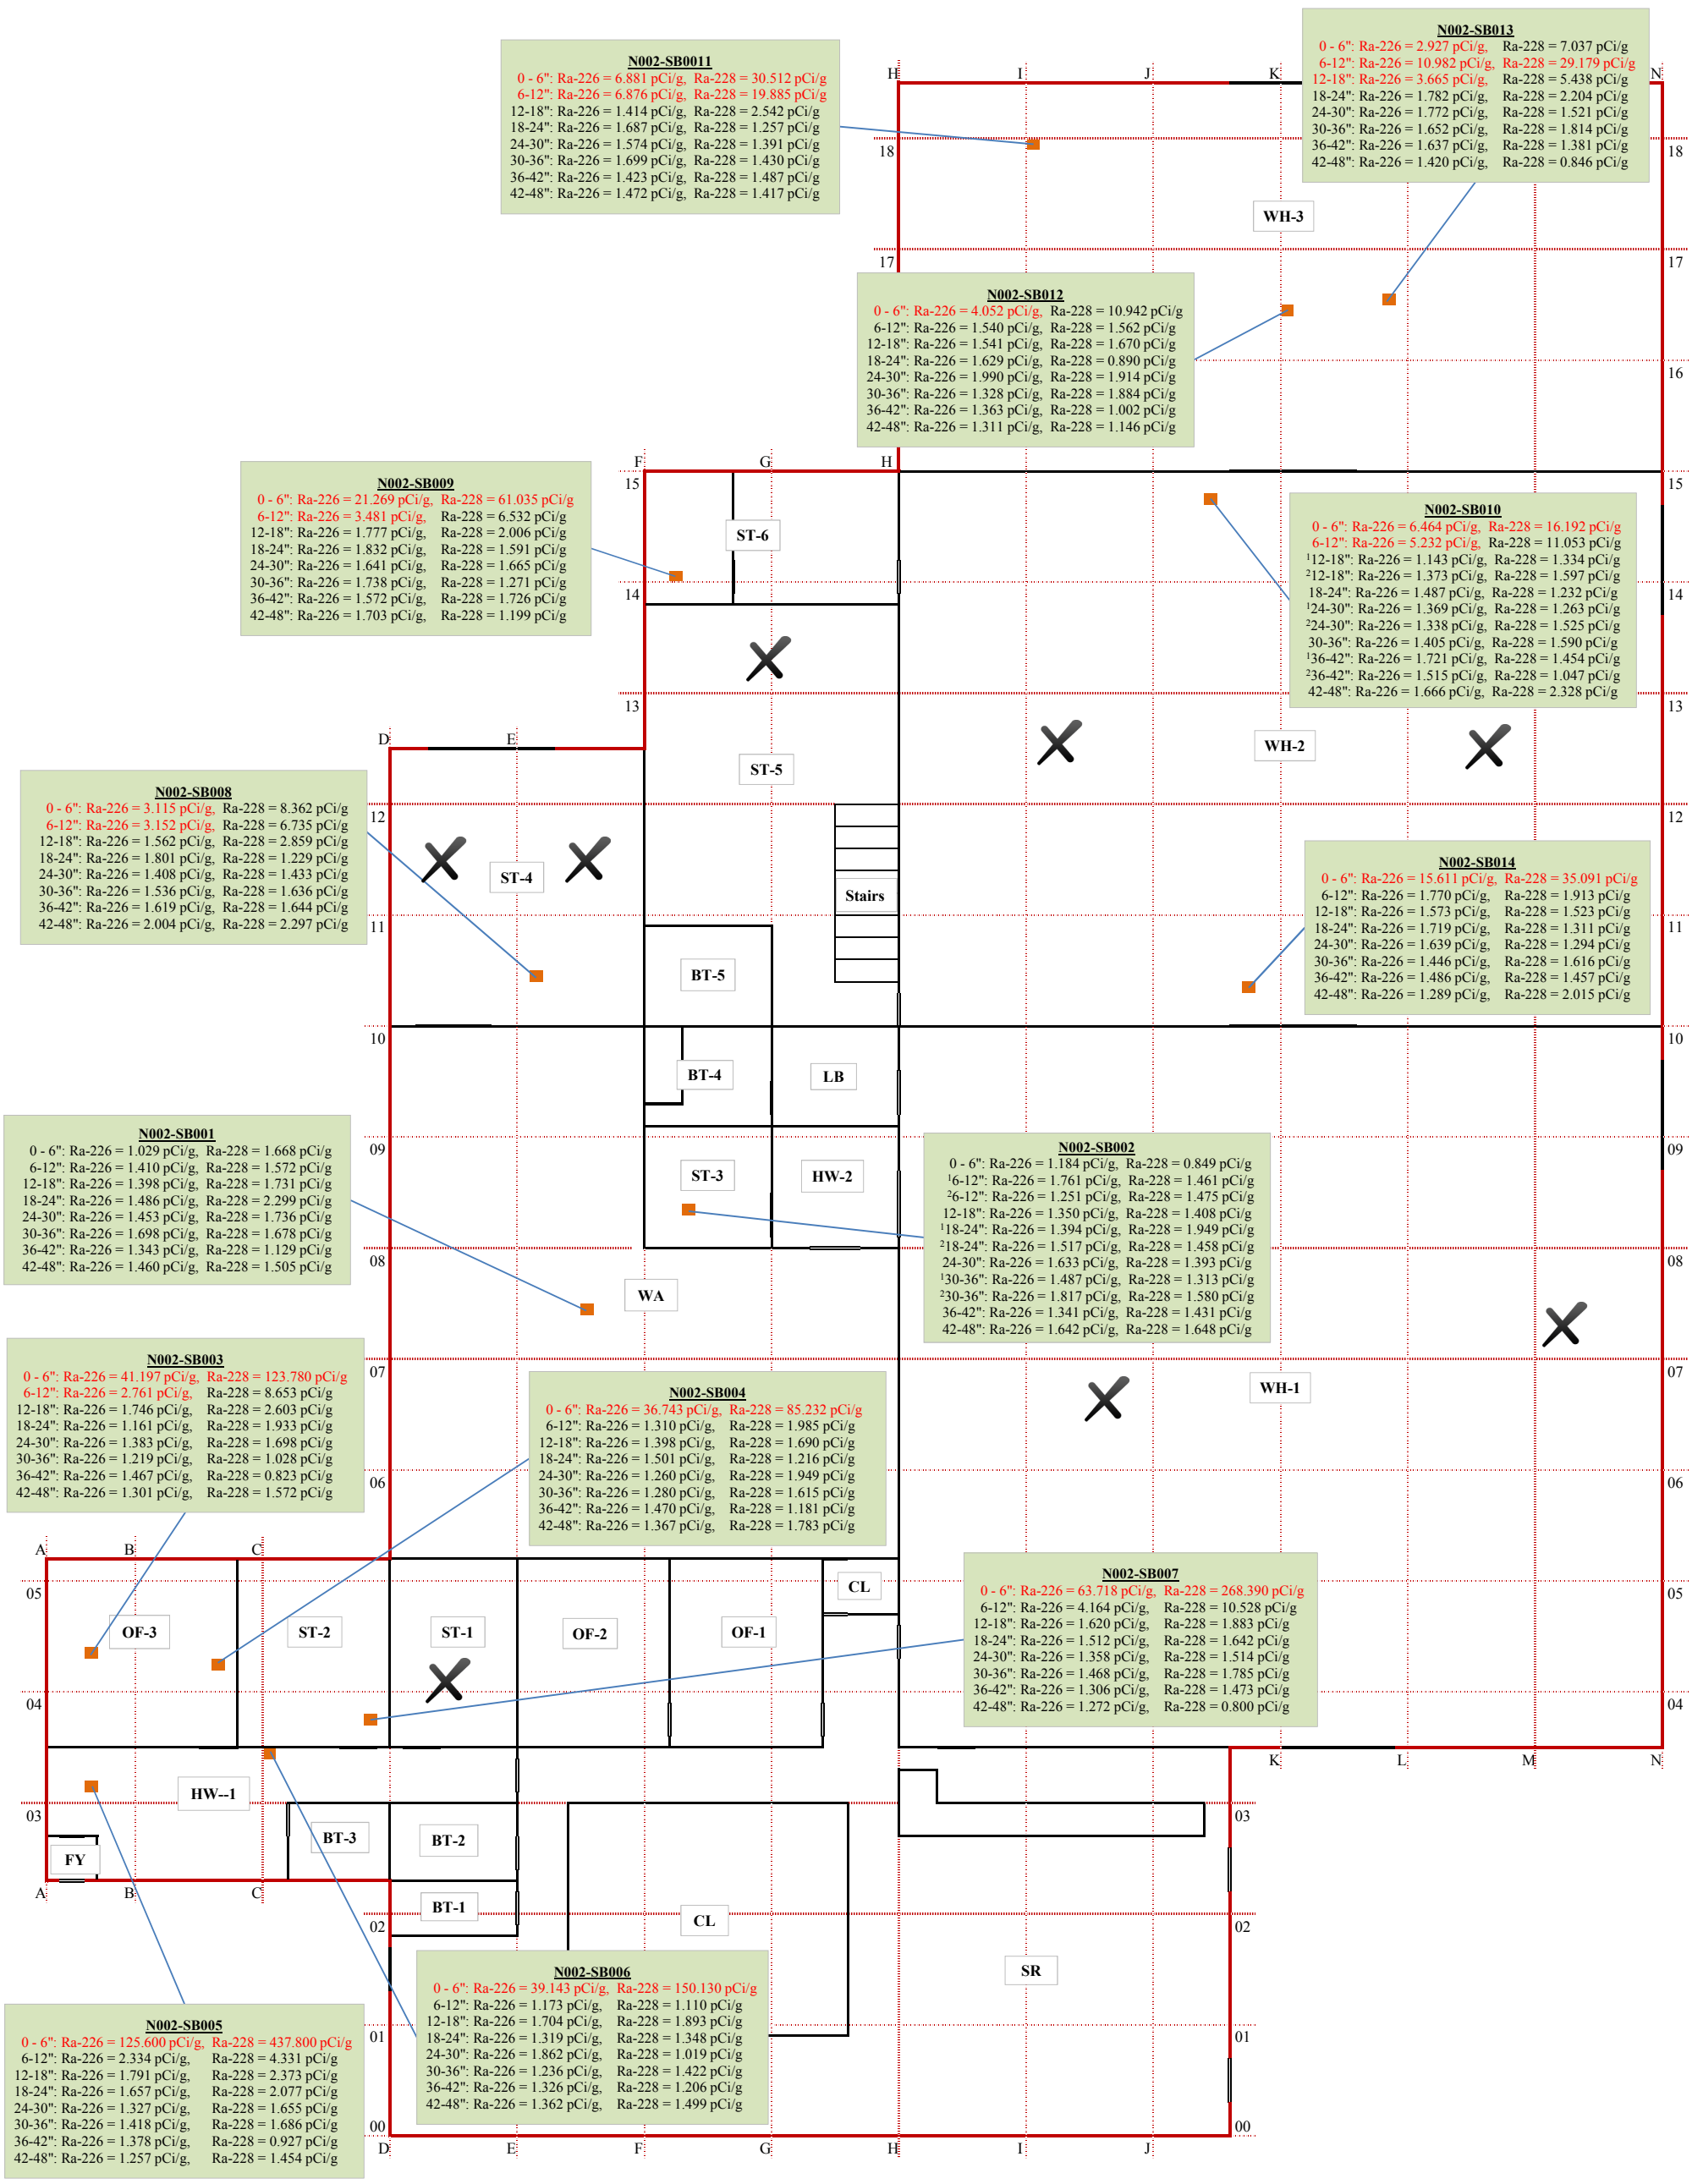

9540 Niagara Falls Boulevard (N002)

Legend

- Soil Sample Location
- Exterior Wall
- Interior Wall
- Transect/ Row Grid lines
- OF - Office
- ST - Storage
- WH - Warehouse
- HW - Hallway
- CL - Customer Lounge
- CR - Communications Room
- WA - Wood Work Area
- FY - Foyer
- BT - Bathroom
- LB - Lobby
- SR - Showroom

All results presented in picocuries per gram (pCi/g), Sampling depth intervals are in inches (")
[1]Soil Sample, [2]Field Duplicate of Soil Sample
Results in red exceed the U.S. Environmental Protection Agency's (EPA) Preliminary Remediation Goals (PRGs) for Radium-226 (Ra-226) and Radium-228 (Ra-228)
EPA PRG for Ra-226 = 2.48 pCi/g and for Ra-228 = 15.9 pCi/g

Weston Solutions, Inc.

In Association With Scientific and Environmental Associates, Inc.,
Environmental Compliance Consultants, Inc.,
Avatar Environmental, LLC,
On-Site Environmental, Inc., and
Sovereign Consulting, Inc.

Figure 3: Property N002 Unvalidated Soil Analytical Results Map

Niagara Falls Boulevard Radiological Site
Niagara Falls, New York

U.S. ENVIRONMENTAL PROTECTION AGENCY
Removal Support Team 3
CONTRACT # EP-S2-13-01

EPA OSC:	E. DALY
RST SPM:	B. NWOSU
PROJECT #:	30400.021.006.2061 (Date: 05.12.2016)