DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

LEASE NO. GS-01P-LMA00534
BUILDING NO. MA6037ZZ

Global Lease
GSA TEMPLATE L100 (10/2021)

A. This Lease is made and entered into between

FARLEY WHITE APOLLO LLC

(Lessor), whose principal place of business is **155 FEDERAL STREET, BOSTON, MA 02110-1727**, and whose interest in the Property described herein is that of Fee Owner, and

The United States of America

(Government), acting by and through the designated representative of the General Services Administration (GSA), upon the terms and conditions set forth herein.

B. Witnesseth**:** The parties hereto, for the consideration hereinafter mentioned, covenant and agree as follows:

Lessor hereby leases to the Government the Premises described herein, being all or a portion of the Property located at

150 APOLLO DRIVE, CHELMSFORD, MA 01824-3696

and more fully described in Section 1 and Exhibit **A,** together with rights to the use of parking and other areas as set forth herein, to be used for such purposes as determined by GSA.

C. LEASE TERM

To Have and To Hold the said Premises with its appurtenances for the term beginning upon acceptance of the Premises as required by this Lease and continuing for a period of

20 Years, 20 Years Firm,

The commencement date of this Lease, along with any applicable termination and renewal rights, shall be more specifically set forth in a Lease Amendment upon substantial completion and acceptance of the Space by the Government.

In Witness Whereof, the parties to this Lease evidence their agreement to all terms and conditions set forth herein by their signatures below, to be effective as of the date of delivery of the fully executed Lease to the Lessor.

(b) (6) [redacted]

Name: John Power

Title: Manager

Entity: Farley White Apollo, LLC

Date: 8/2/2022

(b) (6) [redacted]

Name: Richard T. Reynolds

Title: Lease Contracting Officer

General Services Administration, Public Buildings Service

Date: 8/4/2022

(b) (6) [redacted]

Name: Eileen Lees

Title: Vice President Corporate Administration

Date: 8/2/2022

The information collection requirements contained in this Solicitation/Contract, that are not required by regulation, have been approved by the Office of Management and Budget pursuant to the Paperwork Reduction Act and assigned the OMB Control No. 3090-0163.

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

SECTION 1 THE PREMISES, RENT, AND OTHER TERMS 5
1.01 THE PREMISES (OCT 2016) 5
1.02 EXPRESS APPURTENANT RIGHTS (SEP 2013) 5
1.03 RENT AND OTHER CONSIDERATION (OCT 2021) 5
1.04 BROKER COMMISSION AND COMMISSION CREDIT (OCT 2016) 6
1.05 ~~TERMINATION RIGHTS (OCT 2016)~~ INTENTIONALLY DELETED 7
1.06 ~~RENEWAL RIGHTS (OCT 2016)~~ INTENTIONALLY DELETED 7
1.07 DOCUMENTS INCORPORATED IN THE LEASE (OCT 2021) 7
1.08 TENANT IMPROVEMENT RENTAL ADJUSTMENT (OCT 2016) 7
1.09 TENANT IMPROVEMENT FEE SCHEDULE (OCT 2020) 7
1.10 BUILDING SPECIFIC AMORTIZED CAPITAL (SEP 2012) 7
1.11 BUILDING SPECIFIC AMORTIZED CAPITAL RENTAL ADJUSTMENT (SEP 2013) 8
1.12 PERCENTAGE OF OCCUPANCY FOR TAX ADJUSTMENT (OCT 2021) 8
1.13 REAL ESTATE TAX BASE (SEP 2013) 8
1.14 OPERATING COST BASE (OCT 2016) 8
1.15 RATE FOR ADJUSTMENT FOR VACANT LEASED PREMISES (SEP 2013) 8
1.16 HOURLY OVERTIME HVAC RATES (OCT 2016) 8
1.17 ~~ADJUSTMENT FOR REDUCED SERVICES (OCT 2018)~~ INTENTIONALLY DELETED 8
1.18 BUILDING IMPROVEMENTS (MAR 2016) 8
1.19 HUBZONE SMALL BUSINESS CONCERNS ADDITIONAL PERFORMANCE REQUIREMENTS (MAR 2012) 9
1.20 LESSOR'S UNIQUE ENTITY IDENTIFIER (OCT 2021) 9

SECTION 2 GENERAL TERMS, CONDITIONS, AND STANDARDS 10
2.01 DEFINITIONS AND GENERAL TERMS (OCT 2016) 10
2.02 AUTHORIZED REPRESENTATIVES (OCT 2016) 11
2.03 ALTERATIONS REQUESTED BY THE GOVERNMENT (OCT 2018) 11
2.04 WAIVER OF RESTORATION (OCT 2021) 11
2.05 PAYMENT OF BROKER (OCT 2021) 11
2.06 CHANGE OF OWNERSHIP/NOVATION (OCT 2021) 11
2.07 REAL ESTATE TAX ADJUSTMENT (JUN 2012) 12
2.08 ADJUSTMENT FOR VACANT PREMISES (OCT 2017) 13
2.09 OPERATING COSTS ADJUSTMENT (JUN 2012) 13
2.10 ADDITIONAL POST-AWARD FINANCIAL AND TECHNICAL DELIVERABLES (JUN 2012) 14
2.11 RELOCATION ASSISTANCE ACT (APR 2011) 14

SECTION 3 CONSTRUCTION STANDARDS AND SHELL COMPONENTS 15
3.01 LABOR STANDARDS (OCT 2016) 15
3.02 WORK PERFORMANCE (JUN 2012) 15
3.03 EXISTING FIT-OUT, SALVAGED, OR REUSED BUILDING MATERIAL (OCT 2019) 15
3.04 CONSTRUCTION WASTE MANAGEMENT (OCT 2021) 15
3.05 WOOD PRODUCTS (OCT 2019) 16
3.06 ADHESIVES AND SEALANTS (OCT 2019) 16
3.07 BUILDING SHELL REQUIREMENTS (OCT 2016) 16
3.08 RESPONSIBILITY OF THE LESSOR AND LESSOR'S ARCHITECT/ENGINEER (JUN 2012) 16
3.09 QUALITY AND APPEARANCE OF BUILDING (JUN 2012) 17
3.10 VESTIBULES (OCT 2020) 17
3.11 MEANS OF EGRESS (MAY 2015) 17
3.12 AUTOMATIC FIRE SPRINKLER SYSTEM (SEP 2013) 17
3.13 FIRE ALARM SYSTEM (SEP 2013) 17
3.14 ENERGY INDEPENDENCE AND SECURITY ACT (MAR 2016) 18
3.15 ELEVATORS (OCT 2020) 19
3.16 BUILDING DIRECTORY (OCT 2021) 19
3.17 FLAGPOLE (SEP 2013) 19
3.18 DEMOLITION (JUN 2012) 19
3.19 ACCESSIBILITY (FEB 2007) 19
3.20 CEILINGS (OCT 2019) 19
3.21 EXTERIOR AND COMMON AREA DOORS AND HARDWARE (SEP 2013) 20
3.22 DOORS: IDENTIFICATION (APR 2011) 20
3.23 WINDOWS (OCT 2020) 20
3.24 PARTITIONS: GENERAL (OCT 2019) 20
3.25 PARTITIONS: PERMANENT (OCT 2019) 20
3.26 INSULATION: THERMAL, ACOUSTIC, AND HVAC (OCT 2019) 20
3.27 WALL FINISHES – SHELL (SEP 2015) 21
3.28 PAINTING – SHELL (OCT 2019) 21
3.29 FLOORS AND FLOOR LOAD (OCT 2019) 21
3.30 FLOOR COVERING AND PERIMETERS – SHELL (SEP 2013) 21
3.31 MECHANICAL, ELECTRICAL, PLUMBING: GENERAL (APR 2011) 21
3.32 BUILDING SYSTEMS (APR 2011) 21
3.33 ELECTRICAL (OCT 2019) 21

(b) (6) (b) (6)

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

3.34 ~~ADDITIONAL ELECTRICAL CONTROLS (JUN 2012)~~ INTENTIONALLY DELETED 22
3.35 PLUMBING (JUN 2012) 22
3.36 DRINKING FOUNTAINS (OCT 2018) 22
3.37 RESTROOMS (OCT 2021) 22
3.38 PLUMBING FIXTURES: WATER CONSERVATION (OCT 2019) 23
3.39 JANITOR CLOSETS (SEP 2015) 23
3.40 HEATING, VENTILATION, AND AIR CONDITIONING - SHELL (OCT 2021) 23
3.41 TELECOMMUNICATIONS: DISTRIBUTION AND EQUIPMENT (SEP 2015) 23
3.42 TELECOMMUNICATIONS: LOCAL EXCHANGE ACCESS (JUN 2012) 24
3.43 LIGHTING: INTERIOR AND PARKING - SHELL (OCT 2020) 24
3.44 ACOUSTICAL REQUIREMENTS (JUN 2012) 25
3.45 ~~SECURITY FOR NEW CONSTRUCTION (AUG 2021)~~ INTENTIONALLY DELETED 25
3.46 ~~SEISMIC SAFETY FOR NEW CONSTRUCTION (OCT 2020)~~ INTENTIONALLY DELETED 25
3.47 ~~FIRE PROTECTION FOR NEW CONSTRUCTION (APR 2015)~~ INTENTIONALLY DELETED 25
3.48 ~~GREEN BUILDING RATING CERTIFICATION FOR NEW CONSTRUCTION (OCT 2016)~~ INTENTIONALLY DELETED 25
3.49 ~~GREEN BUILDING RATING CERTIFICATION FOR TENANT INTERIORS (OCT 2016)~~ INTENTIONALLY DELETED 25
3.50 INDOOR AIR QUALITY DURING CONSTRUCTION (OCT 2021) 25
3.51 SYSTEMS COMMISSIONING (OCT 2021) 26
3.52 ~~DUE DILIGENCE AND NATIONAL ENVIRONMENTAL POLICY ACT REQUIREMENTS – LEASE (SEP 2014)~~ INTENTIONALLY DELETED 26
3.53 NATIONAL HISTORIC PRESERVATION ACT REQUIREMENTS - LEASE (SEP 2014) 26
3.54 ~~DESIGN EXCELLENCE – LEASE (OCT 2016)~~ INTENTIONALLY DELETED 26

SECTION 4 DESIGN, CONSTRUCTION, AND POST AWARD ACTIVITIES 27
4.01 SCHEDULE FOR COMPLETION OF SPACE (OCT 2017) 27
4.04 SCHEDULE FOR DELIVERY OF TENANT IMPROVEMENT AND BSAC PRICING: 28
4.05 TENANT IMPROVEMENTS PRICE PROPOSAL (OCT 2016) 28
4.06 BUILDING SPECIFIC AMORTIZED CAPITAL (BSAC) PRICE PROPOSAL (SEP 2015) 28
4.07 GREEN LEASE SUBMITTALS (OCT 2017) 30
4.20 SUBJECT MATTER EXPERTS 31
4.21 POTENTIAL CHANGE ORDERS AND CHANGE ORDERS 31

SECTION 5 TENANT IMPROVEMENT COMPONENTS 32
5.01 TENANT IMPROVEMENT REQUIREMENTS (OCT 2016) 32
5.02 ~~TENANT IMPROVEMENT SPECIFICATIONS (SEP 2015)~~ INTENTIONALLY DELETED 32
5.03 FINISH SELECTIONS (SEP 2015) 32
5.04 WINDOW COVERINGS (JUN 2012) 32
5.05 DOORS: SUITE ENTRY (OCT 2019) 32
5.06 DOORS: INTERIOR (OCT 2019) 32
5.07 DOORS: HARDWARE (SEP 2013) 33
5.08 DOORS: IDENTIFICATION (JUN 2012) 33
5.09 PARTITIONS: SUBDIVIDING (OCT 2020) 33
5.10 WALL FINISHES (OCT 2019) 33
5.11 PAINTING – TI (OCT 2019) 33
5.12 FLOOR COVERINGS AND PERIMETERS (OCT 2019) 33
5.13 HEATING AND AIR CONDITIONING (JUN 2012) 34
5.14 ELECTRICAL: DISTRIBUTION (SEP 2015) 34
5.15 TELECOMMUNICATIONS: DISTRIBUTION AND EQUIPMENT (JUN 2012) 34
5.16 TELECOMMUNICATIONS: LOCAL EXCHANGE ACCESS (AUG 2008) 34
5.17 DATA DISTRIBUTION (OCT 2020) 34
5.18 ELECTRICAL, TELEPHONE, DATA FOR SYSTEMS FURNITURE (OCT 2020) 35
5.19 LIGHTING: INTERIOR AND PARKING – TI (SEP 2015) 35
5.20 AUTOMATIC FIRE SPRINKLER SYSTEM - TI (OCT 2016) 35

SECTION 6 UTILITIES, SERVICES, AND OBLIGATIONS DURING THE LEASE TERM 36
6.01 PROVISION OF SERVICES, ACCESS, AND NORMAL HOURS (JUN 2012) 36
6.02 UTILITIES (APR 2011) 36
6.03 ~~UTILITIES SEPARATE FROM RENTAL/BUILDING OPERATING PLAN (OCT 2020)~~ INTENTIONALLY DELETED 36
6.04 UTILITY CONSUMPTION REPORTING (OCT 2016) 36
6.05 HEATING AND AIR CONDITIONING (OCT 2020) 36
6.06 OVERTIME HVAC USAGE (OCT 2020) 36
6.07 JANITORIAL SERVICES (OCT 2021) 37
6.08 SELECTION OF CLEANING PRODUCTS (OCT 2021) 37
6.09 SELECTION OF PAPER PRODUCTS (OCT 2021) 37
6.10 SNOW REMOVAL (OCT 2020) 38
6.11 MAINTENANCE AND TESTING OF SYSTEMS (SEP 2013) 38
6.12 MAINTENANCE OF PROVIDED FINISHES (OCT 2016) 38
6.13 ASBESTOS ABATEMENT (OCT 2021) 38
6.14 ONSITE LESSOR MANAGEMENT (APR 2011) 38

(b) (6) (b) (6)

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

6.15 IDENTITY VERIFICATION OF PERSONNEL (OCT 2021) 38
6.16 SCHEDULE OF PERIODIC SERVICES (OCT 2020) 39
6.17 LANDSCAPING (OCT 2019) 39
6.18 LANDSCAPE MAINTENANCE (APR 2011) 39
6.19 RECYCLING (OCT 2021) 40
6.20 RANDOLPH-SHEPPARD COMPLIANCE (SEP 2013) 40
6.21 SAFEGUARDING AND DISSEMINATION OF CONTROLLED UNCLASSIFIED INFORMATION (CUI) BUILDING INFORMATION (FEB 2020) 40
6.22 INDOOR AIR QUALITY (OCT 2019) 41
6.23 RADON IN AIR (OCT 2016) 41
6.24 RADON IN WATER (JUN 2012) 42
6.25 HAZARDOUS MATERIALS (SEP 2013) 42
6.26 MOLD (OCT 2021) 43
6.27 OCCUPANT EMERGENCY PLANS (OCT 2020) 43
6.28 FLAG DISPLAY (OCT 2016) 43

SECTION 7 ADDITIONAL TERMS AND CONDITIONS **44**
7.01 SECURITY REQUIREMENTS (OCT 2021) 44
7.02 MODIFIED LEASE PARAGRAPHS (OCT 2016) 44
7.03 ~~ADDENDUM TO GSA FORM 3517B, GENERAL CLAUSES, NO FEDERALLY ELECTED OFFICIALS TO BENEFIT (OCT 2018)~~ INTENTIONALLY DELETED 44
7.04 DAILY OCCUPANCY DATA (OCT 2021) 44
7.05 PROVISIONAL ACCEPTANCE (FEB 2021) 44

(b) (6) (b) (6)

SECTION 1 THE PREMISES, RENT, AND OTHER TERMS

1.01 THE PREMISES (OCT 2016)

The Premises are described as follows:

A. Office and Related Space: **79,873** rentable square feet (RSF), yielding **60,863** ANSI/BOMA Office Area (ABOA) square feet (SF) of office and related Space located on the **1ST, 2ND, and 3RD,** floors, of the building, as depicted on the floor plan(s) attached hereto as Exhibit **A**.

B. Common Area Factor: The Common Area Factor (CAF), defined under Section 2 of the Lease, is established as **31.23** percent. This factor, rounded to the nearest whole percentage, shall be used for purposes of rental adjustments in accordance with the Payment Clause of the General Clauses.

C. INTENTIONALLY DELETED

1.02 EXPRESS APPURTENANT RIGHTS (SEP 2013)

The Government shall have the non-exclusive right to the use of Appurtenant Areas and shall have the right to post Rules and Regulations Governing Conduct on Federal Property, Title 41, CFR, Part 102-74, Subpart C within such areas. The Government will coordinate with Lessor to ensure signage is consistent with Lessor's standards. Appurtenant to the Premises and included in the Lease are rights to use the following:

A. Parking: **320 onsite parking spaces including 23 RESERVED surface or structured** parking spaces as depicted on the plans attached hereto as Exhibit **B,** reserved for the exclusive use of the Government. In addition, the Lessor shall provide such additional parking spaces as required by the applicable code of the local government entity having jurisdiction over the Property.

B. Antennas, Satellite Dishes, and Related Transmission Devices: (1) Space located on the roof of the Building sufficient in size for the installation and placement of telecommunications equipment, (2) the right to access the roof of the Building, and (3) use of all Building areas (e.g., chases, plenums, etc.) necessary for the use, operation, and maintenance of such telecommunications equipment at all times during the term of this Lease.

C. Public Transportation:

1. During the lease term and/or any extensions thereof, routine scheduled public transportation is a requirement of this Lease and must be available within ½ mile walking distance from the main building entrance of property. The routine scheduled public transportation must have sufficient arrivals and departures from this maximum distance of ½ mile from building entrance to allow visitors and staff adequate time to arrive at the building up to one hour before EOIR operating hours begin, during the full operating hours and up to one hour after EOIR operating hours end.

2. If anytime during the lease term and/or any extensions thereof, routine scheduled public transportation is not available within ½ mile walking distance from the main building entrance of property, then the offeror must provide private shuttle services matching the requirements set forth above for the routine schedule, subject to LCO approval.

1.03 RENT AND OTHER CONSIDERATION (OCT 2021)

A. The Government shall pay the Lessor annual rent, payable in monthly installments in arrears, at the following rates:

	FULL TERM ANNUAL RENT
SHELL RENT[1]	(b) (4)
OPERATING COSTS[2]	
TENANT IMPROVEMENTS RENT[3]	
BUILDING SPECIFIC AMORTIZED CAPITAL (BSAC)[4]	
PARKING[5]	
TOTAL ANNUAL RENT[6]	**$2,576,328.60**

[1]Shell rent calculation:
(Full Term) (b) (4) per RSF multiplied by the RSF stated under Paragraph 1.01
[2]Operating Costs rent calculation: (b) (4) per RSF multiplied by the RSF stated under Paragraph 1.01
[3]Tenant Improvements of (b) (4) are amortized at a rate of (b) (4) per annum over **20** years.
[4]Building Specific Amortized Capital (BSAC) of (b) (4) are amortized at a rate of (b) (4) per annum over **20** years
[5]Parking costs described under sub-paragraph B below
[6]Total Annual Rent does not reflect reduction for free rent (if applicable). See subparagraph C below.

B. Parking shall be provided at a rate of (b) (4) per parking space per month (structured/inside), and (b) (4) per parking space per month (surface/outside).

C. The Lessor has offered free rent for the first (b) (4) of the Lease (free rent includes shell, operating, TI, BSAC and parking rent). Therefore, the first (b) (4) of the Lease shall be provided at no cost to the Government.

D. In instances where the Lessor amortizes either the TI or Building Specific Amortized Capital (BSAC) for a period exceeding the Firm Term of the Lease, should the Government terminate the Lease after the Firm Term or does not otherwise renew or extend the term beyond the Firm Term, the Government shall not be liable for any costs, including unamortized costs beyond the Firm Term.

E. Rent is subject to adjustment based upon a mutual on-site measurement of the Space upon acceptance, not to exceed **60,863** ABOA SF based upon the methodology outlined under the "Payment" clause of GSA Form 3517.

F. Rent is subject to adjustment based upon the final Tenant Improvement (TI) cost to be amortized in the rental rate, as agreed upon by the parties subsequent to the Lease Award Date.

G. Rent is subject to adjustment based on the final Building Specific Amortized Capital (BSAC) cost to be amortized in the rental rate, as agreed upon by the parties subsequent to the Lease Award Date.

H. If the Government leases the Premises for less than a full calendar month, then rent shall be prorated based on the actual number of days leased for that month.

I. Rent shall be paid to Lessor by electronic funds transfer (EFT) in accordance with the provisions of the General Clauses. Rent shall be payable using the EFT information contained in the System for Award Management (SAM). In the event the EFT information changes, the Lessor shall be responsible for providing the updated information to SAM. Failure by the Lessor to maintain an active registration in SAM may result in delay of rental payments until such time as the SAM registration is activated.

J. Lessor shall provide to the Government, in exchange for the payment of rental and other specified consideration, the following:

1. The leasehold interest in the Property described herein in the paragraph entitled "The Premises."

2. All costs, expenses and fees to perform the work required for acceptance of the Premises in accordance with this Lease, including all costs for labor, materials, and equipment, professional fees, contractor fees, attorney fees, permit fees, inspection fees, and similar such fees, and all related expenses.

3. Performance or satisfaction of all other obligations set forth in this Lease; and all services, utilities, and maintenance required for the proper operation of the Property, the Building, and the Premises in accordance with the terms of the Lease, including, but not limited to, all inspections, modifications, repairs, replacements, and improvements required to be made thereto to meet the requirements of this Lease.

K. For succeeding Leases with an incumbent Lessor where the Government is currently in occupancy and possession of the leased Premises and where the Lease requires the Lessor to perform alterations using either the TIA or BSAC, the amortized tenant improvement rent and/or BSAC rent will not commence until the alterations are complete and accepted by the Government. Upon acceptance of these improvements, the Government will commence payment of the tenant improvement and/or BSAC rent as stipulated under the Lease, in addition to payment of the tenant improvement and/or BSAC rent for the period starting from the Lease Term Commencement Date to the date of tenant improvements/BSAC acceptance by the Government (such rent payment will not include any additional interest). Alternatively, the Government may elect to re-amortize the tenant improvements/BSAC over the remaining Firm Term of the Lease, at the amortization rate stipulated in the Lease. In the event the Government does not use all the TIA or BSAC, then the rental payments will be adjusted in accordance with the provisions of the Lease (e.g., de-amortization).

(b) (4)

(b) (4)

* Subject to change based on adjustments outlined under the paragraph "Rent and Other Consideration."

1.05 ~~TERMINATION RIGHTS (OCT 2016)~~ INTENTIONALLY DELETED

1.06 ~~RENEWAL RIGHTS (OCT 2016)~~ INTENTIONALLY DELETED

1.07 DOCUMENTS INCORPORATED IN THE LEASE (OCT 2021)

The following documents are attached to and made part of the Lease:

DOCUMENT NAME	NO. OF PAGES	EXHIBIT
FLOOR PLAN	3	A
PARKING / SITE PLAN	2	B
SECURITY REQUIREMENTS FOR LEVEL III	14	C
GSA FORM 3517B GENERAL CLAUSES	17	D
GSAR 552.270-33 FOREIGN OWNERSHIP AND FINANCING REPRESENTATION FOR HIGH-SECURITY LEASED SPACE	1	E
FAR 52.204-24, REPRESENTATION REGARDING CERTAIN TELECOMMUNICATIONS AND VIDEO SURVEILLANCE SERVICES OR EQUIPMENT	4	F
AGENCY SPECIAL REQUIREMENTS	14	G

1.08 TENANT IMPROVEMENT RENTAL ADJUSTMENT (OCT 2016)

A. The Tenant Improvement Allowance (TIA) for purposes of this Lease is (b) (4) per ABOA SF. The TIA is the amount that the Lessor shall make available for the Government to be used for TIs. This amount is amortized in the rent over the Firm Term of this Lease at an annual interest rate of (b) (4).

B. The Government, at its sole discretion, shall make all decisions as to the use of the TIA. The Government may use all or part of the TIA. The Government may return to the Lessor any unused portion of the TIA in exchange for a decrease in rent according to the agreed-upon amortization rate over the Firm Term.

C. The Government may elect to make lump sum payments for any or all work covered by the TIA. That part of the TIA amortized in the rent shall be reduced accordingly. At any time after occupancy and during the Firm Term of the Lease, the Government, at its sole discretion, may elect to pay lump sum for any part or all of the remaining unpaid amortized balance of the TIA. If the Government elects to make a lump sum payment for the TIA after occupancy, the payment of the TIA by the Government will result in a decrease in the rent according to the amortization rate over the Firm Term of the Lease.

D. If it is anticipated that the Government will spend more than the identified TIA, the Government may elect to:

1. Reduce the TI requirements;
2. Pay lump sum for the overage upon substantial completion in accordance with the "Acceptance of Space and Certificate of Occupancy" paragraph;
3. Negotiate an increase in the rent.

1.09 TENANT IMPROVEMENT FEE SCHEDULE (OCT 2020)

For pricing TI costs, the following rates shall apply for the initial build-out of the Space.

	INITIAL BUILD-OUT
ARCHITECT/ENGINEER (A/E) FEES ($ PER ABOA SF OR % OF TI CONSTRUCTION COSTS)	(b) (4)
LESSOR'S PROJECT MANAGEMENT FEE (% OF TI CONSTRUCTION COSTS)	

1.10 BUILDING SPECIFIC AMORTIZED CAPITAL (SEP 2012)

For purposes of this Lease, the Building Specific Amortized Capital (BSAC) is (b) (4) per ABOA SF. The Lessor will make the total BSAC amount available to the Government, which will use the funds for security related improvements. This amount is amortized in the rent over the Firm Term of this lease at an annual interest rate of (b) (4).

1.11 BUILDING SPECIFIC AMORTIZED CAPITAL RENTAL ADJUSTMENT (SEP 2013)

A. The Government, at its sole discretion, shall make all decisions about the use of the Building Specific Amortized Capital (BSAC). The Government may use all or part of the BSAC. The Government may return to the Lessor any unused portion of the BSAC in exchange for a decrease in rent (where applicable) according to the agreed-upon amortization rate over the Firm Term.

B. The Government may elect to make lump-sum payments for any work covered by the BSAC. The part of the BSAC amortized in the rent shall be reduced accordingly. At any time after occupancy and during the Firm Term of the Lease, the Government, at its sole discretion, may elect to pay a lump sum for any part or all of the remaining unpaid amortized balance of the BSAC. If the Government elects to make a lump-sum payment for the BSAC after occupancy, the payment of the BSAC by the Government will result in a decrease in the rent according to the amortization rate over the Firm Term of the Lease.

C. If it is anticipated that the Government will spend more than the BSAC identified above, the Government may elect to:

1. Reduce the security countermeasure requirements;

2. Pay a lump sum for the amount overage upon substantial completion in accordance with the "Acceptance of Space and Certificate of Occupancy" paragraph; or

3. Negotiate an increase in the rent.

1.12 PERCENTAGE OF OCCUPANCY FOR TAX ADJUSTMENT (OCT 2021)

A. As of the Lease Award Date, the Government's Percentage of Occupancy, as defined in the "Real Estate Tax Adjustment" paragraph of this Lease is **100** percent. The Percentage of Occupancy is derived by dividing the total Government Space of **79,873** RSF by the total Building space of **79,873** RSF. The tax parcel number is (b) (6)

B. All relevant tax adjustment documentation (e.g., copies of paid tax receipts, invoices) must be submitted online via the GSA Real Estate Tax Portal at RET.GSA.GOV or a successor portal.

1.13 REAL ESTATE TAX BASE (SEP 2013)

The Real Estate Tax Base, is defined in the "Real Estate Tax Adjustment" paragraph of the Lease. Tax adjustments shall not occur until the tax year following lease commencement has passed.

1.14 OPERATING COST BASE (OCT 2016)

The parties agree, for the purpose of applying the paragraph titled "Operating Costs Adjustment," that the Lessor's base rate for operating costs shall be (b) (4) per RSF.

1.15 RATE FOR ADJUSTMENT FOR VACANT LEASED PREMISES (SEP 2013)

In accordance with the paragraph entitled "Adjustment for Vacant Premises," if the Government fails to occupy or vacates the entire or any portion of the Premises prior to expiration of the term of the Lease, the operating costs paid by the Government as part of the rent shall be reduced by (b) (4) per ABOA SF of Space vacated by the Government.

1.16 HOURLY OVERTIME HVAC RATES (OCT 2016)

A. The following rates shall apply in the application of the paragraph titled "Overtime HVAC Usage:"

- $**70.00** per hour per floor

B. INTENTIONALLY DELETED

1.17 ~~ADJUSTMENT FOR REDUCED SERVICES (OCT 2018)~~ INTENTIONALLY DELETED

1.18 BUILDING IMPROVEMENTS (MAR 2016)

A. Before the Government accepts the Space, the Lessor shall at the Lessor's expense, complete the following additional Building improvements:

1. The Lessor shall meet all Fire Life Safety requirements of the Lease and of any and all applicable codes for the subject property.
2. The Lessor will implement hydrology maintenance and restoration requirements as required.

B. The Lessor shall obtain a building ENERGY STAR Label within 18 months after occupancy by the Government, at the Lessor's expense as per paragraph 3.14 ENERGY INDEPENDENCE AND SECURITY ACT (MAR 2016) subparagraph A.3.

(b) (6)

(b) (6)

1.19 HUBZONE SMALL BUSINESS CONCERNS ADDITIONAL PERFORMANCE REQUIREMENTS (MAR 2012)

If the Lessor is a qualified HUBZone small business concern (SBC) that did not waive the price evaluation preference then as required by 13 C.F.R. 126.700, the HUBZone SBC must spend at least 50% of the cost of the contract incurred for personnel on its own employees or employees of other qualified HUBZone SBC's and must meet the performance of the work requirements for subcontracting in 13 C.F.R. § 125.6(c). If the Lessor is a HUBZone joint venture, the aggregate of the qualified HUBZone SBC's to the joint venture, not each concern separately, must perform the applicable percentage of work required by this clause.

1.20 LESSOR'S UNIQUE ENTITY IDENTIFIER (OCT 2021)

Lessor's Unique Entity Identifier (UEI)

UEI-DUNS: **118618021**

UEI-SAM: (b) (4) [redacted]

(b) (6) [redacted] (b) (6) [redacted]

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

SECTION 2 GENERAL TERMS, CONDITIONS, AND STANDARDS

2.01 DEFINITIONS AND GENERAL TERMS (OCT 2016)

Unless otherwise specifically noted, all terms and conditions set forth in this Lease shall be interpreted by reference to the following definitions, standards, and formulas:

A. Appurtenant Areas. Appurtenant Areas are defined as those areas and facilities on the Property that are not located within the Premises, but for which rights are expressly granted under this Lease, or for which rights to use are reasonably necessary or reasonably anticipated with respect to the Government's enjoyment of the Premises and express appurtenant rights.

B. Broker. If GSA awarded this Lease using a contract real estate broker, Broker shall refer to GSA's broker.

C. Building. Building(s) situated on the Property in which the Premises are located.

D. Commission Credit. If GSA awarded this Lease using a Broker, and the Broker agreed to forego a percentage of its commission to which it is entitled in connection with the award of this Lease, the amount of this credit is referred to as the "Commission Credit."

E. Common Area Factor. The "Common Area Factor" (CAF) is a conversion factor determined by the Building owner and applied by the owner to the ABOA SF to determine the RSF for the leased Space. The CAF is expressed as a percentage of the difference between the amount of rentable SF and ABOA SF, divided by the ABOA SF. For example 11,500 RSF and 10,000 ABOA SF will have a CAF of 15% [(11,500 RSF-10,000 ABOA SF)/10,000 ABOA SF]. For the purposes of this Lease, the CAF shall be determined in accordance with the applicable ANSI/BOMA standard for the type of space to which the CAF shall apply.

F. Contract. "Contract" shall mean this Lease.

G. Contractor. "Contractor" shall mean Lessor.

H. Days. All references to "day" or "days" in this Lease shall mean calendar days, unless specified otherwise.

I. FAR. All references to the FAR shall be understood to mean the Federal Acquisition Regulation, codified at 48 CFR Chapter 1.

J. Firm Term/Non-Firm Term. The Firm Term is that part of the Lease term that is not subject to termination rights. The Non-Firm Term is that part of the Lease term following the end of the Firm Term.

K. GSAR. All references to the GSAR shall be understood to mean the GSA supplement to the FAR, codified at 48 CFR Chapter 5.

L. Lease Term Commencement Date. The date on which the lease term commences.

M. Lease Award Date. The date the LCO executes the Lease and mails or otherwise furnishes written notification of the executed Lease to the successful Offeror (date on which the parties' obligations under the Lease begin).

N. Premises. The Premises are defined as the total Office Area or other type of Space, together with all associated common areas, described in Section 1 of this Lease, and delineated by plan in the attached exhibit. Parking and other areas to which the Government has rights under this Lease are not included in the Premises.

O. Property. Defined as the land and Buildings in which the Premises are located, including all Appurtenant Areas (e.g., parking areas) to which the Government is granted rights.

P. Rentable Space or Rentable Square Feet (RSF). Rentable Space is the area for which a tenant is charged rent. It is determined by the Building owner and may vary by city or by building within the same city. The Rentable Space may include a share of Building support/common areas such as elevator lobbies, Building corridors, and floor service areas. Floor service areas typically include restrooms, janitor rooms, telephone closets, electrical closets, and mechanical rooms. The Rentable Space does not include vertical building penetrations and their enclosing walls, such as stairs, elevator shafts, and vertical ducts. Rentable Square Feet is calculated using the following formula for each type of Space (e.g., office, warehouse, etc.) included in the Premises: ABOA SF of Space x (1 + CAF) = RSF.

Q. Space. The Space shall refer to that part of the Premises to which the Government has exclusive use, such as Office Area, or other type of Space. Parking areas to which the Government has rights under this Lease are not included in the Space.

R. Office Area. For the purposes of this Lease, Space shall be measured in accordance with the standard (Z65.1-1996) provided by American National Standards Institute/Building Owners and Managers Association (ANSI/BOMA) for Office Area, which means "the area where a tenant normally houses personnel and/or furniture, for which a measurement is to be computed." References to ABOA mean ANSI/BOMA Office Area.

S. Working Days. Working Days shall mean weekdays, excluding Saturdays and Sundays and Federal holidays.

(b) (6)

(b) (6)

2.02 AUTHORIZED REPRESENTATIVES (OCT 2016)

Signatories to this Lease shall have full authority to bind their respective principals with regard to all matters relating to this Lease. No other persons shall be understood to have any authority to bind their respective principals, except to the extent that such authority may be explicitly delegated by notice to the other party, or to the extent that such authority is transferred by succession of interest. The Government shall have the right to substitute its Lease Contracting Officer (LCO) by notice, without an express delegation by the prior LCO.

2.03 ALTERATIONS REQUESTED BY THE GOVERNMENT (OCT 2018)

A. The Government may request the Lessor to provide alterations during the term of the Lease. Alterations will be ordered by issuance of a Lease Amendment, GSA Form 300, Order for Supplies or Services, or a tenant agency-approved form when specifically authorized to do so by the LCO. The General Services Administration Acquisition Manual ("GSAM") clause, 552.270-31, Prompt Payment, including its invoice requirements, shall apply to orders for alterations. All orders are subject to the terms and conditions of this Lease and may be placed by the LCO or a warranted contracting officer's representative (COR) in GSA or the tenant agency when specifically authorized to do so by the LCO, subject to the threshold limitation below.

B. Orders for alterations issued by an authorized COR are limited to no more than $250,000 (LCOs are not subject to this threshold). This threshold will change according to future adjustments of the simplified acquisition threshold (see FAR 2.101). The LCO will provide the Lessor with a list of tenant agency officials authorized to place orders and will specify any limitations on the authority delegated to tenant agency officials. The tenant agency officials are not authorized to deal with the Lessor on any other matters.

C. Payments for alterations ordered by the tenant agency under the authorization described in sub-paragraph B will be made directly by the tenant agency placing the order.

2.04 WAIVER OF RESTORATION (OCT 2021)

Lessor shall have no right to require the Government to restore the Premises upon expiration or earlier termination (full or partial) of the Lease, and waives all claims against the Government for:
a) waste, or,
b) damages, or restoration arising from or related to:
(1) the Government's normal and customary use of the Premises during the term of the Lease (including any extensions thereof), as well as
(2) any initial or subsequent alteration to the Premises regardless of whether such alterations are performed by the Lessor or by the Government.

At its sole option, the Government may abandon property in the Space following expiration or earlier termination (full or partial) of the Lease, in which case the property will become the property of the Lessor and the Government will be relieved of any liability in connection therewith.

2.05 PAYMENT OF BROKER (OCT 2021)

If GSA awarded the Lease through its Broker, the Lessor shall pay GSA's Broker its portion of the commission according to the Commission Agreement signed between the Lessor and Broker. "Its portion of the commission" means the agreed-upon commission to GSA's Broker minus the Commission Credit specified in the Lease or Lease Amendment.

2.06 CHANGE OF OWNERSHIP/NOVATION (OCT 2021)

A. If during the term of the Lease, title to the Property is transferred or the Lessor changes its legal name, the Lessor and its successor shall comply with the requirements of FAR Subpart 42.12. If title is transferred, the Lessor shall notify the Government within five days of the transfer of title.

B. The Government and the Lessor may execute a Change of Name Agreement if the Lessor is changing only its legal name, and the Government's and the Lessor's respective rights and obligations remain unaffected.

C. If title to the Property is transferred, the Government, the original Lessor (Transferor), and the new owner or assignee (Transferee) shall execute a Novation Agreement providing for the transfer of Transferor's rights and obligations under the Lease to the Transferee. When executed on behalf of the Government, a Novation Agreement will be made part of the Lease via Lease Amendment.

D. In addition to all documents required by FAR 42.1204, the LCO may request additional information (e.g., copy of the deed, bill of sale, certificate of merger, contract, court decree, articles of incorporation, operation agreement, partnership certificate of good standing, etc.) from the Transferor or Transferee to verify the parties' representations regarding the transfer, and to determine whether the transfer of the Lease is in the Government's interest.

E. If the LCO determines that recognizing the Transferee as the Lessor will not be in the Government's interest, the Transferor shall remain fully liable to the Government for the Transferee's performance of obligations under the Lease, notwithstanding the transfer. Under no condition shall the Government be obligated to release the Transferor of obligations prior to (a) the rent commencement date; and (b) any amounts due and owing to the Government under the Lease that have been paid in full or completely set off against the rental payments due under the Lease.

F. As a condition for being recognized as the Lessor and entitlement to receiving rent, the Transferee must register in the System for Award Management (SAM) for purposes of "All Awards" (See FAR 52.232-33), and complete all required representations and certifications within SAM. In addition, for leases FSL III or above, the Transferee must also complete 552.270-33 Foreign Ownership and Financing Representation for High Security Leased Space. This representation must be completed annually.

G. If title to the Property is transferred, rent shall continue to be paid to the original Lessor, subject to the Government's rights as provided for in this Lease. The Government's obligation to pay rent to the Transferee shall commence on the effective date of the Lease Amendment incorporating the

Novation Agreement. The Lease Amendment will not be issued until the Government has received all information reasonably required by the LCO, the Government has determined that recognizing the Transferee as the Lessor is in the Government's interest (which determination will be prompt and not unreasonably withheld), and the Transferee has met all conditions specified in sub-paragraph F. The original Lessor must maintain an active registration in SAM until the Novation process is complete.

2.07 REAL ESTATE TAX ADJUSTMENT (JUN 2012)

A. Purpose: This paragraph provides for adjustment in the rent (tax adjustment) to account for increases or decreases in Real Estate Taxes for the Property after the establishment of the Real Estate Tax Base, as those terms are defined herein. Tax adjustments shall be calculated in accordance with this paragraph.

B. Definitions: The following definitions apply to the use of the terms within this paragraph:

Property is defined as the land and Buildings in which the Premises are located, including all Appurtenant Areas (e.g., parking areas to which the Government is granted rights).

Real Estate Taxes are those taxes that are levied upon the owners of real property by a Taxing Authority (as hereinafter defined) of a state or local Government on an ad valorem basis to raise general revenue for funding the provision of government services. The term excludes, without limitation, special assessments for specific purposes, assessments for business improvement districts, and/or community development assessments.

Taxing Authority is a state, commonwealth, territory, county, city, parish, or political subdivision thereof, authorized by law to levy, assess, and collect Real Estate Taxes.

Tax Year refers to the 12-month period adopted by a Taxing Authority as its fiscal year for assessing Real Estate Taxes on an annual basis.

Tax Abatement is an authorized reduction in the Lessor's liability for Real Estate Taxes below that determined by applying the generally applicable real estate tax rate to the Fully Assessed (as hereinafter defined) valuation of the Property.

Unadjusted Real Estate Taxes are the full amount of Real Estate Taxes that would be assessed for the Property for one full Tax Year without regard to the Lessor's entitlement to any Tax Abatements (except if such Tax Abatement came into effect after the date of award of the Lease), and not including any late charges, interest or penalties. If a Tax Abatement comes into effect after the date of award of the Lease, "unadjusted Real Estate Taxes" are the full amount of Real Estate Taxes assessed for the Property for one full Tax Year, less the amount of such Tax Abatement, and not including any late charges, interest, or penalties.

Real Estate Tax Base is the unadjusted Real Estate Taxes for the first full Tax Year following the commencement of the Lease term. If the Real Estate Taxes for that Tax Year are not based upon a Full Assessment of the Property, then the Real Estate Tax Base shall be the Unadjusted Real Estate Taxes for the Property for the first full Tax Year for which the Real Estate Taxes are based upon a Full Assessment. Such first full Tax Year may be hereinafter referred to as the Tax Base Year. Alternatively, the Real Estate Tax Base may be an amount negotiated by the parties that reflects an agreed upon base for a Fully Assessed value of the Property.

The Property is deemed to be Fully Assessed (and Real Estate Taxes are deemed to be based on a Full Assessment) only when a Taxing Authority has, for the purpose of determining the Lessor's liability for Real Estate Taxes, determined a value for the Property taking into account the value of all improvements contemplated for the Property pursuant to the Lease, and issued to the Lessor a tax bill or other notice of levy wherein the Real Estate Taxes for the full Tax Year are based upon such Full Assessment. At no time prior to the issuance of such a bill or notice shall the Property be deemed Fully Assessed.

Percentage of Occupancy refers to that portion of the Property exclusively occupied or used by the Government pursuant to the Lease. For Buildings, the Percentage of Occupancy is determined by calculating the ratio of the RSF occupied by the Government pursuant to the Lease to the total RSF in the Building or Buildings so occupied, and shall not take into account the Government's ancillary rights including, but not limited to, parking or roof space for antennas (unless facilities for such ancillary rights are separately assessed). This percentage shall be subject to adjustment to take into account increases or decreases for Space leased by the Government or for rentable space on the Property.

C. Adjustment for changes in Real Estate Taxes. After the Property is Fully Assessed, the Government shall pay its share of any increases and shall receive its share of any decreases in the Real Estate Taxes for the Property, such share of increases or decreases to be referred to herein as "tax adjustment." The amount of the tax adjustment shall be determined by multiplying the Government's Percentage of Occupancy by the difference between the current year Unadjusted Real Estate Taxes and the Real Estate Tax Base, less the portion of such difference not paid due to a Tax Abatement (except if a Tax Abatement comes into effect after the date of award of the Lease). If a Tax Abatement comes into effect after the date of award of the Lease, the amount of the tax adjustment shall be determined by multiplying the Government's Percentage of Occupancy by the difference between the current year Unadjusted Real Estate Taxes and the Real Estate Tax Base. The Government shall pay the tax adjustment in a single annual lump sum payment to the Lessor. In the event that this tax adjustment results in a credit owed to the Government, the Government may elect to receive payment in the form of a rental credit or lump sum payment.

If the Property contains more than one separately assessed parcel, then more than one tax adjustment shall be determined based upon the Percentage of Occupancy, Real Estate Tax Base, and Real Estate Taxes for each respective parcel.

After commencement of the Lease term, the Lessor shall provide to the LCO copies of all real estate tax bills for the Property, all documentation of Tax Abatements, credits, or refunds, if any, and all notices which may affect the assessed valuation of the Property, for the Tax Year prior to the commencement of the Lease Term, and all such documentation for every year following. Lessor acknowledges that the LCO shall rely on the completeness and accuracy of these submissions in order to establish the Real Estate Tax Base and to determine tax adjustments. The LCO may

memorialize the establishment of the Real Estate Tax Base by issuing a unilateral administrative lease amendment indicating the base year, the amount of the Real Estate Tax Base, and the Government's Percentage of Occupancy.

The Real Estate Tax Base is subject to adjustment when increases or decreases to Real Estate Taxes in any Tax Year are attributable to (a) improvements or renovations to the Property not required by this Lease, or (b) changes in net operating income for the Property not derived from this Lease. If either condition results in a change to the Real Estate Taxes, the LCO may re-establish the Real Estate Tax Base as the Unadjusted Real Estate Taxes for the Tax Year the Property is reassessed under such condition, less the amount by which the Unadjusted Real Estate Taxes for the Tax Year prior to reassessment exceeds the prior Real Estate Tax Base.

If this Lease includes any options to renew the term of the Lease, or be otherwise extended, the Real Estate Tax Base for determining tax adjustments during the renewal term or extension shall be the last Real Estate Tax Base established during the base term of the Lease.

If any Real Estate Taxes for the Property are retroactively reduced by a Taxing Authority during the term of the Lease, the Government shall be entitled to a proportional share of any tax refunds to which the Lessor is entitled, calculated in accordance with this Paragraph. Lessor acknowledges that it has an affirmative duty to disclose to the Government any decreases in the Real Estate Taxes paid for the Property during the term of the Lease. Lessor shall annually provide to the LCO all relevant tax records for determining whether a tax adjustment is due, irrespective of whether it seeks an adjustment in any Tax Year.

If the Lease terminates before the end of a Tax Year, or if rent has been suspended, payment for the real estate tax increase due because of this section for the Tax Year will be prorated based on the number of days that the Lease and the rent were in effect. Any credit due the Government after the expiration or earlier termination of the Lease shall be made by a lump sum payment to the Government or as a rental credit to any succeeding Lease, as determined in the LCO's sole discretion. Lessor shall remit any lump sum payment to the Government within 15 calendar days of payment or credit by the Taxing Authority to Lessor or Lessor's designee. If the credit due to the Government is not paid by the due date, interest shall accrue on the late payment at the rate established by the Secretary of the Treasury under Section 12 of the Contract Disputes Act of 1978, as amended (41 USC § 611), that is in effect on the day after the due date. The interest penalty shall accrue daily on the amount of the credit and shall be compounded in 30-day increments inclusive from the first day after the due date through the payment date. The Government shall have the right to pursue the outstanding balance of any tax credit using all such collection methods as are available to the United States to collect debts. Such collection rights shall survive the expiration of this Lease.

In order to obtain a tax adjustment, the Lessor shall furnish the LCO with copies of all paid tax receipts, or other similar evidence of payment acceptable to the LCO, and a proper invoice (as described in GSA Form 3517, General Clauses, 552.270-31, Prompt Payment) for the requested tax adjustment, including the calculation thereof. All such documents must be received by the LCO within 60 calendar days after the last date the real estate tax payment is due from the Lessor to the Taxing Authority without payment of penalty or interest. FAILURE TO SUBMIT THE PROPER INVOICE AND EVIDENCE OF PAYMENT WITHIN SUCH TIME FRAME SHALL CONSTITUTE A WAIVER OF THE LESSOR'S RIGHT TO RECEIVE A TAX ADJUSTMENT PURSUANT TO THIS PARAGRAPH FOR THE TAX YEAR AFFECTED.

Tax Appeals. If the Government occupies more than 50 percent of the Building by virtue of this and any other Government Lease(s), the Government may, upon reasonable notice, direct the Lessor to initiate a tax appeal, or the Government may elect to contest the assessed valuation on its own behalf or jointly on behalf of Government and the Lessor. If the Government elects to contest the assessed valuation on its own behalf or on behalf of the Government and the Lessor, the Lessor shall cooperate fully with this effort, including, without limitation, furnishing to the Government information necessary to contest the assessed valuation in accordance with the filing requirements of the Taxing Authority, executing documents, providing documentary and testimonial evidence, and verifying the accuracy and completeness of records. If the Lessor initiates an appeal at the direction of the Government, the Government shall have the right to approve the selection of counsel who shall represent the Lessor with regard to such appeal, which approval shall not be unreasonably withheld, conditioned or delayed, and the Lessor shall be entitled to a credit in the amount of its reasonable expenses in pursuing the appeal.

2.08 ADJUSTMENT FOR VACANT PREMISES (OCT 2017)

A. If the Government fails to occupy any portion of the leased Premises or vacates the Premises in whole or in part prior to expiration of the term of the Lease, the rental rate and the base for operating cost adjustments will be reduced using the figure specified in the "Rate for Adjustment for Vacant Leased Premises" paragraph of this Lease.

B. If no rate reduction has been established in this Lease, the rate will be reduced by that portion of the costs per ABOA SF of operating expenses not required to maintain the Space.

C. Said reduction shall occur after the Government gives 30 calendar days' prior notice to the Lessor and shall continue in effect until the Government occupies the vacant Premises or the Lease expires or is terminated.

2.09 OPERATING COSTS ADJUSTMENT (JUN 2012)

A. Beginning with the second year of the Lease and each year thereafter, the Government shall pay annual incremental adjusted rent for changes in costs for cleaning services, supplies, materials, maintenance, trash removal, landscaping, water, sewer charges, heating, electricity, and certain administrative expenses attributable to occupancy.

B. The amount of adjustment will be determined by multiplying the base rate by the annual percent of change in the Cost of Living Index. The percent change will be computed by comparing the index figure published for the month prior to the Lease Term Commencement Date with the index figure published for the month prior which begins each successive 12-month period. For example, a Lease which commences in June of 2005 would use the index published for May of 2005, and that figure would be compared with the index published for May of 2006, May of 2007, and so on, to determine the percent change. The Cost of Living Index will be measured by the Department of Labor revised Consumer Price Index for Urban Wage Earners and Clerical Workers (CPI-W), U.S. city average, all items, (1982 to 1984 = 100) published by the Bureau of Labor Statistics. Payment will be

(b) (6)

(b) (6)

made with the monthly installment of fixed rent. Rental adjustments will be effective on the anniversary date of the Lease; however, payment of the adjusted rental rate will become due on the first workday of the second month following the publication of the Cost of Living Index for the month prior to the commencement of each 12-month period.

C. In the event of any decreases in the Cost of Living Index occurring during the term of the occupancy under the Lease, the rental amount will be reduced accordingly. The amount of such reductions will be determined in the same manner as increases in rent provided under this paragraph.

D. If the Government exercises an option to extend the Lease term at the same rate as that of the original term, the option price will be based on the adjustment during the original term. Annual adjustments will continue.

2.10 ADDITIONAL POST-AWARD FINANCIAL AND TECHNICAL DELIVERABLES (JUN 2012)

A. If the Lessor is a HUBZone small business concern (SBC) that did not waive the price evaluation preference, the Lessor shall provide a certification within 10 days after Lease award to the LCO (or representative designated by the LCO) that the Lessor was an eligible HUBZone SBC on the date of award. If it is determined within 20 days after award that a HUBZone SBC Offeror that has been awarded the Lease was not an eligible HUBZone SBC at the time of award, and the HUBZone SBC Lessor failed to provide the LCO with information regarding a change to its HUBZone eligibility prior to award, then the Lease shall be subject, at the LCO's discretion, to termination, and the Government will be relieved of all obligations to the Lessor in such an event and not be liable to the Lessor for any costs, claims or damages of any nature whatsoever.

B. Within **30** days after Lease award, the Lessor shall provide to the LCO (or representative designated by the LCO) evidence of:

1. A firm commitment of funds in an amount sufficient to perform the work.

2. The names of at least two proposed construction contractors, as well as evidence of the contractors' experience, competency, and performance capabilities with construction similar in scope to that which is required herein.

3. The license or certification to practice in the state where the Building is located from the individual(s) and/or firm(s) providing architectural and engineering design services.

C. The Government shall have the right to withhold approval of design intent drawings (DIDs) until the conditions specified in sub-paragraphs A and B have been satisfied.

D. Within ten (10) calendar days after the LCO issues the Notice To Proceed (NTP) for TI construction, the Lessor shall provide to the LCO evidence of:

1. Award of a construction contract for TIs with a firm completion date. This date must be in accordance with the construction schedule for TIs as described in the "Schedule for Completion of Space" paragraph of this Lease.

2. Issuance of required permits for construction of the TIs.

2.11 RELOCATION ASSISTANCE ACT (APR 2011)

A. If the Lessor satisfies the requirements of this Lease by performing new construction on an improved site, and such new construction will result in the displacement of individuals or businesses, the Lessor shall be responsible for payment of relocation costs in accordance with the Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970 (Public Law 91-646), as amended, and the implementing regulations at 49 CFR Part 24.

B. The Lessor shall give GSA the name of the person and agency to be providing the relocation assistance to site tenants. In addition, the Lessor must provide background information about the relocation agency and references for which the relocation agent has performed relocation assistance in the past.

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

SECTION 3 CONSTRUCTION STANDARDS AND SHELL COMPONENTS

3.01 LABOR STANDARDS (OCT 2016)

If the Lessor proposes to satisfy the requirements of this Lease through the construction of a new Building or the complete rehabilitation or reconstruction of an existing Building, and the Government will be the sole or predominant tenant such that any other use of the Building will be functionally or quantitatively incidental to the Government's use and occupancy, the following FAR clauses shall apply to all work (including shell and TIs) performed prior to the Government's acceptance of space as substantially complete. Full text versions of these clauses are available upon request from the LCO. Full text versions are also available at HTTPS://WWW.ACQUISITION.GOV/?Q=BROWSEFAR.

52.222-4 Contract Work Hours and Safety Standards Act—Overtime Compensation
52.222-5 Construction Wage Rate Requirements - Secondary Site of the Work
52.222-6 Construction Wage Rate Requirements
52.222-7 Withholding of Funds
52.222-8 Payrolls and Basic Records
52.222-9 Apprentices and Trainees
52.222-10 Compliance with Copeland Act Requirements
52.222-11 Subcontracts (Labor Standards)
52.222-12 Contract Termination–Debarment
52.222-13 Compliance with Construction Wage Rate Requirements and Related Regulations
52.222-14 Disputes Concerning Labor Standards
52.222-15 Certification of Eligibility

3.02 WORK PERFORMANCE (JUN 2012)

All work in performance of this Lease shall be done by skilled workers or mechanics and shall be acceptable to the LCO. The LCO may reject the Lessor's workers 1) if such are unlicensed, unskilled, or otherwise incompetent, or 2) if such have demonstrated a history of either untimely or otherwise unacceptable performance in connection with work carried out in conjunction with either this contract or other government or private contracts.

3.03 EXISTING FIT-OUT, SALVAGED, OR REUSED BUILDING MATERIAL (OCT 2019)

A. Items and materials existing in the Premises, or to be removed from the Premises during the demolition phase, are eligible for reuse in the construction phase of the project. The reuse of items and materials is preferable to recycling them; however, items considered for reuse shall be in refurbished condition and shall meet the quality standards set forth by the Government in this Lease. In the absence of definitive quality standards, the Lessor is responsible to confirm that the quality of the item(s) in question shall meet or exceed accepted industry or trade standards for first quality commercial grade applications.

B. Unless waived by the LCO, the Lessor shall submit a reuse plan for leases 10,000 RSF or greater. The Government will not pay for existing fixtures and other TIs accepted in place. However, the Government will reimburse the Lessor, as part of the TIA, the costs to repair or improve such fixtures or improvements identified on the reuse plan and approved by the LCO.

3.04 CONSTRUCTION WASTE MANAGEMENT (OCT 2021)

For leases 10,000 RSF or greater, the requirements below apply:

A. Recycling construction waste is mandatory for initial space alterations for TIs and subsequent alterations under the Lease.

B. SUBMITTAL REQUIREMENT: Prior to construction commencement, a proposed plan following industry standards to recycle construction waste. The construction waste management plan shall quantify material diversion goals and maximize the materials to be recycled and/or salvaged (at least 50 percent) from construction, demolition, and packaging debris. Where the small quantity of material, the extraordinarily complex nature of the waste disposal method, or prohibitive expense for recycling would represent a genuine hardship, the Government, upon written request of the Lessor and approval of the LCO, may permit alternative means of disposal.

C. The Lessor shall recycle the following items during both the demolition and construction phases of the project, subject to economic evaluation and feasibility: Ceiling grid and tile, light fixtures, including proper disposal of any transformers, ballasts, and fluorescent light bulbs, duct work and HVAC equipment, wiring and electrical equipment, aluminum and/or steel doors and frames, hardware, drywall, steel studs, carpet, carpet backing, and carpet padding, wood, insulation, cardboard packaging, pallets, windows and glazing materials, all miscellaneous metals (as in steel support frames for filing equipment), and all other finish and construction materials.

D. If any waste materials encountered during the demolition or construction phase are found to contain lead, asbestos, polychlorinated biphenyls (PCBs) (such as fluorescent lamp ballasts), or other harmful substances, they shall be handled and removed in accordance with Federal and state laws and requirements concerning hazardous waste.

E. In addition to providing "one time" removal and recycling of large scale demolition items such as carpeting or drywall, the Lessor shall provide continuous facilities for the recycling of incidental construction waste during the initial construction.

F. Construction materials recycling records shall be maintained by the Lessor and shall be accessible to the LCO. Records shall include materials recycled or land-filled, quantity, date, and identification of hazardous wastes.

(b) (6) [redacted] (b) (6) [redacted]

3.05 WOOD PRODUCTS (OCT 2019)

A. Particle board, strawboard, and plywood materials used shall be free of formaldehyde or sufficiently aged prior to use such that indoor air levels in the finished leased space shall not exceed 0.016 parts per million (ppm) of formaldehyde.

B. All materials comprised of combustible substances, such as wood plywood and wood boards, shall be treated with fire retardant chemicals by a pressure impregnation process or other methods that treats the materials throughout as opposed to surface treatment.

C. For leases 10,000 RSF or greater, new installations of wood products shall not contain wood from endangered wood species, as listed by the Convention on International Trade in Endangered Species. The list of species can be found at HTTP://WWW.WOOD-DATABASE.COM/WOOD-ARTICLES/RESTRICTED-AND-ENDANGERED-WOOD-SPECIES/ or HTTPS://WWW.FWS.GOV/INTERNATIONAL/PLANTS/CURRENT-CITES-LISTINGS-OF-TREE-SPECIES.HTML. In addition, the Lessor is encouraged to use independently certified forest products. For information on certification and certified wood products, refer to the Forest Stewardship Council United States (HTTPS://US.FSC.ORG/EN-US), or the Sustainable Forestry Initiative (HTTP://WWW.SFIPROGRAM.ORG/).

3.06 ADHESIVES AND SEALANTS (OCT 2019)

A. All adhesives employed (including, but not limited to, adhesives for carpet, carpet tile, plastic laminate, wall coverings, adhesives for wood, or sealants) shall meet the requirements of the manufacturer of the products adhered or involved. The Lessor shall use adhesives and sealants with no heavy metals, and that do not result in indoor air levels above 0.016 parts per million (ppm) of formaldehyde. Adhesives and other materials used for the installation of carpets shall be limited to those having a flash point of 140 degrees F or higher.

B. For leases 10,000 RSF or greater, the Lessor is encouraged to use applicable environmentally preferable criteria that are recommended in the Green Procurement Compilation at HTTPS://SFTOOL.GOV/GREENPROCUREMENT and https://sftool.gov/greenprocurement/green-products/8/miscellaneous/1238/adhesives/0.

3.07 BUILDING SHELL REQUIREMENTS (OCT 2016)

A. The Building Shell shall be designed, constructed, and maintained in accordance with the standards set forth herein and completed prior to acceptance of Space. For pricing, fulfillment of all requirements not specifically designated as TIs, Building Specific Amortized Capital, Operating Costs, or other rent components as indicated shall be deemed included in the Shell Rent.

B. Base structure and Building enclosure components shall be complete. All common areas accessible by the Government, such as lobbies, fire egress corridors and stairwells, elevators, garages, and service areas, shall be complete. Restrooms shall be complete and operational. All newly installed Building shell components, including but not limited to, heating, ventilation, and air conditioning (HVAC), electrical, ceilings, sprinklers, etc., shall be furnished, installed, and coordinated with TIs. Circulation corridors are provided as part of the base Building only on multi-tenanted floors where the corridor is common to more than one tenant. On single tenant floors, only the fire egress corridor(s) necessary to meet code is provided as part of the shell.

C. The Building Shell rental rate shall also include, but is not limited to, costs included listed under Section II of GSA Form 1217, Lessor's Annual Cost Statement, including insurance, taxes, lease commission and management, in addition to profit, reserve costs and loan financing for the Building.

3.08 RESPONSIBILITY OF THE LESSOR AND LESSOR'S ARCHITECT/ENGINEER (JUN 2012)

A. The Lessor shall be responsible for the professional quality, technical accuracy, and the coordination of all designs, drawings, specifications, and other services furnished by the Lessor under this contract. The Lessor shall, without additional compensation, correct or revise any errors or deficiencies in its designs, drawings, specifications, or other services.

B. THE LESSOR REMAINS SOLELY RESPONSIBLE FOR DESIGNING, CONSTRUCTING, OPERATING, AND MAINTAINING THE LEASED PREMISES IN FULL ACCORDANCE WITH THE REQUIREMENTS OF THE LEASE. The Government retains the right to review and approve many aspects of the Lessor's design, including without limitation, review of the Lessor's design and construction drawings, shop drawings, product data, finish samples, and completed base building and TI construction. Such review and approval is intended to identify potential design flaws, to minimize costly misdirection of effort, and to assist the Lessor in its effort to monitor whether such design and construction comply with applicable laws and satisfy all Lease requirements.

C. Neither the Government's review, approval or acceptance of, nor payment through rent of the services required under this contract, shall be construed to operate as a waiver of any rights under this contract or of any cause of action arising out of the performance of this contract, and the Lessor shall be and remain liable to the Government in accordance with applicable law for all damages to the Government caused by the Lessor's negligent performance of any of the services required under this Lease.

D. Design and construction and performance information is contained throughout several of the documents which comprise this Lease. The Lessor shall provide to space planners, architects, engineers, construction contractors, etc., all information required whether it is found in this Lease, special requirements and attachments, price lists, or design intent drawings. Reliance upon one of these documents to the exclusion of any other may result in an incomplete understanding of the scope of the work to be performed and/or services to be provided.

3.09 QUALITY AND APPEARANCE OF BUILDING (JUN 2012)

The Building in which the Premises are located shall be designed, built and maintained in good condition and in accordance with the Lease requirements. If not new or recent construction, the Building shall have undergone by occupancy, modernization, or adaptive reuse for office space with modern conveniences. The Building shall be compatible with its surroundings. Overall, the Building shall project a professional and aesthetically pleasing appearance including an attractive front and entrance way.

3.10 VESTIBULES (OCT 2020)

A. Vestibules shall be provided at public entrances wherever entry to the Space is directly from the outside. In the event of negative air pressure conditions, provisions shall be made for equalizing air pressure. For measurement purposes, vestibules are considered building support space and not ABOA.

B. The Lessor shall provide permanent entryway systems (such as grilles or grates) to control dirt and particulates from entering the Building at all primary exterior entryways.

3.11 MEANS OF EGRESS (MAY 2015)

A. Prior to occupancy, the Premises and any parking garage areas shall meet or will be upgraded to meet, either the applicable egress requirements in the National Fire Protection Association, Life Safety Code (NFPA 101), or the International Code Council, International Building Code (IBC), each current as of the Lease Award Date, or use an alternative approach or method that achieves an equivalent level of safety deemed acceptable by the Government.

B. The Space shall have unrestricted access to a minimum of two remote exits on each floor of Government occupancy.

C. Interlocking or scissor stairs located on the floor(s) where Space is located shall only count as one exit stair.

D. A fire escape located on the floor(s) where Space is located shall not be counted as an approved exit stair.

E. Doors shall not be locked in the direction of egress unless equipped with special locking hardware in accordance with requirements of NFPA 101 or the IBC.

3.12 AUTOMATIC FIRE SPRINKLER SYSTEM (SEP 2013)

A. Any portion of the Space located below-grade, including parking garage areas, and all areas in a Building referred to as "hazardous areas" (defined in National Fire Protection Association (NFPA) 101) that are located within the entire Building (including non-Government areas) shall be protected by an automatic fire sprinkler system or an equivalent level of safety.

B. For Buildings in which any portion of the Space is on or above the sixth floor, then, at a minimum, the Building up to and including the highest floor of Government occupancy shall be protected by an automatic fire sprinkler system or an equivalent level of safety.

C. For Buildings in which any portion of the Space is on or above the sixth floor, and lease of the Space will result, either individually or in combination with other Government Leases in the Building, in the Government leasing 35,000 or more ANSI/BOMA Office Area SF of Space in the Building, then the entire Building shall be protected throughout by an automatic fire sprinkler system or an equivalent level of safety.

D. Automatic fire sprinkler system(s) shall be installed in accordance with the requirements of NFPA 13, Standard for the Installation of Sprinkler Systems that was in effect on the actual date of installation.

E. Automatic fire sprinkler system(s) shall be maintained in accordance with the requirements of NFPA 25, Standard for the Inspection, Testing, and Maintenance of Water-based Fire Protection Systems (current as of the Lease Award Date).

F. "Equivalent level of safety" means an alternative design or system (which may include automatic fire sprinkler systems), based upon fire protection engineering analysis, which achieves a level of safety equal to or greater than that provided by automatic fire sprinkler systems.

3.13 FIRE ALARM SYSTEM (SEP 2013)

A. A Building-wide fire alarm system shall be installed in the entire Building in which any portion of the Space is located on the 3rd floor or higher.

B. The fire alarm system shall be installed in accordance with the requirements of NFPA 72, National Fire Alarm and Signaling Code, that was in effect on the actual date of installation.

C. The fire alarm system shall be maintained in accordance with the requirements of NFPA 72, National Fire Alarm and Signaling Code (current as of the Lease Award Date).

D. The fire alarm system shall transmit all fire alarm signals to the local fire department via any of the following means: directly to the local fire department, to the (911) public communications center, to a central station, to a remote supervising station, or to a proprietary supervising station.

E. If the Building's fire alarm control unit is over 25 years old as of the date of award of this Lease, Lessor shall install a new fire alarm system in accordance with the requirements of NFPA 72, National Fire Alarm and Signaling Code (current as of the Lease Award Date), prior to Government acceptance and occupancy of the Space.

3.14 ENERGY INDEPENDENCE AND SECURITY ACT (MAR 2016)

A. Energy-related Requirements:

1. The Energy Independence and Security Act (EISA) establishes the following requirements for Government Leases in Buildings that have not earned the ENERGY STAR® Label conferred by the Environmental Protection Agency (EPA) within one year prior to the due date for final proposal revisions ("most recent year").

2. If this Lease was awarded under any of EISA's Section 435 statutory exceptions, the Lessor shall either:

a. Earn the ENERGY STAR® Label prior to acceptance of the Space (or not later than one year after the Lease Award Date of a succeeding or superseding Lease); or

b. (i) Complete energy efficiency and conservation improvements if any, agreed to by Lessor in lieu of earning the ENERGY STAR® Label prior to acceptance of the Space (or not later than one year after the Lease Award Date of a succeeding or superseding Lease); and

(ii) Obtain and publicly disclose the Building's current ENERGY STAR® score (using EPA's Portfolio Manager tool), unless the Lessor cannot access whole building utility consumption data, or there is no building category within Portfolio Manager to benchmark against, including spaces—

I. That are located in States with privacy laws that provide that utilities shall not provide such aggregated information to multitenant building owners; and

II. For which tenants do not provide energy consumption information to the commercial building owner in response to a request from the building owner. (A Federal agency that is a tenant of the space shall provide to the building owner, or authorize the owner to obtain from the utility, the energy consumption information of the space for the benchmarking and disclosure required by this subparagraph D).

III. That cannot be benchmarked (scored) using EPA's Portfolio Manager tool because of excessive vacancy; in which case Lessor agrees to obtain the score and publicly disclose it within 120 days of the eligibility to obtain a score using the EPA Portfolio Manager tool.

Note: "public disclosure" means posting the Energy Star® score on state or local websites in those areas that have applicable disclosure mandates, and reporting the score to the Government via Portfolio Manager. In the absence of an applicable state or local disclosure mandate, Lessor shall either generate and display the Energy Star® score in a public space at the building location or post the score on Lessor's or Lessor's Parent/Affiliate website.

3. If this Lease was awarded to a Building to be built or to a Building predominantly vacant as of the due date for final proposal revisions and was unable to earn the ENERGY STAR® label for the most recent year (as defined above) due to insufficient occupancy, but was able to demonstrate sufficient evidence of capability to earn the ENERGY STAR® label, then Lessor must earn the ENERGY STAR® label within 18 months after occupancy by the Government.

4. The Lessor is encouraged to purchase at least 50 percent of the Government tenant's electricity from renewable sources.

B. Hydrology-related Requirements:

1. Per EISA Section 438, the sponsor of any development or redevelopment project involving a Federal facility with a footprint that exceeds 5,000 square feet shall use site planning, design, construction, and maintenance strategies for the property to maintain or restore, to the maximum extent technically feasible, the predevelopment hydrology of the Property with regard to the temperature, rate, volume, and duration of flow. If the Lessor proposes to satisfy the Government's space requirements through a development or redevelopment project, and the Government will be the sole or predominant tenant such that any other use of the Property will be functionally or quantitatively incidental to the Government's use, the Lessor is required to implement hydrology maintenance and restoration requirements as required by EISA Section 438.

a. For the purposes of applying EISA Section 438 in this Lease, "sponsor" shall mean "Lessor", and "exceeds 5,000 square feet" shall mean construction that disturbs 5,000 square feet or more of land area at the Property or on adjoining property to accommodate the Government's requirements, or at the Property for whatever reason. Information regarding implementation of the hydrology maintenance and restoration requirements can be found at: http://www.epa.gov/greeningepa/technical-guidance-implementing-stormwater-runoff-requirements-federal-projects

b. Lessor is required to implement these hydrology maintenance and restoration requirements to the maximum extent technically feasible, prior to acceptance of the Space, (or not later than one year after the Lease Award Date or Lease Term Commencement Date, whichever is later, of a succeeding or superseding Lease). Additionally, this Lease requires EISA Section 438 storm water compliance not later than one year from the date of any applicable disturbance (as defined in EISA Section 438) of more than 5,000 square feet of ground area if such disturbance occurs during the term of the Lease if the Government is the sole or predominant tenant. In the event the Lessor is required to comply with EISA Section 438, Lessor shall furnish the Government, prior to the filing for permits for the associated work, with a certification from Lessor's engineer that the design meets the hydrology maintenance and restoration requirements of EISA Section 438.

3.15 ELEVATORS (OCT 2020)

A. The Lessor shall provide suitable passenger elevator and, when required by the Government, freight elevator service to any of the Premises not having ground level access. Service shall be available during the normal hours of operation specified in the in this Lease. However, one passenger elevator and, when required by the Government, one freight elevator shall be available at all times for Government use. When a freight elevator is required by the Government, it shall be accessible to the loading areas. When possible, the Government shall be given 24-hour advance notice if the service is to be interrupted for more than 1-1/2 hours. Normal service interruption shall be scheduled outside of the Government's normal working hours. The Lessor shall also use best efforts to minimize the frequency and duration of unscheduled interruptions.

B. Code: Elevators shall conform to the requirements of the American Society of Mechanical Engineers ASME A17.1/CSA B44, Safety Code for Elevators and Escalators that were in effect based on the elevator installation date code year. Elevators shall be provided with Phase I emergency recall operation and Phase II emergency in-car operation in accordance with ASME A17.1/CSA B44. Fire alarm initiating devices (e.g., smoke detectors) used to initiate Phase I emergency recall operation shall be installed in accordance with the requirements of NFPA 72, National Fire Alarm and Signaling Code. The elevators shall be inspected and maintained in accordance with the current edition of the ASME A17.2, Inspector's Manual for Elevators. Except for the reference to ASME A17.1 in ABAAS, Section F105.2.2, all elevators must meet ABAAS requirements for accessibility in Sections 407, 408, and 409 of ABAAS.

C. Safety Systems: Elevators shall be equipped with telephones or other two-way emergency communication systems. The system used shall be marked and shall reach an emergency communication location staffed 24 hours per day, 7 days per week.

D. Speed: The passenger elevators shall have a capacity to transport in 5 minutes 15 percent of the normal population of all upper floors (based on 150 SF per person). Further, the dispatch interval between elevators during the up-peak demand period shall not exceed 35 seconds.

E. Interior Finishes: Elevator cab walls shall be hardwood, marble, granite, or an equivalent pre-approved by the LCO. Elevator cab floors shall be marble, granite, terrazzo, or an equivalent pre-approved by the LCO.

3.16 BUILDING DIRECTORY (OCT 2021)

A directory listing the Government agency shall be provided in the Building lobby. The directory must be acceptable to the LCO.

3.17 FLAGPOLE (SEP 2013)

If the Government is the sole occupant of the Building, a flagpole shall be provided at a location to be approved by the LCO. The flag of the United States of America will be provided by the Lessor, as part of shell rent, and replaced at all times during the Lease term when showing signs of wear.

3.18 DEMOLITION (JUN 2012)

The Lessor shall remove existing abandoned electric, telephone, and data cabling and devices, as well as any other improvements or fixtures in place to accommodate the Government's requirements. Any demolition of existing improvements that is necessary to satisfy the Government's layout shall be done at the Lessor's expense.

3.19 ACCESSIBILITY (FEB 2007)

The Building, leased Space, and areas serving the leased Space shall be accessible to persons with disabilities in accordance with the Architectural Barriers Act Accessibility Standard (ABAAS), Appendices C and D to 36 CFR Part 1191 (ABA Chapters 1 and 2, and Chapters 3 through 10). To the extent the standard referenced in the preceding sentence conflicts with local accessibility requirements, the more stringent shall apply.

3.20 CEILINGS (OCT 2019)

A complete acoustical ceiling system (which includes grid and lay-in tiles or other Building standard ceiling system as approved by the LCO) throughout the Space and Premises shall be required. The acoustical ceiling system shall be furnished, installed, and coordinated with TIs.

A. Ceilings shall be at a minimum 9 feet and 0 inches and no more than 12 feet and 0 inches measured from floor to the lowest obstruction. Areas with raised flooring shall maintain these ceiling-height limitations above the finished raised flooring. Bulkheads and hanging or surface mounted light fixtures which impede traffic ways shall be avoided. Ceilings shall be uniform in color and appearance throughout the Space, with no obvious damage to tiles or grid.

B. Prior to closing the ceiling, the Lessor shall coordinate with the Government for the installation of any items above the ceiling.

C. Should the ceiling be installed in the Space prior to construction of the TIs, then the Lessor shall be responsible for all costs in regard to the disassembly, storage during construction, and subsequent re-assembly of any of the ceiling components which may be required to complete the TIs. The Lessor shall also bear the risk for any damage to the ceiling or any components thereof during the construction of the TIs.

D. Ceilings shall be a flat plane in each room and shall be suspended and finished as follows unless an alternate equivalent is pre-approved by the LCO:

1. Restrooms. Plastered or spackled and taped gypsum board.

2. Offices and conference rooms. Mineral and acoustical tile or lay in panels with textured or patterned surface and tegular edges or an equivalent pre-approved by the LCO. For leases 10,000 RSF or greater, newly installed tiles or panels shall meet applicable, statutory environmentally preferable criteria related to biobased content as outlined under the Green Procurement Compilation at

https://sftool.gov/greenprocurement and https://sftool.gov/greenprocurement/green-products/3/building-finishes/1732/acoustical-ceiling-tiles/0?addon=False.

3. Corridors and eating/galley areas. Plastered or spackled and taped gypsum board or mineral acoustical tile.

3.21 EXTERIOR AND COMMON AREA DOORS AND HARDWARE (SEP 2013)

A. Exterior Building doors and doors necessary to the lobbies, common areas, and core areas shall be required. This does not include suite entry or interior doors specific to TIs.

B. Exterior doors shall be weather tight and shall open outward. Hinges, pivots, and pins shall be installed in a manner which prevents removal when the door is closed and locked. These doors shall have a minimum clear opening of 32" clear wide x 80" high (per leaf). Doors shall be heavy duty, flush, (1) hollow steel construction, (2) solid core wood, or (3) insulated tempered glass. As a minimum requirement, hollow steel doors shall be fully insulated, flush, #16-gauge hollow steel. Solid-core wood doors and hollow steel doors shall be at least 1-3/4 inches thick. Door assemblies shall be of durable finish and shall have an aesthetically pleasing appearance acceptable to the LCO. The opening dimensions and operations shall conform to the governing building, fire safety, accessibility, and energy codes and/or requirements. Fire door assemblies shall be listed and labeled. Labels on fire door assemblies shall be maintained in a legible condition. Fire door assemblies and their accompanying hardware, including frames and closing devices shall be installed in accordance with the requirements of NFPA 80, Standard for Fire Doors and Other Opening Protectives.

C. Exterior doors and all common area doors shall have door handles or door pulls with heavyweight hinges. All doors shall have corresponding doorstops (wall or floor mounted) and silencers. All public use doors and restroom doors shall be equipped with kick plates. All doors shall have automatic door closers. All Building exterior doors shall have locking devices installed to reasonably deter unauthorized entry.

3.22 DOORS: IDENTIFICATION (APR 2011)

All signage required in common areas unrelated to tenant identification shall be provided and installed by the Lessor.

3.23 WINDOWS (OCT 2020)

A. Office Space shall have windows in each exterior bay unless waived by the LCO.

B. All exterior window assemblies shall be weather resistant and water tight. Operable windows that open shall be equipped with secure latches. Off-street, ground-level windows and those accessible from adjacent roofs and other structures that can be opened must be fitted with a secure latch. Windows intended for use as a secondary means of egress must be openable from the egress side (e.g., inside) of the Building without the use of a key, tool, or special knowledge or effort for operation from the egress side.

3.24 PARTITIONS: GENERAL (OCT 2019)

A. Partitions in public areas shall be marble, granite, hardwood, or drywall covered with durable wall covering or high performance coating, or equivalent pre-approved by the LCO.

B. For leases 10,000 RSF or greater where the Government is a sole tenant of the Building, the Lessor is encouraged to use materials for newly installed gypsum board meeting applicable environmentally preferable criteria that are recommended in the Green Procurement Compilation at HTTPS://SFTOOL.GOV/GREENPROCUREMENT and https://sftool.gov/greenprocurement/green-products/3/building-finishes/1735/wallboardgypsum-boarddrywall/0?addon=False.

3.25 PARTITIONS: PERMANENT (OCT 2019)

A. Permanent partitions shall extend from the structural floor slab to the structural ceiling slab. They shall be provided by the Lessor as part of shell rent as necessary to surround the Space, stairs, corridors, elevator shafts, restrooms, all columns, and janitor closets. They shall have a flame spread rating of 25 or less and a smoke development rating of 450 or less (ASTM E-84). Stairs, elevators, and other floor openings shall be enclosed by partitions and shall have the fire resistance required by the applicable building code, fire code and ordinances adopted by the jurisdiction in which the Building is located (such as the International Building Code, etc.) current as of the Lease Award Date.

B. For leases 10,000 RSF or greater where the Government is a sole tenant of the Building, the Lessor is encouraged to use materials for newly installed gypsum board meeting the applicable environmentally preferable criteria that are recommended in the Green Procurement Compilation at HTTPS://SFTOOL.GOV/GREENPROCUREMENT and https://sftool.gov/greenprocurement/green-products/3/building-finishes/1735/wallboardgypsum-boarddrywall/0?addon=False.

3.26 INSULATION: THERMAL, ACOUSTIC, AND HVAC (OCT 2019)

A. No insulation installed with this project shall be material manufactured using chlorofluorocarbons (CFCs), nor shall CFCs be used in the installation of the product.

B. All insulation containing fibrous materials exposed to air flow shall be rated for that exposure or shall be encapsulated.

C. Insulating properties for all materials shall meet or exceed applicable industry standards. Polystyrene products shall meet American Society for Testing and Materials (ASTM) C578 91.

D. All insulation shall contain low emitting volatiles and not result in indoor air levels above 0.016 parts per million (ppm) of formaldehyde.

E. The maximum flame spread and smoke developed index for insulation shall meet the requirements of the applicable local codes and ordinances (current as of the Lease Award Date) adopted by the jurisdiction in which the Building is located.

F. For leases 10,000 RSF or greater, all insulation products shall meet applicable, statutory environmentally preferable criteria related to recovered material content as outlined in the Green Procurement Compilation at HTTPS://SFTOOL.GOV/GREENPROCUREMENT and https://sftool.gov/greenprocurement/green-products/1/construction-materials/22/building-insulation/0.

3.27 WALL FINISHES – SHELL (SEP 2015)

A. All restrooms within the Building common areas of Government-occupied floors shall have 1) ceramic tile, recycled glass tile, or comparable wainscot from the finished floor to a minimum height of 4'-6" and 2) semigloss paint on remaining wall areas, or other finish approved by the Government.

B. All elevator areas that access the Space and hallways accessing the Space shall be covered with wall coverings not less than 20 ounces per square yard, high performance paint, or an equivalent.

3.28 PAINTING – SHELL (OCT 2019)

A. The Lessor shall bear the expense for all painting associated with the Building shell. These areas shall include all common areas. Exterior perimeter walls and interior core walls within the Space shall be spackled and prime painted. If any Building shell areas are already painted prior to TIs, then the Lessor shall repaint, at the Lessor's expense, as necessary during TIs.

B. The costs for cyclical painting requirements as outlined in Section 6 shall be included in the shell rent.

C. For leases 10,000 RSF or greater, primer shall meet applicable, statutory environmentally preferable criteria related to biobased and recovered material content as outlined in the Green Procurement Compilation at HTTPS://SFTOOL.GOV/GREENPROCUREMENT and https://sftool.gov/greenprocurement/green-products/3/building-finishes/1338/paint/0?addon=False.

3.29 FLOORS AND FLOOR LOAD (OCT 2019)

A. All adjoining floor areas shall be of a common level not varying more than 1/4 inch over a 10-foot horizontal run in accordance with the American Concrete Institute standards, non-slip, and acceptable to the LCO.

B. Under-floor surfaces shall be smooth and level. Office areas shall have a minimum live load capacity of 50 pounds per ABOA SF plus 20 pounds per ABOA SF for moveable partitions. Storage areas shall have a minimum live load capacity of 100 pounds per ABOA SF, including moveable partitions. Lessor may be required to provide a report by a registered structural engineer showing the floor load capacity, at the Lessor's expense. Calculations and structural drawings may also be required.

3.30 FLOOR COVERING AND PERIMETERS – SHELL (SEP 2013)

A. Exposed interior floors in primary entrances and lobbies shall be marble, granite, or terrazzo. Exposed interior floors in secondary entrances, elevator lobbies, and primary interior corridors shall be high-grade carpet, marble, granite, or terrazzo. Resilient flooring shall be used in telecommunications rooms. Floor perimeters at partitions shall have wood, rubber, vinyl, marble, or carpet base.

B. Terrazzo, unglazed ceramic tile, recycled glass tile, and/or quarry tile shall be used in all restroom and service areas of Government-occupied floors.

C. Any alternate flooring must be pre-approved by the LCO.

D. The costs for cyclical carpet replacement requirements as outlined in Section 6 shall be included in the shell rent.

3.31 MECHANICAL, ELECTRICAL, PLUMBING: GENERAL (APR 2011)

The Lessor shall provide and operate all Building equipment and systems in accordance with applicable technical publications, manuals, and standard procedures. Mains, lines, and meters for utilities shall be provided by the Lessor. Exposed ducts, piping, and conduits are not permitted in office Space.

3.32 BUILDING SYSTEMS (APR 2011)

Whenever requested, the Lessor shall furnish to GSA as part of shell rent, a report by a registered professional engineer(s) showing that the Building and its systems as designed and constructed will satisfy the requirements of this Lease.

3.33 ELECTRICAL (OCT 2019)

A. The Lessor shall be responsible for meeting the applicable requirements of local codes and ordinances. When codes conflict, the more stringent standard shall apply. Main service facilities shall be enclosed. The enclosure may not be used for storage or other purposes and shall have door(s) fitted with an automatic deadlocking latch bolt with a minimum throw of 1/2 inch. Main distribution for standard office occupancy shall be provided at the Lessor's expense. The electrical distribution panels enclosed in the electrical room shall include: single-phase 120/240 volt or 3-phase 120/208 volt service for leased spaces under 10,000 RSF; 3-phase 120/208 volt service for leased spaces between 10,000 and 25,000 RSF; and 3-phase 277/480 volt and 3-phase120/208 volt service for leases spaces over 25,000 RSF. In no event shall such power distribution (not including lighting and HVAC) for the Space fall below 4 watts per ABOA SF.

B. Main power distribution switchboards and distribution and lighting panel boards shall be circuit breaker type with copper buses that are properly rated to provide the calculated fault circuits. All power distribution panel boards shall be supplied with separate equipment ground buses. All power distribution equipment shall be required to handle the actual specified and projected loads and 10 percent spare load capacity. Distribution panels are required to accommodate circuit breakers for the actual calculated needs and 10 percent spare circuits that will be equivalent to the majority of other circuit breakers in the panel system. Fuses and circuit breakers shall be plainly marked or labeled to identify circuits or equipment supplied through them.

C. Convenience outlets shall be installed in accordance with NFPA Standard 70, National Electrical Code, or local code, whichever is more stringent. The Lessor shall provide duplex utility outlets in restrooms, corridors, and dispensing areas.

3.34 ~~ADDITIONAL ELECTRICAL CONTROLS (JUN 2012)~~ INTENTIONALLY DELETED

3.35 PLUMBING (JUN 2012)

The Lessor shall include the cost of plumbing in common areas. Hot and cold water risers and domestic waste and vent risers, installed and ready for connections that are required for TIs, shall be included in the shell rent.

3.36 DRINKING FOUNTAINS (OCT 2018)

On each floor of Government-occupied Space, the Lessor shall provide a minimum of two drinking fountains with chilled potable water within 200 feet of travel from any Government-occupied area on the floor. The fountains shall comply with Section F211 of the Architectural Barriers Act Accessibility Standard. Potable is defined as water meeting current EPA primary drinking water standards or more stringent, applicable state or local regulations. The Lessor shall serve as first responder to any occupant complaints about drinking water. The Lessor shall promptly investigate any such complaints and implement the necessary controls to address the complaints and maintain potable water conditions.

3.37 RESTROOMS (OCT 2021)

A. If this Lease is satisfied by new construction or by renovations that include the construction of restrooms, Lessor shall provide water closets, sinks and urinals on each floor that is partially or fully occupied by the government per the schedule below. The schedule is per floor and based on a density of one person for each 135 ABOA SF of office Space, allocated as 50% women and 50% men. If future renovations requiring restroom construction occur during the term of this Lease, the number of fixtures then must meet the schedule as part of the major alterations.

ESTIMATED NUMBER OF EACH GENDER PER FLOOR			(WOMEN'S) WATER CLOSETS	(WOMEN'S) SINKS	(MEN'S) WATER CLOSETS	(MEN'S) URINALS	(MEN'S) SINKS
1	to	8	2	1	1	1	1
9	to	24	3	2	2	1	1
25	to	36	3	2	2	1	2
37	to	56	5	3	3	2	2
57	to	75	6	4	4	2	2
76	to	96	6	5	4	2	3
97	to	119	7	5	5	2	3
120	to	134	9	5	6	3	4
Above 135			3/40	1/24	1/20	1/40	1/30

B. If no new construction of a restroom is occurring, at a minimum, separate restroom facilities for men and women shall be provided with sufficient fixtures (water closets, sinks and urinals), in accordance with local code or ordinances.

C. Each restroom shall have water closets enclosed with modern stall partitions and doors, urinals (in men's room), and hot (set in accordance with applicable building codes) and cold water. Water closets and urinals shall not be visible when the exterior door is open. These facilities shall be located on each floor occupied by the Government in the Building and shall be located so that employees will not be required to travel more than 200 feet on one floor to reach the restrooms.

D. Restrooms must meet ABAAS requirements as stated under this Lease.

E. Each main restroom shall contain the following:

1. A mirror and shelf above the lavatory.
2. A toilet paper dispenser in each water closet stall that will hold the equivalent of at least two standard-sized rolls and allow easy, unrestricted dispensing.
3. A coat hook on the inside face of the door to each water closet stall and on several wall locations by the lavatories.
4. At least one modern paper towel dispenser, soap dispenser, and waste receptacle for every two lavatories.
5. A coin-operated sanitary napkin dispenser in women's restrooms with a waste receptacle in each water closet stall.
6. A disposable toilet seat cover dispenser.
7. A counter area of at least 2 feet, 0 inches in length, exclusive of the lavatories (however, it may be attached to the lavatories) with a mirror above and a ground-fault interrupter-type convenience outlet located adjacent to the counter area. The counter should be installed to minimize pooling or spilling of water at the front edge.
8. A floor drain.
9. Newly installed restroom partitions shall be made from recovered materials as listed in EPA's CPG.

3.38 PLUMBING FIXTURES: WATER CONSERVATION (OCT 2019)

For leases 10,000 RSF or greater, the specifications listed below apply:

1. New installations of plumbing fixtures,
2. Replacement of existing plumbing fixtures, or
3. Existing non-conforming fixtures where the Government occupies the full floor.

A. Water closets must conform to EPA WaterSense or fixtures with equivalent flush volumes must be utilized.

B. Urinals must conform to EPA WaterSense or fixtures with equivalent flush volumes must be utilized. Waterless urinals are acceptable.

C. Faucets must conform to EPA WaterSense or fixtures with equivalent flow rates must be utilized.

Information on EPA WaterSense fixtures can be found at HTTP://WWW.EPA.GOV/WATERSENSE/.

3.39 JANITOR CLOSETS (SEP 2015)

Janitor closets shall meet all local codes and ordinances. When not addressed by local code, Lessor shall provide containment drains plumbed for appropriate disposal of liquid wastes in spaces where water and chemical concentrate mixing occurs for maintenance purposes. Disposal is not permitted in restrooms.

3.40 HEATING, VENTILATION, AND AIR CONDITIONING - SHELL (OCT 2021)

A. Central HVAC systems shall be installed and operational, including, as appropriate, main and branch lines, VAV boxes, dampers, flex ducts, and diffusers, for an open office layout, including all Building common areas. The Lessor shall provide conditioned air through medium pressure duct work at a rate of .75 cubic feet per minute per ABOA SF and systems shall be designed with sufficient systems capacity to meet all requirements in this Lease.

B. Areas having excessive heat gain or heat loss, or affected by solar radiation at different times of the day, shall be independently controlled.

C. Equipment Performance. Temperature control for office Spaces shall be provided by concealed central heating and air conditioning equipment. The equipment shall maintain Space temperature control over a range of internal load fluctuations of plus 0.5 W/SF to minus 1.5 W/SF from initial design requirements of the tenant.

D. Ductwork Re-use and Cleaning. Any ductwork to be reused and/or to remain in place shall be cleaned, tested, and demonstrated to be clean in accordance with the standards set forth by NADCA. The cleaning, testing, and demonstration shall occur immediately prior to Government occupancy to avoid contamination from construction dust and other airborne particulates.

E. During working hours in periods of heating and cooling, ventilation shall be provided in accordance with American National Standards Institute, American Society of Heating, Refrigeration and Air-Conditioning Engineers (ANSI/ASHRAE) Standard 62.1, Ventilation for Acceptable Indoor Air Quality that corresponds with how the HVAC system was designed to perform. At a minimum, Lessor must meet ASHRAE Standard 62.1-2004.

F. For all refrigerant-containing equipment with over 50 pounds of ozone-depleting substances (including chlorofluorocarbons- CFCs or hydrochlorofluorocarbons- HCFCs), the Lessor shall comply with the U.S. Environmental Protection Agency (EPA)'s Significant New Alternative Policy (SNAP) Program for acceptable substitutes and alternatives to ozone-depleting substances when equipment is replaced, comes to its end of useful life, or when newly purchased. Upon request, the Lessor must provide to the Government the type of refrigerant used in chillers and HVAC systems, and the date by which the Lessor plans to replace ozone depleting substances with acceptable refrigerant substitutes in accordance with EPA's SNAP program.

G. Heating and air-conditioning air distribution systems (air handling units, VAV boxes, fan coil units, etc.) for the Space shall be equipped with particulate matter air filters that meet the Minimum Efficiency Reporting Value (MERV) specified in the ANSI/ASHRAE Standard 62.1 version referenced in sub-paragraph E above. Locations that do not meet the EPA National Ambient Air Quality Standards (NAAQS) for particulates (PM 10 or PM 2.5) must be equipped with additional filtration on outdoor air intakes as required in ANSI/ASHRAE Standard 62.1. NAAQS information can be found at HTTPS://WWW.EPA.GOV/GREEN-BOOK.

H. Restrooms shall be properly exhausted, with a minimum of 10 air changes per hour.

I. INTENTIONALLY DELETED

3.41 TELECOMMUNICATIONS: DISTRIBUTION AND EQUIPMENT (SEP 2015)

A. Sufficient space shall be provided on the floor(s) where the Government occupies Space for the purposes of terminating telecommunications service into the Building. The Building's telecommunications closets located on all floors shall be vertically-stacked. Telecommunications switch rooms, wire closets, and related spaces shall be enclosed. The enclosure shall not be used for storage or other purposes and shall have door(s) fitted with an automatic door-closer and deadlocking latch bolt with a minimum throw of 1/2 inch. The telephone closets shall include a telephone backboard.

B. Telecommunications switch rooms, wire closets, and related spaces shall meet applicable Telecommunications Industry Association (TIA) and Electronic Industries Alliance (EIA) standards. These standards include the following:

1. TIA/EIA-568, Commercial Building Telecommunications Cabling Standard,

2. TIA/EIA 569, Commercial Building Standard for Telecommunications Pathways and Spaces,
3. TIA/EIA-570, Residential and Light Commercial Telecommunications Wiring Standard, and
4. TIA/EIA-607, Commercial Building Grounding and Bonding Requirements for Telecommunications Standard.

C. Telecommunications switch rooms, wire closets, and related spaces shall meet applicable NFPA standards. Bonding and grounding shall be in accordance with NFPA Standard 70, National Electrical Code, and other applicable NFPA standards and/or local code requirements.

3.42 TELECOMMUNICATIONS: LOCAL EXCHANGE ACCESS (JUN 2012)

A. The Government may elect to contract its own telecommunications (voice, data, video, Internet or other emerging technologies) service in the Space. The Government may contract with one or more parties to have INS wiring (or other transmission medium) and telecommunications equipment installed.

B. The Lessor shall allow the Government's designated telecommunications providers access to utilize existing Building wiring to connect its services to the Government's Space. If the existing Building wiring is insufficient to handle the transmission requirements of the Government's designated telecommunications providers, the Lessor shall provide access from the point of entry into the Building to the Government's floor Space, subject to any inherent limitations in the pathway involved.

C. The Lessor shall allow the Government's designated telecommunications providers to affix telecommunications antennas (high frequency, mobile, microwave, satellite, or other emerging technologies), subject to weight and wind load conditions, to roof, parapet, or Building envelope as required. Access from the antennas to the Premises shall be provided.

D. The Lessor shall allow the Government's designated telecommunications providers to affix antennas and transmission devices throughout the Space and in appropriate common areas frequented by the Government's employees to allow the use of cellular telephones and communications devices necessary to conduct business.

3.43 LIGHTING: INTERIOR AND PARKING - SHELL (OCT 2020)

NOTE: FOR PRICING ESTIMATING PURPOSES, FIXTURES WILL BE INSTALLED AT THE AVERAGE RATIO OF 1 FIXTURE PER 80 ABOA SF.

A. INTERIOR FIXTURES**:** High efficiency T-8, T-5, or LED light fixtures (and associated ballasts or drivers) shall be installed as either ceiling grid or pendant mounted for an open-office plan. Ceiling grid fixtures shall be either 2' wide by 4' long or 2' wide by 2' long. Lessor shall provide, as part of Shell Rent, a minimum overall lighting fixture efficiency of 85 percent. Lamps shall maintain a uniform color level throughout the lease term.

B. LIGHTING LEVELS**:** Fixtures shall have a minimum of two tubes and shall provide 50 foot-candles at desktop level (30" above finished floor) with a maximum uniformity ratio of 1.5:1. Lessor shall provide, as part of Shell Rent, 10 average foot-candles in all other Building areas within the Premises with a uniformity ratio of 4:1. Emergency egress lighting levels shall be provided in accordance with the local applicable building codes (but not less than 1 foot-candle) by either an onsite emergency generator or fixture mounted battery packs.

B. LIGHTING LEVELS WITH TASK LIGHTING: Fixtures shall have a minimum of two tubes and shall provide 30 foot-candles at desktop level (30" above finished floor) with a maximum uniformity ratio of 1.5:1 for _**XX**_ percent of the total Space, and 50 foot-candles at desktop level (30" above finished floor) with a maximum uniformity ratio of 1.5:1 for _**XX**_ percent of the Space. Lessor shall provide, as part of Shell Rent, 10 average foot-candles in all other Building areas within the Premises with a uniformity ratio of 4:1. Emergency egress lighting levels shall be provided in accordance with the local applicable building codes (but not less than 1 foot-candle) by either an onsite emergency generator or fixture mounted battery packs.

C. POWER DENSITY:

Existing Buildings: The maximum fixture power density shall not exceed 1.4 watts per ABOA SF.
New Construction: The maximum fixture power density shall not exceed 1.1 watts per ABOA SF.

D. DAYLIGHTING CONTROLS: If the Lease is more than 10,000 ABOA SF, the Lessor shall provide daylight dimming controls in atriums or within 15 feet of windows and skylights where daylight can contribute to energy savings. Daylight harvesting sensing and controls shall be either integral to the fixtures or ceiling mounted and shall maintain required lighting levels in work spaces.

E. OCCUPANCY/VACANCY SENSORS: The Lessor shall provide ceiling mount occupancy sensors, or vacancy sensors (preferred), or scheduling controls through the building automation system (BAS) throughout the Space in order to reduce the hours that the lights are on when a particular space is unoccupied. No more than 1,000 square feet shall be controlled by any one sensor. Occupancy sensors in enclosed rooms shall continue to operate after the BAS has shut down the building at the end of the workday.

F. BUILDING PERIMETER:

1. Exterior parking areas, vehicle driveways, pedestrian walks, and the Building perimeter lighting levels shall be designed per Illuminating Engineering Society (IES) standards. Provide 5 foot-candles for doorway areas, 3 foot-candles for transition areas and at least 1 foot-candle at the surface throughout the parking lot. Parking lot fixtures shall provide a maximum to minimum uniformity ratio of 15:1 and a maximum to average uniformity ratio of 4:1.

2. If the leased space is 100 percent occupied by Government tenants, all exterior parking lot fixtures shall be "Dark Sky" compliant with no property line trespass.

G. PARKING STRUCTURES: The minimum illuminance level for parking structures is 5 foot-candles as measured on the floor with a uniformity ratio of 10:1.

H. PARKING SENSORS: If the leased space is 100 percent occupied by Government tenants, exterior parking area and parking structure lighting shall be sensor or BAS controlled in order that it may be programmed to produce reduced lighting levels during non-use. This non-use time period will normally be from 11:00 pm to 6:00 am.

I. EXTERIOR POWER BACKUP**:** Exterior egress, walkway, parking lot, and parking structure lighting must have emergency power backup to provide for safe evacuation of the Building.

J. VIDEO SURVEILLANCE SYSTEM (VSS): Lighting shall be provided in such a manner to adequately support VSS operations, and not limit or preclude adequate fields of view.

3.44 ACOUSTICAL REQUIREMENTS (JUN 2012)

A. Reverberation Control. Private office and conference rooms using suspended acoustical ceilings shall have a noise reduction coefficient (NRC) of not less than 0.65 in accordance with ASTM C-423. Open office using suspended acoustical ceilings shall have an NRC of not less than 0.75. Private offices, conference rooms, and open offices using acoustical cloud or acoustical wall panels with a minimum of 70% coverage shall have an NRC of not less than 0.85.

B. Ambient Noise Control. Ambient noise from mechanical equipment shall not exceed noise criteria curve (NC) 35 in accordance with the ASHRAE Handbook of Fundamentals in offices and conference rooms; NC 40 in corridors, cafeterias, lobbies, and restrooms; NC 50 in other spaces.

C. Noise Isolation. Rooms separated from adjacent spaces by ceiling high partitions (not including doors) shall not be less than the following noise isolation class (NIC) standards when tested in accordance with ASTM E-336:

Conference rooms: NIC 40
Offices: NIC 35

D. Testing. The LCO may require, at Lessor's expense, test reports by a qualified acoustical consultant showing that acoustical requirements have been met.

3.45 ~~SECURITY FOR NEW CONSTRUCTION (AUG 2021)~~ INTENTIONALLY DELETED

3.46 ~~SEISMIC SAFETY FOR NEW CONSTRUCTION (OCT 2020)~~ INTENTIONALLY DELETED

3.47 ~~FIRE PROTECTION FOR NEW CONSTRUCTION (APR 2015)~~ INTENTIONALLY DELETED

3.48 ~~GREEN BUILDING RATING CERTIFICATION FOR NEW CONSTRUCTION (OCT 2016)~~ INTENTIONALLY DELETED

3.49 ~~GREEN BUILDING RATING CERTIFICATION FOR TENANT INTERIORS (OCT 2016)~~ INTENTIONALLY DELETED

3.50 INDOOR AIR QUALITY DURING CONSTRUCTION (OCT 2021)

A. The Lessor shall provide to the Government safety data sheets (SDS) or other appropriate documents upon request, but prior to installation or use for the following products, including but not limited to, adhesives, caulking, sealants, insulating materials, fireproofing or fire stopping materials, paints, carpets, floor and wall patching or leveling materials, lubricants, clear finishes for wood surfaces, janitorial cleaning products, and pest control products.

B. The LCO may eliminate from consideration products with significant quantities of toxic, flammable, corrosive, or carcinogenic material and products with potential for harmful chemical emissions. Materials used often or in large quantities will receive the greatest amount of review.

C. Where demolition or construction work occurs adjacent to occupied Space, the Lessor shall erect appropriate barriers (noise, dust, odor, etc.) and take necessary steps to minimize interference with the occupants. This includes maintaining acceptable temperature, humidity, and ventilation in the occupied areas during window removal, window replacement, or similar types of work.

D. HVAC during Construction: If air handlers are used during construction, the Lessor shall provide filtration media with a MERV of 8 at each return air grill, as determined by ANSI/ASHRAE Standard 52.2, Method of Testing General Ventilation Air Cleaning Devices for Removal Efficiency by Particle Size.

E. Flush-Out Procedure:

1. For leases 10,000 RSF or greater:

i. HVAC flush-out shall commence after construction ends and the Building has been completely cleaned. All interior finishes, such as millwork, doors, paint, carpet, acoustic tiles, and movable furnishings (e.g., workstations, partitions), must be installed, and major VOC punch list items must be finished.

ii. Prior to occupancy, Lessor shall install new filtration media and perform a building flush-out by supplying a total air volume of 14,000 cubic feet of outdoor air per square foot of gross floor area while maintaining an internal temperature of at least 60°F (15°C) and no higher than 80°F (27°C) and relative humidity no higher than 60%.

iii. If the LCO determines that occupancy is required before flush-out can be completed, the Space may be occupied only after delivery of a minimum of 3,500 cubic feet of outdoor air per square foot of gross floor area while maintaining an internal temperature of at least 60°F (15°C) and no higher than 80°F (27°C) and relative humidity no higher than 60%. Once the Space is occupied, it must be ventilated at a minimum rate of 0.30 cubic foot per minute (cfm) per square foot of outdoor air or greater. During each day of the flush-out period, ventilation must begin at least three hours before occupancy and continue during occupancy. These conditions must be maintained until a total of 14,000 cubic feet per square foot of outdoor air (4 270 liters of outdoor air per square meter) has been delivered to the space.

iv. The Lessor shall provide a signed statement explaining how all HVAC systems serving the leased Space will achieve the desired ventilation of the Space during the flush-out period.

2. For leases less than 10,000 RSF, the Lessor shall sufficiently flush-out or ventilate the area(s) following construction and prior to occupancy in order to remove any detectable odors or visible dust related to the work.

3.51 SYSTEMS COMMISSIONING (OCT 2021)

A. The Lessor shall incorporate commissioning requirements to verify that the installation and performance of energy consuming systems meet the Government's project requirements. These systems include, at a minimum, heating, ventilating, air conditioning and refrigeration (HVAC&R) systems and associated controls, lighting controls, and domestic hot water systems. The commissioning shall cover work associated with TIs or alterations. In instances involving minimal improvements, recommissioning is required to ensure that the systems are operating properly. In the event the Government exercises a renewal option, recommissioning is required within 60 days after the exercising of the option.

B. The Lessor shall submit a written commissioning plan prior to completion of DIDs. In instances involving minimal improvements not requiring DIDs, the plan is due within 60 days prior to Space acceptance. The plan shall include:

1. A schedule of systems commissioning (revised as needed during all construction phases of the project, with such revisions provided to the LCO immediately); and

2. A description of how commissioning requirements will be met and confirmed.

3.52 ~~DUE DILIGENCE AND NATIONAL ENVIRONMENTAL POLICY ACT REQUIREMENTS – LEASE (SEP 2014)~~ INTENTIONALLY DELETED

3.53 NATIONAL HISTORIC PRESERVATION ACT REQUIREMENTS - LEASE (SEP 2014)

A. Where a Memorandum of Agreement or other pre-award agreement concluding the Section 106 consultation includes mitigation, design review or other continuing responsibilities of the Government, Lessor must allow the Government access to the Property to carry out compliance activities. Compliance may require excavation for artifact recovery, recordation and interpretation. For Tenant Improvements and other tenant-driven alterations within an existing historic building, new construction or exterior alterations that could affect historic properties, compliance also may require on-going design review. In these instances, Lessor will be required to retain, at its sole cost and expense, the services of a preservation architect who meets or exceeds the *Secretary of the Interior's Professional Qualifications Standards for Historic Architecture*, as amended and annotated and previously published in the Code of Federal Regulations, 36 C.F.R. part 61, and the *GSA Qualifications Standards for Preservation Architects*. These standards are available at: HTTP://WWW.GSA.GOV/HISTORICPRESERVATION>Project Management Tools> Qualification Requirements for Preservation Architects. The preservation architect will be responsible for developing preservation design solutions and project documentation required for review by the Government, the State Historic Preservation Officer (SHPO), the Tribal Historic Preservation Officer (THPO), if applicable, and other consulting parties in accordance with Section 106. For Tenant Improvements and other tenant-driven alterations within an existing historic building, the preservation architect must develop context-sensitive design options consistent with the *Secretary of the Interior's Standards for the Treatment of Historic Properties*. Where new construction or exterior alterations, or both, are located within a historic district, may be visible from historic properties or may affect archeological resources, compliance may require tailoring the design of the improvements to be compatible with the surrounding area. Design review may require multiple revised submissions, depending on the complexity of the project and potential for adverse effects to historic properties. GSA is responsible for corresponding with the SHPO, the THPO, if applicable, and any other consulting party.

B. Compliance requirements under Section 106 apply to all historic property alterations and new construction, regardless of the magnitude, complexity or cost of the proposed scope of work.

C. The costs for development of design alternatives and review submittals for work required under the Lease are the sole responsibility of Lessor. In addition, building shell costs relating to such design alternatives are the sole responsibility of Lessor and must be included in the shell rent. Such costs may be offset by federal, state or local preservation tax benefits. Lessor is encouraged to seek independent financial and legal advice concerning the availability of these tax benefits.

3.54 ~~DESIGN EXCELLENCE – LEASE (OCT 2016)~~ INTENTIONALLY DELETED

SECTION 4 DESIGN, CONSTRUCTION, AND POST AWARD ACTIVITIES

4.01 SCHEDULE FOR COMPLETION OF SPACE (OCT 2017)

Within **10 Working days** after Lease award, the Lessor shall furnish to the Government a complete set of Computer Aided Design (CAD) files of as-built floor plans showing the Space under Lease, as well as corridors, stairways, and core areas for the government development of DIDs. The plans shall have been generated by a CAD program which is compatible with the latest release of AutoCAD. The required file extension is ".DWG". Design and construction activities for the Space shall commence following Government receipt of the CAD as required herein. The Lessor shall schedule the following activities to achieve timely completion of the work required by this Lease.

4.02 DESIGN INTENT DRAWINGS (DID's)

A. DIDs. For the purposes of this Lease, DIDs are defined as layout line drawings of the leased Space, reflecting all Lease requirements to communicate the design intent to the lessor's architect for the purpose of preparing the construction documents (CDs). A DID set shall include the following elements:

Design Intent Drawings:
1. Floor (partition) Plan
2. Power/Communication (Electrical) Plan
3. Generic Furniture Plan
4. Finish schedule and plan
5. Interior Elevations
6. Interior Sections
7. Partition Types/Sections
8. Door/Hardware Schedule

B. Government-Provided Design Intent Drawings (DIDs): The Government shall prepare and provide to the Lessor the Government's approved DIDs based upon the base Building documents provided by the Lessor as required in the paragraph titled "Documents Incorporated in the Lease" paragraph of this Lease. DIDs shall be due to the Lessor within **55 Working days after the Government's receipt of the CAD drawing per paragraph 4.01 above**. If required by the Government, weekly design review meetings may be held with the lessor's Architect to review all relevant design issues.

4.03 CONSTRUCTION DOCUMENTS:

A. Lessor's Construction Document Drawings shall include all: demolition, mechanical, electrical, plumbing, fire protection, life safety, lighting, structural, security, and architectural improvements scheduled for inclusion into the Space. CDs shall be annotated with all applicable specifications or by separate project manual per CIS standards. CDs shall also clearly identify TI vs Shell scope of work (see lease for definition). Notwithstanding the Government's review of the CDs, the Lessor is solely responsible and liable for their technical accuracy and compliance with all applicable Lease requirements. **A weekly design review meeting will be held by the lessors Architect to review all relevant design issues. Electronic progress drawings are to be shown weekly for these meetings. The GSA may request a set of progress drawings at any time.**

B. Shell vs. Tenant Improvements: Construction documents must clearly identify all scope of work assigned to each category (shell vs TI). On each drawing sheet the architect-engineer is to use annotation and graphics to define shell vs TI scope of work. The lessor's GC and all trades and suppliers pricing the work must be able to identify and breakdown costs accordingly. Each price proposal shall properly provide the scope for shell and TI work and the price for each separately. Such costs are to be entered in the government provided TI pricing proposal format that separates Shell vs. TI scope and costs.

C. The Lessor's preparation and submission of construction documents (CDs): Immediately following government approval of the DIDs, the Lessor, as part of the TI, must complete CDs conforming to the Government approved DIDs. The Lessor's CDs shall be submitted in accordance with the following deliverables and schedule:

(75%) Lessor CD Submission	- 15 Working Days
(75%) Government Review	- 15 Working Days
(90%) Lessor CD Submission	- 15 Working Days
(90%) Government Review	- 15 Working Days
(100%) Lessor CD Submission	- 10 Working Days
(100%) Government Review	- 15 Working Days

C. Government review of CDs: The Government shall have review periods as noted in section "C" above. At any time during this period of review, the Government shall have the right to require the Lessor to modify the CDs to enforce conformance to Lease requirements and the approved DIDs.

4.04 SCHEDULE FOR DELIVERY OF TENANT IMPROVEMENT AND BSAC PRICING:

The Lessor shall prepare and submit a complete TI, BSAC and Shell price proposal based upon the final CD's and in accordance with the terms of the Lease within 20 Working Days following the end of the Government CD review period. The Government shall have 5 working days to review and the Lessor shall have 5 Calendar Days to revise the pricing following the Government review.

4.05 TENANT IMPROVEMENTS PRICE PROPOSAL (OCT 2016)

A. The Lessor's TI price proposal shall be supported by sufficient cost or pricing data to enable the Government to evaluate the reasonableness of the proposal, or documentation that the Proposal is based upon competitive proposals (as described below) obtained from entities not affiliated with the Lessor. Any work shown on the CDs that is required to be included in the Building shell rent or already priced as BSAC shall be clearly identified and excluded from the TI price proposal. After negotiation and acceptance of the TI price, GSA shall issue a NTP to the Lessor.

B. Under the provisions of FAR Subpart 15.4, the Lessor shall submit a TI price proposal with information that is adequate for the Government to evaluate the reasonableness of the price or determining cost realism for the TIs within the time frame specified in this section. The TI price proposal shall use the fee rates specified in the "Tenant Improvement Fee Schedule" paragraph of this Lease. The Lessor shall exclude from the TI price proposal all costs for fixtures and/or other TIs already in place, provided the Government has accepted same. However, the Lessor will be reimbursed for costs to repair or improve the fixture(s) and/or any other improvements already in place. The Lessor must provide certified cost or pricing data for TI proposals exceeding the threshold in FAR 15.403-4, to establish a fair and reasonable price. For TI proposals that do not exceed the threshold in FAR 15-403-4, the Lessor shall submit adequate documentation to support the reasonableness of the price proposal as determined by the LCO.

C. The TIs scope of work includes the Lease, the DIDs, the CDs, and written specifications. In cases of discrepancies, the Lessor shall immediately notify the LCO for resolution. All differences will be resolved by the LCO in accordance with the terms and conditions of the Lease.

D. In lieu of requiring the submission of detailed cost or pricing data as described above, the Government (in accordance with FAR 15.403) is willing to negotiate a price based upon the results of a competitive proposal process. A minimum of two qualified General Contractors (GCs) shall be invited by the Lessor to participate in the competitive proposal process. Each participant shall compete independently in the process. In the absence of sufficient competition from the GCs, a minimum of two qualified subcontractors from each trade of the Tenant Improvement Cost Summary (TICS) Table (described below) shall be invited to participate in the competitive proposal process.

E. Each TI proposal shall be (1) submitted by the proposed General Contractors (or subcontractors) using the TICS Table in CSI Masterformat; (2) reviewed by the Lessor prior to submission to the Government to ensure compliance with the scope of work (specified above) and the proper allocation of shell and TI costs; and (3) reviewed by the Government. General Contractors shall submit the supporting bids from the major subcontractors along with additional backup to the TICS Table in a format acceptable to the Government. Backup will follow the TICS table Master format cost elements and be to level 5 as described in P-120, Project Estimating Requirements for the Public Buildings Service.

F. Unless specifically designated in this Lease as a TI or BSAC cost, all construction costs shall be deemed to be included in the Shell Rent. Any costs in the GC's proposal for Building shell items shall be clearly identified on the TICS Table separately from the TI costs.

G. The Government reserves the right to determine if bids meet the scope of work, that the price is reasonable, and that the Lessor's proposed contractors are qualified to perform the work. The Government reserves the right to reject all bids at its sole discretion. The Government reserves the right to attend or be represented at all negotiation sessions between the Lessor and potential contractors.

H. The Lessor shall demonstrate to the Government that best efforts have been made to obtain the most competitive prices possible, and the Lessor shall accept responsibility for all prices through direct contracts with all contractors. The LCO shall issue to the Lessor a NTP with the TIs upon the Government's sole determination that the Lessor's proposal is acceptable. The Lessor shall complete the work within the time frame specified in this section of the Lease.

I. The Lessor shall submit one TICS table for each bid submitted and shall not combine or alter the TICS table. The adding of new sheets to the TICS Table is prohibited.

4.06 BUILDING SPECIFIC AMORTIZED CAPITAL (BSAC) PRICE PROPOSAL (SEP 2015)

The Lessor's BSAC price proposal shall be supported by sufficient cost or pricing data to enable the Government to evaluate the reasonableness of the proposal, or documentation that the Proposal is based upon competitive proposals. The pricing shall be submitted using the Security Unit Price List (SecUP).

4.07 NEGOTIATION OF TI AND BSAC PRICE PROPOSALS AND ISSUANCE OF THE NOTICE TO PROCEED (NTP):

The Government shall issue NTP within **5 Working Days** following the submission of the TI and BSAC price proposals, provided that price proposals conform to the requirements of the Lease and the parties negotiate a fair and reasonable price.

4.08 CONSTRUCTION OF TI's AND COMPLETION OF OTHER REQUIRED CONSTRUCTION WORK:

The Lessor shall complete all work required to prepare the Premises as required in this Lease ready for use not later than **165 Working days following issuance of NTP.** If applicable, this project may require multiple construction phases to complete the project without interfering with the agency's ability to conduct its mission. The phases of construction will be agreed to by the Government during the design process (DIDs and CDs). If the construction schedule exceeds the calendar days noted above, the lessor shall present to the Lease Contracting Officer for a review and modification, if applicable for the days required to complete the construction.

4.09 CONSTRUCTION SCHEDULE AND CONSTRUCTION MEETINGS

A. Schedule: The Lessor shall furnish a detailed construction schedule (such as Critical Path Method) to the Government within 14 Calendar Days of issuance of the NTP. Such schedule shall indicate the dates available for Government contractors to install telephone/data lines or equipment, if needed and long lead items' delivery dates.

B. Meetings: Within 7 Calendar Days of NTP, the Lessor shall initiate the first construction meeting. The Lessor will have its architect, engineers, general contractor PM and Super in attendance. The Lessor/architect shall keep meeting minutes (per exhibit A: "Meeting Minutes") of discussion topics, a brief narrative of same and include a listing of those in attendance. Construction meetings shall occur on a weekly basis, unless otherwise agreed to in writing by the LCO. The weekly meeting shall inform Government personnel and/or contractors on the progress of design and construction of the Space.

4.10 PROGRESS REPORTS

After start of construction, the Lessor shall submit to the LCO written progress reports with photos at intervals of **7** Calendar Days. Each report shall include information as to the percentage of the work completed by phase and trade; a statement as to expected completion and occupancy dates; changes introduced into the work; and general remarks on such items as material shortages, strikes, weather, etc, that may affect timely completion.

4.11 CONSTRUCTION INSPECTIONS (SEP 2015)

A. The LCO or the LCO's designated technical representative may periodically inspect construction work to review compliance with Lease requirements and approved DIDs, if applicable.

B. Periodic reviews, witnessing of tests, and inspections by the Government shall not constitute approval of the Lessor's apparent progress toward meeting the Government's objectives but are intended to discover any information which the LCO may be able to call to the Lessor's attention to prevent costly misdirection of effort. The Lessor shall remain responsible for designing, constructing, operating, and maintaining the Building in full accordance with the requirements of the Lease.

4.12 ACCESS BY THE GOVERNMENT PRIOR TO ACCEPTANCE (SEP 2013)

The Government shall have the right to access any space within the Building during construction for the purposes of performing inspections or installing Government furnished equipment. The Government shall coordinate the activity of Government contractors with the Lessor to minimize conflicts with and disruption to other contractors on site. Access shall not be unreasonably denied to authorized Government officials including, but not limited to, Government contractors, subcontractors, or consultants acting on behalf of the Government on this project.

4.13 ACCEPTANCE OF SPACE AND CERTIFICATE OF OCCUPANCY (SEP 2015)

A. Fourteen (14) Calendar Days prior to the completion of the Space, the Lessor shall, 1) issue written notice to the Government to schedule the inspection of the Space for acceptance; 2) Deliver complete set of all required documents on the Pre-Occupancy and Inspection Checklist (See Exhibit A-7). The Government shall accept the Space only if the construction of Building Shell and TIs conforming to this Lease, the approved DIDs and the final CDs is substantially complete, a Certificate of Occupancy (C-O) has been issued as set forth below, and the Building improvements necessary for acceptance as described in the paragraph "Building Improvements" are completed.

B. The Space shall be considered substantially complete only if the Space may be used for its intended purpose and completion of remaining work will not interfere unreasonably with the Government's enjoyment of the Space. Acceptance shall be final and binding upon the Government with respect to conformance of the completed Space subject to correction/completion of any items identified on a punch list generated as a result of the inspection, concealed conditions, latent defects, or fraud, but shall not relieve the Lessor of any other Lease requirements. All items identified in the punch list generated shall be corrected/completed within 30 calendar days unless otherwise agreed to and directed by the LCO.

C. The Lessor shall provide a valid C-O, issued by the local jurisdiction, for the intended use of the Government. If the local jurisdiction does not issue C-O's or if the C-O is not available, the Lessor may satisfy this condition by providing a report prepared by a licensed fire protection engineer that indicates the Space and Building are compliant with all applicable local codes and ordinances and all fire protection and life safety-related requirements of this Lease.

D. The Government will not be required to accept space prior to the schedule outlined in this Lease.

4.14 LEASE TERM COMMENCEMENT DATE AND RENT RECONCILIATION (JUN 2012)

At acceptance, the Space shall be measured in accordance with the standards set forth in this Lease to determine the total ABOA SF in the Space. The rent for the Space will be adjusted based upon the measured ABOA square footage as outlined under the Payment clause of the General Clauses. At acceptance, the Lease term shall commence. The Lease Term Commencement Date, final measurement of the Premises, reconciliation of the annual rent, and amount of Commission Credit, if any, shall be memorialized by Lease Amendment.

4.15 AS-BUILT DRAWINGS (OCT 2019)

Not later than **28 Calendar** days after the acceptance of the Space, the Lessor, at Lessor's expense, shall furnish to the Government a complete set of Computer Aided Design (CAD) files of as-built floor plans showing the Space under Lease, as well as corridors, stairways, and core areas. The plans shall have been generated by a CAD program which is compatible with the latest release of AutoCAD. The required file extension is ".DWG." Clean and purged files shall be submitted in a digital format. They shall be labeled with Building name, address, list of drawing(s), date of the drawing(s), and Lessor's architect and architect's phone number.

4.16 LIQUIDATED DAMAGES (JUN 2012)

In case of failure on the part of the Lessor to complete the work within the time fixed in the Lease, the Lessor shall pay the Government as fixed and agreed liquidated damages in an amount equal to 1 day's rent for each and every calendar day that the delivery is delayed beyond the date specified for delivery of all the Space ready for occupancy by the Government. This remedy is not exclusive and is in addition to any other remedies which may be available under this Lease or at law. This liquidated sum is not meant as a penalty, but as an approximation of actual damages that would be suffered by the Government because of the Lessor's delay.

4.17 SEISMIC RETROFIT (SEP 2013)

If leased property is in either a moderate or higher seismic zone, this requirement must be complied with.

The following requirements apply to Leases requiring seismic retrofit:

A. The Lessor shall provide a final construction schedule, all final design and construction documents for the seismic retrofit, including structural calculations, drawings, and specifications to the Government for review and approval prior to the start of construction. When required by local building code, a geotechnical report shall be made available to the Government.

B. The Lessor's registered civil or structural engineer shall perform special inspections to meet the requirements of Chapter 17 of the International Building Code (IBC).

C. For Leases requiring seismic retrofit, the Space will not be considered substantially complete until a Seismic Form E - Certificate Of Seismic Compliance - Retrofitted Building, certifying that the Building meets the Basic Safety Objective of ASCE/SEI 41, executed by a registered civil or structural engineer, has been delivered to the LCO.

4.18 LESSOR'S PROJECT MANAGEMENT FEE (SEP 2013)

A. The Lessor's project management fee shall cover all of the Lessor's project management costs associated with the delivery of Tenant Improvements, including, but not limited to:

1. Legal fees
2. Travel costs
3. Insurance
4. Home office overhead and other indirect costs
5. Carrying costs, exclusive of the TI amortization rate. Carrying costs are those costs of capital incurred for the delivery of TI, for the period starting from Lessor's outlay of funds, until the Lease Term Commencement Date.
6. Municipal, county, or state fees (not related to sales tax)
7. TI proposal preparation costs
8. Lessor's labor costs related to the management of the TI build-out.

B. At a minimum, the Lessor shall be responsible for performing the following services in order to receive the project management fee:

1. Provide assistance and expertise to the Government project team in the form of coordination, management, and administration of the design and construction process;
2. Monitor performance of; the general contractor, other contractors, control schedules, and oversee financial accounts;
3. Conduct and document design and construction project meetings;
4. Perform administrative tasks, including documentation, record keeping (issuing meeting minutes), and payment validation in addition to submittal and change order processing;
5. Maintain Request for Information (RFI), submittal, and change order logs; and
6. Provide technical expertise (e.g. testing, estimating, resolving claims, or responding to inquiries).

4.19 GREEN LEASE SUBMITTALS (OCT 2017)

The Lessor shall submit to the LCO:

A. Product data sheets for floor coverings, paints and wall coverings, ceiling materials, all adhesives, wood products, suite and interior doors, subdividing partitions, wall base, door hardware finishes, window coverings, millwork substrate and millwork finishes, lighting and lighting controls, and insulation to be used within the leased Space. This information must be submitted NO LATER THAN the submission of the DIDs, if applicable.

B. SDS or other appropriate documents upon request for products listed in the Lease. All SDS shall comply with Occupational Safety and Health Administration (OSHA) requirements for the Globally Harmonized System of Classification and Labeling of Chemicals (GHS). The Lessor and its agents shall comply with all recommended measures in the SDS to protect the health and safety of personnel.

(b) (6) (b) (6)

C. For leases 10,000 RSF or greater, a re-use plan, if required in accordance with the "Existing Fit-out, Salvaged, or Re-used Building Material" paragraph in the Lease.

D. Re-use plan required in accordance with the "Existing Fit-out, Salvaged, or Re-used Building Material" paragraph in the Lease.

E. Any waiver needed when not using materials from the Green Procurement Compilation list of acceptable products in accordance with the "Environmentally Preferable Product Requirements" paragraph in the Lease.

F. Radon test results as may be required by the "Radon in Air" and "Radon in Water" paragraphs in the Lease.

G. Construction waste management plan: For leases 10,000 RSF or greater, prior to construction commencement, a proposed plan following industry standards to recycle construction waste. The construction waste management plan shall quantify material diversion goals and maximize the materials to be recycled and/or salvaged (at least 50 percent) from construction, demolition, and packaging debris. Where the small quantity of material, the extraordinarily complex nature of the waste disposal method, or prohibitive expense for recycling would represent a genuine hardship, the Government, upon written request of the Lessor and approval of the LCO, may permit alternative means of disposal.

H. Building recycling service plan: A Building recycling service plan with floor plans annotating recycling area(s) as part of DIDs, if applicable, to be reflected on the CD submission.

I. A signed statement from the Lessor for the leased Space explaining how all HVAC systems serving the leased Space will achieve the desired ventilation of the Space during the flush-out period called for in the Lease.

J. A written commissioning plan submitted to the LCO prior to the completion of DIDs, if applicable, that includes:

1. A schedule of systems commissioning (revised as needed during all construction phases of the project, with such revisions provided to the LCO immediately); and

2. A description of how commissioning requirements will be met and confirmed.

K. INTENTIONALLY DELETED

L. If renewable source power is purchased, documentation within 9 months of occupancy.

4.20 SUBJECT MATTER EXPERTS

A. The government may, at its digression, call upon Subject Matter Experts (SME) to assist periodically throughout the duration of the project and will include but is not limited to; conducting site surveys and existing condition assessments.

4.21 POTENTIAL CHANGE ORDERS AND CHANGE ORDERS

A. The Contracting Officer is the only Government official that can make changes to the contract schedule, cost or scope. **Tenant agencies are not authorized to make any changes.**

B. A Potential Change Order (PCO) shall be prepared by the Lessor and submitted as soon as possible to the government by providing the following:

1. Full detailed breakdown, drawings (Sketches (SK's) if applicable) of the change in the Scope of Work;
2. If a totally new scope, submit in TICS format the proposed cost of the PCO.
3. If a change in scope, provide detailed pricing data of original scope as a credit against the detailed pricing data for the PCO. The credit must include any and all fees, overhead, and profit or other markups.
4. Provide submittals for all components of the PCO as applicable.
5. If applicable, provide any impact on schedule of the PCO.

C. PCO once reviewed and approved by the Government (LCO), shall then be deemed an official as a formal Change Order. Multiple PCO's may be combined and submitted as a Change Order.

D. Upon receipt of a written approval of a Change Order from the LCO, the Lessor shall promptly proceed with the change in the Work involved.

E. All Change Orders shall be recorded by the Lessor in a Change Order Log which will be maintained by the Lessor.

~~See exhibit _____~~

SECTION 5 TENANT IMPROVEMENT COMPONENTS

5.01 TENANT IMPROVEMENT REQUIREMENTS (OCT 2016)

The TIs shall be designed, constructed, and maintained in accordance with the standards set forth in this Lease. For pricing, only those requirements designated within this Section 5, or designated as TIs within the attached agency requirements and Security Requirements, shall be deemed to be TI costs.

5.02 ~~TENANT IMPROVEMENT SPECIFICATIONS (SEP 2015)~~ INTENTIONALLY DELETED

5.03 FINISH SELECTIONS (SEP 2015)

The Lessor must consult with the Government prior to developing a minimum of three (3) finish options to include coordinated samples of finishes for all interior elements such as paint, wall coverings, base coving, carpet, window treatments, laminates, and flooring. All samples provided must comply with specifications set forth elsewhere in this Lease. All required finish option samples must be provided at no additional cost to the Government within 10 Working Days after initial submission of DIDs, if applicable. GSA must deliver necessary finish selections to the Lessor within 10 Working Days after receipt of samples. The finish options must be approved by GSA prior to installation. The Lessor may not make any substitutions after the finish option is selected.

5.04 WINDOW COVERINGS (JUN 2012)

A. Window Blinds. All exterior windows shall be equipped with window blinds in new or like new condition, which shall be provided as part of the TIs. The blinds may be aluminum or plastic vertical blinds, horizontal blinds with aluminum slats of one-inch width or less, solar fabric roller shades, or an equivalent product pre-approved by the Government. The window blinds shall have non-corroding mechanisms and synthetic tapes. Color selection will be made by the Government.

B. Draperies:

1. If draperies are required, they shall be part of the TIs and the following minimum specifications shall apply:

a. Fabrics shall be lined with either white or off-white plain lining fabric suited to the drapery fabric weight. Draperies shall be floor, apron, or sill length, as specified by the Government, and shall be wide enough to cover window and trim. Draperies shall be hung with drapery hooks on well-anchored heavy duty traverse rods. Traverse rods shall draw from the center, right, or left side.

b. Construction. Any draperies to be newly installed shall be made as follows:

i. Fullness of 100 percent, including overlap, side hems, and necessary returns;
ii. Double headings of 4 inches turned over a 4-inch permanently finished stiffener;
iii. Doubled side hems of 1-1/2 inches; 4-inch doubled and blind stitched bottom hems;
iv. Three-fold pinch pleats;
v. Safety stitched intermediate seams;
vi. Matched patterns;
vii. Tacked corners; and,
viii. No raw edges or exposed seams.

c. Use of existing draperies must be approved by the Government.

5.05 DOORS: SUITE ENTRY (OCT 2019)

A. Suite entry doors shall be provided as part of the TIs and shall have a minimum clear opening of 32" wide x 84" high (per leaf). Doors shall meet the requirements of being a flush, solid core, 1-3/4-inch thick, wood door with a natural wood veneer face or an equivalent pre-approved by the Government. Hollow core wood doors are not acceptable. They shall be operable by a single effort; and shall meet the requirement of NFPA 101, Life Safety Code or the International Building Code (current as of the Lease Award Date). Doors shall be installed in a metal frame assembly which is primed and finished with a low VOC semi gloss oil-based paint finish that does not result in indoor air quality levels above 0.016 parts per million (ppm) of formaldehyde.

B. For leases 10,000 RSF or greater, the paint finish must meet applicable, statutory environmentally preferable criteria related to biobased and recovered material content as outlined in the Green Procurement Compilation at HTTPS://SFTOOL.GOV/GREENPROCUREMENT.and https://sftool.gov/greenprocurement/green-products/3/building-finishes/1338/paint/0?addon=False.

5.06 DOORS: INTERIOR (OCT 2019)

A. Doors within the Space shall be provided as part of the TIs and shall have a minimum clear opening of 32" wide x 80" high. Doors shall be flush, solid core, wood with a natural wood veneer face or an equivalent door pre-approved by the LCO. Hollow core wood doors are not acceptable. They shall be operable with a single effort, and shall meet the requirements of NFPA 101, Life Safety Code or the International Building Code (current as of the Lease Award Date). Doors shall be installed in a metal frame assembly which is primed and finished with a low VOC semi-gloss oil-based paint and which does not result in indoor air quality levels above 0.016 parts per million (ppm) of formaldehyde.

B. For leases 10,000 RSF or greater, the paint finish must meet applicable, statutory environmentally preferable criteria related to biobased and recovered material content as outlined in the Green Procurement Compilation at HTTPS://SFTOOL.GOV/GREENPROCUREMENT.and https://sftool.gov/greenprocurement/green-products/3/building-finishes/1338/paint/0?addon=False.

5.07 DOORS: HARDWARE (SEP 2013)

Doors shall have door handles or door pulls with heavyweight hinges. The Lessor is encouraged to avoid the use of chrome-plated hardware. All doors shall have corresponding doorstops (wall- or floor-mounted) and silencers. All door entrances leading into the Space from public corridors and exterior doors shall have automatic door closers. Doors designated by the Government shall be equipped with 5-pin, tumbler cylinder locks and strike plates. All locks shall be master keyed. Furnish at least two master keys for each lock to the Government. Any exterior entrance shall have a high security lock, with appropriate key control procedures, as determined by Government specifications. Hinge pins and hasps shall be secured against unauthorized removal by using spot welds or pinned mounting bolts. The exterior side of the door shall have a lock guard or astragal to prevent tampering of the latch hardware. Doors used for egress only shall not have any operable exterior hardware. All security-locking arrangements on doors used for egress shall comply with requirements of NFPA 101or the International Building Code current as of the Lease Award Date.

5.08 DOORS: IDENTIFICATION (JUN 2012)

Door identification shall be installed in approved locations adjacent to office entrances as part of the TIs. The form of door identification shall be approved by the Government.

5.09 PARTITIONS: SUBDIVIDING (OCT 2020)

A. Office subdividing partitions shall comply with applicable building codes and local requirements and ordinances and shall be provided as part of the TIs. Partitioning shall extend from the finished floor to the finished ceiling and shall be designed to provide a minimum sound transmission class (STC) of 37. Partitioning shall be installed by the Lessor at locations to be determined by the Government as identified in the DIDs, if applicable. They shall have a flame spread rating of 25 or less and a smoke development rating of 450 or less (ASTM E-84).

B. HVAC shall be rebalanced and lighting repositioned, as appropriate, after installation of partitions.

C. If installed in accordance with the “Automatic Fire Sprinkler System” and “Fire Alarm System” paragraphs, sprinklers and fire alarm notification appliances shall be repositioned as appropriate after installation of partitions to maintain the level of fire protection and life safety.

D. Partitioning requirements may be satisfied with existing partitions if they meet the Government’s standards and layout requirements.

E. For leases 10,000 RSF or greater where the Government is a sole tenant of the Building, the Lessor is encouraged to use materials for newly installed gypsum board meeting applicable environmentally preferable criteria that are recommended in the Green Procurement Compilation at HTTPS://SFTOOL.GOV/GREENPROCUREMENT and https://sftool.gov/greenprocurement/green-products/3/building-finishes/1735/wallboardgypsum-boarddrywall/0?addon=False.

5.10 WALL FINISHES (OCT 2019)

If the Government chooses to install a wall covering, the following specifications shall apply:

A. Commercial grade, weighing not less than 13 ounces per square yard.

B. For leases 10,000 RSF or greater, wall covering shall be vinyl-free, chlorine-free, plasticizer-free, with recycled or bio-based content. If the Government chooses to install a high-performance paint coating, it shall comply with the VOC limits of the Green Seal Standard GS-11.

5.11 PAINTING – TI (OCT 2019)

A. Prior to acceptance, all surfaces within the Space which are designated by GSA for painting shall be newly finished in colors and type of paint acceptable to the Government.

B. For leases 10,000 RSF or greater, the Lessor shall provide interior paints, primers, coatings, stains, and sealers that meet applicable, statutory, environmentally preferable criteria for biobased and recovered material content as outlined under the Green Procurement Compilation at HTTPS://SFTOOL.GREENPROCUREMENT and https://sftool.gov/greenprocurement/green-products/3/building-finishes/1338/paint/0?addon=False . The Lessor shall use reprocessed latex paint in accordance with EPA’s CPG (Comprehensive Procurement Guidelines) on all painted surfaces where feasible.

5.12 FLOOR COVERINGS AND PERIMETERS (OCT 2019)

A. Broadloom carpet or carpet tiles shall meet the requirements set forth in the specifications below. Floor perimeters at partitions shall have wood, rubber, vinyl, or carpet base. Floor covering shall be installed in accordance with manufacturing instructions to lay smoothly and evenly.

B. The use of existing carpet may be approved by the Government; however, existing carpet shall be repaired, stretched, and cleaned before occupancy and shall meet the static buildup requirement as stated in the specifications below.

C. Any alternate flooring shall be pre-approved by the Government.

D. SPECIFICATIONS FOR CARPET TO BE NEWLY INSTALLED OR REPLACED

1. Product sustainability and environmental requirements. For leases 10,000 RSF or greater, floor covering and perimeter products must meet applicable, statutory, environmentally preferable criteria related to biobased and recovered material content as outlined under the Green Procurement Compilation at WWW.SFTOOL.GOV/GREENPROCUREMENT and HTTPS://SFTOOL.GOV/GREENPROCUREMENT/GREEN-PRODUCTS/3/BUILDING-FINISHES/23/CARPET/0?ADDON=FALSE, HTTPS://SFTOOL.GOV/GREENPROCUREMENT/GREEN-PRODUCTS/3/BUILDING-FINISHES/1307/FLOOR-COVERINGS-NON-CARPET/0?ADDON=FALSE, and https://sftool.gov/greenprocurement/green-products/3/building-finishes/97/floor-tiles-heavy-dutycommercial/0?addon=False.

2. Face fiber content. Face yarn must be 100 percent nylon fiber. Loop Pile shall be 100 percent Bulk Continuous Filament (BCF); cut and loop shall be 100 percent BCF for the loop portion and may be BCF or staple for the cut portion; cut pile carpet shall be staple or BCF.

3. Performance requirements for broadloom and modular tile:

a. Static: Less than or equal to 3.5 kV when tested by AATCC Test Method 134 (Step Test Option).
b. Flammability: Meets CPSC-FF-1-70, DOC-FF-1-70 Methenamine Tablet Test criteria.
c. Flooring Radiant Panel Test: Meets NFPA 253 Class I or II depending upon occupancy and fire code when tested under ASTM E-648 for glue down installation.
d. Smoke Density: NBS Smoke Chamber - Less than 450 Flaming Mode when tested under ASTM E-662.

NOTE: Testing must be performed in a NVLAP accredited laboratory.

4. Texture Appearance Retention Rating (TARR). Carpet must meet TARR rating of at least 3.0 TARR for moderate traffic areas such as private offices, and heavy traffic areas such as training space, conference rooms, courtrooms, etc., and at least 3.5 TARR for severe traffic areas, including open office space, cafeteria, corridors and lobbies. The carpet must be evaluated using ASTM D-5252 Hexapod Drum Test as per the commercial carpet test procedure and the TARR classification determined using ASTM D-7330.

5. Carpet reclamation. Reclamation of existing carpet to be determined with potential vendor. When carpet is replaced, submit certification documentation from the reclamation facility to the LCO.

6. Warranty. Submit a copy of the manufacturer's standard warranty to the LCO within the first 60 days of Government occupancy. The Government is to be a beneficiary of the terms of this warranty.

5.13 HEATING AND AIR CONDITIONING (JUN 2012)

Zone Control. Provide individual thermostat control for office Space with control areas not to exceed 1,500 ABOA SF. Interior spaces must be separately zoned. Specialty occupancies (conference rooms, kitchens, etc.) must have active controls capable of sensing Space use and modulating HVAC system in response to Space demand. Areas that routinely have extended hours of operation shall be environmentally controlled through dedicated heating and air conditioning equipment. Special purpose areas (such as photocopy centers, large conference rooms, computer rooms, etc.) with an internal cooling load in excess of 5 tons shall be independently controlled. Provide concealed package air conditioning equipment to meet localized spot cooling of tenant special equipment. Portable space heaters are prohibited.

5.14 ELECTRICAL: DISTRIBUTION (SEP 2015)

A. All electrical, telephone, and data outlets within the Space shall be installed by the Lessor in accordance with the DIDs, if applicable. All electrical outlets shall be installed in accordance with NFPA Standard 70.

B. All outlets within the Space shall be marked and coded for ease of wire tracing; outlets shall be circuited separately from lighting. All floor outlets shall be flush with the plane of the finished floor. Outlet cover colors shall be coordinated with partition finish selections.

C. The Lessor shall in all cases safely conceal outlets and associated wiring (for electricity, voice, and data) to the workstation(s) in partitions, ceiling plenums, in recessed floor ducts, under raised flooring, or by use of a method acceptable to the Government.

5.15 TELECOMMUNICATIONS: DISTRIBUTION AND EQUIPMENT (JUN 2012)

Telecommunications floor or wall outlets shall be provided as part of the TIs. At a minimum, each outlet shall house one 4-pair wire jack for voice and one 4-pair wire jack for data. The Lessor shall ensure that all outlets and associated wiring, copper, coaxial cable, optical fiber, or other transmission medium used to transmit telecommunications (voice, data, video, Internet, or other emerging technologies) service to the workstation shall be safely concealed under raised floors, in floor ducts, walls, columns, or molding. All outlets/junction boxes shall be provided with rings and pull strings to facilitate the installation of cable. Some transmission medium may require special conduit, inner duct, or shielding as specified by the Government.

5.16 TELECOMMUNICATIONS: LOCAL EXCHANGE ACCESS (AUG 2008)

Provide sealed conduit to house the agency telecommunications system when required.

5.17 DATA DISTRIBUTION (OCT 2020)

The Lessor shall purchase and install data cable as part of the tenant improvements. The Lessor shall safely conceal data outlets and the associated wiring used to transmit data to workstations in floor ducts, walls, columns, or below access flooring. When cable consists of multiple runs, the Lessor shall provide ladder type or other acceptable cable trays to prevent cable coming into contact with suspended ceilings or sprinkler piping. Cable trays shall form a loop around the perimeter of the Space such that they are within a 30-foot horizontal distance of any single drop. If the Government chooses to purchase and install data cabling, then the Lessor shall provide, as part of the tenant improvements, outlets with rings and pull strings to facilitate the installation of the data cable.

5.18 ELECTRICAL, TELEPHONE, DATA FOR SYSTEMS FURNITURE (OCT 2020)

A. The Lessor shall provide as part of the TIs separate data, telephone, and electric junction boxes for the base feed connections to Government provided modular or systems furniture, when such feeds are supplied via wall outlets or floor penetrations. When overhead feeds are used, junction boxes shall be installed for electrical connections. Raceways shall be provided throughout the furniture panels to distribute the electrical, telephone, and data cable. The Lessor shall provide all electrical service wiring and connections to the furniture at designated junction points. Each electrical junction shall contain an 8-wire feed consisting of 3 general purpose 120-V circuits with 1 neutral and 1 ground wire, and a 120-V isolated ground circuit with 1 neutral and 1 isolated ground wire. A 20-ampere circuit shall have no more than 8 general purpose receptacles or 4 isolated ground "computer" receptacles.

B. The Lessor shall purchase and install data and telecommunications cable. Said cable shall be installed and connected to systems furniture by the Lessor/contractor with the assistance and/or advice of the Government or computer vendor. The Lessor shall provide wall mounted data and telephone junction boxes. When cable consists of multiple runs, the Lessor shall provide ladder-type or other acceptable cable trays to prevent Government provided cable coming into contact with suspended ceilings or sprinkler piping. Cable trays shall form a loop around the perimeter of the Space such that they are within a 30-foot horizontal distance of any single drop. Said cable trays shall provide access to both telecommunications data closets and telephone closets. If the Government chooses to purchase and install data and telecommunications cabling, then the Lessor shall provide, as part of the TIs, outlets with rings and pull strings to facilitate the installation of the data cable.

C. The Lessor shall furnish and install suitably sized junction boxes near the “feeding points” of the furniture panels. All “feeding points” shall be shown on Government approved design intent drawings. The Lessor shall temporarily cap off the wiring in the junction boxes until the furniture is installed. The Lessor shall make all connections in the power panel and shall keep the circuit breakers off. The Lessor shall identify each circuit with the breaker number and shall identify the computer hardware to be connected to it. The Lessor shall identify each breaker at the panel and identify the devices that it serves.

D. The Lessor’s electrical contractor must connect power poles or base feeds in the junction boxes to the furniture electrical system and test all pre-wired receptacles in the systems furniture. Other Government contractors will be installing the data cable in the furniture panels for the terminal and printer locations, installing the connectors on the terminal/printer ends of the cable, and continuity testing each cable. Work shall be coordinated and performed in conjunction with the furniture, telephone, and data cable installers. Much of this work may occur over a weekend on a schedule that requires flexibility and on-call visits. The Lessor must coordinate the application of Certification of Occupancy with furniture installation.

5.19 LIGHTING: INTERIOR AND PARKING – TI (SEP 2015)

A. FIXTURES: Once the design intent drawings are approved, the Lessor shall design and provide interior lighting to comply with requirements under the paragraph, “Lighting: Interior and Parking – Shell.” Any additional lighting fixtures and/or components required beyond what would have been provided for an open office plan (shell) are part of the TIs.

B. PENDANT STYLE FIXTURES: If pendant style lighting fixtures are used, the increase between the number of fixtures required in the Building shell and the Space layout is part of the TIs.

C. MIXED FIXTURES: DIDs, if applicable, may require a mixed use of recessed or pendant style fixtures in the Space.

D. BUILDING PERIMETER: There may be additional requirements for lighting in exterior parking areas, vehicle driveways, pedestrian walkways, and Building perimeter in the Security Requirements attached to this Lease.

5.20 AUTOMATIC FIRE SPRINKLER SYSTEM - TI (OCT 2016)

Where sprinklers are required in the Space, sprinkler mains and distribution piping in a “protection” layout (open plan) with heads turned down with an escutcheon or trim plate shall be provided as part of Shell rent. Any additional sprinkler fixtures and/or components required in the Space beyond what would have been provided for an open office plan (shell) are part of the TIs.

SECTION 6 UTILITIES, SERVICES, AND OBLIGATIONS DURING THE LEASE TERM

6.01 PROVISION OF SERVICES, ACCESS, AND NORMAL HOURS (JUN 2012)

A. The Government's normal hours of operations are established as **7:00** AM to **5:00** PM, Monday through Friday, with the exception of Federal holidays. Services, maintenance, and utilities shall be provided during these hours. The Government shall have access to the Premises and its Appurtenant Areas at all times without additional payment, including the use, during other than normal hours, of necessary services and utilities such as elevators, restrooms, lights, and electric power. Cleaning shall be performed during normal hours.

B. The Lessor and the Lessor's representatives, employees and contractors shall demonstrate a cooperative, positive, welcoming, respectful, professional and business-like demeanor and shall present a neat, clean, job-appropriate (professional) appearance.

6.02 UTILITIES (APR 2011)

The Lessor is responsible for providing all utilities necessary for base Building and tenant operations as part of the rental consideration.

6.03 ~~UTILITIES SEPARATE FROM RENTAL/BUILDING OPERATING PLAN (OCT 2020)~~ INTENTIONALLY DELETED

6.04 UTILITY CONSUMPTION REPORTING (OCT 2016)

Upon the effective date of the Lease, only for leases over 10,000 RSF, the Lessor shall provide regular quarterly reports for the amount of utilities (including water) consumed at the Building broken down by utility type per month for the duration of the Lease. Lessors shall report this utility consumption data within 45 calendar days of the end of each calendar quarter in the Environmental Protection Agency (EPA) Portfolio Manager online tool HTTPS://WWW.ENERGYSTAR.GOV/. Data reported includes, but is not limited to, the number of actual units consumed, by utility type per month, and associated start and end date(s) for that consumption.

(Refer to the following link for reporting guidance: www.gsa.gov/ucr)

6.05 HEATING AND AIR CONDITIONING (OCT 2020)

A. In all office areas, temperatures shall conform to local commercial equivalent temperature levels and operating practices in order to maximize tenant satisfaction. These temperatures shall be maintained throughout the leased Premises and service areas, regardless of outside temperatures, during the hours of operation specified in the Lease. The Lessor shall perform any necessary systems start-up required to meet the commercially equivalent temperature levels prior to the first hour of each day's operation. At all times, humidity shall be maintained below 60% relative humidity.

B. During non working hours, heating temperatures shall be set no higher than 55° Fahrenheit, and air conditioning shall not be provided except as necessary to return Space temperatures to a suitable level for the beginning of working hours. Thermostats shall be secured from manual operation by key or locked cage. A key shall be provided to the Government's designated representative.

C. Thermal comfort. During all working hours, Lessor shall comply with ANSI/ASHRAE Standard 55, Thermal Environmental Conditions for Human Occupancy that corresponds with how the Building's HVAC system was designed to perform. At a minimum, Lessor must meet ASHRAE Standard 55-2004.

D. Warehouse or garage areas require heating and ventilation only. Cooling of this Space is not required. Temperature of warehouse or garage areas shall be maintained at a minimum of 50° Fahrenheit.

E. The Lessor shall conduct HVAC system balancing after any HVAC system alterations during the term of the Lease and shall make a reasonable attempt to schedule major construction outside of office hours.

F. Normal HVAC systems' maintenance shall not disrupt tenant operations.

G. **240** ABOA SF of the Premises shall receive cooling at all times (24 hrs a day, 365 days a year) for purposes of cooling the designated server room. The BTU output of this room is established as **40,000** BTU per hour. The temperature of this room shall be maintained at **68-75** degrees F, with humidity control not to exceed 60% relative humidity, regardless of outside temperature or seasonal changes.

H. In addition to the server room requirements stated above, the following areas shall receive HVAC at all times:

I. The 24 hour, 365 days a year HVAC service(s) stated above shall be provided by the Lessor as part of the operating rent established under the Lease.

6.06 OVERTIME HVAC USAGE (OCT 2020)

A. If there is to be a charge for heating or cooling outside of the Building's normal hours, such services shall be provided at the hourly rates set forth elsewhere in the Lease. Overtime usage services may be ordered by the Government's authorized representative only.

B. When the cost of service is $10,000 or less, the service may be ordered orally. An invoice shall be submitted to the official placing the order for certification and payment. Orders for services costing more than $10,000 shall be placed using GSA Form 300, Order for Supplies or Services, or

other approved service requisition procurement document. An invoice conforming to the requirements of this Lease shall be submitted to the official placing the order for certification and payment.

C. Failure to submit a proper invoice within 120 days of providing overtime utilities shall constitute a waiver of the Lessor's right to receive any payment for such overtime utilities pursuant to this Lease.

6.07 JANITORIAL SERVICES (OCT 2021)

The Lessor shall maintain the Premises and all areas of the Property to which the Government has routine access, including high-touch surfaces (e.g., door knobs, light switches, handles, handrails, and elevator buttons) in a clean condition and shall provide supplies and equipment for the term of the Lease. The following schedule describes the level of services intended. Performance will be based on the LCO's evaluation of results, not the frequency or method of performance. **Daytime cleaning is required. Cleaning staff shall be onsite during the hours the court is open for hearings.**

A. Daily. Empty trash receptacles. Sweep entrances, lobbies, and corridors. Spot sweep floors, and spot vacuum carpets. Clean drinking fountains. Sweep and damp mop or scrub restrooms. Clean all restroom fixtures and replenish restroom supplies. Dispose of all trash and garbage generated in or about the Building. Wash inside and out or steam clean cans used for collection of food remnants from snack bars and vending machines. Dust horizontal surfaces that are readily available and visibly require dusting. Spray buff resilient floors in main corridors, entrances, and lobbies. Clean elevators and escalators. Remove carpet stains. Police sidewalks, parking areas, and driveways. Sweep loading dock areas and platforms. Clean glass entry doors to the Space. Clean all high-touch surfaces.

B. Three times a week. Sweep or vacuum stairs.

C. Weekly. Damp mop and spray buff all resilient floors in restrooms and health units. Sweep sidewalks, parking areas, and driveways (weather permitting).

D. Every two weeks. Spray buff resilient floors in secondary corridors, entrance, and lobbies. Damp mop and spray buff hard and resilient floors in office Space.

E. Monthly. Thoroughly dust furniture. Completely sweep and/or vacuum carpets. Sweep storage Space. Spot clean all wall surfaces within 70 inches of the floor.

F. Every two months. Damp wipe restroom wastepaper receptacles, stall partitions, doors, window sills, and frames. Shampoo entrance and elevator carpets.

G. Three times a year. Dust wall surfaces within 70 inches of the floor, vertical surfaces and under surfaces. Clean metal and marble surfaces in lobbies. Wet mop or scrub garages.

H. Twice a year. Wash all interior and exterior windows and other glass surfaces. Strip and apply four coats of finish to resilient floors in restrooms. Strip and refinish main corridors and other heavy traffic areas.

I. Annually. Wash all venetian blinds, and dust 6 months from washing. Vacuum or dust all surfaces in the Building more than 70 inches from the floor, including light fixtures. Vacuum all draperies in place. Strip and refinish floors in offices and secondary lobbies and corridors. Shampoo carpets in corridors and lobbies. Clean balconies, ledges, courts, areaways, and flat roofs.

J. Every two years. Shampoo carpets in all offices and other non-public areas.

K. Every five years. Dry clean or wash (as appropriate) all draperies.

L. As required. Properly maintain plants and lawns. Provide initial supply, installation, and replacement of light bulbs, tubes, ballasts, and starters. Provide and empty exterior ash cans and clean area of any discarded cigarette butts.

M. Pest control. Control pests as appropriate, using Integrated Pest Management techniques, as specified by the U.S. Environmental Protection Agency at https://www.epa.gov/ipm/introduction-integrated-pest-management.

6.08 SELECTION OF CLEANING PRODUCTS (OCT 2021)

For leases 10,000 RSF or greater where the Government is a sole occupant of the Building, the Lessor shall use cleaning products (including general purpose cleaners, floor cleaners, hand soap, etc.) that meet applicable, statutory, environmentally preferable criteria related to biobased and recovered material content as outlined under the Green Procurement Compilation at HTTPS://SFTOOL.GOV/GREENPROCUREMENT and https://sftool.gov/greenprocurement/green-products/5/cleaning-products/0.

6.09 SELECTION OF PAPER PRODUCTS (OCT 2021)

For leases 10,000 RSF or greater where the Government is a sole occupant of the Building, the Lessor shall select paper and paper products (e.g., restroom tissue and paper towels)that meet applicable, statutory, environmentally preferable criteria related to recovered material content as outlined under the Green Procurement Compilation at HTTPS://SFTOOL.GOV/GREENPROCUREMENT and https://sftool.gov/greenprocurement/green-products/5/cleaning-products/0

6.10 SNOW REMOVAL (OCT 2020)

Lessor shall provide snow removal services for the Government on all days for which this Lease has designated normal hours. Lessor shall clear parking lots if the accumulation of snow exceeds two inches. Lessor shall clear sidewalks, walkways and other entrances before accumulation exceeds 1.5 inches. The snow removal shall take place no later than 5:00 AM, without exception. Should accumulation continue throughout the day, the Lessor shall provide such additional snow removal services to prevent accumulation greater than the maximums specified in this paragraph. In addition to snow removal, the Lessor shall keep walkways, sidewalks and parking lots free of ice during the normal hours. The Lessor shall remove excess buildup of sand and/or ice melt to minimize slipping hazards. If the Building entrance(s) has a northern exposure, then Lessor shall take additional measures (e.g., more frequent snow removal or application of ice-melting agents, warning signs, etc.) to protect the safety of pedestrians.

6.11 MAINTENANCE AND TESTING OF SYSTEMS (SEP 2013)

A. The Lessor is responsible for the total maintenance and repair of the leased Premises. Such maintenance and repairs include the site and private access roads. All equipment and systems shall be maintained to provide reliable, energy efficient service without unusual interruption, disturbing noises, exposure to fire or safety hazards, uncomfortable drafts, excessive air velocities, or unusual emissions of dirt. The Lessor's maintenance responsibility includes initial supply and replacement of all supplies, materials, and equipment necessary for such maintenance. Maintenance, testing, and inspection of appropriate equipment and systems shall be done in accordance with current applicable codes, and inspection certificates shall be displayed as appropriate. Copies of all records in this regard shall be forwarded to the Government's designated representative.

B. At the Lessor's expense, the Government reserves the right to require documentation of proper operations, inspection, testing, and maintenance of fire protection systems, such as, but not limited to, fire alarm, fire sprinkler, standpipes, fire pump, emergency lighting, illuminated exit signs, emergency generator, prior to occupancy to ensure proper operation. These tests shall be witnessed by the Government's designated representative.

6.12 MAINTENANCE OF PROVIDED FINISHES (OCT 2016)

A. Paint, wall coverings. Lessor shall maintain all wall coverings and high performance paint coatings in "like new" condition for the life of the Lease. All painted surfaces shall be repainted at the Lessor's expense, including the moving and returning of furnishings, any time during the occupancy by the Government if the paint is peeling or permanently stained, except where damaged due to the negligence of the Government. All work shall be done after normal working hours as defined elsewhere in this Lease. In addition to the foregoing requirement,

1. Lessor shall repaint common areas at least every three years.

2. Lessor shall perform cyclical repainting of the Space every **5** years of occupancy. This cost, including the moving and returning of furnishings, as well as disassembly and reassembly of systems furniture per manufacturer's warranty, shall be at the Lessor's expense.

B. Carpet and flooring.

1. Except when damaged by the Government, the Lessor shall repair or replace flooring at any time during the Lease term when:

   a. Backing or underlayment is exposed;
   b. There are noticeable variations in surface color or texture;
   c. It has curls, upturned edges, or other noticeable variations in texture;
   d. Tiles are loose; or,
   e. Tears or tripping hazards are present.

2. Notwithstanding the foregoing, as part of the rental consideration, the Lessor shall replace all carpet and base coving in the Space every **10** years, with a product which meets the requirements in the "Floor Coverings and Perimeters" paragraph in this Lease.

3. Repair or replacement shall include the moving and returning of furnishings, including disassembly and reassembly of systems furniture per manufacturer's warranty, if necessary. Work shall be performed after the normal hours established elsewhere in this Lease.

6.13 ASBESTOS ABATEMENT (OCT 2021)

If asbestos abatement work is to be performed in the Space after occupancy, the Lessor shall submit to the Government documentation that the abatement was done in accordance with OSHA, EPA, DOT, state, and local regulations and that final clearance is achieved.

6.14 ONSITE LESSOR MANAGEMENT (APR 2011)

The Lessor shall provide an onsite Building superintendent or a locally designated representative available to promptly respond to deficiencies, and immediately address all emergency situations.

6.15 IDENTITY VERIFICATION OF PERSONNEL (OCT 2021)

A. The Government reserves the right to verify identities of personnel with routine and/or unaccompanied access to the Government's Space, including both pre and post occupancy periods. The Lessor shall comply with GSA personal identity verification requirements, identified in the CIO P 2181.1 GSA HSPD-12 Personal Identity Verification and Credentialing Handbook. The Lessor can find the CIO policy and additional information at *HTTP://WWW.GSA.GOV/HSPD12*. This policy requires the Government to conduct background investigations and make HSPD-12 compliant suitability determinations for all persons with routine or unaccompanied access to Government leased Space. By definition, this includes at a minimum each employee of the Lessor, as well as employees of the Lessor's contractors or subcontractors who will provide building operating services requiring routine

access to the Government's leased Space for a period greater than 6 months. The Government may also require this information for the Lessor's employees, contractors, or subcontractors who will be engaged to perform alterations or emergency repairs in the Government's Space.

B. Application Process: The background investigation will be done using the Government's prescribed process. The Lessor must provide information on each of their contractor/personnel meeting the above criteria to the Government, whereupon each identified contractor/personnel will be notified with instructions for completing the identity verification application within a given time frame. The application process will include completing supplemental information forms that must be inputted into the identity verification system in order for the application to be considered complete. Additionally, the Lessor must ensure prompt completion of the fingerprint process for their contractor/personnel. Email notifications will be sent with instructions on the steps to be taken to schedule an appointment for fingerprinting at an approved regional location along with instructions on how to complete the background investigation application.

C. The Lessor must ensure the Lease Contracting Officer (or the Lease Contracting Officer's designated representative) has all of the requested documentation timely to ensure the completion of the investigation.

D. Based on the information furnished, the Government will conduct background investigations. The Lease Contracting Officer will advise the Lessor in writing if a person fails the investigation, and, effective immediately, that person will no longer be allowed to work or be assigned to work in the Government's Space.

E. Throughout the life of the Lease, the Lessor shall provide the same data for any new employees, contractors, or subcontractors who will be assigned to the Government's Space in accordance with the above criteria. In the event the Lessor's contractor or subcontractor is subsequently replaced, the new contractor or subcontractor is not required to have persons re-apply who were cleared through this process while associated with the former contractor or subcontractor in accordance with GSA policy. The Lessor shall require each cleared person to re-apply and obtain a new clearance in accordance with GSA policy.

F. The Lessor is accountable for not allowing contractors to start work without the successful completion of the appropriate background investigation as required by GSA policy.

G. Access Card Retrieval/Return: Upon an Entry on Duty notification, the Government will issue a Personal Identity Verification (PIV) credential that is sometimes referred to as a GSA Access card. Lessors are responsible for all PIV credential issued to their contractors/personnel pursuant to this Lease. Lessors are specifically responsible for ensuring that all GSA PIV access cards are returned to the Lease Contracting Officer or their designee whenever their employees or a contractor no longer require access to the Space (such as When no longer needed for contract performance, upon completion of the Contractor employee's employment, and upon contract completion or termination). Additionally, the Lessor must notify the Lease Contracting Officer or their designee whenever a GSA PIV Access card is lost or stolen in which event the Lessor may be responsible for reimbursing the Government for replacement credentials at the current cost per PIV HSPD12 credential. Unreturned PIV Access cards will be considered as lost or stolen cards.

H. The Government reserves the right to conduct additional background checks on Lessor personnel and contractors with routine access to Government leased Space throughout the term of the Lease to determine who may have access to the Premises.

I. The Lease Contracting Officer may delay final payment under a contract if the Contractor fails to comply with these requirements.

J. The Lessor shall insert this paragraph in all subcontracts when the subcontractor is required to have physical access to a federally controlled facility or access to a federal information system.

6.16 SCHEDULE OF PERIODIC SERVICES (OCT 2020)

Upon acceptance of the Space, the Lessor shall provide the LCO with a detailed written schedule of all periodic services and maintenance to be performed other than daily, weekly, or monthly.

6.17 LANDSCAPING (OCT 2019)

A. For leases 10,000 RSF or greater where the Government is the sole occupant of the building, the Lessor shall use landscaping products that meet applicable, statutory, environmentally preferable criteria related to recycled content as outlined under the Green Procurement Compilation at HTTPS://SFTOOL/GREENPROCUREMENT AND HTTPS://SFTOOL.GOV/GREENPROCUREMENT/GREEN-PRODUCTS/6/LANDSCAPING-PRODUCTS/0.

B. Landscape management practices shall prevent pollution by:

1. Employing practices which avoid or minimize the need for herbicides, fertilizers and pesticides; and

2. Composting/recycling all yard waste.

C. For leases 10,000 RSF or greater, if the Lessor satisfies performance of this Lease by new construction, and where conditions permit, the site shall be landscaped for low maintenance and water conservation with plants that are either native or well-adapted to local growing conditions.

6.18 LANDSCAPE MAINTENANCE (APR 2011)

Landscape maintenance shall be performed during the growing season at not less than a weekly cycle and shall consist of watering, weeding, mowing, and policing the area to keep it free of debris. Pruning and fertilization shall be done on an as-needed basis. In addition, dead, dying, or damaged plants shall be replaced.

6.19 RECYCLING (OCT 2021)

A. For Leases 10,000 rentable SF or greater, with a Lease term greater than six months, the Lessor shall establish a recycling program for (at a minimum) paper, corrugated cardboard, glass, plastics, and metals where local markets for recovered materials exist.

B. Where state or local law, code, or ordinance requires recycling programs for the Premises, Lessor shall comply with such state and/or local law, code, or ordinance.

C. When implementing any recycling program, the Lessor shall provide an easily accessible, appropriately sized area (2 SF per 1,000 SF of Building gross floor area) that serves the Space for the collection and storage of materials for recycling. Telecom rooms are not acceptable as recycling space. During the Lease term, the Lessor agrees, upon request, to provide the Government with additional information concerning recycling programs maintained in the Building and in the Space.

D. For leases 10,000 rentable SF or greater, the Lessor shall submit a Building recycling service plan with floor plans annotating recycling area(s) as part of DIDs, if applicable, to be reflected on the CD submission.

6.20 RANDOLPH-SHEPPARD COMPLIANCE (SEP 2013)

During the term of the Lease, the Lessor may not establish vending facilities within the leased Space that will compete with any Randolph-Sheppard vending facilities.

6.21 SAFEGUARDING AND DISSEMINATION OF CONTROLLED UNCLASSIFIED INFORMATION (CUI) BUILDING INFORMATION (FEB 2020)

This clause applies to all recipients of CUI building information (which falls within the CUI Physical Security category), including offerors, bidders, awardees, contractors, subcontractors, lessors, suppliers and manufacturers.

Marking CUI. Contractors must submit any contractor-generated documents that contain building information to GSA for review and identification of any CUI building information that may be included. In addition, any documents GSA identifies as containing CUI building information must be marked in accordance with the Order and the Marking Controlled Unclassified Information Handbook (the current version may be found at https://www.archives.gov/files/cui/20161206-cui-marking-handbook-v1-1.pdf) before the original or any copies are disseminated to any other parties. If CUI content is identified, the CO may direct the contractor, as specified elsewhere in this contract, to imprint or affix CUI document markings (CUI) to the original documents and all copies, before any dissemination, or authorized GSA employees may mark the documents.

1. Authorized recipients.
    a. Building information designated as CUI must be protected with access strictly controlled and limited to those individuals having a Lawful Government Purpose to access such information, as defined in 32 C.F.R. § 2002.4(bb). Those with such a Lawful Government Purpose may include Federal, state and local government entities, and non-governmental entities engaged in the conduct of business on behalf of or with GSA. Non-governmental entities may include architects, engineers, consultants, contractors, subcontractors, suppliers, utilities, and others submitting an offer or bid to GSA, or performing work under a GSA contract or subcontract. Recipient contractors must be registered as "active" in the System for Award Management (SAM) database at www.sam.gov, and have a Lawful Government Purpose to access such information. If a subcontractor is not registered in the SAM database and has a Lawful Government Purpose to possess CUI building information in furtherance of the contract, the subcontractor must provide to the contractor its DUNS number or its tax ID number and a copy of its business license. The contractor must keep this information related to the subcontractor for the duration of the contract and subcontract.
    b. All GSA personnel and contractors must be provided CUI building information when needed for the performance of official Federal, state, and local government functions, such as for code compliance reviews and the issuance of building permits. Public safety entities such as fire and utility departments may have a Lawful Government Purpose to access CUI building information on a case-by-case basis. This clause must not prevent or encumber the necessary dissemination of CUI building information to public safety entities.

2. Dissemination of CUI building information:
    a. By electronic transmission. Electronic transmission of CUI information outside of the GSA network must use session encryption (or alternatively, file encryption) consistent with National Institute of Standards and Technology (NIST) SP 800-171. Encryption must be through an approved NIST algorithm with a valid certification, such as Advanced Encryption Standard or Triple Data Encryption Standard, in accordance with Federal Information Processing Standards Publication 140-2, Security Requirements for Cryptographic Modules, as required by GSA policy.
    b. By nonelectronic form or on portable electronic data storage devices. Portable electronic data storage devices include CDs, DVDs, and USB drives. Nonelectronic forms of CUI building information include paper documents, photographs, and film, among other formats.
        i. By mail. Contractors must only use methods of shipping that provide services for monitoring receipt such as track and confirm, proof of delivery, signature confirmation, or return receipt.
        ii. In person. Contractors must provide CUI building information only to authorized recipients with a Lawful Government Purpose to access such information. Further information on authorized recipients is found in section 1 of this clause.
3. Record keeping. Contractors must maintain a list of all entities to which CUI is disseminated, in accordance with sections 2 and 3 of this clause. This list must include, at a minimum:
    1) The name of the state, Federal, or local government entity, utility, or firm to which CUI has been disseminated;
    2) The name of the individual at the entity or firm who is responsible for protecting the CUI building information, with access strictly controlled and limited to those individuals having a Lawful Government Purpose to access such information;
    3) Contact information for the named individual; and
    4) A description of the CUI building information provided.

Once "as built" drawings are submitted, the contractor must collect all lists maintained in accordance with this clause, including those maintained by any subcontractors and suppliers, and submit them to the CO. For Federal buildings, final payment may be withheld until the lists are received.

4. Safeguarding CUI documents. CUI building information (both electronic and paper formats) must be stored within controlled environments that prevent unauthorized access. GSA contractors and subcontractors must not take CUI building information outside of GSA or their own facilities or network, except as necessary for the performance of that contract. Access to the information must be limited to those with a Lawful Government Purpose for access.

5. Destroying CUI building information. When no longer needed, CUI building information must either be returned to the CO or destroyed in accordance with guidelines in NIST Special Publication 800-88, Guidelines for Media Sanitization.

6. Notice of disposal. The contractor must notify the CO that all CUI building information has been returned or destroyed by the contractor and its subcontractors or suppliers in accordance with paragraphs 4 and 5 of this clause, with the exception of the contractor's record copy. This notice must be submitted to the CO at the completion of the contract to receive final payment. For leases, this notice must be submitted to the CO at the completion of the lease term.

7. CUI security incidents. All improper disclosures or receipt of CUI building information must be immediately reported to the CO and the GSA Incident Response Team Center at gsa-ir@gsa.gov. If the contract provides for progress payments, the CO may withhold approval of progress payments until the contractor provides a corrective action plan explaining how the contractor will prevent future improper disclosures of CUI building information. Progress payments may also be withheld for failure to comply with any provision in this clause until the contractor provides a corrective action plan explaining how the contractor will rectify any noncompliance and comply with the clause in the future.

8. Subcontracts. The contractor and subcontractors must insert the substance of this clause in all subcontracts.

6.22 INDOOR AIR QUALITY (OCT 2019)

A. The Lessor shall control airborne contaminants at the source and/or operate the Space in such a manner that indoor air quality action limits identified in the PBS Desk Guide for Indoor Air Quality Management (Companion to GSA Order PBS 1000.8), OSHA regulatory limits, and generally accepted consensus standards are not exceeded. .

B. The Lessor shall avoid the use of products containing toxic, hazardous, carcinogenic, flammable, or corrosive ingredients as determined from the product label or manufacturer's safety data sheet. The Lessor shall use available odor-free or low odor products when applying paints, glues, lubricants, and similar wet products. When such equivalent products are not available, lessor shall use the alternate products outside normal working hours. Except in an emergency, the Lessor shall provide at least 72 hours advance notice to the Government before applying chemicals or products with noticeable odors in occupied Spaces and shall adequately ventilate those Spaces during and after application.

C. The Lessor shall serve as first responder to any occupant complaints about indoor air quality (IAQ). The Lessor shall promptly investigate such complaints and implement the necessary controls to address each complaint. Investigations shall include testing as needed, to ascertain the source and severity of the complaint.

D. The Government reserves the right to conduct independent IAQ assessments and detailed studies in Space that it occupies, as well as in space serving the Space (e.g., common use areas, mechanical rooms, HVAC systems, etc.). The Lessor shall assist the Government in its assessments and detailed studies by:

1. Making available information on Building operations and Lessor activities;
2. Providing access to Space for assessment and testing, if required; and
3. Implementing corrective measures required by the LCO. The Lessor shall take corrective action to correct any tests or measurements that do not meet GSA policy action limits in the PBS Desk Guide for Indoor Air Quality Management (Companion to GSA Order PBS 1000.8), OSHA regulatory limits, and generally accepted consensus standards.

E. The Lessor shall provide to the Government safety data sheets (SDS) upon request for the following products prior to their use during the term of the Lease: adhesives, caulking, sealants, insulating materials, fireproofing or firestopping materials, paints, carpets, floor and wall patching or leveling materials, lubricants, clear finish for wood surfaces, janitorial cleaning products, pesticides, rodenticides, and herbicides. The Government reserves the right to review such products used by the Lessor within the Space, common building areas, ventilation systems and zones serving the Space, and the area above suspended ceilings and engineering space in the same ventilation zone as the Space.

F. The Lessor shall use high efficiency (HEPA) filtration vacuums for cleaning and minimum MERV 10 rated ventilation system filtration whenever feasible.

G. The Lessor is encouraged to comply with best practices outlined in Appendix D- Indoor Air Quality in GSA Leased Facilities (Best Practices) within the PBS Desk Guide for Indoor Air Quality Management (Companion to GSA Order PBS 1000.8).

6.23 RADON IN AIR (OCT 2016)

If Space planned for occupancy by the Government is on the second floor above grade or lower, the Lessor shall, prior to occupancy, test the leased Space for 2 days to 3 days using charcoal canisters. The Lessor is responsible to provide Space in which radon levels in air are below the GSA action levels of 4 picoCuries per liter (pCi/L) for childcare and 25 pCi/L for all other space. After the initial testing, a follow-up test for a minimum of 90 days using alpha track detectors shall be completed. For further information on radon, go to: HTTPS://WWW.EPA.GOV/RADON .

A. The radon concentration in the air of the Space shall be less than 4 picoCuries per liter (pCi/L) for childcare and 25 pCi/L for all other space, herein called "GSA action levels."

B. Initial Testing:

1. The Lessor shall:
   a. Test for radon that portion of Space planned for occupancy by the Government in ground contact or closest to the ground up to and including the second floor above grade (Space on the third or higher floor above grade need not be measured);.
   b. Report the results to the LCO upon award; and
   c. Promptly carry out a corrective action program for any radon concentration which equals or exceeds the GSA action levels.
2. Testing sequence. The Lessor shall measure radon by the standard test in sub-paragraph D.1, completing the test not later than 150 days after award, unless the LCO decides that there is not enough time to complete the test before Government occupancy, in which case the Lessor shall perform the short test in sub-paragraph D.2.
3. If the Space offered for Lease to the Government is in a Building under construction or proposed for construction, the Lessor, if possible, shall perform the standard test during buildout before Government occupancy of the Space. If the LCO decides that it is not possible to complete the standard test before occupancy, the Lessor shall complete the short test before occupancy and the standard test not later than 150 days after occupancy.

C. Corrective Action Program:

1. Program Initiation and Procedures.
   a. If either the Government or the Lessor detects radon at or above the GSA action levels at any time before Government occupancy, the Lessor shall carry out a corrective action program which reduces the concentration to below the GSA action levels before Government occupancy.
   b. If either the Government or the Lessor detects a radon concentration at or above the GSA action levels at any time after Government occupancy, the Lessor shall promptly carry out a corrective action program which reduces the concentration to below the GSA action levels.
   c. If either the Government or the Lessor detects a radon concentration at or above the GSA action levels at any time after Government occupancy, the Lessor shall promptly restrict the use of the affected area and shall provide comparable temporary space for the tenants, as agreed to by the Government, until the Lessor carries out a prompt corrective action program which reduces the concentration to below the GSA action levels and certifies the Space for re-occupancy.
   d. The Lessor shall provide the Government with prior written notice of any proposed corrective action or tenant relocation. The Lessor shall promptly revise the corrective action program upon any change in Building condition or operation which would affect the program or increase the radon concentration to or above the GSA action levels.
2. The Lessor shall perform the standard test in sub-paragraph D.1 to assess the effectiveness of a corrective action program. The Lessor may also perform the short test in sub-paragraph D.2 to determine whether the Space may be occupied but shall begin the standard test concurrently with the short test.
3. All measures to accommodate delay of occupancy, corrective action, tenant relocation, tenant re-occupancy, or follow-up measurement, shall be provided by the Lessor at no additional cost to the Government.
4. If the Lessor fails to exercise due diligence, or is otherwise unable to reduce the radon concentration promptly to below the GSA action levels, the Government may implement a corrective action program and deduct its costs from the rent.

D. Testing Procedures:

1. Standard Test. Place alpha track detectors throughout the required area for 91 or more days so that each covers no more than 2,000 ABOA SF. Use only devices listed in the EPA Radon Measurement Proficiency Program (RMP) application device checklists. Use a laboratory rated proficient in the EPA RMP to analyze the devices. Submit the results and supporting data (sample location, device type, duration, radon measurements, laboratory proficiency certification number, and the signature of a responsible laboratory official) within 30 days after the measurement.
2. Short Test. Place alpha track detectors for at least 14 days, or charcoal canisters for 2 days to 3 days, throughout the required area so that each covers no more than 2,000 ABOA SF, starting not later than 7 days after award. Use only devices listed in the EPA RMP application device checklists. Use a laboratory rated proficient in the EPA RMP to analyze the devices. Submit the results and supporting data within 30 days after the measurement. In addition, complete the standard test not later than 150 days after Government occupancy.

6.24 RADON IN WATER (JUN 2012)

A. If the water source is not from a public utility, the Lessor shall demonstrate that water provided to the Premises is in compliance with EPA requirements and shall submit certification to the LCO prior to the Government occupying the Space.

B. If the EPA action level is reached or exceeded, the Lessor shall institute appropriate abatement methods which reduce the radon levels to below this action.

6.25 HAZARDOUS MATERIALS (SEP 2013)

A. The leased Space shall be free of hazardous materials, hazardous substances, and hazardous wastes, as defined by and according to applicable Federal, state, and local environmental regulations. Should there be reason to suspect otherwise, the Government reserves the right, at Lessor's expense, to require documentation or testing to confirm that the Space is free of all hazardous materials.

B. Lessor shall, to the extent of its knowledge, notify Government of the introduction of any hazardous materials onto the Property by Lessor or others, including but not limited to, co-tenants occupying Space in the Building.

6.26 MOLD (OCT 2021)

A. Actionable mold is either visible mold or airborne mold of types and concentrations in excess of that found in the local outdoor air or non-problematic control areas elsewhere in the same building, whichever is lower. The Lessor shall safely remediate all actionable mold in accordance with sub-paragraph C below.

B. The Lessor shall provide Space to the Government that is free from ongoing water leaks or moisture infiltration. The Space and ventilation zones serving the Space shall also be free of actionable mold.

C. Within 48 hours following a flood, plumbing leak or heavy rain whereby the Government Space or air zones serving the Space may have become moisture damaged, the Lessor shall repair any leakage sources and remediate the moisture damage. Whenever moisture damage or infiltration persists such that: mold is visible, mold odors are present, or occupants register complaints about mold, the Lessor shall employ a board-certified industrial hygienist to inspect and evaluate the Space and air zones serving the Space for visible and/or actionable mold presence; inspection shall take place as soon as possible but no later than 15 calendar days following identification of a potential mold issue as described above. Notwithstanding the above, when a board-certified industrial hygienist is not available to perform this inspection, the Lessor may, upon written request and the Government's approval, employ an environmental consultant experienced in mold assessment. The Lessor shall promptly furnish the mold report to the Government. After all leaks have been identified and corrected, the Lessor shall safely remediate all visible moldy and/or water damaged materials identified by the consultant using a qualified remediation contractor following the methods identified in "Mold Remediation in Schools and Commercial Buildings" (EPA 402-K-01-001, September 2008 or ANSI/IICRC S520-2015: Standard for Professional Mold Remediation) and all applicable state laws pertaining to mold remediation practices. Remediation shall also remove actionable mold levels. Remediation shall be completed within a time frame acceptable to the Lease Contracting Officer which shall be no later than 90 calendar days following confirmation of the presence of actionable mold.

D. The presence of actionable mold in the Premises may be treated as a Casualty, as determined by the Government, in accordance with the Fire and Other Casualty clause contained in the General Clauses of this Lease. In addition to the provisions of the Fire and Other Casualty clause of this Lease, should a portion of the Premises be determined by the Government to be un-tenantable due to an act of negligence by the Lessor or his agents, the Lessor shall provide reasonably acceptable alternative Space at the Lessor's expense, including the cost of moving, and any required alterations.

6.27 OCCUPANT EMERGENCY PLANS (OCT 2020)

The Lessor is required to cooperate, participate and comply with the development and implementation of the Government's Occupant Emergency Plan (OEP) and a supplemental Shelter-in Place (SIP) Plan. Periodically, the Government may request that the Lessor assist in reviewing and revising its OEP and SIP. The Plan, among other things, will include evacuation procedures and an annual emergency evacuation drill, emergency shutdown of air intake procedures, and emergency notification procedures for the Lessor's Building engineer or manager, Building security, local emergency personnel, and Government agency personnel.

6.28 FLAG DISPLAY (OCT 2016)

If the Lessor has supplied a flagpole on the Property as a requirement of this Lease, the Lessor shall be responsible for flag display on all workdays and Federal holidays. The Lessor may illuminate the flag in lieu of raising and lowering the flag daily. The Lessor shall register with the Federal Protective Service (FPS) MegaCenter in order to receive notifications regarding when flags shall be flown at half-staff, as determined by Executive Order.

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

SECTION 7 ADDITIONAL TERMS AND CONDITIONS

7.01 SECURITY REQUIREMENTS (OCT 2021)

The Lessor agrees to the requirements of Facility Security Level **III** attached to this Lease.

7.02 MODIFIED LEASE PARAGRAPHS (OCT 2016)

The following paragraphs have been modified in this Lease:

1.02.A EXPRESS APPURTENANT RIGHTS (SEP 2013)

7.03 ~~ADDENDUM TO GSA FORM 3517B, GENERAL CLAUSES, NO FEDERALLY ELECTED OFFICIALS TO BENEFIT (OCT 2018)~~ INTENTIONALLY DELETED

7.04 DAILY OCCUPANCY DATA (OCT 2021)

If the Lessor has a means to capture system-generated daily occupancy data identifying the number of people accessing the government occupied space for the period of time specified (e.g., turnstiles, building access system, badges, sensors, WiFi) the Government reserves the right to request daily occupancy data at the Lessor's expense. The data shall cover a 12-month consecutive period of occupancy, and the Government is limited to a total of two (2) separate data requests over the lease term. The LCO (or representative designated by the LCO) shall provide at least 30 calendar days' prior notice to the Lessor for the daily occupancy data period to commence. The Lessor shall provide the daily occupancy data within 30 calendar days after the end of the 12-month consecutive period. Data shall be submitted using either a CSV or Excel file. Data elements shall include, but are not limited to: date, occupancy count, and the tenant agency's name, if the Building contains multiple Government tenant agencies. Data should not include Personally Identifiable Information (PII), e.g., name. If available, additional information may be provided, e.g., date, time of entry, unique card identification number or another anonymous unique identifier, floor accessed, type of occupant - Government employee or contractor, visitor indication, building staff.

7.05 PROVISIONAL ACCEPTANCE (FEB 2021)

A. At a time of exceptional circumstance, i.e., pandemic, the Government may accept the Space on a provisional basis until such time that a re-inspection on-site can occur. In this instance and upon request from the LCO, the Lessor shall provide such documentation (e.g., picture(s), video(s) and/or a representative on-site for a live-stream or 'virtual' walkthrough) to confirm substantial completion. In such an instance the Government may withhold a percentage of lump sum Tenant Improvement payment as a reserve to ensure that all deficiencies and/or punch list item(s) will be addressed by the Lessor within the time frame established or until the Government can determine the space has been delivered in accordance with the Lease requirements, Design Intent Drawings and Construction Drawings.

B. At such time as a physical on-site inspection is deemed possible by the Government, the Government reserves the right to physically inspect the Space with an on-site representative to conduct a space measurement and to document any deficiencies and/or punch-list item(s) for the Lessor's correction.

C. Upon re-inspection and Government acceptance of any deficiencies and/or punch list item(s) documented per above, or in the instance of no such documented items, this provisional acceptance will be rendered non-provisional and fully accepted by the Government via subsequent Lease Amendment.

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-05199B2A0F84

EXHIBIT A

[redacted]

(b)(5), (b)(7)(F)

[redacted]

3 Executive Park Drive
Suite # 106
Bedford, NH 03110
603.623.8852

Copyright © 2022 by Stolzer Associates
All reproductions, without permission.

150 APOLLO DRIVE FLOOR 1

150 APOLLO DRIVE
CHELMSFORD, MA

DATE ISSUED:
6.14.2022

SCALE : 1/8" = 1'-0"
DRAWN BY : HP
REVIEWED BY :

USABLE SQAURE FOOT

FL1

C:\CLIENTS\150 Apollo Drive - PHIPHOOR (AS BUILT)\DWG\PHOOR1 150 Apollo Dr FL 1 - As Built UPF GOV.dwg, 6/14/2022 7:59 PM

LESSOR: HP GOVERNMENT: KTR

(b) (5), (b) (7)(F)

[redacted]

DocuSign Envelope ID: [redacted]

(b) (5), (b) (7)(F)

[redacted]

EXHIBIT B

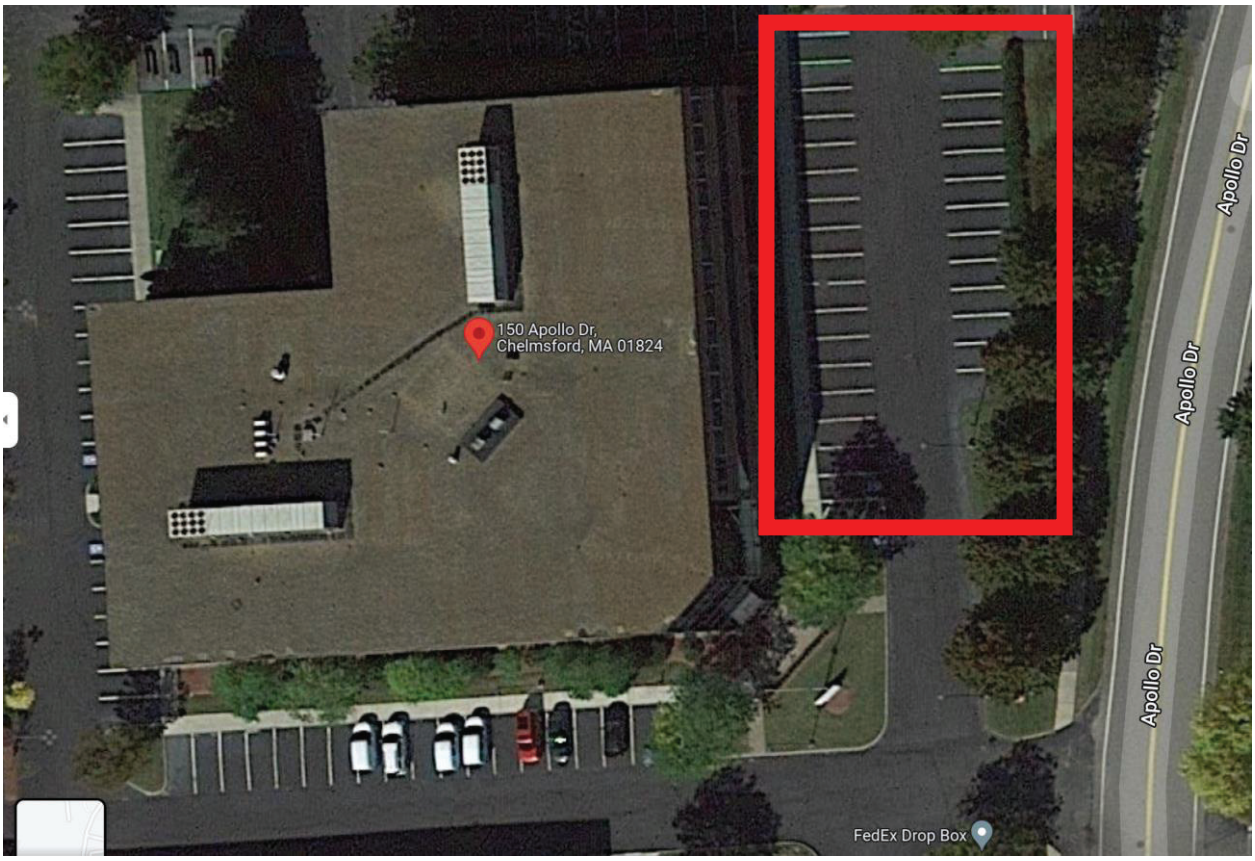

The Tenant shall have 23 surface spots reserved as shown on the attached plan. The Tenant will the sole tenant of the building and will have a parking ratio of 3:1000 SF unreserved surface parking.

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519B82A0F84

ZONING TABLE

ZONE: IA LIMITED INDUSTRIAL
USE: BUSINESS, PROFESSIONAL OFFICES

	REQUIRED	PROVIDED
MINIMUM LOT AREA	40,000 SF PER BLDG	191,173 SF ± ACRES
MINIMUM FRONTAGE	150 FT PER BLDG	> 150 FT
MINIMUM LOT WIDTH	150 FT	> 150 FT
FRONT SETBACK	40 FT	> 40 FT
SIDE SETBACK	40 FT	> 40 FT
SIDE SETBACK IF ABUT RESIDENTIAL	100 FT	> 100 FT
REAR SETBACK	30 FT	> 30 FT
MAX. BUILDING HEIGHT	45 FT	–
MAX. BUILDING COVERAGE	40%	< 40%
MIN. PARKING SETBACK FROM INSTITUTIONAL USE	30 FT (REAR)	10.5 FT (REAR)
MIN. PARKING SETBACK FROM RESIDENTIAL USE	100 FT (SIDE)	42'± FT (SIDE)
MIN. PARKING SETBACK FROM PROPERTY LINE	25 FT (SIDE)	0 FT (SIDE)
MIN. PARKING SETBACK FROM STREET LINE	20 FT	20 FT
MIN. LANDSCAPING WITHIN PARKING AREA	16,600 SF	17,840 SF

PARKING SUMMARY

	REQUIRED *	AS DESIGNED
STANDARD SPACES (8.5'x19')	744	744
HANDICAP SPACES	17	17
TOTAL PARKING SPACES	761	761

PHASE 1
- BUILDING GROSS FLOOR AREA = 111,912 S.F.
- BUILDING NET FLOOR AREA (EXCLUDES STAIRWAYS, MECH. ROOMS, TOILET ROOMS, SERVICE AREAS, LOBBIES, CORRIDORS, ELEVATORS, ETC.) = 89,400 S.F.
- ONE PARKING SPACE PER 200 Sq.Ft. NET FLOOR AREA: (89,400 Sq.Ft. NFA x 1 SPACE / 200 Sq.Ft NFA. = 447 SPACES)

PHASE 1 DESIGN: 447 SPACES

PHASE 2
- BUILDING GROSS FLOOR AREA = 78,305 S.F.
- BUILDING NET FLOOR AREA (EXCLUDES STAIRWAYS, MECH. ROOMS, TOILET ROOMS, SERVICE AREAS, LOBBIES, CORRIDORS, ELEVATORS, ETC.) = 62,644 S.F.**
- ONE PARKING SPACE PER 200 Sq.Ft. NET FLOOR AREA: (62,644 Sq.Ft. NFA x 1 SPACE / 200 Sq.Ft NFA. = 314 SPACES)

** ASSUMES BUILDING NET FLOOR AREA = 80% BUILDING GROSS FLOOR AREA

PHASE 1 + PHASE 2 TOTAL PARKING SPACES REQUIRED:
(447 SPACES + 314 SPACES= 761 SPACES)

PHASE 2 DESIGN: 314 SPACES

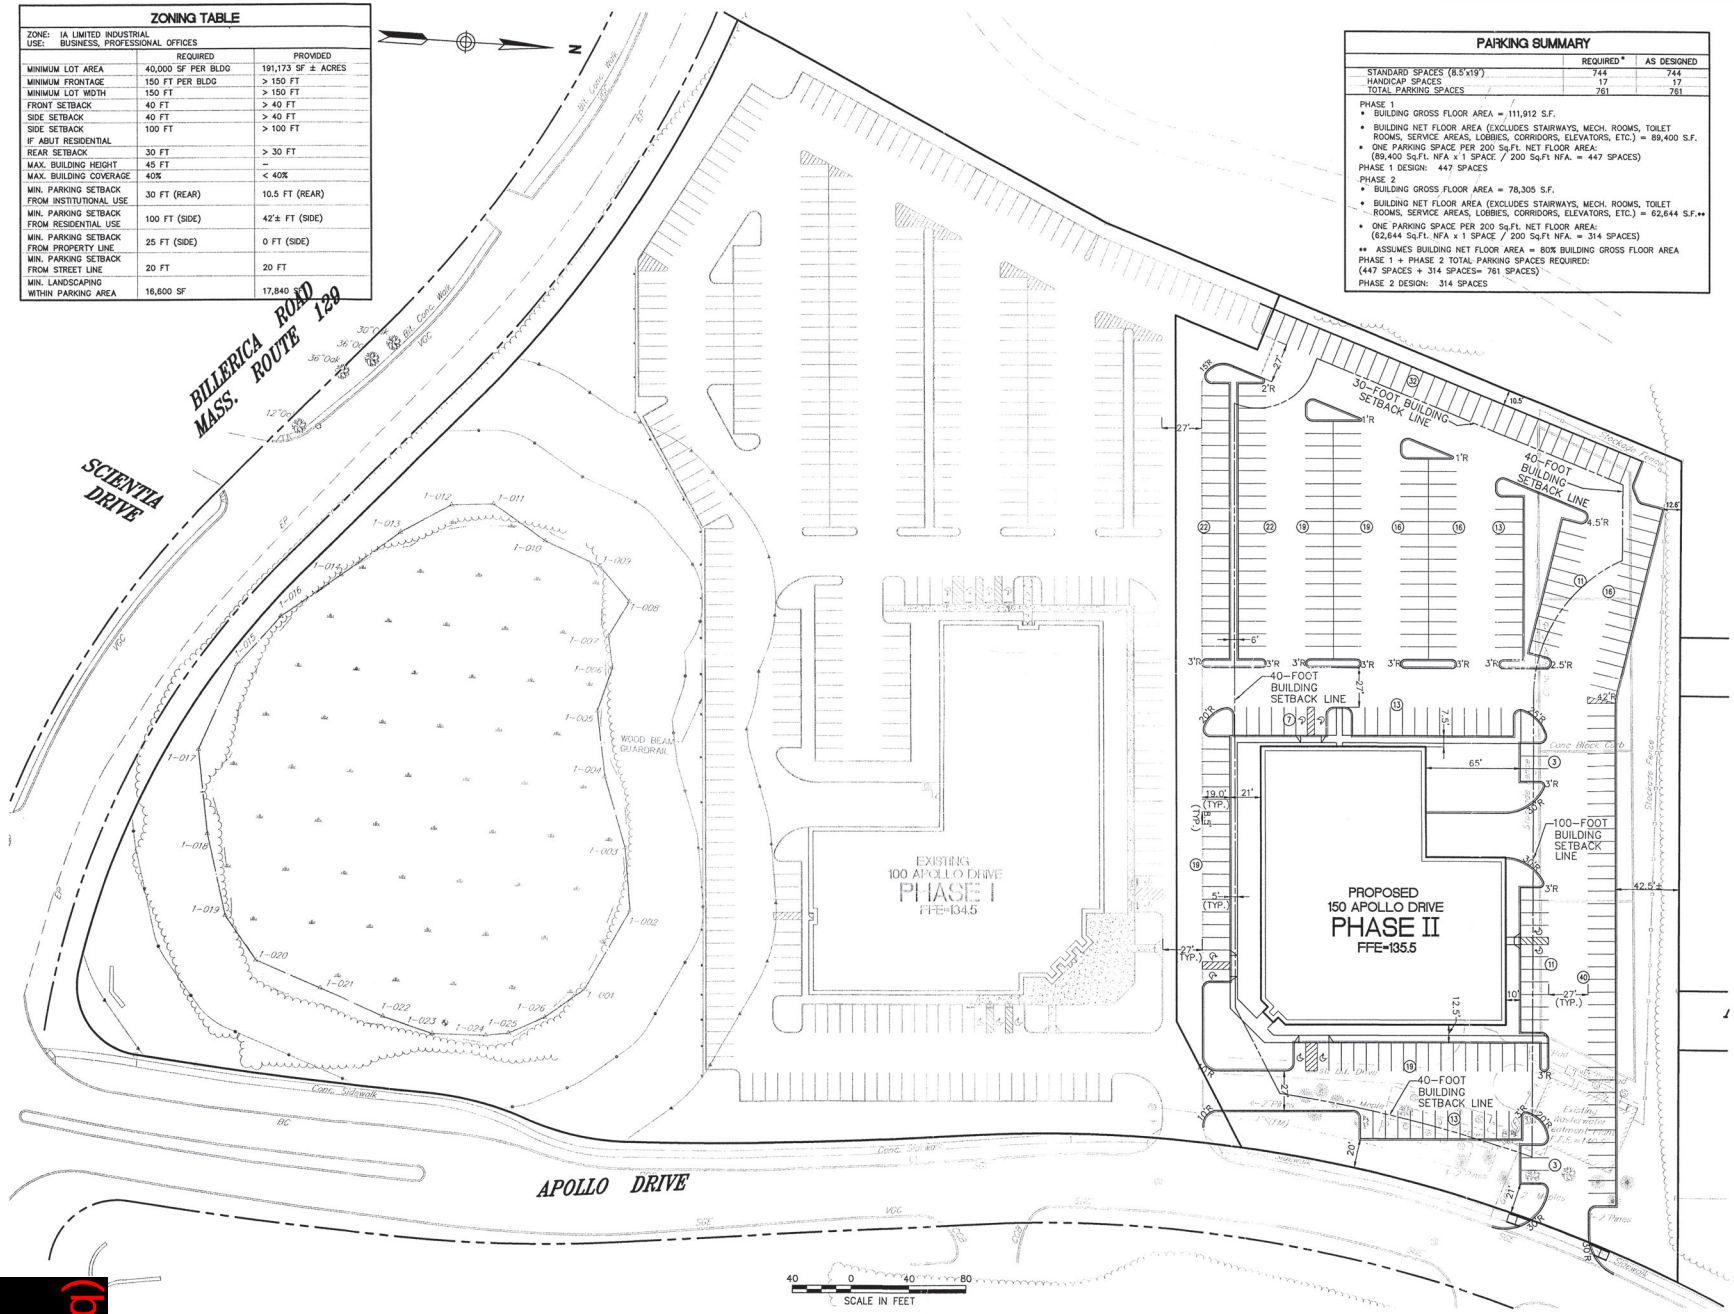

VHB
Vanasse Hangen Brustlin, Inc.
Transportation
Land Development
Environmental Services
530 Broadway
Providence, Rhode Island 02909
401 272 8100 • FAX 401 273 9694

No.	Revision	Date	Appvd.

Designed by ASM | Drawn by ASM | Checked by SJS
CAD checked by | Approved by
Scale 1"= 40' | Date September 16, 1999

Project Title
150 Apollo Drive
Chelmsford, Massachusetts

Issued for
Site Plan Review
Planning Board File 99-25

Drawing Title
Layout & Striping Plan

Drawing Number C-4
Sheet 4 of 11
Project Number 70945

70945LS

[redacted] (9) (a)

EXHIBIT C

SECURITY REQUIREMENTS - FACILITY SECURITY LEVEL III

THESE PARAGRAPHS CONTAIN ADDITIONAL SECURITY REQUIREMENTS THAT MAY BE INSTALLED IN THE LEASED SPACE, AND UNLESS INDICATED OTHERWISE, ARE TO BE PRICED AS PART OF THE BUILDING SPECIFIC AMORTIZED CAPITAL (BSAC). BECAUSE EACH BUILDING IS UNIQUE, THE FINAL LIST OF SECURITY COUNTERMEASURES WILL BE DETERMINED DURING THE DESIGN PHASE AND IDENTIFIED IN THE DESIGN INTENT DRAWINGS AND CONSTRUCTION DOCUMENTS. AFTER COMPLETING THE CONSTRUCTION DOCUMENTS, THE LESSOR SHALL SUBMIT A LIST OF THE ITEMIZED COSTS. SUCH COSTS SHALL BE SUBJECT TO NEGOTIATION.

NOTE THAT ITEMS IDENTIFIED AS "SHELL *" REPRESENT A LESSOR'S OBLIGATIONS OR THE GOVERNMENT'S RIGHTS AND ARE NOT NECESSARILY ITEMS TO BE CONSTRUCTED.

DEFINITIONS: Definitions are the same as those used in the Lease unless re-defined in these Security Requirements.

CRITICAL AREAS AND SYSTEMS- The areas that house systems that if damaged and/or compromised could have significant adverse consequences for the facility, operation of the facility, or mission of the agency or its occupants and visitors. These areas may also be referred to as "limited access areas," "restricted areas," or "exclusionary zones." Critical areas do not necessarily have to be within Government-controlled Space (e.g., generators, air handlers, electrical feeds, utilities, telecom closets or potable water supply that may be located outside Government-controlled Space).

DESIGN-BASIS THREAT – The Design-Basis Threat (DBT) is the profile and estimate of the threats to a Government facility across a range of specific undesirable events, and serves as the basis for determining appropriate security standards. The Lessor's technical consultant(s) shall work in conjunction with the Government, including the Federal Protective Service (FPS), to apply the DBT to the post-award risk assessment. The risk assessment identifies recommended countermeasures and security design features that achieve the minimum baseline level of protection for a particular facility. The baseline level of protection may be further customized to address facility-specific conditions. The Lessor is responsible for providing countermeasure provisions outlined in this FSL document, as well as for additional items identified during the post-award risk assessment. Any additional countermeasures identified during this assessment shall be priced as BSAC.

I. FACILITY ENTRANCES, LOBBY, COMMON AREAS, NON-PUBLIC, AND UTILITY AREAS

A. FACILITY ENTRANCES AND LOBBY

If the Space for this lease is greater than 75% of the space in the Building (based upon ABOA measurement), the requirements of **FACILITY ENTRANCES AND LOBBY** Section below shall apply to the entrance of the

(b) (6) [redacted]

Building. If the leased Space is less than or equal to 75% of the space in the Building (based upon ABOA measurement), then the requirements of **FACILITY ENTRANCES AND LOBBY** Section below shall apply to the entrance of the leased Space.

1. LIMITING LOBBY QUEUING
The Lessor and the Government shall minimize lobby queuing caused by screening, visitor processing, and access control systems.

2. PHYSICAL BOUNDARIES TO CONTROL ACCESS TO PUBLIC AND NON-PUBLIC AREAS
The Government reserves the right to use signage, stanchions, counters, furniture, knee walls, or product-equivalents, as determined by the Government, to establish physical boundaries to control access to non-public areas. The Lessor shall post directional signs as appropriate.

3.. MAGNETOMETERS AND X-RAYS AT PUBLIC ENTRANCES
The Government shall establish a list of prohibited items, including potential weapons, that shall apply to all building tenants and visitors. Magnetometers and X-ray machines will be installed, tested (on a daily basis), and maintained by the Government at the public entrance(s). Armed security guards, provided by the Government, will direct the occupants and visitors through the screening equipment. Appropriate lobby and entrance/exit space shall be made available for this purpose in a manner to minimize queuing. This space shall be considered part of the lease common area and not ABOA square footage. The Government requires visitors to non-public areas to display a visitor's identification badge. If there are other non-Government tenants, the Lessor shall notify them of this requirement and assist those tenants in obtaining ID acceptable to the Government.

B. ADDITIONAL REQUIREMENTS

1. EMPLOYEE AND VISITOR SIGN-IN/OUT AFTER HOURS
The Lessor shall provide a system, acceptable to the Government, that after hour employees, contractors, and visitors to the Building shall be required to sign in and sign out either electronically or on a building register.

2. ACCOMMODATION OF RETAIL/MIX USE SPACE (SHELL)
Lessor shall accommodate publicly accessible retail and mixed uses through such means as separating entryways.

C. COMMON AREAS, NON-PUBLIC, AND UTILITY AREAS

1. PUBLIC RESTROOMS ACCESS (SHELL)
If required by the Government, the Lessor shall provide a means to control access to public restrooms within Government controlled Space.

2. SECURING CRITICAL AREAS

(b) (6) [redacted]

Areas designated as Critical Areas shall be locked using fully HSPD-12 compliant electronic access control equipment (see Intrusion Detection System (IDS) requirements). The Government shall have the right to monitor and limit access to these areas. Access shall be limited to authorized personnel, as determined by the Government.

3. VISITOR ESCORT AND ID REQUIREMENTS
The Government shall require the Lessor to escort contractors, service personnel, and visitors to all non-public areas. The Lessor shall require visitors to non-public areas to display a visitor ID at all times.

4. SECURING COMMON BUILDING UTILITIES, SERVICE ROOMS, AND ACCESS TO ROOF
The Lessor shall secure utility, mechanical, electrical telecommunication rooms, HVAC control panels, roof access points, and access to interior space from the roof with locks or Physical Access Control Systems (PACS), and as part of BSAC, monitor these areas with an Intrusion Detection System (IDS). Roof access should meet the applicable egress requirements in National Fire Protection Association (NFPA) 101, Life Safety Code, or IBC, current as of the award date of the lease.

5. CRITICAL SYSTEM LOCATION

Critical Systems (e.g., mechanical, electrical, utility rooms; HVAC vents; emergency generator) shall be located at least 25 feet from the Building loading docks, entrances, mailrooms, personnel and package screening locations, and uncontrolled parking areas, or, alternatively, as part of BSAC, Lessor shall protect critical Building system areas in accordance with the post-award DBT analysis by implementing sufficient standoff, hardening, and venting methods.

6. RESTRICT CONTACT FROM PUBLIC AREAS WITH PRIMARY VERTICAL LOAD MEMBERS
The Lessor shall implement architectural or structural features, or other positive countermeasures that deny contact with exposed primary vertical load members in the public areas. A minimum standoff of at least 100 mm (4 inches) is required. For measurement purposes, standoff shall be considered building support space and not ABOA.

7. RESTRICT CONTACT FROM MAIL AREA WITH PRIMARY VERTICAL LOAD MEMBERS
The Lessor shall implement architectural or structural features, or other positive countermeasures in the mail screening and receiving areas that deny contact with exposed primary vertical load members. A minimum standoff of at least 150 mm (6 inches) is required. For measurement purposes, standoff shall be considered building support space and not ABOA.

II. INTERIOR (GOVERNMENT SPACE)

A. WEARING PHOTO ID IN GOVERNMENT SPACE
The Lessor and his/her contractors shall be required to wear a photo ID to be visible at all times when in Government- controlled Space.

B. SECURE EMPLOYEE ENTRANCE DOORS

The Lessor shall provide a means to secure doors identified by Government as employee entrance doors. The Government may elect to post guards to verify ID badges via visual and physical inspection or electronic means before entry to Government occupied Space.

C. LIMIT ON ENTRY POINTS (SHELL)
The Government may elect to limit the number of entry points to the Building or to the Government occupied Space to the fewest number practicable.

D. FORMAL KEY CONTROL PROGRAM (SHELL)
The Government reserves the right to implement a formal key control program. The Lessor shall have a means of allowing the electronic disabling of lost or stolen access media if electronic media is used.

E. ELECTRONIC ACCESS FOR EMPLOYEES
The Lessor shall provide a PACS card reader for employee entry doors without a guard post (including after-hours access) in conjunction with Video Surveillance System (VSS) coverage.

F. 552.270-34 ACCESS LIMITATIONS FOR HIGH-SECURITY LEASED SPACE (JUN 2021) (SHELL *)
(a) The Lessor, including representatives of the Lessor's property management company responsible for operation and maintenance of the leased space, shall not—

(1) Maintain access to the leased space; or

(2) Have access to the leased space without prior approval of the authorized Government representative.

(b) Access to the leased space or any property or information located within that Space will only be granted by the Government upon determining that such access is consistent with the Government's mission and responsibilities.

(c) Written procedures governing access to the leased space in the event of emergencies shall be documented as part of the Government's Occupant Emergency Plan, to be signed by both the Government and the Lessor.

III. SITE AND EXTERIOR OF THE BUILDING

A. SIGNAGE

1. POSTING OF SIGNAGE IDENTIFYING THE SPACE AS GOVERNMENTAL (SHELL)
The Lessor shall not post sign(s) or otherwise identify the facility and parking areas as a Government, or specific Government tenant, occupied facility, including during construction, without written Government approval.

2. POSTING OF REGULATORY SIGNAGE (SHELL)
The Government may post or request the Lessor to post regulatory, statutory, sensitive areas, and site-specific signage.

B. LANDSCAPING AND ENTRANCES

1. CRIME PREVENTION THROUGH ENVIRONMENTAL DESIGN (SHELL)

a. The Lessor shall separate from public access, restricted areas as designated by the Government, through the application of Crime Prevention Through Environmental Design (CPTED) principles by using trees, hedges, berms, or a combination of these or similar features, and by fences, walls, gates, and other barriers, where feasible and acceptable to the Government.

b. Landscaping shall be neatly trimmed in order to minimize the opportunity for concealment of individuals, packages/containers, and parking areas. Lessor shall provide trees, hedges, berms, or any combination of these to create buffer zones to separate public areas and other functions. Landscaping shall not obstruct the views of security guards and VSS cameras or interfere with lighting or IDS equipment.

2. HAZMAT STORAGE

Where applicable, Lessor shall locate HAZMAT storage in a restricted area or storage container away from loading docks, entrances, and uncontrolled parking. As part of BSAC, Lessor shall monitor the HAZMAT storage area using IDS and/or VSS, and control access to these areas.

3. PLACEMENT OF RECEPTACLES, CONTAINERS, AND MAILBOXES

Lessor shall position trash containers, mailboxes, FedEx-UPS boxes, donation/recycle containers, vending machines, or other fixtures and features that could conceal packages, briefcases, or other portable containers away from building exterior and entry points. Alternatively, as part of BSAC, the Lessor shall implement blast containment measures to mitigate an explosion in these areas. If blast containment measures are proposed, certification by a registered professional engineer is required that the equivalent mitigation capability is present.

4. VEHICLE BARRIERS

In accordance with the post-award DBT analysis, the Lessor shall provide vehicle barriers to protect pedestrian entrances from penetration by a vehicle (e.g., concrete bollards, concrete planters, concrete retention walls).

Minimum barrier height is 30 inches, and maximum clear spacing between vehicle barriers is 4 feet. The Lessor shall use barriers to ensure that vehicles cannot pass beyond the screening check point until cleared.

C. PARKING

1. NUMBER OF PARKING ENTRANCES

The number of parking entrances shall be limited to the minimum required for efficient operations or local code, (giving consideration to minimizing queuing). Entrances to parking areas shall be equipped with vehicle gates to control access to authorized vehicles (employee, screened visitor and approved Government vehicle). Gates controlling vehicles may include, but are not limited to, barriers (drop arm/wedge), garage style doors, and traditional chain link fences.

(b) (6) [redacted]

2. AUTHORIZED ACCESS TO PARKING (SHELL)
Lessor shall limit parking and access to parking to employee vehicles, authorized visitor vehicles, approved government vehicles, and other authorized vehicles.

3. VEHICLE SCREENING
The Government may elect to screen all visitor vehicles (before entry into the controlled parking area) as prescribed by the Government. This screening shall include ID verification and visual inspection of the vehicle, including undercarriage. The Lessor shall provide adequate lighting in screening area to illuminate the vehicle exterior and undercarriage. VSS coverage of the screening area shall be provided by the Lessor (see VSS requirements).

4. PUBLIC ACCESS TO GOVERNMENT PARKING AREAS
Where there is Government controlled parking the area shall be controlled by limiting pedestrian access to the controlled parking areas. Pedestrian and vehicle access points to all parking areas shall be monitored by VSS camera(s) at all times

IV. SECURITY SYSTEMS

A. SECURITY SYSTEM TESTING AND MAINTENANCE CRITERIA:

The Lessor in consultation and coordination with a security provider, either internal or external, as determined by the Lease Contracting Officer, and the Government security representative shall implement a testing and preventive maintenance program for all security systems the Lessor has installed. Testing must be based on established, consistent, agency-specific protocols, to be determined at the time of design. All testing shall be documented. Operational performance testing shall be conducted annually and functional testing shall be conducted more frequently, as determined by the Government. Components which fail, either during testing or throughout the life of this lease shall be repaired or replaced by the Lessor within a reasonable timeframe as determined by the Government. Any critical component that becomes inoperable must be replaced or repaired by the Lessor within 72 hours. Critical components are those required to provide security (IDS, VSS, PACS, etc.) for a perimeter access point or critical area. "Replacement" may include implementing other temporary measures in instances where the replacement or repair is not achievable within the specified time frame (e.g. a temporary barrier to replace an inoperable pop-up vehicle barrier, etc.). Failure by the Lessor to provide sufficient replacement measures within the timeframe identified above may result in the Government providing guard service, the cost of which must be reimbursed by the Lessor.

B. VIDEO SURVEILLANCE SYSTEM

LESSOR PROVIDED DESIGN, INSTALLATION, AND MAINTENANCE
The Lessor shall design, install, and maintain a Video Surveillance System (VSS) system as described in this section. The VSS system will support the entry control system (at screening check points, personnel and vehicle entrances, exits, loading docks, and lobbies), with time lapse video recording and digital image storage, that will allow Government employees to view and communicate remotely with visitors before allowing access to the Space. As determined by the Government the VSS shall provide unobstructed coverage of designated pedestrian entrances and exits. Technical review of the proposed system shall be

(b) (6) [redacted]

coordinated with the Government security representative, at the direction of the Contracting Officer, prior to completion of the CDs, as well as prior to installation. VSS system testing, and acceptance shall be conducted by the Government prior to occupancy. The VSS system shall comply with the Architectural Barriers Act, section F230.0. The Government will centrally monitor the VSS system. Government specifications are available from the Lease Contracting Officer. VSS system components which fail or require maintenance, or which fail during testing should be serviced in accordance with the Security System Maintenance Criteria listed above.
The Lessor shall comply with FAR 52.204-25: Prohibition on Contracting for Certain Telecommunications and Video Surveillance Services or Equipment (Aug 2020). See https://www.acquisition.gov/far/part-52#FAR_52_204_25.

GOVERNMENT PROVIDED PRODUCT, INSTALLATION, AND MAINTENANCE
The Government may provide and install an entry control system, with time lapse video recording and digital image storage, that will allow Government employees to view and communicate remotely with visitors before allowing access. This Video Surveillance System (VSS) shall provide the Government with unobstructed coverage, as determined by the Government, of designated pedestrian entrances and exits. The Lessor shall permit twenty-four-hour VSS coverage and recording, provided and operated by the Government. The Government will centrally monitor the VSS surveillance. Government specifications are available from the Contracting Officer.

After notice to proceed, the Lessor shall advise the Government of the appropriate time to install the equipment during the construction of the Space and shall facilitate the installation, including access to electrical panels and other areas of the building, as necessary. The Lessor's construction schedule shall reflect the installation of this equipment.

C. INTRUSION DETECTION SYSTEM

LESSOR PROVIDED DESIGN, INSTALLATION, AND MAINTENANCE
The Lessor shall design, install, and maintain an Intrusion Detection System (IDS) as described in this section. The Government requires an IDS, which will cover perimeter entry and exit doors, and all ground-floor windows. Basic Security-in-Depth IDS components include: magnetic door switch(s), alarm system keypad, passive infrared sensor(s) (PIR), an alarm panel (to designated monitoring center) and appropriate communication method i.e. telephone and/or Internet connection, glass-break detector, magnetic window switches or shock sensors. Technical review of the proposed system shall be coordinated with the Government security representative, at the direction of the Lease Contracting Officer, prior to completion of the CDs, as well as prior to installation. System testing and acceptance shall be conducted by the Government prior to occupancy.

Basic Security-in-Depth IDS shall be connected to and monitored at a central station operated by the Department of Homeland Security Mega Center. Emergency notification lists shall be coordinated with the monitoring station to include all applicable Government and Lessor points of contact, including law enforcement (FPS and facility security force). Monitoring shall be designed to facilitate a real-time detection of an incident, and to coordinate an active response to an incident. The Lessor must complete the Mega

(b) (6) [redacted]

Center Alarm Requirements (MAR) application process specified by the Government to meet the monitoring requirements for a functional IDS. The Government creates an FPS monitoring account and works with the Lessor to complete the Mega Center Alarm Requirement (MAR) in conjunction with the installing security vendor. Components which fail or require maintenance, or which fail during testing shall be serviced in accordance with the Security System Maintenance Criteria listed above.

GOVERNMENT PROVIDED SCOPE AND PRODUCT, INSTALLATION, AND MAINTENANCE The Lessor shall permit installation of a perimeter Intrusion Detection System (IDS) to be operated by the Government. The Government shall provide and install an IDS on perimeter entry and exit doors, and all ground-floor windows. Basic Security-in-Depth IDS— include: magnetic door switch(s), alarm system keypad, passive infrared sensor(s) (PIR), an alarm panel (to designated monitoring center) and appropriate communication method i.e. telephone and/or Internet connection, glass-break detector, magnetic window switches or shock sensors.

Basic Security-in-Depth IDS shall be connected and monitored at a central station. Emergency notification lists shall be coordinated with the monitoring station to include all applicable Government and Lessor points of contact, including law enforcement (Federal Protective Service and facility security force). Monitoring shall be designed to facilitate a real-time detection of an incident, and to coordinate an active response to an incident.

After notice to proceed, the Lessor shall advise the Government of the appropriate time to install the equipment during the construction of the Space and shall facilitate the installation, including access to electrical panels and other areas of the building, as necessary. The Lessor's construction schedule shall reflect the installation of this equipment.

D. DURESS ALARM

LESSOR PROVIDED DESIGN, INSTALLATION, AND MAINTENANCE
The Lessor shall design, install, and maintain a duress alarm system as described below. The system will include, at a minimum, duress buttons or call buttons at security force posts and sensitive public contact areas, in garages, and other areas that are identified as high-risk locations.Technical review shall be coordinated with the Government security representative, at the direction of the Contracting Officer, prior to completion of the CDs, as well as prior to installation. System testing and acceptance shall be conducted by the Government prior to occupancy. This system shall comply with the Architectural Barriers Act, section F230.0.

The Lessor in consultation and coordination with the security provider and Government shall conduct security system performance testing annually. Testing must be based on established, consistent agency-specific protocols, documented and furnished to the Lease Contracting Officer. Components which fail or require maintenance, or which fail during testing should be serviced in accordance with the Security System Maintenance Criteria listed above.

GOVERNMENT PROVIDED SCOPE, PRODUCT, INSTALLATION, AND MAINTENANCE
The Lessor shall permit installation of a duress alarm system to be provided and operated by the Government. The Government, in coordination with a security provider, either internal or external, as determined by the Lease Contracting Officer, shall document and implement duress procedures for emergency situations.

After notice to proceed, the Lessor shall advise the Government of the appropriate time to install the equipment during the construction of the Space and shall facilitate the installation, including access to electrical panels and other areas of the building, as necessary.
The Lessor's construction schedule shall reflect the installation of this equipment.

E. SECURITY SYSTEMS DESIGN

The Lessor, in consultation and coordination with security providers (internal or external) and the agency designated security representative, shall ensure at the time of system design, system construction, and throughout the term of the Lease, that alarm and Physical Access Control Panel, VSS components, controllers, and cabling shall be secured from unauthorized physical and logical access.

F. CENTRAL SECURITY CONTROL CENTER

1. CENTRALIZED COMMUNICATIONS SYSTEM

The Lessor, in consultation and coordination with security providers (internal or external) and the agency designated security representative, shall provide and maintain a communication system for security and emergency announcements. Communication may be achieved through public address systems, specially-designed phone systems, and computer-based mass delivery. This communication system should be utilized to provide emergency announcements, alerts and instructions to occupants. On site communication with guards (if applicable), designated response personnel and Occupant Emergency Plan (OEP) support employees is essential during an incident. Procedures for standard announcements and drills shall be developed. Standard announcements may be prerecorded into the Building communication system for immediate notification.

2. EMERGENCY POWER TO SECURITY SYSTEMS

The Lessor, in consultation and coordination with a security provider (internal or external) and the agency designated security representative, shall provide uninterruptible emergency power to essential electronic security systems for a minimum of 4 hours. Uninterruptable power can be provided through the use of batteries, emergency generators, UPS, or a combination thereof to meet the requirements.

V. STRUCTURE

NOTE: FOR ADDITIONAL BLAST RESISTANT MEASURES REQUIRED IN NEW LEASE CONSTRUCTION PROJECTS, REFER TO LEASE PARAGRAPH “SECURITY FOR NEW CONSTRUCTION”.

A. WINDOWS

1. SHATTER-RESISTANT WINDOW PROTECTION

The Lessor shall use either (1) preferred or acceptable glazing systems or (2) acceptable fragment retention film to reduce the glass fragmentation hazard. Preferred glazing systems include thermally tempered heat strengthened or annealed glass with a fragment retention film installed on the interior surface and attached to the frame, or laminated thermally tempered, laminated heat strengthened, or laminated annealed glass. Acceptable glazing systems include thermally tempered glass and thermally tempered, heat strengthened, or annealed glass with fragment retention film installed on the interior surface. Acceptable fragment retention film must meet or exceed the following physical properties:

- Shatter-resistant material shall not be less than 0.18 millimeters (7 mil) thick on all exterior windows in Government-occupied Space meeting the following properties –
- Film composite strength and elongation rate measured at a strain rate not exceeding 50% per minute shall not be less than the following:
  - Yield Strength: 12,000 psi
  - Elongation at yield: 3%
  - Longitudinal Tensile strength: 22,000 psi
  - Traverse Tensile strength: 25,000 psi
  - Longitudinal Elongation at break: 90%
  - Traverse Elongation at break: 75%

2. LOCK GROUND FLOOR WINDOWS

If a Government tenant occupies ground floor space in the Building, there shall be no operable windows. As part of BSAC, the Lessor shall monitor any operable windows via IDS.

3. SECURE NON-WINDOW OPENINGS (SHELL)

The Lessor shall secure all non-window openings, such as, mechanical vents, utility entries, and exposed plenums to prevent forcible entry.

4. PREVENT VISUAL OBSERVATION INTO EXTERIOR OFFICES (T.I.)

The Lessor shall provide blinds, curtains, or other window treatments in critical areas acceptable to the Government, that can be employed to prevent visual observation of that area when temporary conditions warrant.

B. BUILDING SYSTEMS

1. EMERGENCY GENERATOR PROTECTION (T.I.)

If an emergency generator is required by the Government, the Lessor shall locate it in a secure area, protected from unauthorized access, and vehicle ramming, if outdoors. The emergency generator and its fuel

(b) (6) [redacted]

tank must be located at least 25 feet from loading docks, entrances, and parking areas. Alternatively, if the 25 foot distance cannot be achieved, Lessor shall protect utilities in accordance with the post-award DBT analysis, through a combination of standoff, hardening, and venting methods.

2. SECURING ON-SITE PUBLICLY ACCESSIBLE UTILITIES
The Lessor shall secure the water supply handles, control mechanisms, and service connections at on-site publicly accessible locations with locks and anti-tamper devices.

3. SECURING AIR INTAKE GRILLES
The Lessor shall secure accessible air intakes with fencing. Air intake grilles shall be secured with tamper switches connected to a central alarm monitoring station and monitored by VSS or other security force patrols.

4. HVAC SYSTEM FOR CHEMICAL, BIOLOGICAL AND RADIOLOGICAL (CBR) ATTACK-SUSCEPTIBLE AREAS
The Lessor shall provide separate isolated HVAC systems in lobbies, loading docks, mail rooms and other locations as identified by a risk assessment as susceptible to CBR attack, to protect other building areas from possible contamination.
All exterior air handling units (AHUs), including the supply air for re-circulating AHUs, shall be equipped with Minimum Efficiency Reporting Value (MERV) 10 particulate filters. AHUs serving lobbies and mailroom, including the supply air stream for re-circulating AHUs, shall be equipped with Minimum Efficiency Reporting Value (MERV) 13 filters.

5. HVAC CONTROL
As part of operating rates, all air handlers must be equipped with an emergency shut-off and exhaust system. Lessor must provide for controlling the movement of elevators, and the closing of applicable doors and dampers to seal the Building. Where shut-off is via a Building Automation System (BAS), the system configurations must be properly programmed, tested, and accessible at all necessary times.

VI. OPERATIONS AND ADMINISTRATION

A. FACILITY SECURITY COMMITTEE (SHELL *)
The Lessor shall cooperate and work with the buildings Facility Security Committee (FSC) throughout the term of the Lease. The FSC is responsible for addressing facility-specific security issues and approving the implementation of security measures and practices. The FSC consists of representatives of all Federal tenants in the facility, the security organization, and the leasing department or agency.

B. ACCESS TO BUILDING INFORMATION (SHELL *)
Building Information—including mechanical, electrical, vertical transport, fire and life safety, security system plans and schematics, computer automation systems, and emergency operations procedures—shall be strictly controlled. Such information shall be released to authorized personnel only, approved by the Government, by the development of an access list and controlled copy numbering. The Lease Contracting Officer may direct that the names and locations of Government tenants not be disclosed in any publicly accessed document or record. If that is the case, the Government may request that such information not be posted in the building directory.

(b) (6) [redacted]

Lessor shall have emergency plans and associated documents readily available to the Government in the event of an emergency.

C. SECURITY PLANS AND LAYOUTS

The Lessor shall secure and keep safe any security plans, construction and alteration plans and layouts. This shall be addressed in the construction security plan. The Lessor shall treat and safe keep any plans and specifications related to security measures as For Official Use Only (FOUO).

D. CONSTRUCTION SECURITY PLAN (SHELL)

The Lessor shall develop and implement a construction security plan. The plan should specify who is responsible for the security of the site during each phase of the project until final completion. The construction security plan shall describe in detail, how the Government's information, assets, equipment, and personnel will be protected during the construction process. (This shall include background checks, restrictions on accessibility, and escorts for the construction personnel). The required security measures will vary with the risk presented during the project. The Lessor shall also submit a security plan for all post-occupancy construction and alterations projects in the leased Space, throughout the term of this Lease.

E. SCREENING OF MAIL AND PACKAGES

Lessor shall provide space suitable for the Government to inspect and screen all mail and packages using X-ray at a loading dock, if present. If there is no loading dock, Lessor shall provide space at an existing screening location or at an alternative location in the Building acceptable to the Government. The screeners shall physically inspect items that cannot be passed through screening equipment before distribution to the Government agencies throughout the facility. This space shall be considered part of the lease common area and not ABOA square footage.

F. SECURITY GUARD POSTINGS

The Government may elect to post armed security guards at all screening checkpoints and at the entrances to Government-occupied Space.

G. SECURITY GUARD PATROLS

The Government may elect to provide interior and exterior roving guard patrols which may be conducted four times each day during normal business hours. The security guard force, provided by the U.S. Department of Homeland Security Federal Protection Service, will be armed and equipped with a centralized radio network with incident response dispatch capability from the on-site central security control center. The Lessor and the Government shall develop in coordination with the Government's Designated (security) Official, the security guard response SOPs to alarms and incidents to ensure full coordination and cooperation between the on-site Lessor representative and the Government tenant(s).

VII. CYBERSECURITY (SHELL *)

A. Lessors are prohibited from connecting any portion of their building and access control systems (BACS) to any federally-owned or operated IT network. BACS include systems providing fire and life safety control, physical access control, building power and energy control, electronic

(b) (6) [redacted]

surveillance, and automated HVAC, elevator, or building monitoring and control services (including IP addressable devices, application servers, or network switches).

B. In the event of a cybersecurity incident related to BACS, the Lessor shall initially assess the cyber incident, identify the impacts and risks to the Building and its occupants, and follow their organization's cyber and IT procedures and protocols related to containing and handling a cybersecurity incident. In addition, the Lessor shall immediately inform the Lease Contracting Officer's (LCO's) designated representative, i.e., the Lease Administration Manager (LAM), about cybersecurity incidents that impact a federal tenant's safety, security, or proper functioning.

C. Lessors are encouraged to put into place the following cyber protection measures in order to safeguard facilities and occupants:

1. Engineer and install BACS to comply with the Department of Homeland Security Industrial Control Systems Computer Emergency Response Team (DHS ICS-CERT) cyber security guidance and recommendations (https://ics-cert.us-cert.gov/Recommended-Practices).

2. Refer to the National Institute of Standards and Technology Cyber Security Framework (NIST-CSF) (https://www.nist.gov/cyberframework) and cybersecurity guidance in the DHS Commercial Facilities Sector-Specific Plan (https://www.dhs.gov/publication/nipp-ssp-commercial-facilities-2015) for best practices to manage cyber risks.

3. Encourage vendors of BACS to secure these devices and software through the following:

   a. Develop and institute a proper Configuration Management Plan for the BACS devices and applications, so that the system can be supported.

   b. Safeguard sensitive data and/or login credentials through the use of strong encryption on devices and applications. This means using NIST- approved encryption algorithms, secure protocols (i.e., Transport Layer Security (TLS) 1.1, TLS 1.2, TLS 1.3) and Federal Information Processing Standard (FIPS) 140-2 validated modules.

   c. Disable unnecessary services in order to protect the system from unnecessary access and a potential exposure point by a malicious attacker. Examples include File Transfer Protocol-FTP (a protocol used for transferring files to a remote location) and Telnet (allowing a user to issue commands remotely). Additionally, use of protocols that transmit data in the clear (such as default ZigBee) should be avoided, in favor of protocols that are encrypted.

   d. Close unnecessary open ports to secure against unprivileged access.

   e. Monitor and free web applications and supporting servers of common vulnerabilities in web applications, such as those identified by the (Open Web Application Security Project (OWASP) Top 10 Project (https://www.owasp.org/index.php/Category:OWASP_Top_Ten_Project).

   f. Enforce Least Privilege, where proper permissions are enforced on a device or application so that a malicious attacker cannot gain access to all data. Enforcing Least Privilege will only allow users to access data they are allowed to see. Additional information can be found at https://www.beyondtrust.com/blog/what-is-least-privilege/

g. Protect against Insufficient User Access Auditing, where device or application does not have a mechanism to log/track activity by user. Enforce changing of factory default Username and Password to prevent unauthorized entry into the BACS system.
h. Use updated antivirus software subscription at all times. Kaspersky-branded products or services, prohibited from use by the Federal Government, are not to be utilized.

i. Conduct antivirus and spyware scans on a regular basis. Patching for workstations and server Operating System (OS), as well as vulnerability patching should follow standard industry best practices for software development life cycle (SDLC).

j. Discontinue the use of end of life (EOL) systems and use only applications/systems that are supported by the manufacturer.

k. Operating Systems must be supported by the vendor for security updates (e.g., do not use Windows Server 2003).

l. Proposed standard installation, operation, maintenance, updates, and/or patching of software shall not alter the configuration settings from the approved United States Government Configuration Baseline (USGCB) or tenant agency guidance (if applicable).

m. Disallow the use of commercially-provided circuits to manage building systems and install building systems on a protected network, safeguarded by the enterprise firewalls in place. Workstations or servers running building monitor and control systems are not connected and visible on the public internet.

n. Systems should have proper system configuration hardening and align with Center for Internet Security (CIS) benchmarks or other industry recognized benchmarks. Additional information can be found at https://www.cisecurity.org/cis-benchmarks/.

(b) (6)

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

GENERAL CLAUSES
(Acquisition of Leasehold Interests in Real Property)

CATEGORY	CLAUSE NO.	48 CFR REF.	CLAUSE TITLE
GENERAL	1		SUBLETTING AND ASSIGNMENT
	2	552.270-11	SUCCESSORS BOUND
	3	552.270-23	SUBORDINATION, NON-DISTURBANCE AND ATTORNMENT
	4	552.270-24	STATEMENT OF LEASE
	5	552.270-25	SUBSTITUTION OF TENANT AGENCY
	6	552.270-26	NO WAIVER
	7		INTEGRATED AGREEMENT
	8	552.270-28	MUTUALITY OF OBLIGATION
PERFORMANCE	9		DELIVERY AND CONDITION
	10		DEFAULT BY LESSOR
	11	552.270-19	PROGRESSIVE OCCUPANCY
	12		MAINTENANCE OF THE PROPERTY, RIGHT TO INSPECT
	13		FIRE AND CASUALTY DAMAGE
	14		COMPLIANCE WITH APPLICABLE LAW
	15	552.270-12	ALTERATIONS
	16		ACCEPTANCE OF SPACE AND CERTIFICATE OF OCCUPANCY
PAYMENT	17	52.204-13	SYSTEM FOR AWARD MANAGEMENT MAINTENANCE
	18	552.270-31	PROMPT PAYMENT
	19	52.232-23	ASSIGNMENT OF CLAIMS
	20		PAYMENT
	21	52.232-33	PAYMENT BY ELECTRONIC FUNDS TRANSFER—SYSTEM FOR AWARD MANAGEMENT
STANDARDS OF CONDUCT	22	52.203-13	CONTRACTOR CODE OF BUSINESS ETHICS AND CONDUCT
	23	552.270-32	COVENANT AGAINST CONTINGENT FEES
	24	52-203-7	ANTI-KICKBACK PROCEDURES
	25	52-223-6	DRUG-FREE WORKPLACE
	26	52.203-14	DISPLAY OF HOTLINE POSTER(S)
ADJUSTMENTS	27	552.270-30	PRICE ADJUSTMENT FOR ILLEGAL OR IMPROPER ACTIVITY
	28	52.215-10	PRICE REDUCTION FOR DEFECTIVE COST OR PRICING DATA
	29	552.270-13	PROPOSALS FOR ADJUSTMENT
	30		CHANGES
AUDITS	31	552.215-70	EXAMINATION OF RECORDS BY GSA
	32	52.215-2	AUDIT AND RECORDS—NEGOTIATION
DISPUTES	33	52.233-1	DISPUTES

(b) (6) [redacted]

LABOR STANDARDS	34	52.222-26	EQUAL OPPORTUNITY
	35	52.222-21	PROHIBITION OF SEGREGATED FACILITIES
	36	52.219-28	POST-AWARD SMALL BUSINESS PROGRAM REREPRESENTATION
	37	52.222-35	EQUAL OPPORTUNITY FOR VETERANS
	38	52.222-36	EQUAL OPPORTUNITY FOR WORKERS WITH DISABILITIES
	39	52.222-37	EMPLOYMENT REPORTS ON VETERANS
SUBCONTRACTING	40	52.209-6	PROTECTING THE GOVERNMENT'S INTEREST WHEN SUBCONTRACTING WITH CONTRACTORS DEBARRED, SUSPENDED, OR PROPOSED FOR DEBARMENT
	41	52.215-12	SUBCONTRACTOR CERTIFIED COST OR PRICING DATA
	42	52.219-8	UTILIZATION OF SMALL BUSINESS CONCERNS
	43	52.219-9	SMALL BUSINESS SUBCONTRACTING PLAN
	44	52.219-16	LIQUIDATED DAMAGES—SUBCONTRACTING PLAN
	45	52.204-10	REPORTING EXECUTIVE COMPENSATION AND FIRST-TIER SUBCONTRACT AWARDS
OTHER	46	52.204-25	PROHIBITION ON CONTRACTING FOR CERTAIN TELECOMMUNICATIONS AND VIDEO SURVEILLANCE SERVICES OR EQUIPMENT
	47		INTENTIONALLY DELETED
	48	52.204-19	INCORPORATION BY REFERENCE OF REPRESENTATIONS AND CERTIFICATIONS

The information collection requirements contained in this solicitation/contract that are not required by regulation have been approved by the Office of Management and Budget (OMB) pursuant to the Paperwork Reduction Act and assigned the OMB Control No. 3090-0163.

LE (b) (6)

EXHIBIT D

GENERAL CLAUSES
(Acquisition of Leasehold Interests in Real Property)

1. SUBLETTING AND ASSIGNMENT (JAN 2011)

The Government may sublet any part of the premises but shall not be relieved from any obligations under this lease by reason of any such subletting. The Government may at any time assign this lease, and be relieved from all obligations to Lessor under this lease excepting only unpaid rent and other liabilities, if any, that have accrued to the date of said assignment. Any subletting or assignment shall be subject to prior written consent of Lessor, which shall not be unreasonably withheld.

2. 552.270-11 SUCCESSORS BOUND (SEP 1999)

This lease shall bind, and inure to the benefit of, the parties and their respective heirs, executors, administrators, successors, and assigns.

3. 552.270-23 SUBORDINATION, NON-DISTURBANCE AND ATTORNMENT (SEP 1999)

(a) Lessor warrants that it holds such title to or other interest in the premises and other property as is necessary to the Government's access to the premises and full use and enjoyment thereof in accordance with the provisions of this lease. Government agrees, in consideration of the warranties and conditions set forth in this clause, that this lease is subject and subordinate to any and all recorded mortgages, deeds of trust and other liens now or hereafter existing or imposed upon the premises, and to any renewal, modification or extension thereof. It is the intention of the parties that this provision shall be self-operative and that no further instrument shall be required to effect the present or subsequent subordination of this lease. Government agrees, however, within twenty (20) business days next following the Contracting Officer's receipt of a written demand, to execute such instruments as Lessor may reasonably request to evidence further the subordination of this lease to any existing or future mortgage, deed of trust or other security interest pertaining to the premises, and to any water, sewer or access easement necessary or desirable to serve the premises or adjoining property owned in whole or in part by Lessor if such easement does not interfere with the full enjoyment of any right granted the Government under this lease.

(b) No such subordination, to either existing or future mortgages, deeds of trust or other lien or security instrument shall operate to affect adversely any right of the Government under this lease so long as the Government is not in default under this lease. Lessor will include in any future mortgage, deed of trust or other security instrument to which this lease becomes subordinate, or in a separate non-disturbance agreement, a provision to the foregoing effect. Lessor warrants that the holders of all notes or other obligations secured by existing mortgages, deeds of trust or other security instruments have consented to the provisions of this clause, and agrees to provide true copies of all such consents to the Contracting Officer promptly upon demand.

(c) In the event of any sale of the premises or any portion thereof by foreclosure of the lien of any such mortgage, deed of trust or other security instrument, or the giving of a deed in lieu of foreclosure, the Government will be deemed to have attorned to any purchaser, purchasers, transferee or transferees of the premises or any portion thereof and its or their successors and assigns, and any such purchasers and transferees will be deemed to have assumed all obligations of the Lessor under this lease, so as to establish direct privity of estate and contract between Government and such purchasers or transferees, with the same force, effect and relative priority in time and right as if the lease had initially been entered into between such purchasers or transferees and the Government; provided, further, that the Contracting Officer and such purchasers or transferees shall, with reasonable promptness following any such sale or deed delivery in lieu of foreclosure, execute all such revisions to this lease, or other writings, as shall be necessary to document the foregoing relationship.

(d) None of the foregoing provisions may be deemed or construed to imply a waiver of the Government's rights as a sovereign.

4. 552.270-24 STATEMENT OF LEASE (SEP 1999)

(a) The Contracting Officer will, within thirty (30) days next following the Contracting Officer's receipt of a joint written request from Lessor and a prospective lender or purchaser of the building, execute and deliver to Lessor a letter stating that the same is issued subject to the conditions stated in this clause and, if such is the case, that (1) the lease is in full force and effect; (2) the date to which the rent and other charges have been paid in advance, if any; and (3) whether any notice of default has been issued.

(b) Letters issued pursuant to this clause are subject to the following conditions:

(1) That they are based solely upon a reasonably diligent review of the Contracting Officer's lease file as of the date of issuance;

(2) That the Government shall not be held liable because of any defect in or condition of the premises or building;

(3) That the Contracting Officer does not warrant or represent that the premises or building comply with applicable Federal, State and local law; and

(4) That the Lessor, and each prospective lender and purchaser are deemed to have constructive notice of such facts as would be ascertainable by reasonable pre-purchase and pre-commitment inspection of the Premises and Building and by inquiry to appropriate Federal, State and local Government officials.

5. 552.270-25 SUBSTITUTION OF TENANT AGENCY (SEP 1999)

The Government may, at any time and from time to time, substitute any Government agency or agencies for the Government agency or agencies, if any, named in the lease.

6. 552.270-26 NO WAIVER (SEP 1999)

No failure by either party to insist upon the strict performance of any provision of this lease or to exercise any right or remedy consequent upon a breach thereof, and no acceptance of full or partial rent or other performance by either party during the continuance of any such breach shall constitute a waiver of any such breach of such provision.

7. INTEGRATED AGREEMENT (JUN 2012)

This Lease, upon execution, contains the entire agreement of the parties and no prior written or oral agreement, express or implied, shall be admissible to contradict the provisions of the Lease. Except as expressly attached to and made a part of the Lease, neither the Request for Lease Proposals nor any pre-award communications by either party shall be incorporated in the Lease.

8. 552.270-28 MUTUALITY OF OBLIGATION (SEP 1999)

The obligations and covenants of the Lessor, and the Government's obligation to pay rent and other Government obligations and covenants, arising under or related to this Lease, are interdependent. The Government may, upon issuance of and delivery to Lessor of a final decision asserting a claim against Lessor, set off such claim, in whole or in part, as against any payment or payments then or thereafter due the Lessor under this lease. No setoff pursuant to this clause shall constitute a breach by the Government of this lease.

9. DELIVERY AND CONDITION (JAN 2011)

(a) Unless the Government elects to have the space occupied in increments, the space must be delivered ready for occupancy as a complete unit.

(b) The Government may elect to accept the Space notwithstanding the Lessor's failure to deliver the Space substantially complete; if the Government so elects, it may reduce the rent payments.

(b) (6) [redacted]

10. DEFAULT BY LESSOR (APR 2012)

(a) The following conditions shall constitute default by the Lessor, and shall give rise to the following rights and remedies for the Government:

(1) Prior to Acceptance of the Premises. Failure by the Lessor to diligently perform all obligations required for Acceptance of the Space within the times specified, without excuse, shall constitute a default by the Lessor. Subject to provision of notice of default to the Lessor, and provision of a reasonable opportunity for the Lessor to cure its default, the Government may terminate the Lease on account of the Lessor's default.

(2) After Acceptance of the Premises. Failure by the Lessor to perform any service, to provide any item, or satisfy any requirement of this Lease, without excuse, shall constitute a default by the Lessor. Subject to provision of notice of default to the Lessor, and provision of a reasonable opportunity for the Lessor to cure its default, the Government may perform the service, provide the item, or obtain satisfaction of the requirement by its own employees or contractors. If the Government elects to take such action, the Government may deduct from rental payments its costs incurred in connection with taking the action. Alternatively, the Government may reduce the rent by an amount reasonably calculated to approximate the cost or value of the service not performed, item not provided, or requirement not satisfied, such reduction effective as of the date of the commencement of the default condition.

(3) Grounds for Termination. The Government may terminate the Lease if:

(i) The Lessor's default persists notwithstanding provision of notice and reasonable opportunity to cure by the Government, or

(ii) The Lessor fails to take such actions as are necessary to prevent the recurrence of default conditions,

and such conditions (i) or (ii) substantially impair the safe and healthful occupancy of the Premises, or render the Space unusable for its intended purposes.

(4) Excuse. Failure by the Lessor to timely deliver the Space or perform any service, provide any item, or satisfy any requirement of this Lease shall not be excused if its failure in performance arises from:

(i) Circumstances within the Lessor's control;

(ii) Circumstances about which the Lessor had actual or constructive knowledge prior to the Lease Award Date that could reasonably be expected to affect the Lessor's capability to perform, regardless of the Government's knowledge of such matters;

(iii) The condition of the Property;

(iv) The acts or omissions of the Lessor, its employees, agents or contractors; or

(v) The Lessor's inability to obtain sufficient financial resources to perform its obligations.

(5) The rights and remedies specified in this clause are in addition to any and all remedies to which the Government may be entitled as a matter of law.

11. 552.270-19 PROGRESSIVE OCCUPANCY (SEP 1999)

The Government shall have the right to elect to occupy the space in partial increments prior to the substantial completion of the entire leased premises, and the Lessor agrees to schedule its work so as to deliver the space incrementally as elected by the Government. The Government shall pay rent commencing with the first business day following substantial completion of the entire leased premise unless the Government has elected to occupy the leased premises incrementally. In case of incremental occupancy, the Government shall pay rent pro rata upon the first business day following substantial

(b) (6) [redacted]

completion of each incremental unit. Rental payments shall become due on the first workday of the month following the month in which an increment of space is substantially complete, except that should an increment of space be substantially completed after the fifteenth day of the month, the payment due date will be the first workday of the second month following the month in which it was substantially complete. The commencement date of the firm lease term will be a composite determined from all rent commencement dates.

12. MAINTENANCE OF THE PROPERTY, RIGHT TO INSPECT (APR 2015)

The Lessor shall maintain the Property, including the building, building systems, and all equipment, fixtures, and appurtenances furnished by the Lessor under this Lease, in good repair and tenantable condition so that they are suitable in appearance and capable of supplying such heat, air conditioning, light, ventilation, safety systems, access and other things to the premises, without reasonably preventable or recurring disruption, as is required for the Government's access to, occupancy, possession, use and enjoyment of the premises as provided in this lease. For the purpose of so maintaining the premises, the Lessor may at reasonable times enter the premises with the approval of the authorized Government representative in charge. Upon request of the Lease Contracting Officer (LCO), the Lessor shall provide written documentation that building systems have been properly maintained, tested, and are operational within manufacturer's warranted operating standards. The Lessor shall maintain the Premises in a safe and healthful condition according to applicable OSHA standards and all other requirements of this Lease, including standards governing indoor air quality, existence of mold and other biological hazards, presence of hazardous materials, etc. The Government shall have the right, at any time after the Lease Award Date and during the term of the Lease, to inspect all areas of the Property to which access is necessary for the purpose of determining the Lessor’s compliance with this clause.

13. FIRE AND CASUALTY DAMAGE (JUN 2016)

If the building in which the Premises are located is totally destroyed or damaged by fire or other casualty, this Lease shall immediately terminate. If the building in which the Premises are located are only partially destroyed or damaged, so as to render the Premises untenantable, or not usable for their intended purpose, the Lessor shall have the option to elect to repair and restore the Premises or terminate the Lease. The Lessor shall be permitted a reasonable amount of time, not to exceed **270 days** from the event of destruction or damage, to repair or restore the Premises, provided that the Lessor submits to the Government a reasonable schedule for repair of the Premises within **60 days** of the event of destruction or damage. If the Lessor fails to timely submit a reasonable schedule for completing the work, the Government may elect to terminate the Lease effective as of the date of the event of destruction or damage. If the Lessor elects to repair or restore the Premises, but fails to repair or restore the Premises within **270 days** from the event of destruction or damage, or fails to diligently pursue such repairs or restoration so as to render timely completion commercially impracticable, the Government may terminate the Lease effective as of the date of the destruction or damage. During the time that the Premises are unoccupied, rent shall be abated. Termination of the Lease by either party under this clause shall not give rise to liability for either party.

Nothing in this lease shall be construed as relieving Lessor from liability for damage to, or destruction of, property of the United States of America caused by the willful or negligent act or omission of Lessor.

14. COMPLIANCE WITH APPLICABLE LAW (JAN 2011)

Lessor shall comply with all Federal, state and local laws applicable to its ownership and leasing of the Property, including, without limitation, laws applicable to the construction, ownership, alteration or operation of all buildings, structures, and facilities located thereon, and obtain all necessary permits, licenses and similar items at its own expense. The Government will comply with all Federal, State and local laws applicable to and enforceable against it as a tenant under this lease, provided that nothing in this Lease shall be construed as a waiver of the sovereign immunity of the Government. This Lease shall be governed by Federal law.

15. 552.270-12 ALTERATIONS (SEP 1999)

The Government shall have the right during the existence of this lease to make alterations, attach fixtures, and erect structures or signs in or upon the premises hereby leased, which fixtures, additions or structures so placed in, on, upon, or attached to the said premises shall be and remain the property of the Government and may be removed or otherwise disposed of by the Government. If the lease contemplates that the Government is the sole occupant of the building, for

(b) (6) [redacted]

purposes of this clause, the leased premises include the land on which the building is sited and the building itself. Otherwise, the Government shall have the right to tie into or make any physical connection with any structure located on the property as is reasonably necessary for appropriate utilization of the leased space.

16. ACCEPTANCE OF SPACE AND CERTIFICATE OF OCCUPANCY (APR 2015)

(a) Ten (10) working days prior to the completion of the Space, the Lessor shall issue written notice to the Government to schedule the inspection of the Space for acceptance. The Government shall accept the Space only if the construction of building shell and TIs conforming to this Lease and the approved DIDs is substantially complete, and a Certificate of Occupancy has been issued as set forth below.

(b) The Space shall be considered substantially complete only if the Space may be used for its intended purpose and completion of remaining work will not unreasonably interfere with the Government's enjoyment of the Space. Acceptance shall be final and binding upon the Government with respect to conformance of the completed TIs to the approved DIDs, with the exception of items identified on a punchlist generated as a result of the inspection, concealed conditions, latent defects, or fraud, but shall not relieve the Lessor of any other Lease requirements.

(c) The Lessor shall provide a valid Certificate of Occupancy, issued by the local jurisdiction, for the intended use of the Government. If the local jurisdiction does not issue Certificates of Occupancy or if the Certificate of Occupancy is not available, the Lessor may satisfy this condition by providing a report prepared by a licensed fire protection engineer that indicates that the Space and Building are compliant with all applicable local codes and ordinances and all fire protection and life safety-related requirements of this Lease to ensure an acceptable level of safety is provided. Under such circumstances, the Government shall only accept the Space without a Certificate of Occupancy if a licensed fire protection engineer determines that the offered space is compliant with all applicable local codes and ordinances and fire protection and life safety-related requirements of this Lease.

17. 52.204-13 SYSTEM FOR AWARD MANAGEMENT MAINTENANCE (OCT 2018)

This clause is incorporated by reference.

18. 552.270-31 PROMPT PAYMENT (JUN 2011)

The Government will make payments under the terms and conditions specified in this clause. Payment shall be considered as being made on the day a check is dated or an electronic funds transfer is made. All days referred to in this clause are calendar days, unless otherwise specified.

(a) *Payment due date—*

(1) *Rental payments.* Rent shall be paid monthly in arrears and will be due on the first workday of each month, and only as provided for by the lease.

(i) When the date for commencement of rent falls on the 15th day of the month or earlier, the initial monthly rental payment under this contract shall become due on the first workday of the month following the month in which the commencement of the rent is effective.

(ii) When the date for commencement of rent falls after the 15th day of the month, the initial monthly rental payment under this contract shall become due on the first workday of the second month following the month in which the commencement of the rent is effective.

(2) *Other payments.* The due date for making payments other than rent shall be the later of the following two events:

(i) The 30th day after the designated billing office has received a proper invoice from the Contractor.

(ii) The 30th day after Government acceptance of the work or service. However, if the designated billing office fails to annotate the invoice with the actual date of receipt, the invoice payment due date shall be deemed to be the 30th day after the Contractor's invoice is dated, provided a proper invoice is received and there is no disagreement over quantity, quality, or Contractor compliance with contract requirements.

(b) *Invoice and inspection requirements for payments other than rent.*

(1) The Contractor shall prepare and submit an invoice to the designated billing office after completion of the work. A proper invoice shall include the following items:

(i) Name and address of the Contractor.

(ii) Invoice date.

(iii) Lease number.

(iv) Government's order number or other authorization.

(v) Description, price, and quantity of work or services delivered.

(vi) Name and address of Contractor official to whom payment is to be sent (must be the same as that in the remittance address in the lease or the order).

(vii) Name (where practicable), title, phone number, and mailing address of person to be notified in the event of a defective invoice.

(2) The Government will inspect and determine the acceptability of the work performed or services delivered within seven days after the receipt of a proper invoice or notification of completion of the work or services unless a different period is specified at the time the order is placed. If actual acceptance occurs later, for the purpose of determining the payment due date and calculation of interest, acceptance will be deemed to occur on the last day of the seven day inspection period. If the work or service is rejected for failure to conform to the technical requirements of the contract, the seven days will be counted beginning with receipt of a new invoice or notification. In either case, the Contractor is not entitled to any payment or interest unless actual acceptance by the Government occurs.

(c) *Interest Penalty.*

(1) An interest penalty shall be paid automatically by the Government, without request from the Contractor, if payment is not made by the due date.

(2) The interest penalty shall be at the rate established by the Secretary of the Treasury under Section 12 of the Contract Disputes Act of 1978 (41 U.S.C. 611) that is in effect on the day after the due date. This rate is referred to as the ''Renegotiation Board Interest Rate,'' and it is published in the **Federal Register** semiannually on or about January 1 and July 1. The interest penalty shall accrue daily on the payment amount approved by the Government and be compounded in 30-day increments inclusive from the first day after the due date through the payment date.

(3) Interest penalties will not continue to accrue after the filing of a claim for such penalties under the clause at 52.233–1, Disputes, or for more than one year. Interest penalties of less than $1.00 need not be paid.

(4) Interest penalties are not required on payment delays due to disagreement between the Government and Contractor over the payment amount or other issues involving contract compliance or on amounts temporarily withheld or retained in accordance with the terms of the contract. Claims involving disputes, and any interest that may be payable, will be resolved in accordance with the clause at 52.233-1, Disputes.

(d) *Overpayments.* If the Lessor becomes aware of a duplicate payment or that the Government has otherwise overpaid on a payment, the Contractor shall—

(b) (6) [redacted]

(1) Return the overpayment amount to the payment office cited in the contract along with a description of the overpayment including the—

(i) Circumstances of the overpayment (*e.g.,* duplicate payment, erroneous payment, liquidation errors, date(s) of overpayment);

(ii) Affected lease number; (iii) Affected lease line item or sub-line item, if applicable; and

(iii) Lessor point of contact.

(2) Provide a copy of the remittance and supporting documentation to the Contracting Officer.

19. 52.232-23 ASSIGNMENT OF CLAIMS (MAY 2014)

(Applicable to leases over the micro-purchase threshold.)

(a) The Contractor, under the Assignment of Claims Act, as amended, 31 U.S.C. 3727, 41 U.S.C. 6305 (hereafter referred to as "the Act"), may assign its rights to be paid amounts due or to become due as a result of the performance of this contract to a bank, trust company, or other financing institution, including any Federal lending agency. The assignee under such an assignment may thereafter further assign or reassign its right under the original assignment to any type of financing institution described in the preceding sentence.

(b) Any assignment or reassignment authorized under the Act and this clause shall cover all unpaid amounts payable under this contract, and shall not be made to more than one party, except that an assignment or reassignment may be made to one party as agent or trustee for two or more parties participating in the financing of this contract.

(c) The Contractor shall not furnish or disclose to any assignee under this contract any classified document (including this contract) or information related to work under this contract until the Contracting Officer authorizes such action in writing.

20. PAYMENT (MAY 2011)

(a) When space is offered and accepted, the amount of American National Standards Institute/Building Owners and Managers Association Office Area (ABOA) square footage delivered will be confirmed by:

(1) The Government's measurement of plans submitted by the successful Offeror as approved by the Government, and an inspection of the space to verify that the delivered space is in conformance with such plans or

(2) A mutual on-site measurement of the space, if the Contracting Officer determines that it is necessary.

(b) Payment will not be made for space which is in excess of the amount of ABOA square footage stated in the lease.

(c) If it is determined that the amount of ABOA square footage actually delivered is less than the amount agreed to in the lease, the lease will be modified to reflect the amount of ABOA space delivered and the annual rental will be adjusted as follows:

ABOA square feet not delivered multiplied by one plus the common area factor (CAF), multiplied by the rate per rentable square foot (RSF). That is: (1+CAF) x Rate per RSF = Reduction in Annual Rent

21. 52.232-33 PAYMENT BY ELECTRONIC FUNDS TRANSFER—SYSTEM FOR AWARD MANAGEMENT (OCT 2018)

This clause is incorporated by reference.

22. 52.203-13 Contractor Code of Business Ethics and Conduct (JUN 2020)

(Applicable to leases over $5.5 million total contract value and performance period is 120 days or more.)

This clause is incorporated by reference.

23. 552.270-32 COVENANT AGAINST CONTINGENT FEES (JUN 2011)

(Applicable to leases over the Simplified Lease Acquisition Threshold.)

(a) The Contractor warrants that no person or agency has been employed or retained to solicit or obtain this contract upon an agreement or understanding for a contingent fee, except a bona fide employee or agency. For breach or violation of this warranty, the Government shall have the right to annul this contract without liability or, in its discretion, to deduct from the contract price or consideration, or otherwise recover the full amount of the contingent fee.

(b) *Bona fide agency,* as used in this clause, means an established commercial or selling agency (including licensed real estate agents or brokers), maintained by a Contractor for the purpose of securing business, that neither exerts nor proposes to exert improper influence to solicit or obtain Government contracts nor holds itself out as being able to obtain any Government contract or contracts through improper influence.

(1) Bona fide employee, as used in this clause, means a person, employed by a Contractor and subject to the Contractor's supervision and control as to time, place, and manner of performance, who neither exerts nor proposes to exert improper influence to solicit or obtain Government contracts nor holds out as being able to obtain any Government contract or contracts through improper influence.

(2) Contingent fee, as used in this clause, means any commission, percentage, brokerage, or other fee that is contingent upon the success that a person or concern has in securing a Government contract.

(3) Improper influence, as used in this clause, means any influence that induces or tends to induce a *Government* employee or officer to give consideration or to act regarding a Government contract on any basis other than the merits of the matter.

24. 52.203-7 ANTI-KICKBACK PROCEDURES (JUN 2020)

(Applicable to leases over the Simplified Lease Acquisition Threshold.)

This clause is incorporated by reference.

25. 52.223-6 DRUG-FREE WORKPLACE (MAY 2001)

(Applicable to leases over the Simplified Lease Acquisition Threshold, as well as to leases of any value awarded to an individual.)

This clause is incorporated by reference.

26. 52.203-14 DISPLAY OF HOTLINE POSTER(S) (JUN 2020)

(Applicable to leases over $5.5 Million total contract value and performance period is 120 days or more.)

(a) *Definition.*

United States, as used in this clause, means the 50 States, the District of Columbia, and outlying areas.

(b) *Display of fraud hotline poster(s).* Except as

(1) During contract performance in the United States, the Contractor shall prominently display in common work areas within business segments performing work under this contract and at contract work sites-

(i) Any agency fraud hotline poster or Department of Homeland Security (DHS) fraud hotline poster identified in paragraph (b)(3) of this clause; and

(ii) Any DHS fraud hotline poster subsequently identified by the Contracting Officer.

(2) Additionally, if the Contractor maintains a company website as a method of providing information to employees, the Contractor shall display an electronic version of the poster(s) at the website.

(3) Any required posters may be obtained as follows:

Poster(s)	***Obtain from***
_____	_____
_____	_____

(*Contracting Officer shall insert—*

(i) Appropriate agency name(s) and/or title of applicable Department of Homeland Security fraud hotline poster); and

(ii) The website(s) or other contact information for obtaining the poster(s).)

(c) If the Contractor has implemented a business ethics and conduct awareness program, including a reporting mechanism, such as a hotline poster, then the Contractor need not display any agency fraud hotline posters as required in paragraph (b) of this clause, other than any required DHS posters.

(d) *Subcontracts.* The Contractor shall include the substance of this clause, including this paragraph (d), in all subcontracts that exceed the threshold specified in Federal Acquisition Regulation 3.1004(b)(1) on the date of subcontract award, except when the subcontract—

(1) Is for the acquisition of a commercial item; or

(2) Is performed entirely outside the United States.

27. 552.270-30 PRICE ADJUSTMENT FOR ILLEGAL OR IMPROPER ACTIVITY (JUN 2011)

(Applicable to leases over the Simplified Lease Acquisition Threshold.)

(a) If the head of the contracting activity (HCA) or his or her designee determines that there was a violation of subsection 27(a) of the Office of Federal Procurement Policy Act, as amended (41 U.S.C. 423), as implemented in the Federal Acquisition Regulation, the Government, at its election, may—

(1) Reduce the monthly rental under this lease by five percent of the amount of the rental for each month of the remaining term of the lease, including any option periods, and recover five percent of the rental already paid;

(2) Reduce payments for alterations not included in monthly rental payments by five percent of the amount of the alterations agreement; or

(3) Reduce the payments for violations by a Lessor's subcontractor by an amount not to exceed the amount of profit or fee reflected in the subcontract at the time the subcontract was placed.

(b) Prior to making a determination as set forth above, the HCA or designee shall provide to the Lessor a written notice of the action being considered and the basis thereof. The Lessor shall have a period determined by the agency head or designee, but not less than 30 calendar days after receipt of such notice, to submit in person, in writing, or through a representative, information and argument in opposition to the proposed reduction. The agency head or designee may, upon good cause shown, determine to deduct less than the above amounts from payments.

(c) The rights and remedies of the Government specified herein are not exclusive, and are in addition to any other rights and remedies provided by law or under this lease.

28. 52.215-10 PRICE REDUCTION FOR DEFECTIVE COST OR PRICING DATA (AUG 2011)

(Applicable when cost or pricing data are required for work or services over $750,000.)
This clause is incorporated by reference.

29. 552.270-13 PROPOSALS FOR ADJUSTMENT (OCT 2016)

This clause is incorporated by reference.

30. CHANGES (MAR 2013)

(a) The LCO may at any time, by written order, direct changes to the Tenant Improvements within the Space, Building Security Requirements, or the services required under the Lease.

(b) If any such change causes an increase or decrease in Lessor's costs or time required for performance of its obligations under this Lease, whether or not changed by the order, the Lessor shall be entitled to an amendment to the Lease providing for one or more of the following:

(1) An adjustment of the delivery date;

(2) An equitable adjustment in the rental rate;

(3) A lump sum equitable adjustment; or

(4) A change to the operating cost base, if applicable.

(c) The Lessor shall assert its right to an amendment under this clause within 30 days from the date of receipt of the change order and shall submit a proposal for adjustment. Failure to agree to any adjustment shall be a dispute under the Disputes clause. However, the pendency of an adjustment or existence of a dispute shall not excuse the Lessor from proceeding with the change as directed.

(d) Absent a written change order from the LCO, or from a Government official to whom the LCO has explicitly and in writing delegated the authority to direct changes, the Government shall not be liable to Lessor under this clause.

31. 552.215-70 EXAMINATION OF RECORDS BY GSA (JUN 2016)

(Applicable to leases over the Simplified Lease Acquisition Threshold.)
This clause is incorporated by reference.

32. 52.215-2 AUDIT AND RECORDS—NEGOTIATION (JUN 2020)

(Applicable to leases over the Simplified Lease Acquisition Threshold.)
This clause is incorporated by reference.

33. 52.233-1 DISPUTES (MAY 2014)

This clause is incorporated by reference.

34. 52.222-26 EQUAL OPPORTUNITY (SEP 2016)

This clause is incorporated by reference.

35. 52.222-21 PROHIBITION OF SEGREGATED FACILITIES (APR 2015)

This clause is incorporated by reference.

36. 52.219-28 POST-AWARD SMALL BUSINESS PROGRAM REREPRESENTATION (SEP 2021)

(Applicable to leases exceeding the micro-purchase threshold.)
This clause is incorporated by reference.

37. 52.222-35 EQUAL OPPORTUNITY FOR VETERANS (JUN 2020)

(Applicable to leases $150,000 or more, total contract value.)

(a) *Definitions*. As used in this clause-

"Active duty wartime or campaign badge veteran," "Armed Forces service medal veteran," "disabled veteran," "protected veteran," "qualified disabled veteran," and "recently separated veteran" have the meanings given at Federal Acquisition Regulation (FAR) 22.1301.

(b) Equal opportunity clause. The Contractor shall abide by the requirements of the equal opportunity clause at 41 CFR 60-300.5(a), as of March 24, 2014. This clause prohibits discrimination against qualified protected veterans, and requires affirmative action by the Contractor to employ and advance in employment qualified protected veterans.

(c) Subcontracts. The Contractor shall insert the terms of this clause in subcontracts valued at or above the threshold specified in FAR 22.1303(a) on the date of subcontract award, unless exempted by rules, regulations, or orders of the Secretary of Labor. The Contractor shall act as specified by the Director, Office of Federal Contract Compliance Programs, to enforce the terms, including action for noncompliance. Such necessary changes in language may be made as shall be appropriate to identify properly the parties and their undertakings.

38. 52.222-36 EQUAL OPPORTUNITY FOR WORKERS WITH DISABILITIES (JUN 2020)

(Applicable to leases over $15,000 total contract value.)

(a) Equal opportunity clause. The Contractor shall abide by the requirements of the equal opportunity clause at 41 CFR 60-741.5(a), as of March 24, 2014. This clause prohibits discrimination against qualified individuals on the basis of disability, and requires affirmative action by the Contractor to employ and advance in employment qualified individuals with disabilities.

(b) Subcontracts. The Contractor shall include the terms of this clause in every subcontract or purchase order in excess of the threshold specified in Federal Acquisition Regulation (FAR) 22.1408(a) on the date of subcontract award, unless exempted by rules, regulations, or orders of the Secretary, so that such provisions will be binding upon each subcontractor or vendor. The Contractor shall act as specified by the Director, Office of Federal Contract Compliance Programs of the U.S. Department of Labor, to enforce the terms, including action for noncompliance. Such necessary changes in language may be made as shall be appropriate to identify properly the parties and their undertakings.

39. 52.222-37 EMPLOYMENT REPORTS ON VETERANS (JUN 2020)

(Applicable to leases $150,000 or more, total contract value.)
This clause is incorporated by reference.

40. 52.209-6 PROTECTING THE GOVERNMENT'S INTEREST WHEN SUBCONTRACTING WITH CONTRACTORS DEBARRED, SUSPENDED, OR PROPOSED FOR DEBARMENT (JUN 2020)

(Applicable to leases over $35,000 total contract value.)

This clause is incorporated by reference.

41. 52.215-12 SUBCONTRACTOR CERTIFIED COST OR PRICING DATA (JUN 2020)

(Applicable if over $750,000 total contract value.)

This clause is incorporated by reference.

42. 52.219-8 UTILIZATION OF SMALL BUSINESS CONCERNS (OCT 2018)

(Applicable to leases over the Simplified Lease Acquisition Threshold.)
This clause is incorporated by reference.

43. 52.219-9 SMALL BUSINESS SUBCONTRACTING PLAN (SEP 2021) ALTERNATE III (JUN 2020)

(Applicable to leases over $750,000 total contract value.)
This clause is incorporated by reference.

44. 52.219-16 LIQUIDATED DAMAGES—SUBCONTRACTING PLAN (SEP 2021)

(Applicable to leases over $750,000 total contract value.)
This clause is incorporated by reference.

45. 52.204-10 REPORTING EXECUTIVE COMPENSATION AND FIRST-TIER SUBCONTRACT AWARDS (JUN 2020)

(Applicable if over $30,000 total contract value.)
This clause is incorporated by reference.

46. 52.204-25 PROHIBITION ON CONTRACTING FOR CERTAIN TELECOMMUNICATIONS AND VIDEO SURVEILLANCE SERVICES OR EQUIPMENT (AUG 2020)

(a) *Definitions.* As used in this clause—

Backhaul means intermediate links between the core network, or backbone network, and the small subnetworks at the edge of the network (*e.g.*, connecting cell phones/towers to the core telephone network). Backhaul can be wireless (e.g., microwave) or wired (*e.g.*, fiber optic, coaxial cable, Ethernet).

Covered foreign country means The People's Republic of China.

Covered telecommunications equipment or services means–

(1) Telecommunications equipment produced by Huawei Technologies Company or ZTE Corporation (or any subsidiary or affiliate of such entities);

(2) For the purpose of public safety, security of Government facilities, physical security surveillance of critical infrastructure, and other national security purposes, video surveillance and telecommunications equipment produced by Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities);

(3) Telecommunications or video surveillance services provided by such entities or using such equipment; or

(4) Telecommunications or video surveillance equipment or services produced or provided by an entity that the Secretary of Defense, in consultation with the Director of National Intelligence or the Director of the Federal Bureau of Investigation, reasonably believes to be an entity owned or controlled by, or otherwise connected to, the government of a covered foreign country.

Critical technology means–

(1) Defense articles or defense services included on the United States Munitions List set forth in the International Traffic in Arms Regulations under subchapter M of chapter I of title 22, Code of Federal Regulations;

(2) Items included on the Commerce Control List set forth in Supplement No. 1 to part 774 of the Export Administration Regulations under subchapter C of chapter VII of title 15, Code of Federal Regulations, and controlled-

(i) Pursuant to multilateral regimes, including for reasons relating to national security, chemical and biological weapons proliferation, nuclear nonproliferation, or missile technology; or

(ii) For reasons relating to regional stability or surreptitious listening;

(3) Specially designed and prepared nuclear equipment, parts and components, materials, software, and technology covered by part 810 of title 10, Code of Federal Regulations (relating to assistance to foreign atomic energy activities);

(4) Nuclear facilities, equipment, and material covered by part 110 of title 10, Code of Federal Regulations (relating to export and import of nuclear equipment and material);

(5) Select agents and toxins covered by part 331 of title 7, Code of Federal Regulations, part 121 of title 9 of such Code, or part 73 of title 42 of such Code; or

(6) Emerging and foundational technologies controlled pursuant to section 1758 of the Export Control Reform Act of 2018 (50 U.S.C. 4817).

Interconnection arrangements means arrangements governing the physical connection of two or more networks to allow the use of another's network to hand off traffic where it is ultimately delivered (*e.g.*, connection of a customer of telephone provider A to a customer of telephone company B) or sharing data and other information resources.

Reasonable inquiry means an inquiry designed to uncover any information in the entity's possession about the identity of the producer or provider of covered telecommunications equipment or services used by the entity that excludes the need to include an internal or third-party audit.

Roaming means cellular communications services (*e.g.*, voice, video, data) received from a visited network when unable to connect to the facilities of the home network either because signal coverage is too weak or because traffic is too high.

Substantial or essential component means any component necessary for the proper function or performance of a piece of equipment, system, or service.

(b) *Prohibition*. (1) Section 889(a)(1)(A) of the John S. McCain National Defense Authorization Act for Fiscal Year 2019 (Pub. L. 115-232) prohibits the head of an executive agency on or after August 13, 2019, from procuring or obtaining, or extending or renewing a contract to procure or obtain, any equipment, system, or service that uses covered telecommunications equipment or services as a substantial or essential component of any system, or as critical technology as part of any system. The Contractor is prohibited from providing to the Government any equipment, system, or service that uses covered telecommunications equipment or services as a substantial or essential component of any system, or as critical technology as part of any system, unless an exception at paragraph (c) of this clause applies or the covered telecommunication equipment or services are covered by a waiver described in FAR 4.2104.

(2) Section 889(a)(1)(B) of the John S. McCain National Defense Authorization Act for Fiscal Year 2019 (Pub. L. 115-232) prohibits the head of an executive agency on or after August 13, 2020, from entering into a contract, or extending or renewing a contract, with an entity that uses any equipment, system, or service that uses covered telecommunications equipment or services as a substantial or essential component of any system, or as critical technology as part of any system, unless an exception at paragraph (c) of this clause applies or the covered telecommunication equipment or services are covered by a waiver described in FAR 4.2104. This prohibition applies to the use of covered telecommunications equipment or services, regardless of whether that use is in performance of work under a Federal contract.

(c) *Exceptions.* This clause does not prohibit contractors from providing—

(1) A service that connects to the facilities of a third-party, such as backhaul, roaming, or interconnection arrangements; or

(2) Telecommunications equipment that cannot route or redirect user data traffic or permit visibility into any user data or packets that such equipment transmits or otherwise handles.

(d) Reporting requirement. (1) In the event the Contractor identifies covered telecommunications equipment or services used as a substantial or essential component of any system, or as critical technology as part of any system, during contract performance, or the Contractor is notified of such by a subcontractor at any tier or by any other source, the Contractor shall report the information in paragraph (d)(2) of this clause to the Contracting Officer, unless elsewhere in this contract are established procedures for reporting the information; in the case of the Department of Defense, the Contractor shall report to the website at https://dibnet.dod.mil. For indefinite delivery contracts, the Contractor shall report to the Contracting Officer for the indefinite delivery contract and the Contracting Officer(s) for any affected order or, in the case of the Department of Defense, identify both the indefinite delivery contract and any affected orders in the report provided at https://dibnet.dod.mil.

(2) The Contractor shall report the following information pursuant to paragraph (d)(1) of this clause

(i) Within one business day from the date of such identification or notification: the contract number; the order number(s), if applicable; supplier name; supplier unique entity identifier (if known); supplier Commercial and Government Entity (CAGE) code (if known); brand; model number (original equipment manufacturer number, manufacturer part number, or wholesaler number); item description; and any readily available information about mitigation actions undertaken or recommended.

(ii) Within 10 business days of submitting the information in paragraph (d)(2)(i) of this clause: any further available information about mitigation actions undertaken or recommended. In addition, the Contractor shall describe the efforts it undertook to prevent use or submission of covered telecommunications equipment or services, and any additional efforts that will be incorporated to prevent future use or submission of covered telecommunications equipment or services.

(e) *Subcontracts.* The Contractor shall insert the substance of this clause, including this paragraph (e) and excluding paragraph (b)(2), in all subcontracts and other contractual instruments, including subcontracts for the acquisition of commercial items.

47. *INTENTIONALLY DELETED*

48. 52.204-19 INCORPORATION BY REFERENCE OF REPRESENTATIONS AND CERTIFICATIONS (DEC 2014)

This clause is incorporated by reference.

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

Issued 10/2018

EXHIBIT E

Foreign Ownership and Financing Representation (Acquisitions of Leasehold Interests in Real Property)	Request for Lease Proposals Number	Dated 8/2/2022

Complete appropriate boxes, sign the form, and return to LCO.
The Offeror makes the following additional Representations. NOTE: The "Offeror," as used on this form, is the owner of the property offered, not an individual or agent representing the owner.

FOREIGN OWNERSHIP AND FINANCING (APR 2018)

(a) Offeror represents that the ownership of the offered Building

[ ] has a foreign person, foreign-owned entity, or foreign government involved in the ownership structure.

If checked, enter country: _____

[X] does not have a foreign person, foreign-owned entity, or foreign government involved in the ownership structure

(b) Offeror represents that the financing of the offered Premises, including, but not limited to, construction and permanent loans:

[ ] has a foreign person, foreign-owned entity, or foreign government involved in the financing structure

If checked, enter country: _____

[X] does not have a foreign person, foreign-owned entity, or foreign government involved in the financing structure.

OFFEROR OR LEGALLY AUTHORIZED REPRESENTATIVE	NAME, ADDRESS (INCLUDING ZIP CODE)	TELEPHONE NUMBER
	Farley White Apollo LLC 155 Federal Street Boston, MA 02110-1727	6176549400
	(b) (6) [redacted] Signature	8/2/2022 Date

INITIAL (b) (6) [redacted] & (b) (6) [redacted]

LESSOR GOVERNMENT

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

EXHIBIT F

Representation Regarding Certain Telecommunications and Video Surveillance Services or Equipment

See instructions within the representation regarding whether or not completion of this form is required If required, complete appropriate boxes, sign the form, and return form, along with any other required disclosure information, to LCO or his/her designee.
NOTE: The "Offeror," as used on this form, is the owner of the property offered, not an individual or agent representing the owner.

52.204-24 Representation Regarding Certain Telecommunications and Video Surveillance Services or Equipment (OCT 2020)

The Offeror shall not complete the representation at paragraph (d)(1) of this provision if the Offeror has represented that it "does not provide covered telecommunications equipment or services as a part of its offered products or services to the Government in the performance of any contract, subcontract, or other contractual instrument" in paragraph (c)(1) in the provision at 52.204-26, Covered Telecommunications Equipment or Services—Representation, or in paragraph (v)(2)(i) of the provision at 52.212-3, Offeror Representations and Certifications-Commercial Items. The Offeror shall not complete the representation in paragraph (d)(2) of this provision if the Offeror has represented that it "does not use covered telecommunications equipment or services, or any equipment, system, or service that uses covered telecommunications equipment or services" in paragraph (c)(2) of the provision at 52.204-26, or in paragraph (v)(2)(ii) of the provision at 52.212-3.

(a) *Definitions.* As used in this provision—

Backhaul, covered telecommunications equipment or services, critical technology, interconnection arrangements, reasonable inquiry, roaming, and substantial or essential component have the meanings provided in the clause 52.204-25, Prohibition on Contracting for Certain Telecommunications and Video Surveillance Services or Equipment.

(b) *Prohibition*.

(1) Section 889(a)(1)(A) of the John S. McCain National Defense Authorization Act for Fiscal Year 2019 (Pub. L. 115-232) prohibits the head of an executive agency on or after August 13, 2019, from procuring or obtaining, or extending or renewing a contract to procure or obtain, any equipment, system, or service that uses covered telecommunications equipment or services as a substantial or essential component of any system, or as critical technology as part of any system. Nothing in the prohibition shall be construed to—

(i) Prohibit the head of an executive agency from procuring with an entity to provide a service that connects to the facilities of a third-party, such as backhaul, roaming, or interconnection arrangements; or

(b) (6) (b) (6)

(ii) Cover telecommunications equipment that cannot route or redirect user data traffic or cannot permit visibility into any user data or packets that such equipment transmits or otherwise handles.

(2) Section 889(a)(1)(B) of the John S. McCain National Defense Authorization Act for Fiscal Year 2019 (Pub. L. 115-232) prohibits the head of an executive agency on or after August 13, 2020, from entering into a contract or extending or renewing a contract with an entity that uses any equipment, system, or service that uses covered telecommunications equipment or services as a substantial or essential component of any system, or as critical technology as part of any system. This prohibition applies to the use of covered telecommunications equipment or services, regardless of whether that use is in performance of work under a Federal contract. Nothing in the prohibition shall be construed to—

(i) Prohibit the head of an executive agency from procuring with an entity to provide a service that connects to the facilities of a third-party, such as backhaul, roaming, or interconnection arrangements; or

(ii) Cover telecommunications equipment that cannot route or redirect user data traffic or cannot permit visibility into any user data or packets that such equipment transmits or otherwise handles.

(c) *Procedures.* The Offeror shall review the list of excluded parties in the System for Award Management (SAM) (https://www.sam.gov) for entities excluded from receiving federal awards for "covered telecommunications equipment or services".

(d) *Representation.* The Offeror represents that—

(1) It ☐ will, ☒ will not provide covered telecommunications equipment or services to the Government in the performance of any contract, subcontract or other contractual instrument resulting from this solicitation. The Offeror shall provide the additional disclosure information required at paragraph (e)(1) of this section if the Offeror responds "will" in paragraph (d)(1) of this section; and

(2) After conducting a reasonable inquiry, for purposes of this representation, the Offeror represents that—

It ☐ does, ☒ does not use covered telecommunications equipment or services, or use any equipment, system, or service that uses covered telecommunications equipment or services. The Offeror shall provide the additional disclosure information required at paragraph (e)(2) of this section if the Offeror responds "does" in paragraph (d)(2) of this section.

(e) *Disclosures.* (1) Disclosure for the representation in paragraph (d)(1) of this provision. If the Offeror has responded "will" in the representation in paragraph (d)(1) of this provision, the Offeror shall provide the following information as part of the offer:

(i) For covered equipment—

(A) The entity that produced the covered telecommunications equipment (include entity name, unique entity identifier, CAGE code, and whether the entity was the original equipment manufacturer (OEM) or a distributor, if known);

(B) A description of all covered telecommunications equipment offered (include brand; model number, such as OEM number, manufacturer part number, or wholesaler number; and item description, as applicable); and

(C) Explanation of the proposed use of covered telecommunications equipment and any factors relevant to determining if such use would be permissible under the prohibition in paragraph (b)(1) of this provision.

(ii) For covered services—

(A) If the service is related to item maintenance: A description of all covered telecommunications services offered (include on the item being maintained: Brand; model number, such as OEM number, manufacturer part number, or wholesaler number; and item description, as applicable); or

(B) If not associated with maintenance, the Product Service Code (PSC) of the service being provided; and explanation of the proposed use of covered telecommunications services and any factors relevant to determining if such use would be permissible under the prohibition in paragraph (b)(1) of this provision.

(2) Disclosure for the representation in paragraph (d)(2) of this provision. If the Offeror has responded "does" in the representation in paragraph (d)(2) of this provision, the Offeror shall provide the following information as part of the offer:

(i) For covered equipment—

(A) The entity that produced the covered telecommunications equipment (include entity name, unique entity identifier, CAGE code, and whether the entity was the OEM or a distributor, if known);

(B) A description of all covered telecommunications equipment offered (include brand; model number, such as OEM number, manufacturer part number, or wholesaler number; and item description, as applicable); and

(C) Explanation of the proposed use of covered telecommunications equipment and any factors relevant to determining if such use would be permissible under the prohibition in paragraph (b)(2) of this provision.

(ii) For covered services—

(A) If the service is related to item maintenance: A description of all covered telecommunications services offered (include on the item being maintained: Brand; model

number, such as OEM number, manufacturer part number, or wholesaler number; and item description, as applicable); or

(B) If not associated with maintenance, the PSC of the service being provided; and explanation of the proposed use of covered telecommunications services and any factors relevant to determining if such use would be permissible under the prohibition in paragraph (b)(2) of this provision.

(End of provision)

OFFEROR OR LEGALLY AUTHORIZED REPRESENTATIVE	NAME, ADDRESS (INCLUDING ZIP CODE)	TELEPHONE NUMBER
	John Power 155 Federal Street Boston, MA 02110	(b) (6) [redacted]
	(b) (6) [redacted] Signature	8/2/2022 Date

(b) (6) [redacted] (b) (6) [redacted]

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

EXHIBIT G

Executive Office for Immigration Review
Space Planning and Facilities Management
5107 Leesburg Pike, Suite 1900
Falls Church, VA 22041
703-305-1178 (OFFICE)
703-305-1702 (FAX)

SPECIAL REQUIREMENTS FOR COMMERCIAL BUILDINGS

SITE: Boston Immigration Court

DATE: 02/24/2020

AGENCY CONTACT: Mary Costa

DELINEATED AREA:

DATE REQUIRED: ASAP

AGENCY DESCRIPTION and MISSION:

The Executive Office for Immigration Review (EOIR) was created in 1983, through a reorganization of the Department of Justice. EOIR was established as a separate agency, independent of the former Immigration and Naturalization Service (INS), and now the Department of Homeland Security (DHS), Immigration and Customs Enforcement (ICE).

Under delegated authority of the Attorney General of the United States, EOIR administers and interprets Federal immigration laws and regulations through the conduct of immigration court proceedings, appellate reviews, and administrative hearings. The purpose of these proceedings is to adhere to statutory and regulatory guidelines ensuring the uniform application of law and the fair and equitable treatment of all parties involved. EOIR carries out these responsibilities through its three main components:

The Board of Immigration Appeals, which hears appeals of decisions made in individual cases;

The Office of the Chief Administrative Hearing Officer, which resolves cases concerning employer sanctions and immigration-related employment discrimination; and,

The Office of the Chief Immigration Judge, which oversees all the Immigration Courts and their proceedings throughout the United States.

The Immigration Court and its Immigration Judges, located in 61 field offices nationwide, serve the public interest through the application of immigration law in formal court proceedings. All court respondents, by their own initiative, have regularly scheduled court dates and times, and are normally accompanied by a private sector attorney. There are no large assemblies to receive information or forms. Individuals in DHS custody do not have their hearings in Immigration Courts located within a commercial lease building.

IDENTIFICATIONS

For the purpose of clarity in this document, the following parties involved in this transaction are referred to as follows throughout this document. For simplification, the terms OFFEROR and LESSOR are used interchangeably in this document.

THE GOVERNMENT – The General Services Administration (GSA).
THE AGENCY – Executive Office of Immigration Review (EOIR)
THE OFFEROR - The building owner and/or [redacted] ment company submitting an offer to the

EXHIBIT G

THE LESSOR – The building owner and/or building management company leasing space to the Government for the Agency's use.

I. PLANS WITH THE OFFER

All plans submitted for consideration must be generated by a Computer Aided Design & Drafting (CADD) program, which is compatible with Autodesk AutoCad Architecture 2013. Floor Plans shall include a proposed corridor pattern for typical floors and/or partial floors, and the space available to this agency clearly delineated. All architectural features of the space must be accurately shown to scale.

II. PROJECT SCHEDULE

Within fourteen (14) calendar days of project initiation the Government shall provide a draft project schedule and draft post award schedule that will be incorporated into the lease. The complete project schedule is due at the completion of the design phase or forty-five (45) calendar days after award of the lease. Throughout the design, construction, and initial occupancy of the premises, the Lessor shall submit to GSA and the Agency, written progress reports weekly or on intervals agreed to by the Agency and GSA. The reports shall include the current status of the Project Schedule, the percentage of work completed by trade, a statement of expected completion and occupancy dates, and general remarks.

III. BUILDING CRITERIA

After the review of final offers is complete, the lease will be awarded to the Offeror whose offer will be most advantageous to the Government.

A) QUALITY OF BUILDING AND IMMEDIATE SURROUNDINGS

The quality of the building itself and the appearance of the neighborhood immediately surrounding it will be assessed. In examining the building, areas of consideration will be the building's physical characteristics and the overall quality of the building, including the building systems and employee services. The building's interior and exterior condition and decor will be assessed as well as the exterior of the neighboring facilities. The Offeror must provide the following information for the building (or proposed building):

1. A description of the lobby, windows and facade of the building; a description of the condition of the facade, down spouts, roof trim and window casing; a description of the rest rooms; a description of the renovations or construction (if any) including architectural plans; and
2. A description of the immediate neighborhood with photographs of views from every side of the building (or proposed building) at street level; and
3. Proximity of the space to elevated structures such as highways, on and off ramps, elevated rail lines.
4. A description of the HVAC system, alarm and sprinkler fire protection systems; and
5. A list of building amenities.

B) SPACE LAYOUT EFFICIENCY

In examining the space, consideration will be given to size and configuration of open office space as well as the size, shape, and consistency of the column bays. The design of the premises, especially the building core, must be conducive to efficient layout and good utilization. In addition the following must be met:

1. Building floor plate must be a minimum of 15,000 usable square feet.
2. Column spacing shall be a minimum of 25' on center.
3. The ceiling height must be 9' or greater from slab to ceiling.

C) SECURED VERTICAL ACCESS

In Immigration Courts which will occupy mo[redacted]or, all proposed buildings must provide Card [redacted]o provide secure [redacted] space from building stairwells.

D) LEVEL OF SERVICE
The Offeror shall fully describe how they plan on meeting the requirements of the Solicitation for Offers for building maintenance and cleaning services. If available, the Offeror may provide other current tenant references who have leased for a minimum of six months, including company names, addresses, name of the points of contact and telephone numbers..

E) SEPARATE ENTRANCE
It may be advantageous if an additional separate entrance for Agency clients and/or employees is offered.

IV. SPACE

A) Space must provide a **minimum of** 57,972 **ABOASF**.

B) Number of parking spaces required for this site: Provide per code with 23 reserve spaces.

C) Hours of normal operation **Monday through Friday: 7:00 am – 5:00 pm**

D) Daytime cleaning is required. Cleaning staff shall be onsite during the hours the court is open for hearings.

E) Entrance signage shall be provided and installed by the Agency. Lobby signage other than that on building directory may be required by Lessor.

Lettering shall read:
U.S. Department of Justice
Immigration Court

V. BUILDING SYSTEMS CERTIFICATION

Whenever requested, the Offeror/Lessor shall furnish, at no cost to the Government, a certification by a registered professional engineer(s) that the Building and its systems as designed and constructed will satisfy the requirements of this lease.

VI. UTILITIES

A) The Lessor shall ensure that utility areas are secured and only authorized personnel shall have access.

B) The Lessor shall furnish and install emergency lighting in each courtroom and at all egress areas. The emergency lights shall be incorporated into the building emergency generator electrical system or have battery back-up emergency lighting. (See Section XII.F.10 for related requirements)

C) Heating Ventilation and Air Conditioning (HVAC):

1. Accessible Outside Fresh Air Intakes: The Lessor shall establish a security zone around publicly accessible outdoor air intakes. When outdoor air intakes are publicly accessible and relocation or physical extensions are not viable options, perimeter barriers provided by the Lessor that prevent public access to outdoor air intake areas may be required based on a Building Security Assessment.

2. Prevent Public Access to Mechanical Areas and Building Roofs: The Lessor shall ensure that access to [redacted]anical Areas shall [redacted]ed by keyed locks, keycards, or similar

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

security measures. Controls for access to keys, keycards, and key codes shall be strictly maintained. The Lessor shall develop and maintain accurate HVAC diagrams and HVAC system labeling within mechanical areas. The Lessor shall ensure that roofs with HVAC systems are secured. Fencing or other barriers furnished and installed by the Lessor may be required to restrict access from adjacent roofs based on a Building Security Assessment. Roof access shall be strictly controlled through keyed locks, keycards, or similar measures. Fire and life safety egress shall be carefully reviewed when restricting roof access.

3. Secure Return-Air Grilles: If return air grilles are located in walls, the Lessor shall establish a selected measure to secure the grilles, but none that would adversely affect the performance of the building HVAC system. (i.e., directing public access away from wall return air-grilles, removing furniture and visual obstructions from areas near grilles)

4. Restrict Access to Building Information: The Lessor shall ensure that restrictions on Building Information including mechanical, electrical, vertical transport, fire and life safety, security system plans and schematics, computer automation systems, and emergency operations procedures are strictly controlled. Such information shall be released to authorized personnel only, preferably by the development of an access list and controlled copy numbering. Names and locations of government tenants shall not be disclosed within any publicly-accessed document or record.

VII. PARKING AND TRANSPORTATION

A) The Lessor shall provide controlled parking for judges and the court administrator located on-site. At the Agency's discretion off-site parking located wit walking distance of the Agency's space shall be considered only when on-site parking is not available. The Agency shall determine if the proposed parking meets the Agency's requirements.

1. Authorized parking spaces shall be assigned and identified with signage as "reserved" (not agency specific) in surface lots/adjacent structures/underground garages that are under the Lessor's control.
2. The Lessor shall ensure the following minimum levels of lighting are met, except where local codes conflict (follow the more stringent requirements): 5 foot-candles (54 lux) for doorway areas; 3 foot-candles (32 lux) for transition areas (including stairwells); and at least 3 foot-candle (32 lux) overlapping throughout the parking lot or structure.

B) Controlled Parking:
"Controlled" is defined as ranging from Agency management of the parking facility to a facility in which parking is restricted to long term permits (i.e., no daily parking). Additionally, the posting of signs concerning parking policy, towing unauthorized vehicles, installation of an identification system, and providing adequate lighting for parking areas, are major elements of parking security. Controlled access to parking shall be by card reader or transponder.

C) The lessor shall ensure that public transportation must be available not to exceed ½ mile, (2,640 feet) from the building being offered. The Agency shall determine if public transportation is sufficient to meet Agency needs.

VIII. SECURITY/SAFETY REQUIREMENTS

A) The Agency requirement is for contiguous space. The Lessor shall ensure that the space will be accessible to the public while providing adequate security measures. Unique building siting and/or security issues and concerns may also preclude building occupancy.

(b) (6) [redacted] ot possible, the L (b) (6) h and install woven wire fabric 10 gauge

or higher, installed above ceilings, from top of walls to structural deck above, in a structurally sufficient manor to prevent unauthorized entry. (See Section IX for related requirements).

C) The Lessor shall be responsible for furnishing and installing a U.L. listed, Level 3 rated, Ballistic-rated Transaction Window (BTW) with polycarbonate glazing SP-1250, incorporating a level 3 rated center speaker device, deal tray, and countertop in the wall between the waiting area and the receptionist.

Agency Specification:
Armortex Transaction Window model number WI-03-SS-WW with hinged panel, Speaker Model #SP-SS-PV-GA and deal tray, Model #RMDT 1016.

Contact: Armortex
5926 Corridor Parkway
Schertz, TX 78154 Phone: 1-800-880-8306

D) In the area adjacent to the Ballistic-rated Transaction Window (BTW) the Lessor shall furnish and install UL-752, Level 3 rated ballistic fiberglass. At a minimum, the ballistic fiberglass shall extend floor to ceiling, above and below the BTW, as well as 48” to either side of the BTW.

E) The Agency requires the Lessor to furnish and install the infrastructure (power and data) for a public access control (PAC) point where visitors are required to pass through a screening area containing a guard(s). The Agency shall provide and install a magnetometer, and/or X-ray equipment. EOIR controls the PAC point and the Agency screening equipment. The Agency will include the area for this function in the initial space request to the Government.

F) The Agency requires Judges’ secure corridors. The Lessor shall provide secure corridors (no public access) for each courtroom and separate, secured access to and from the courtroom. This ensures that the Immigration Judges, court staff, and related case files do not traverse public space including waiting areas and the seating area of the courtroom. In case of an emergency, the staff can escape with the files from the courtroom through the door immediately beside the Judge’s bench. The recommended security system secures the door (See paragraph H below) to the corridor at closure, providing safe egress from the courtroom.

G) The Lessor shall furnish and install a fully operational duress system including cabling, which, when activated, will summon an immediate armed response, activate a ceiling mounted camera, LED light, and strobe light system, and also activate other (EDRS) devices described below (See paragraphs for duress system and EDRS below). Installation is defined as the purchase and installation of all electrical wiring and system components. The Agency is responsible for establishing monitoring by the Federal Protection Services (FPS) MegaCenter.

Components shall be as follows:

1. Duress buttons shall be cylinder slide, noiseless, Honeywell 269R stainless steel.
2. Alarm reset with key operation.
3. Controller shall be a Lenel LNL-500 or approved equal.
4. Electronic keypad shall be an Ademco Vista Model #6139 or approved equal.
5. Strobe lights shall be SECO-LARM Model #SL-126 Q/B ceiling mount or approved equal.
6. Wiring shall be steel shield in conduit, 18-22 gauge, four conductor, stranded copper.
7. Courtroom ceiling mounted, 360 degree, mini-dome camera Axis M3047-P and 30 FPS 1080 IP digital video recorder, Pelco DSSRV2 or approved equal, located in the ADP room.
8. Courtroom ceiling mounted LED light shielded from public view. LED light LED Andon LD 2837-122 or approved equal. LED light cover Arlington Industries CE-1.

H) The Lessor shall furnish and install an Electronic Door Release System (EDRS), including cabling, incorporated into the duress alarm system in each courtroom. EDRS system components shall be as

1. Electric strike shall be Rutherford Model #7114 or approved equal.
2. Power supply shall be Altronix AL600ULX or approved equal.
3. Timer shall be Altronix Model #6062.
4. Deadbolt shall be Schlage Model #B680N or approved equal.
5. Peephole shall be Ives Model #698 or approved equal.
6. Building standard hardware, classroom function lockset.

Note: The EDRS shall function as follows:
When pressed, duress buttons installed in the courtrooms should simultaneously disengage the electric strike only on the affected interior courtroom door, activate an alarm at the appropriate Federal Protective Service (FPS) and/or private monitoring facility, alert the on-site security staff (when available), activate the WAVE system, activate the court's internal strobe light system, activate the courtroom camera and DVR system, activate the courtroom LED light, and initiate a low audible signal at the court's duress alarm panel (keypad). A timer will keep the electric strike disengaged only until a court employee opens the door (but no more than 15 seconds), at which time, the timer will shut-down so that the electric strike immediately re-engages and the door is automatically secured when closed.
For example: *If the door is opened and closed within 6-seconds after the duress button is pressed, the strike will immediately re-engage and not time out at 15 seconds. Once closed, the courtroom door will remain secured and the duress button will not be able to disengage the electric strike (a second time) until the threat situation is nullified and the duress system is reset by the court staff and/or the FPS.*

I) The Lessor shall furnish and install a fully operational WAVE system. The WAVE system is a private emergency wireless notification system for alarms. When activated, the WAVE system will alert the onsite security officers to respond to an emergency in an immigration court. It will also notify EOIR/OS staff through email and text messaging. The WAVE system will connect directly to the duress buttons which will send an alarm signal once the duress button is activated.

WAVE Plus system requires the following components:
1. WAVE Plus Control Panel at ADP (Head End) room.
2. WAVE Plus Transmitters at Judges' benches inside of each courtroom, Conference Room, Reception Desk, and Court Administrators (CA) Office.
3. Stream wireless repeater and repeater enclosure kit in areas where the transmitters are too far away from the WAVE Plus control panel to be connected.
4. Surge protector at ADP (Head End) room by UPS or battery backup.

J) The Lessor shall furnish and install the wiring for an electronic keyless entry system (card readers) at all suite entry doors.

K) The Lessor shall furnish and install doors accessible to the public equipped with hinges, pivots, and pins installed in a manner which prevents removal when the door is closed and locked.

L) The Lessor shall furnish and install Exterior building lighting with emergency backup power.

O) The Lessor shall furnish and install Interior emergency lighting with emergency backup power.

P) The Lessor shall furnish and install EOIR's Intrusion Detection System. The Agency is responsible for establishing monitoring by the FPS MegaCenter.

Q) Development of Occupant Emergency Plans (OEP) and Contingency Procedures requires the cooperation between Agency and Lessor. Building owners and managers shall cooperate and participate in the development and implementation of Agency OEP.

[redacted] ves the right to [redacted] rade security during heightened security

conditions.

SECURITY ACCESS:
The Agency reserves the right to require the Lessor to submit completed fingerprint charts and personal history statements for all employees of the Lessor, as well as contractors or subcontractors employed by the Lessor who will provide building operating services of a continuing nature for the property in which the leased space is located. The Agency may also require this information for employees of the Lessor, his contractors, or subcontractors who will be engaged to perform alterations or emergency repairs for the property. The required forms will be returned by the Lessor to the Government Contracting Officer or his designated representative within 10 working days from the date of the written request. Based on the information furnished, the Government will conduct security checks of the employees. The Government Contracting Officer will advise the Lessor in writing if any employee is found to be unsuitable or unfit for his assigned duties. Effective immediately, an unsuitable or unfit employee cannot work or be assigned to work on the property in which the leased space is located. The Lessor will be required to provide the same data within 10 working days for the addition of new employee(s) to the work force. In the event the Lessor's contractor/subcontractor is subsequently replaced, the new contractor /subcontractor is not required to submit another set of these forms for employees who were cleared through this process while employed by the former contractor/subcontractor. The Government Contracting Officer may require the Lessor to submit the required forms for every employee covered by this clause on a 3-year basis.

The Agency reserves the right to revoke any contract individual's access to its facilities or property where such access is no longer clearly consistent with Agency mission and responsibilities. The Lessor and contractor agrees to immediately remove that individual from the work site in such circumstances. The Agency shall have and exercise full and complete control over granting, denying, withholding, or terminating access for individuals.

IX. PARTITIONS

DEMOLITION:
Any demolition of existing improvements which is necessary to satisfy the Agency's layout shall be done at the Lessors expense.

AGENCY (TENANT) DEMISING PARTITIONS,
COURTROOM AND ADP ROOM PARTITIONS:
If the Agency shares any floor with other tenants or adjoins public space, the Lessor shall furnish and install perimeter walls of the Agency space that will be separated by slab-to-slab partitions. These partitions shall be concrete block with drywall or plaster finish, or metal stud with drywall and fiberglass sound batt insulation. If the slab-to-slab partitions interfere with, or impede the functioning of the air-conditioning system, then installation of 10-gauge expanded metal affixed with metal screws from ceiling height to the slab above shall be provided; or install sound-trap ductwork above the ceiling through the partition to facilitate the return air requirement. Walls shall be soundproofed to ensure Sound Transmission Coefficient (STC) rating of 45, sufficient enough to ensure ambient and/or external noises are not recorded during proceedings (in-person or Tele-Video). Courtrooms and ADP Rooms are designated areas to achieve an STC rating of 45.

PARTITIONS SUBDIVIDING AGENCY SPACE:
Agency partitioning must be designed to provide a minimum STC rating of 40. Partitioning shall be furnished and installed by the Lessor at locations to be determined by Agency. The partitioning shall extend from the finished floor to the finished ceiling except in specified areas which shall be slab-to-slab.

EXHIBIT G

X. DOORS AND HARDWARE:

The Lessor shall furnish and install all perimeter access doors. They must be heavy duty, full flush, hollow metal (steel) construction or solid core wood, having a mechanical lock with master key override, door closer and a peephole. Tempered opaque glass at entrance to agency suite is permitted. Solid wood doors shall be at least 1-3/4 inches thick.

The Lessor shall furnish and install all interior doors having a minimum clear opening of 36 inches by 80 inches, unless noted otherwise. Hollow core wood doors are not acceptable. They must be flush, solid-core natural wood, veneer faced or equivalent finish as approved by the Government and the Agency.

DOOR HARDWARE:
The Lessor shall furnish and install with all doors, lever hardware to comply with the Architectural Barriers Act Accessibility Standards (ABAAS) and the following standards. Doors shall have door handles or door pulls with heavy-duty hinges. All doors shall have corresponding door stops (wall or floor mounted). All public use doors and toilet room doors shall be equipped with kick plates. All door entrances from public corridors and exterior doors shall have automatic door closers. All door entrances from public corridors, exterior doors, and other doors designated by the Government and Agency shall be equipped with 5-pin, tumbler cylinder locks, and strike plates. All locks shall be master keyed. The Agency shall be furnished with four copies of all lock set keys and at least two master keys that open all perimeter and interior locks. Door identification shall be installed in approved locations adjacent to courtroom and public entrances.

XI. VENTILATION

A) The Lessor shall ensure that during working hours during all seasons, ventilation shall be provided in accordance with ASHRAE Standard 62, Ventilation for Acceptable Indoor Air Quality.

B) The Lessor shall ensure that Conference and Waiting rooms of 500 square feet and greater shall be provided with a dedicated source of ventilation or be fitted with air handling equipment with smoke/odor removing filters.

C) The Lessor shall ensure that Toilet rooms have properly exhaust, with a minimum of 10 air changes per hour.

D) The Lessor shall furnish and install Break rooms having an air exhaust system: Model: Penn-Zephyr Z-10, 200 CFM or equivalent. It shall be vented to outside or building's exhaust system.

XII. OFFICE SPACE

A) Private Offices:
The Lessor shall provide standard office build-out and the following standards, with vinyl cove base and carpet floor covering, and solid core wood door with building standard lockset (lockset function as specified by the Agency). Court Administrators office and Conference Room shall receive a duress alarm activation button. The Court Administrator's office shall have a security system keypad.

B) Waiting Area:
1. The Lessor shall provide standard office build out, with vinyl wall covering, vinyl cove base, and vinyl tile flooring.
2. The Lessor shall provide a wall separating the Waiting Area from the Reception Area, extending slab to slab, with a minimum STC rating of 45.
3. The Lessor shall furnish and install in the area adjacent to the Ballistic-rated Transaction Window (BTW) UL-752, Level 3 rated ballistic fiberglass. At a minimum, the ballistic fiberglass shall extend floor to ceiling, above and below the BTW, as well as 48" to either side of the BTW.

C) Reception/Intake Area:

1. At the door from waiting area into secure agency administrative area the Lessor shall furnish and install the following standards: An electronic door strike with remote release button to be accessible by the receptionist in the main staff work area. Exact location of release button will be specified at the time of space layout. Door shall also contain a peephole. A doorbell shall be located at the Ballistic-rated Transaction Window (BTW) for public use. Space shall have a duress activation button and security system keypad.

D) Pro Bono Room:

The Lessor shall provide standard office build-out with painted drywall, vinyl cove base, solid core wood door and vinyl tile flooring. Provide electrical outlets only, data outlets are prohibited.

E) Case File Room and Storage Room:

The Lessor shall provide standard office build out with painted drywall, vinyl cove base, vinyl floor covering, with standard partitions from finished floor to finished ceiling. Door shall be secured with Trilogy model DL 2700 lock with key override.

F) Copier and Printer Areas**:**

1. The Lessor shall provide open office standard build out with systems furniture (furnished and installed by the Agency) or, as furnished and installed by the Lessor, low walls (4'-6"), painted drywall, vinyl cove base, with finished stained hardwood cap and floor to ceiling drywall partitions as shown in the Agency's space layout drawings.
2. The Lessor shall furnish and install one (1) [duplex] NEMA 5-20R receptacle (orange), mounted at 18" above finished floor, 120 volt, 20 amp, 3-wire single phase, individual branch circuit with isolated ground for copier.
3. The Lessor shall furnish and install one (1) data outlet and one (1) analog telephone outlet,

G) Automated Data Processing (ADP) Room:

1. The Lessor shall furnish and install slab-to-slab partitioning (minimum STC of 45), vinyl flooring, solid core wood door (for card reader restricted access).
2. The Lessor shall furnish and install fire rated at 500 pound pull out force plywood mounting board for the Agency provided telephone equipment.
3. The Lessor shall furnish and install a thermostatically controlled suspended above ceiling-type supplemental air-conditioning system, capable of maintaining a temperature range of 65 to 75 degrees Fahrenheit and a humidity range of 40% to 60%; 24 hours a day and 7 days a week. Where floor space allows a floor-mounted vertical up-flow supplemental air-conditioning system may be used in-lieu-of a suspended ceiling air-conditioner, provided it meets or exceeds the same performance specifications. The Agency shall provide a heat load calculation for the equipment in this room during the development of the Agency's detailed drawings.
4. The Lessor shall furnish and install the following:

One (1) [duplex] NEMA L6-30A receptacle, mounted at 18" above finished floor, 120 Volt, 20 Amp, 3-wire single phase, individual branch circuit with isolated ground for data equipment Uninterruptible Power Source (UPS).

In large Immigration Courts the Agency may require one (1) NEMA L6-30R, 30A/250V locking style receptacle, 3 wire single phase with isolated ground for data equipment UPS.
One (1) NEMA 5-20R dedicated 125 Volt, 20 Amp, 3-wire single phase circuit hard wired to the duress control panel, mounted at 54" above finished floor.

Security cabling to connect the duress button in each courtroom with the security panels in the ADP room.

(b) (6) d Digital Audio (b) (6) ocated in ADP room requires the

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

Lessor to furnish and install the following (**for each courtroom):**

One (1) NEMA 5-20R receptacle, mounted at 18" above finished floor,
125 Volt, 20 Amp, 3-wire single phase individual branch circuit, with isolated ground.

For each courtroom five (5) data outlets and 5 Cat-6 cables run to patch panel in ADP Room.

For each courtroom a 2" conduit with cable tray from 18" above finished floor to above ceiling. Conduit and cable tray to be used for Lessor provided and installed microphone and speaker wires running from each courtroom to Agency furnished and installed DAR racks in ADP Room.

5. **Data Drops and Voice Drops:**
The Lessor shall furnish, install, label, terminate, and test/certify Category 6, 4-pair, twisted-pair, plenum-rated cable runs to connect from computer workstations to the ADP Room. Cable runs shall originate at each workstation location with a single, 8-pin, RJ 45 jack (pin-out configuration: 1, 2; 3, 6; 4, 5; 7, 8) and shall terminate and be hard wired into the back of the patch panel (8-pin, 110 type termination; pin-out straight through). The patch panels, furnished and installed by the Lessor, shall be installed in a floor-mounted, upright, distribution cabinet, furnished and installed by the Lessor, with appropriate ladder system or cable management located in the ADP Room.

The Lessor shall ensure that both ends of the cable are clearly marked to uniquely identify each cable in the ADP Room and at each workstation location. The Lessor shall ensure that each cable shall be tested for Category 6 certification (certification documents to be sent to EOIR at the above address).

In addition, each data drop will be supplied by the Lessor with (1) 15'-0" patch cord at the computer workstation and (1) 5'-0" patch cord at the patch panel. Patch cords shall have an 8-pin, RJ45 single plug on each end (pin-point configuration straight through; 1, 2; 3, 6; 4, 5; 7, 8 and shall be tested for Category 6 certification.

The Lessor shall ensure that all work be performed by qualified personnel in a workmanlike manner, in accordance with the manufacturer's specifications, local codes, the best trade practices and the following standards. All lines shall be run concealed in the ceiling and will be attached every twenty (20) feet in the required fasteners. No wiring will lay on ceiling tiles. Where wiring passes through a floor deck or wall and is not otherwise concealed, or run in a protected electrical closet, or exposed and could be subject to tampering or any form of mechanical abuse, it shall be installed in Wiremold or other suitable protective covering or electrical conduit.

H) Staff Area:
The Lessor shall provide open office standard build out with systems furniture (furnished and installed by the Agency) or, as furnished and installed by the Lessor: low walls (4'-6") include painted drywall, vinyl cove base with finished stained hardwood cap. Flooring shall be carpet.

I) Courtrooms:
1. The Lessor shall furnish and install slab to slab partitioning, STC rating of 45, sufficient enough to allow for soundproofing that will ensure ambient and/or external noises are not picked up by the courtroom recorder during the court proceedings.
2. The Lessor shall furnish and install supplemental, separately zoned HVAC to support approximately 35 people.
3. The Lessor shall furnish and install in each Courtroom one 24' L x 10' W x 7" H (approx. dimensions) raised dais, carpeted to match carpet in rest of Courtroom and with a wood nosing.
4. The lessor shall furnish and install a built-in 30"W x32"H work surface on top of the DAIS for [redacted] d interpreter wor [redacted] ont of the work surface must be solid wood

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

panels approximately 38” high to provide privacy to the staff siting in the DAIS area. The lessor shall furnish and install a 36W x 38”H swing gate in the DAIS to separate the interpreter from the judge.

5. The Lessor shall furnish and install ramps and handrails for access to the judge’s dais as required by code. Both shall be in compliance with the Architectural Barriers Act Accessibility Standards (ABAAS) or as required to meet local building codes (use the more stringent requirements). Ramps shall be finished at a level consistent with the balance of the space.
6. The Lessor shall furnish and install a public entrance door to each courtroom that shall be a minimum of 3'-6" wide, with swing-clear offset hinges. Doors leading from public space (i.e. waiting rooms, reception areas, corridors, etc.) into Courtrooms shall have building standard classroom function lock.
7. The Public Area (visitor side) shall be separated from the Litigation Area by a railing about 38 inches high with a 40” wide opening equipped with a swing gate and self-closing hydraulic hinges, furnished and installed by the Lessor. The gate shall be able to swing into the Public Zone only, at an angle no less than 90 degrees from the plane of the railing.
8. Each judge's bench shall be equipped with a silent duress alarm activation button and a WAVE transmitter, furnished and installed by the Lessor, located on the right side of the judge under the benchtop. Lessor shall be responsible for the installation of wire through conduit in the raised dais to the control unit location. The activation duress button must be pre-wired, maintaining an 8'-0" lead to facilitate mounting to the bench (bench is furnished and installed by EOIR).
9. The Lessor shall ensure that the judge’s entrance/exit door in each courtroom will be equipped with a building standard classroom function lock, a card reader (courtroom side installation), a peephole (administrative side installation), a deadbolt (administrative side installation) and an Electronic Door Release System.
10. The Lessor shall furnish and install recessed floor boxes at each attorney table and flush mounted floor boxes on each raised dais within the courtrooms. All floor boxes shall sufficiently accommodate courtroom equipment (i.e. microphone, speaker phone, telephone, power and data cabling) specified in Agency detail drawings, and shall be approved by EOIR/SFMS.
11. The Lessor shall ensure that emergency lighting within the suite is on an emergency circuit backed up by an emergency generator. Stand alone battery back-up emergency lighting will not be permitted unless emergency circuits/emergency panel are not backed-up by the emergency generator. In such case, the Lessor is responsible for quarterly maintenance, testing, and repair of the individual battery back-up units. In each courtroom, the light fixture directly above the judge’s bench shall be on the emergency circuit.
12. The Lessor shall furnish and install a thermostatically controlled suspended above-ceiling type supplemental air-conditioning system. Unit shall be capable of maintaining a temperature range of 65 to 75 degrees Fahrenheit and a humidity range of 40% to 60%. Unit will be operational during normal duty hours. The courtroom ceiling plenum shall be free of equipment, utilities, and other items requiring maintenance and/or repair (i.e., courtroom HVAC equipment shall be mounted outside the courtroom perimeter walls).
13. The Lessor shall furnish and install 1¼” thick beveled edge, wall mounted, sound absorption panels at the rear wall of each courtroom, as shown in the Agency’s detailed drawings.
14. The Lessor shall furnish and install the infrastructure (power, data cabling and DAR cabling) for a wall mounted VTC (Video Tele-Conferencing) unit in each courtroom at a location shown on the Agency’s detailed drawings, including the wall blocking and monitor bracket:
    - Bracket – Chief Thinstall TS325TU.
    - Shelf – Chief Thinstall TA200.
15. The Lessor shall furnish and install the infrastructure (power, data cabling and DAR cabling) for a wall mounted monitor located behind the Judges bench in each courtroom at a location shown on the agency’s detailed drawings, including the wall blocking. Monitor and monitor bracket shall be furnished and installed by the Agency.

J) Secure Corridor:
The Lessor shall provide standard office build-out with finishes to match.

K) Break Room:
1. The Lessor shall provide standard [redacted] h painted drywall, vinyl cove base, and [redacted] g.

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

2. The Lessor shall furnish and install an 18" x 24" stainless steel sink with garbage disposal with hot and cold water supply in a finished 6-LF wood kitchen sink base cabinet (two 36" base cabinet and one 36" ADA base) and 6-LF above sink cabinets. Base cabinets shall have a 6-LF laminate counter top with integral back/side splash.
3. The Lessor shall furnish and install a Ground Fault Interrupter (GFI) electrical quad-plex outlet above sink base cabinet.
4. Furnished and installed by the Agency: One 18 cubic foot, frost-free refrigerator and one 1.5 cubic foot microwave oven with carousel turn-table.
5. Lessor shall provide initial and replacement supplies of paper towels.

L) Staff Toilets: (Shall be ABAAS compliant)

1. The Lessor shall furnish and install ceramic tile flooring and base, ceramic wall covering to extend approximately 5' AFF.
2. The Lessor shall furnish and install rooms equipped with one (1) water closet, one (1) wall mounted lavatory with hot and cold water supply, mirror, toilet seat cover dispenser, paper towel dispenser, toilet paper holder, soap dispenser, waste receptacle, and one (1) GFI duplex electrical outlet. Toilet room door shall have a marble threshold.
5. The Lessor shall furnish and install initial and replacement supplies of soap, paper towels, and toilet tissue.

XIII. INTERIOR FINISHES, CEILINGS AND WINDOWS

The Lessor shall furnish and install the following finishes and flooring:

PAINT:

Two (2) coats after primer. Agency areas shall be painted at least every 5 years at the Lessor's expense, including moving and replacing furnishings. All painting shall be done after working hours and on weekends. Agency space shall be painted throughout, unless otherwise noted.

WALL COVERING:

Vinyl or polyolefin commercial wall coverings weighing not less than 19 ounces per square yard. All wall covering shall be maintained in "like new" condition for the life of the lease. Wall covering must be replaced or repaired at the Lessor's expense, including moving and replacing furnishings, anytime during occupancy if it is torn, peeling, or permanently stained (except where wall covering has been damaged due to the negligence of the Agency). All repair and replacement work shall be done after working hours.

CERAMIC TILE:

Ceramic tile flooring and ceramic tile wall from top of finished floor to approximately five (5) feet above finished floor (AFF) in Agency rest room(s). The ceramic tile must be replaced or repaired at the Lessor's expense, if it is loose, chipped, broken, or permanently discolored (except where tile has been damaged due to the negligence of the Agency). All repair and replacement work shall be done after working hours.

VINYL COMPOSITION TILE (VCT):

Commercial grade 1/8" solid vinyl tile. The vinyl tile must be replaced or repaired at the Lessor's expense, if it is loose, chipped, broken, or permanently discolored (except where tile has been damaged due to the negligence of the Agency). Installation shall include sealing, polishing, and buffing.

CARPET:

Commercial grade broadloom carpet, 34 oz.--glue down. If building standard requires use of an under floor raceway system, carpet tiles of same specification may be acceptable. Deviation [redacted] cification is prohi[redacted] roved/authorized by EOIR/Space and

DocuSign Envelope ID: 9E95B8DF-7D64-489D-8113-0519BB2A0F84

Facilities Management Staff (SFMS) Space Management Specialist. Carpeting shall be installed throughout, unless otherwise noted.

CEILING:

Ceiling must be at least 8 feet AFF and no more than 10 feet AFF measured from floor to the lowest obstruction. Courtroom ceilings shall have an overall height of 10 feet AFF whenever structurally feasible; areas with raised flooring other than courtrooms must maintain these ceiling height limitations above the finished raised flooring. Ceilings must have a minimum noise reduction coefficient (NRC) of 0.70. Maintain a minimum STC of 40 throughout agency occupied space.

WINDOWS:

Provide building standard window treatment for sun control. Shatter resistant protection on all exterior windows may be required from the Lessor as a result of a Building Security Assessment.
This material may require replacement at the end of the warranty period based on a Government assessment.

XIV. FINISHES AND FLOORING: AGENCY SPECIFICATIONS

Paint:

General Space:	Manufacturer:	Benjamin Moore
	Color:	Cloud Cover OC-25
	Finish:	Eggshell
Wood Cap:	Manufacturer:	Minwax
	Color:	Walnut #224, Satin Gloss
Wall Covering: Waiting Room	Manufacturer:	MDC Wallcoverings
	Color:	Allegria Serenade
	Style:	3374Al
		Weight: 20 oz.
Chair Railing: Waiting Room	Manufacturer:	Acrovyn
	Color:	262 Driftwood
	Style:	Model SCR-48N

VCT Flooring: File, Computer, Storage, Pro Bono, Break, and Waiting Rooms

Manufacturer:	Armstrong
Color:	Multicolor Pie Car (52525)
Style:	Standard Excelon

Carpet: Commercial grade broadloom, glue down. If building standard requires use of under floor raceway system, carpet tiles of same specifications are acceptable
.

Manufacturer:	Bentley Prince Street
Color:	Custom Blue (13553-012)
Style:	International Glamour
Style Number:	8IG340630R

Vinyl Base Molding: General Space:

Manufacturer:	Roppe
Color:	140 Fawn
Style:	4" Cove Base

(b) (6) m(s): Manufa

	Color:	MW-80 (Fawn) - F
	Style:	4 1/4" Millwork Reveal Profile
Corner Guard: General Space:	Manufacturer:	Acrovyn
	Color:	933 Mission White
	Style:	Model SM-10
Plastic Laminate: Break Room and Reception/Waiting Room Counter		
	Manufacturer:	Nevamar
	Color:	LD-6-1T Black Lodestone Textured
Cabinets: Break Room	Manufacturer:	Merillat
	Finish/Color:	Nevamar - Sandpiper (#S-6-475) Textured
Ceramic Tile:	Manufacturer:	Dal-Tile
Toilet Room Walls	Color:	Semi-Gloss/0135 (Almond)
	Style:	4 1/4" x 4 1/4" installed to 5' height
	Border Accent:	Semi-Gloss/1469 (Galaxy)
Toilet Room Floor:	Manufacturer:	Dal-Tile
	Color:	Keystones/D037-Pepper White
	Style:	2" x 2" mosaic tile
Grout: Toilet Room Wall & Floor	Manufacturer:	Mapei
	Color & Style:	48 – Almond, Unsanded
Sound Absorbing Panels:	Manufacturer:	MPC, Inc.
Courtrooms	Color:	FR 701-380 Quartz
	Style:	Sound Absorbing, 1-1/4" Thick Beveled Edges, Wall Mounted

End of Special Requirements for Commercial Buildings